


Freestanding Bath Faucet Instruction Sheet

20A-M1011

Solid brass construction with deluxe finish
Hand shower and 59" hose
Pressure balance cartridge
Cartridge with limited lifetime warranty
Easy to install

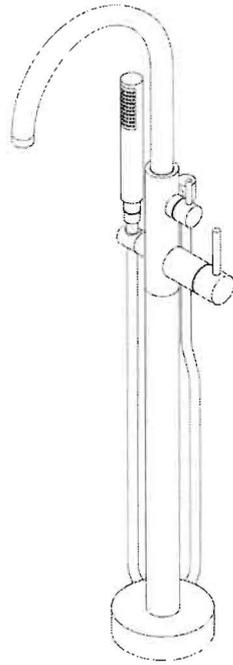


Tools You May Need



Adjustable
Wrench



Groove
Joint Plier



Screwdriver



Pipe Tap



Allen Key



Hammer



Marker



Tape
Measure



Drill

Before installation, please read the followings.

Be sure to read the instruction sheet carefully and install the product correctly.
Please check with the local plumbing code requirements before installation.
This faucet should be installed by an experienced plumber.

Warranty Card

Warranty period: 2 years from the date of purchase.

Warranty card and proof of purchase, such as the bill of sale is mandatory when requesting warranty service.


Averen reserves the right to designate a representative to inspect the faucet for analysis.

Warranty service does not extend to the followings:

Due to the occurrence of events of force majeure, such as fire, flood, storm, typhoon, lightning, earthquake or external damage such as acid and alkali liquid, vandalism, or other natural disasters and uncontrollable incidents.

Damages caused by the parts from the third-party which are unauthorized installation, addition, extension, modification or repair.

Specification

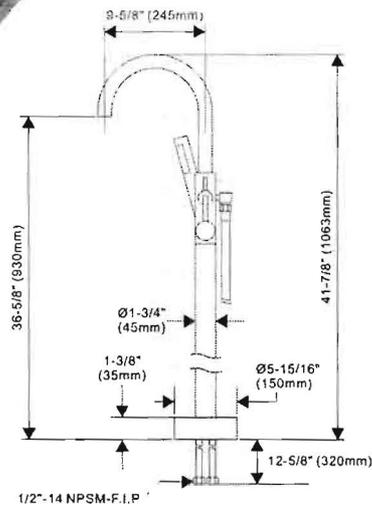


Note:

Before beginning the installation, make sure the distance between the final resting place of the faucet and the bathtub is adequate:

- (a) While opening and closing, the handle should not be blocked by the bathtub.
- (b) When open, the water should fall straight down in the bathtub, not on the lip or on the floor.


Including

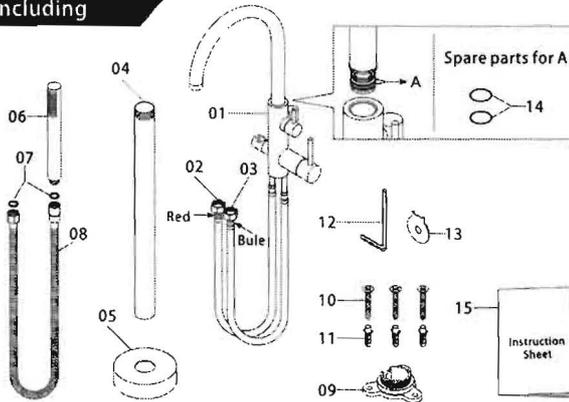

No.	Descriptions	Q'ty
01	Freestanding faucet	1
02	37-7/16\"(950mm)Hose(Red)	1
03	37-7/16\"(950mm)Hose(Bule)	1
04	Body post	1
05	Decorative plate	1
06	Hand shower	1
07	Washer	2
08	Hose	1
09	Base	1
10	Screw	3
11	Plastic anchor	3
12	Allen key	1
13	Tool	1
14	O-ring(spare parts)	2
15	Instruction sheet	1


Installation

Step 1 Insert hoses (01, 02) through the body post (03). Tighten post (03) to the faucet.

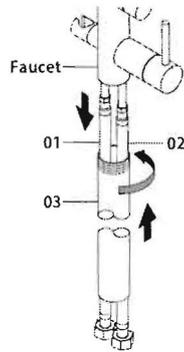

Step 2 Use base (01) as a template, drill three holes (A) on the floor.


Step 3 Install plastic anchors (02) into the drilled holes.

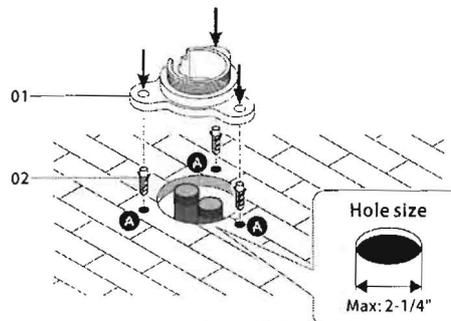

Step 4 Place decorative plate (02) outside of the body post (01).


Step 5 Slide hoses (03, 04) into the base (05) through base opening (Figure A).

Step 6 Tighten the base mount (05) to the body post (01).

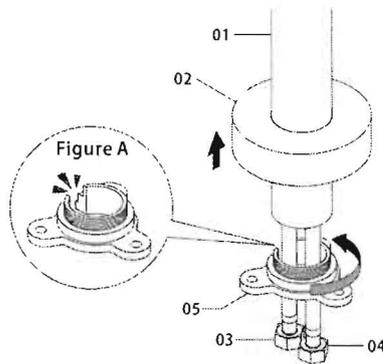

Step 7 Thread the red hose (01) to hot water supply. Thread the blue hose (02) to cold water supply.

Step 8 Use screws (03) to attach the base (04) to the floor. Move decorative plate (05) down to cover the base mount.

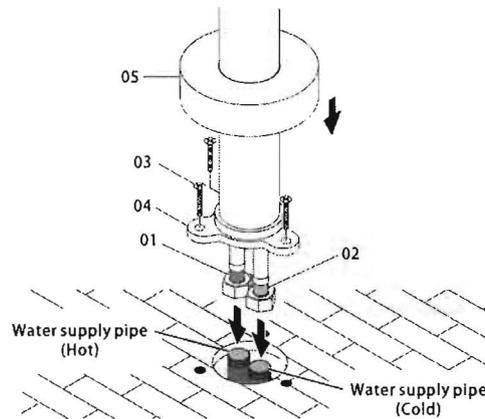


Step 9 (Figure A). Insert rubber washer (02) to hose (01) and thread them to the handshower bridge.


Step 10 Thread washer (04) and hose (03) to handshower (05).

Step 11 (Figure B). Adjust shower cradle (06) using allen key (07) & allen screw (08).

Step 12 (Figure C). Align spout (08) to desired position using allen key (09) & allen screw (10).


Step 13 Remove aerator (11) using tool (12). Turn on water supplies. Check for leaks. Turn on the faucet handle for one minute to flush debris from faucet. Turn off faucet handle and re-assemble the aerator in place.

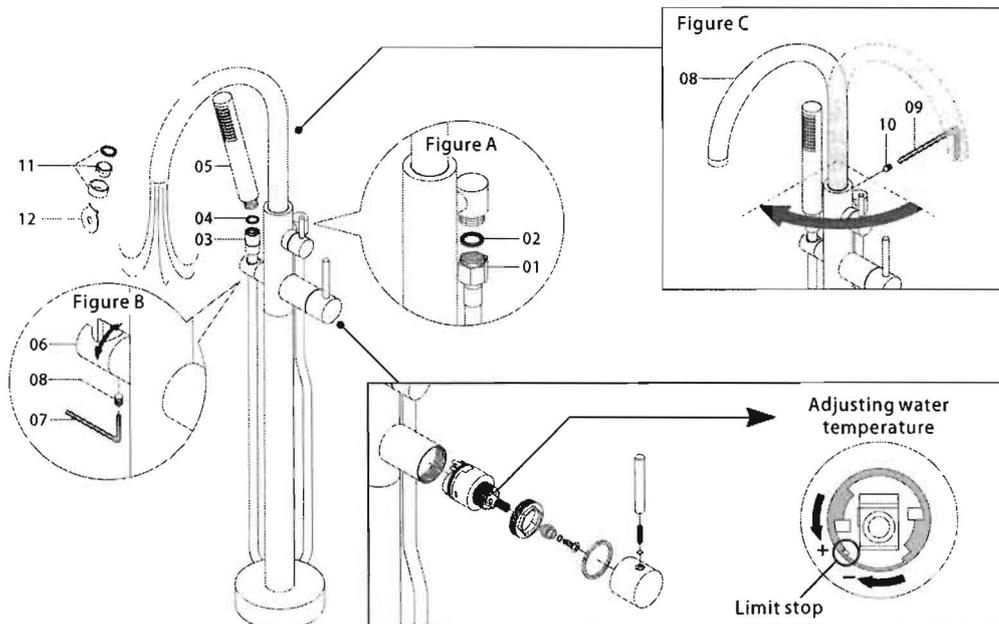

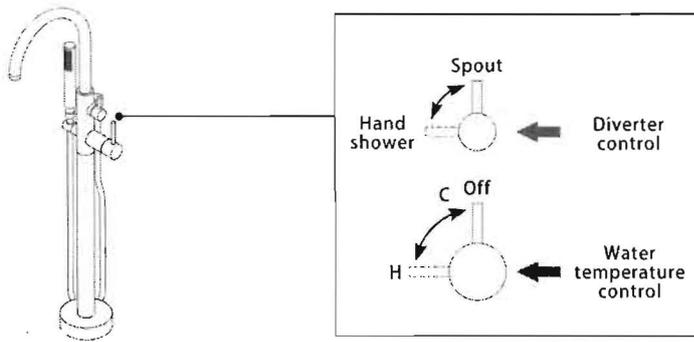


Notice

Do not abuse the product which might cause irreversible damage or leakage.

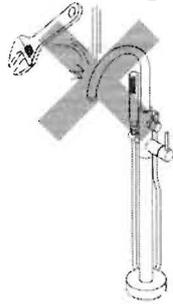

Keep away from rough objects, sharps, acid and alkali liquids which might cause surface damage and corrosion.

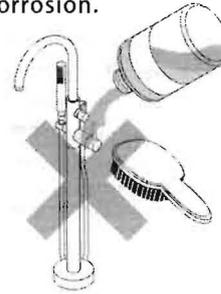

Follow the instruction sheet carefully, please don't dismantle the product which might cause irreversible damage.

