



# Loure® | K-15285-4

Deck-mount bath faucet

## Features

- Two Lever handles offer separate control of hot and cold water
- 12.0 gpm (45.4 l/min) @ 45 psi
- 6-1/2" (165 mm) spout reach
- Nondiverter bath spout
- KOHLER® ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Coordinates with Loure faucets, accessories, and showering components to complete your bathroom



1-800-4KOHLER (1-800-456-4537)  
Kohler Co. reserves the right to make revisions without notice to product specifications.  
For the most current specification sheet, go to [www.kohler.com](http://www.kohler.com) USA or [www.kohler.ca](http://www.kohler.ca) Canada.  
7-29-2026 22:20 - US-CA

THE BOLD LOOK  
OF **KOHLER**®

## Codes/Standards

ASME A112.18.1/CSA B125.1

## Technical Information

*All product dimensions are nominal.*

### Handle

Handle Style/Type: Lever

### Spout

Spout Reach: 6-1/2" (165 mm)

### Flow Rate

Faucet Flow Rate: 12 gpm (45.4 l/min)

## Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

## Recommended Products/Accessories


K-23723 Faucet cleaner

## Warranty

*See website for detailed warranty information.*

KOHLER® Faucet Lifetime Limited Warranty



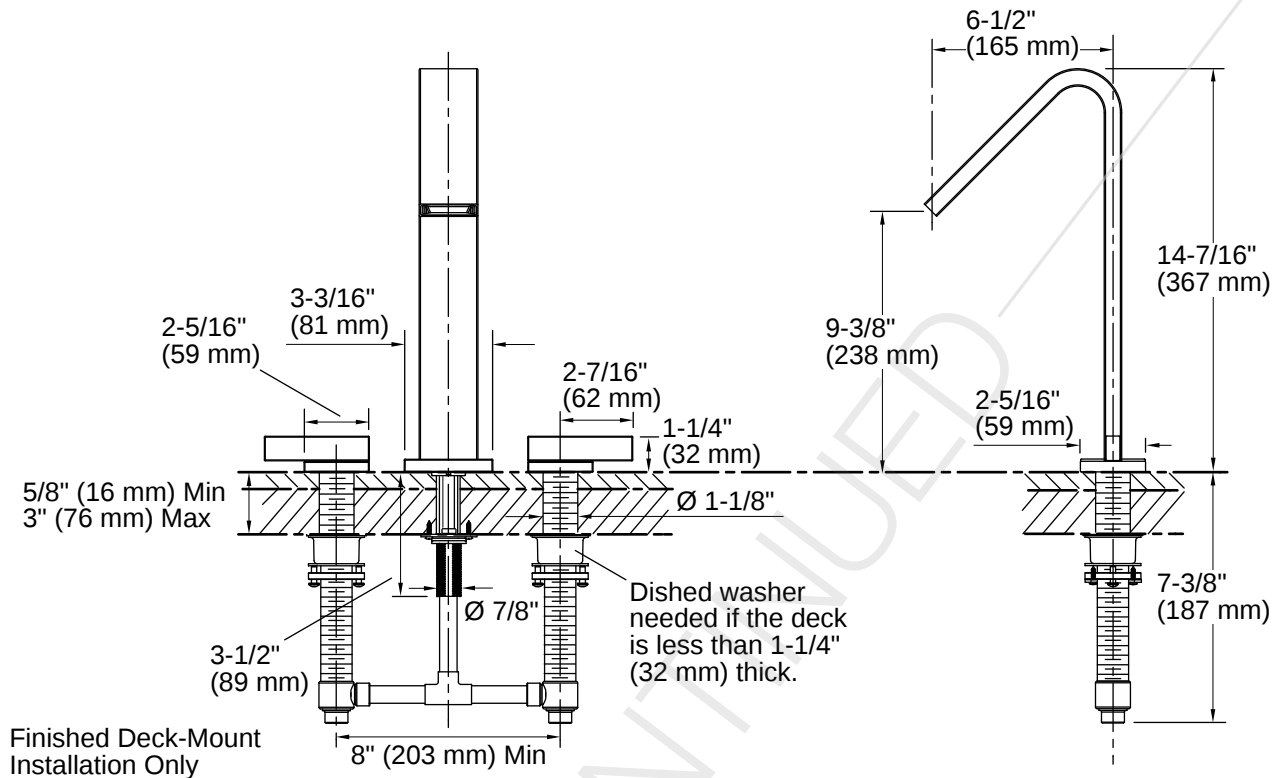

## Installation

- Deck- or bath-mount

## Installation Notes

*Install this product according to the installation instructions.*

For a finished bath deck/rim less than 5/8" (16 mm) thick:  
Install wood reinforcing material to the underside of the deck/rim. The combined thickness of the reinforcing material and the deck/rim must not exceed 3" (76 mm).

