


WRTRPENDT



When the light frame is tilted back and forth and unbalanced.

Please remove the 6 pieces of glass in the front and back direction and weigh them, then 3 pieces of glass as a group, the weight of the 2 groups is equal and then install them separately according to the group.

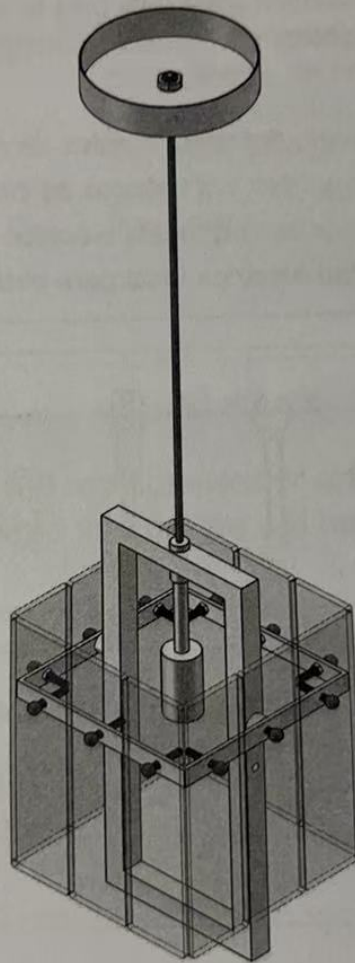


IMPORTANT

Always shut off power to the circuit before starting installation work. In some countries electrical installation work may only be carried out by a authorised electrical contractor. Contact your local electricity authority for advice.

IMPORTANTE

Siempre apague la energía del circuito antes de comenzar el trabajo de instalación. En algunos países, los trabajos de instalación eléctrica solo pueden ser realizados por un contratista eléctrico autorizado. Póngase en contacto con su autoridad eléctrica local para obtener asesoramiento.

TOOLS REQUIRED

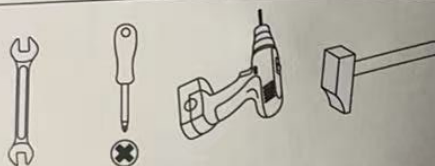

This chandelier requires 1 x E12 base max 40W bulbs (Not Included)



The manufacturer and distributor accepts no liability for incorrect installation.




If you have questions about installation, accessories, technical parameters, etc., you can also directly contact us through the site message letter. For detailed operation steps, see page 3 - 4 of the manual.

1-Year warranty (Free replacement or unconditional refund) 24/7 services, Feel free find us, we will help you soon if any problems.




NOTE:The uneven side of the glass faces the front!

Please use the parts list to ensure you are not missing any parts.



Part	Picture	Description	Qty	Check list
P01		Fixture body	1	
P02		Mounting strap	1	
P03		Mounting strap Screws	2	
P05		Handmade glass	12	
P06		Wire nut	3	
P07		Junction box screws	2	
P08		Fixture frame	1	
P09		Fixture frame and handmade glass connection 0.3" hexagonal nuts	12	
P10		Handmade glass connection 0.4" knurled knobs	12	
P11		1.0" threaded rod	12	


Part	Picture	Description	Qty	Check list
P12		Ceiling screws	2	
P13		Rubber plugs	2	
P15		Transparent Rubber Gasket	12	

Frame Assembly Instructions

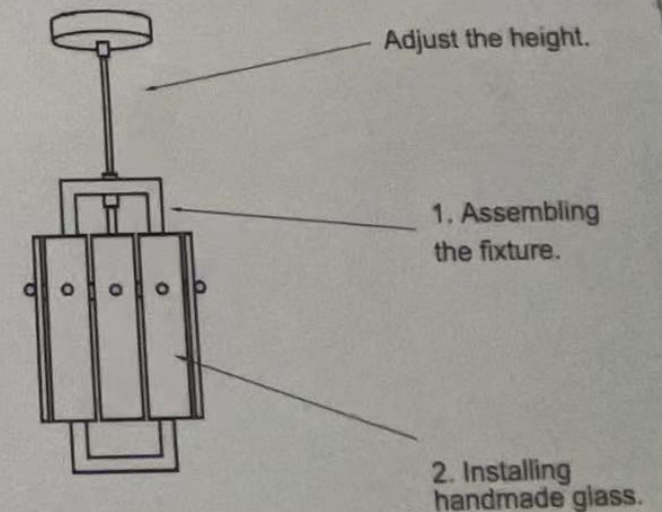



1. Assembling the fixture

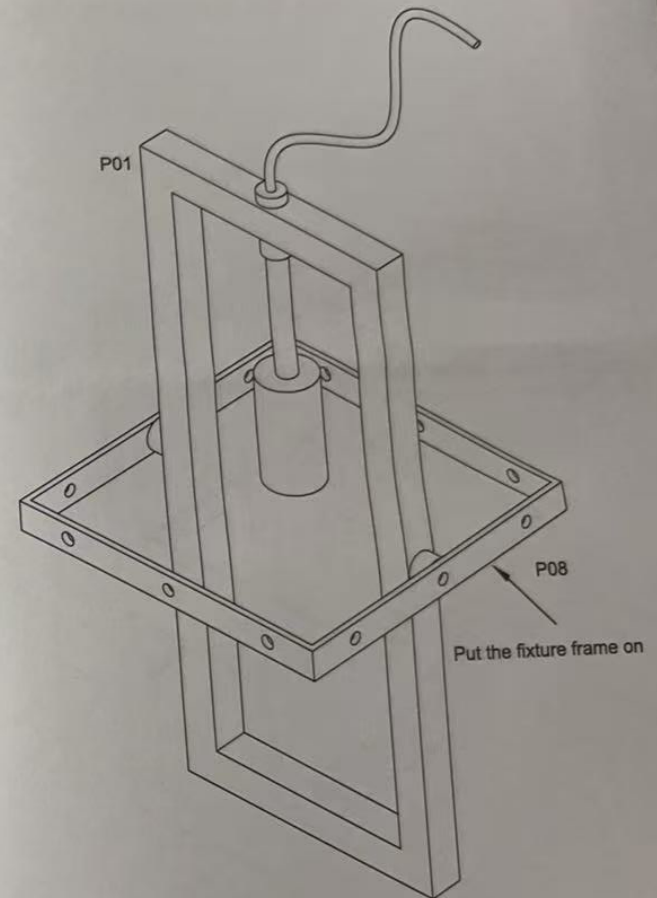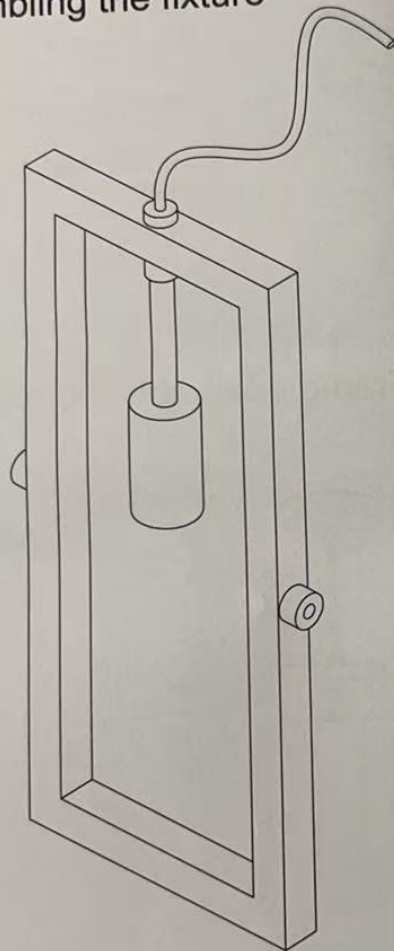

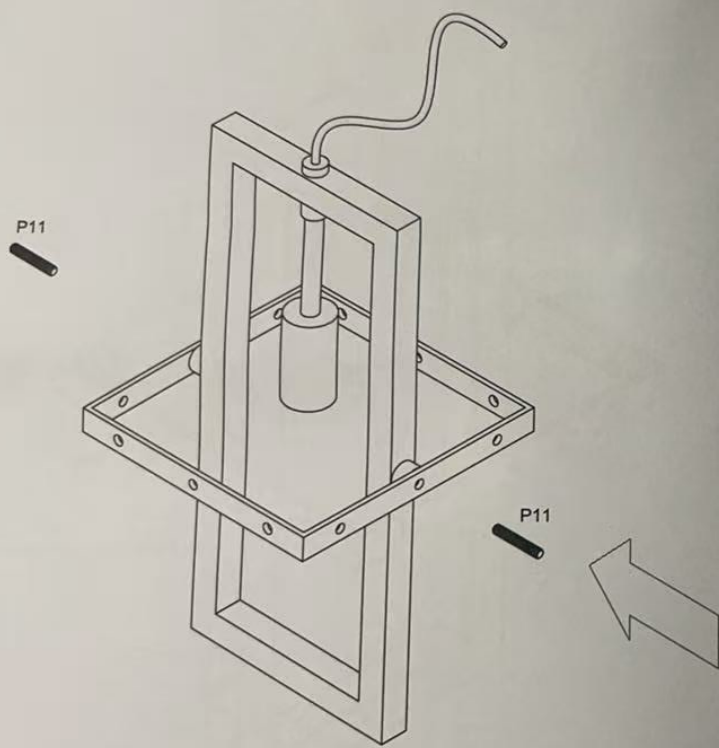

2. Installing handmade glass.

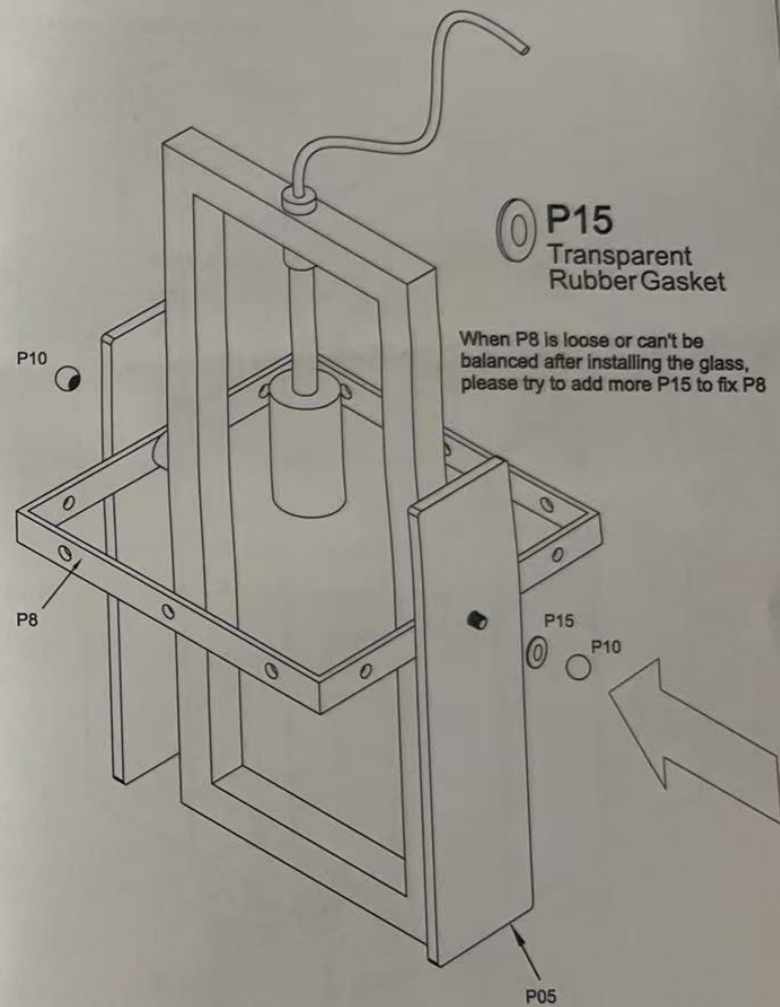


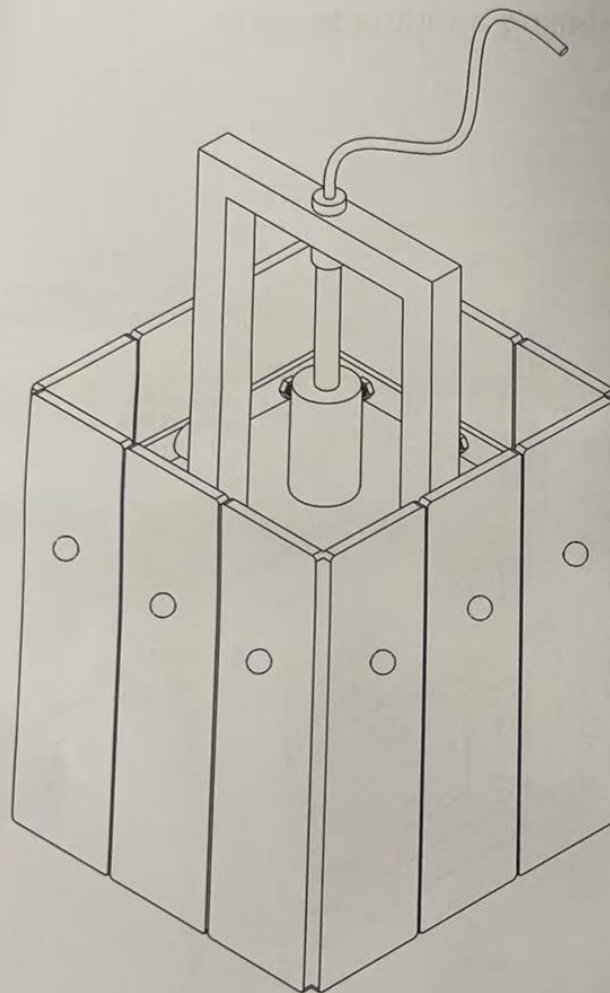


3. Installing the mounting strap.

There are two installation methods, respectively as follows.

A. Attaching the mounting strap to the ceiling

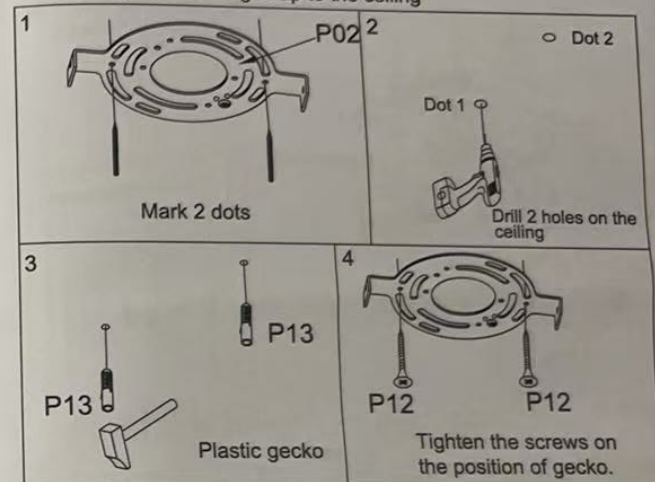


B. Attaching the mounting strap to the junction box.

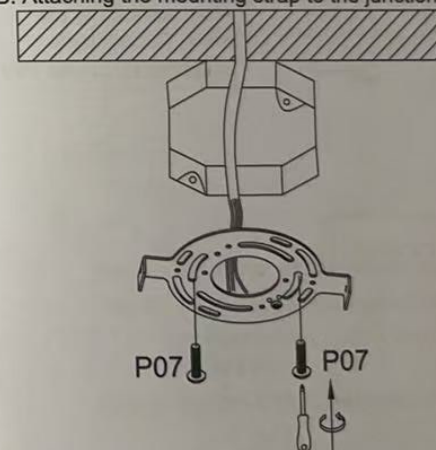


4. Connect the wires.

Connect the Live wire and neutral wire accordingly with (P06).
PS: There are labels *L* and *N* at the end of the wire.

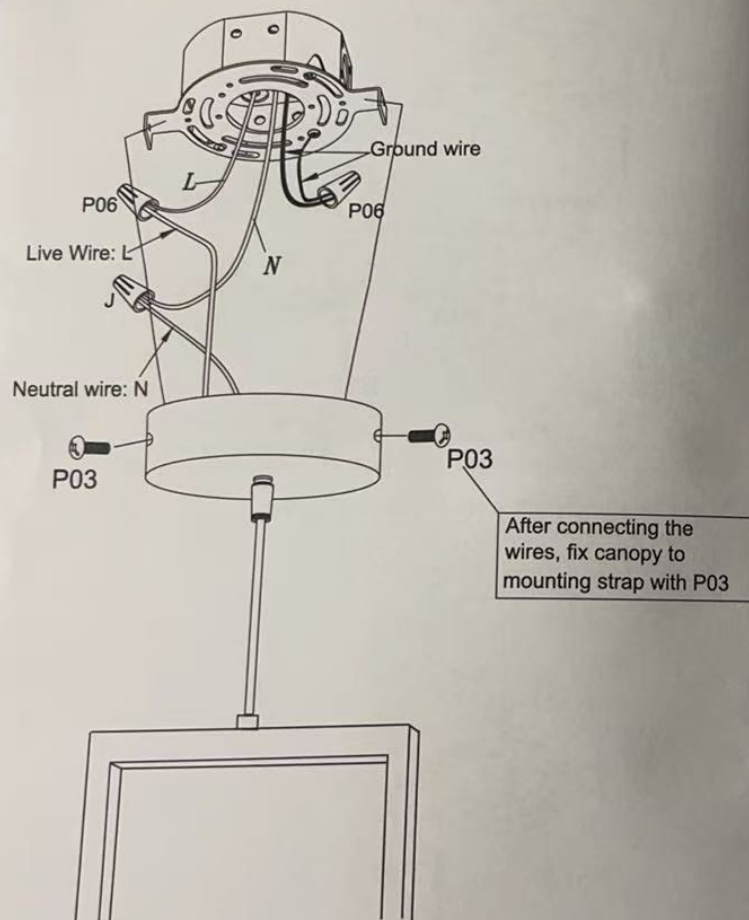


5. Power-on test.

Please install the E12 bulb to test whether it works.
If the lamp does not work, please check whether the wiring is properly connected. If it still does not work, please contact us for return or exchange.

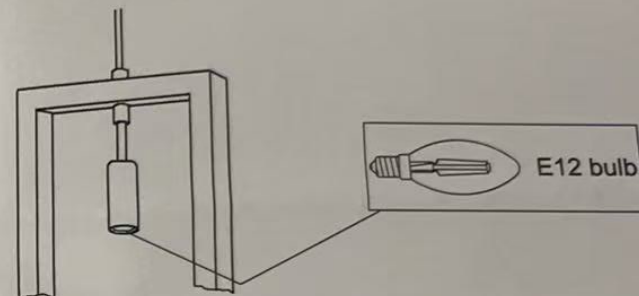

6. Adjust the height of the light.

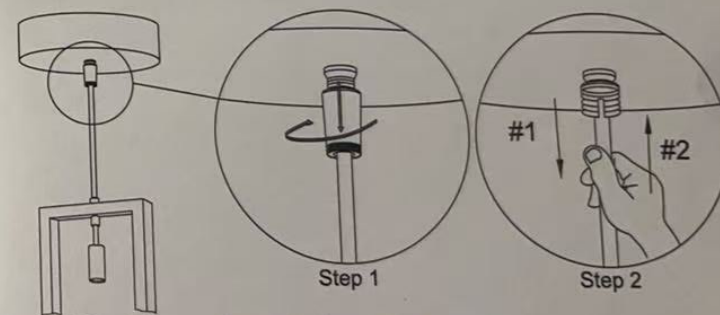

Step 1: Loosen the device holding the wires.

Step 2: Lengthened island lights: Reference #1: Pull the wire down.

Shortened island lights: Reference #2: Push the wire up into the canopy.

Step 3: Tighten and fix the wiring device.