

Project:

Location:

Fixture Type:

Catalog Number:

AVAILABLE FINISHES:



Illusion

PD-72316

PRODUCT DESCRIPTION


Perfect in design and function. Oval shaped, etched opal glass provides beautiful and consistent illumination from integral LEDs concealed within.

FEATURES

- Driver concealed within the canopy
- Mouth blown etched opal glass
- Spin-on round canopy with minimal hardware
- Three 12" and one 6" down rods included (additional sold separately)
- Slope ceiling adaptable. Hang straight swivel.
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Not recommended for dimming @220V

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-5%, TRIAC: 100-10%
Color Temp	3500K, 3000K, 2700K
CRI	90
Construction	Mouth blown etched opal glass with decorative metalwork

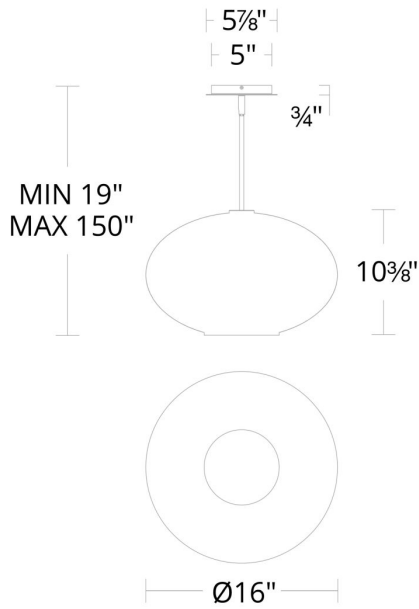

PD-72316

REPLACEMENT PARTS

- RPL-GLA-72316 - Replacement Glass
- RPL-RODIN06-886-AB - 6" Rod - AB finish
- RPL-RODIN12-886-AB - 12" Rod - AB finish

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-72316 16"	2700K	AB Aged Brass	20.2W	3370	1554
	2700K	BK Black	20.2W	3370	1554
	3000K	AB Aged Brass	20.2W	3370	1554
	3000K	BK Black	20.2W	3370	1554
	3500K	AB Aged Brass	20.2W	3370	1554
	3500K	BK Black	20.2W	3370	1554

Example: **PD-72316-35-BK**

For custom requests please contact customs@modernforms.com



Project: _____

Location: _____

Fixture Type: _____

Catalog Number: _____

AVAILABLE FINISHES:



Illusion

PD-72322

PRODUCT DESCRIPTION


Perfect in design and function. Oval shaped, etched opal glass provides beautiful and consistent illumination from integral LEDs concealed within.

FEATURES

- Driver concealed within the canopy
- Mouth blown etched opal glass
- Spin-on round canopy with minimal hardware
- Three 12" and one 6" down rods included (additional sold separately)
- Slope ceiling adaptable. Hang straight swivel.
- Built in color temperature adjustability. Switch from 2700K/3000K/3500K
- Option to pre-select color temperature or adjust in the field
- Not recommended for dimming @220V

SPECIFICATIONS

Rated Life	50,000 Hours
Standards	ETL, cETL,Damp Location Listed, Title 24 JA8: 2019 Compliant
Input	120-277 VAC, 50/60Hz
Dimming	ELV: 100-5%, TRIAC: 100-10%
Color Temp	2700K, 3500K, 3000K
CRI	90
Construction	Mouth blown etched opal glass with decorative metalwork

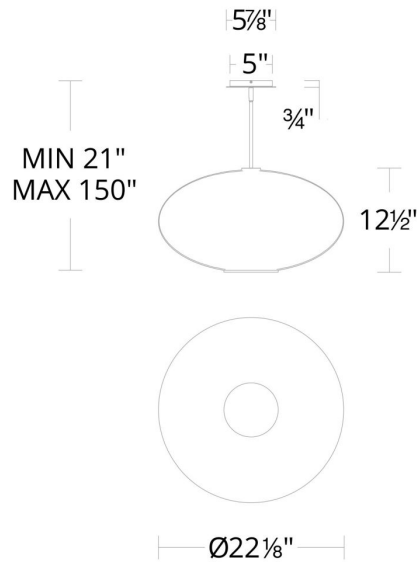

PD-72322

REPLACEMENT PARTS

- RPL-GLA-72322 - Replacement Glass
- RPL-RODIN06-886-AB - 6" Rod - AB finish
- RPL-RODIN12-886-AB - 12" Rod - AB finish

Model & Size	Color Temp	Finish	LED Watts	LED Lumens	Delivered Lumens
PD-72322 22"	2700K	AB Aged Brass	29.3W	5055	2331
	2700K	BK Black	29.3W	5055	2331
	3000K	AB Aged Brass	29.3W	5055	2331
	3000K	BK Black	29.3W	5055	2331
	3500K	AB Aged Brass	29.3W	5055	2331
	3500K	BK Black	29.3W	5055	2331

Example: **PD-72322-35-BK**

For custom requests please contact customs@modernforms.com