



Specifications

Input Voltage: 120V, 60 Hz AC operation (15V DC driver output)

Wattage. LP-1 = 2.9W
 LP-3KIT = 8.2W
 LP-5KIT = 13W

Maximum Run 6 single pucks or one 5-light kit plus one single puck using LP-6P-15W (included with 5-light kits)

LED specs 5630 SMD LEDs, 30,000 hours rated life

Finish Black or White

Colour Temperature Warm White (3000K)

Colour Rendering Index 80

Dimmers Dimmable with inline dimmer attached to plug-in drivers (LP-3P-9W and LP-6P-15W)

Lead wires 60" lead wires

Construction Heavy duty, hard durable plastic


Dimensions H = 7/8" (surface mounted), H = 1/8" (recessed mounted), Diameter = 2-15/16"

Mounting Recess or surface mount


Cut-out 2-5/8" hole size for recessed mounting

Warranty 2 Year

Recess Mount

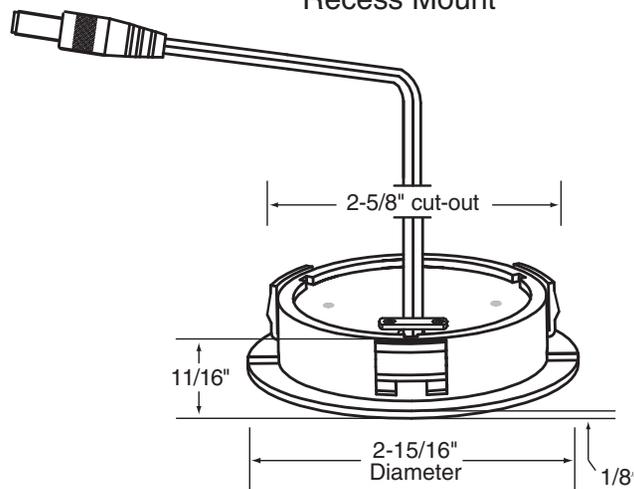

Surface Mount

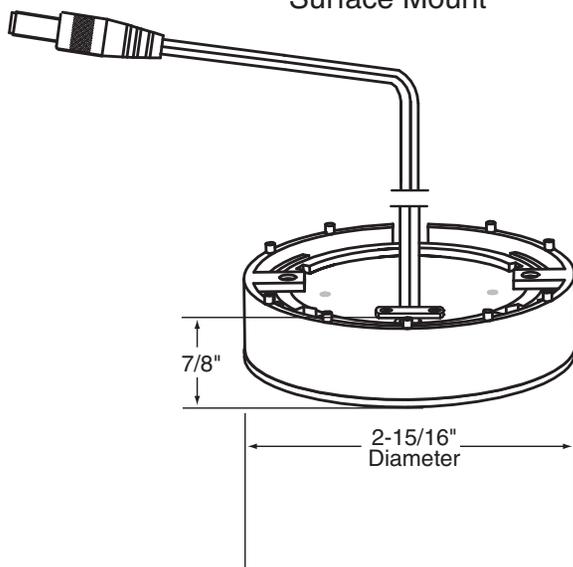

LP-X-YY

LED LP	Kit	Finish
Puck Light	1=Single Puck	WH= White
	3KIT=3 Puck Kit	BK = Black
	5KIT=5 Puck Kit	

NOTE:
 LP-3KIT-YY includes 3-hub connector, 9W plug-in driver and inline dimmer.
 LP-5KIT-YY includes 6-hub connector, 15W plug-in driver and inline dimmer.

Revisions:

4		
3		
2		
1		



Project:

Part number: LP-X-YY

Scale: NTS

Product: LED PUCK LIGHT, 3000K

Type:

Date: