


INSTALLATION INSTRUCTIONS FOR FIXTURE

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.
AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

ASSEMBLING THE FIXTURE (FIG. 1)

1. Shut off the power at the fuse box or circuit breaker. If necessary, remove the old fixture including the mounting hardware.
2. Carefully remove the new fixture from the carton and check that all parts are included as shown in the illustration.
3. Thread the loop (A) onto the nipple (B) **until snug**.
4. **Place** the tubes (C) over the sockets (D).
5. **Install** the light bulbs (**not included**) in accordance with the fixture's specifications. (**DO NOT EXCEED THE MAXIMUM WATTAGE RATING!**) (**NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!**).
6. Hang the crystal drops (F and I) onto the small rings (E) as shown in Fig. 2.
7. Hang the crystal chain (H and G) onto the fixture as shown in Figure 2.


Fig. 1

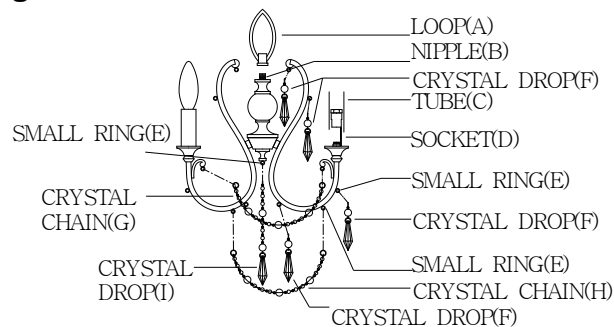

MOUNTING THE FIXTURE (FIG. 2)

1. Thread the nipple (S) into the collar loop (T) until snug.
2. Thread the other end of nipple (S) into the cross bar (P).
3. Place lock washer (Q) and hex nut (R) over the end of nipple (S) protruding through cross bar (P), then thread hex nut (R) to nipple (S) until snug.
4. Take this crossbar assembly and mount to ceiling outlet box (V) using outlet box screws (W). The side of cross bar marked "GND" must face out.
5. Use proper chain pliers to open one end link of the chain and connect to the fixture loop (A). Then close the link.
6. By measuring, determine the correct number of links needed for the **desired** hanging height. Using the chain pliers, disconnect and discard the remaining chain.
7. Carefully lace the fixture wires through the chain (X).
8. Slip the **lock collar (Y) and canopy (U)** over the chain (X), **allowing them to rest on the fixture loop (A)**.
9. Open the other end link of the chain (X) and connect to the collar loop (T). Then close the link.
10. Feed the fixture wires through the collar loop (T) and nipple (S) and pull until tight.

Fig. 2

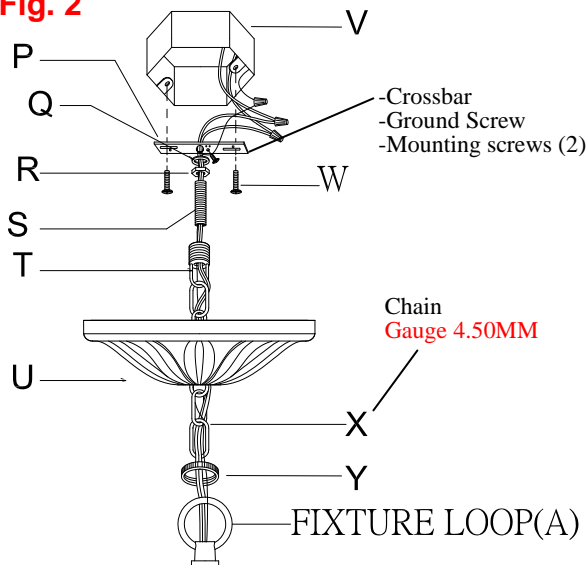

CONNECTING THE WIRES (See Wiring Diagram)

1. **Connect** the electrical wire as shown in the wiring diagram, making sure that all wire connectors are secured. If your outlet box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate using the green screw provided.
2. Tuck the wire connectors neatly into the ceiling outlet box and raise the **canopy (U) to the ceiling**. Then **raise lock collar (Y) and thread** onto collar loop (T) protruding through canopy (U).

FIXTURE WIRES BLACK OR SMOOTH		FIXTURE WIRES WHITE OR RIBBED		FIXTURE WIRES GREEN OR BARE COPPER (GROUND)	
HOUSE WIRES BLACK (HOT)		HOUSE WIRES WHITE (NEUTRAL)		HOUSE WIRES GREEN OR BARE COPPER (GROUND)	



Your installation is now complete. Return power to the outlet box and test the fixture.

Notice: It is important to use proper chain pliers (not included) to OPEN and CLOSE the chain included with this fixture. Do not open them with other tools that may twist or stress the chain links. It is important to use proper chain pliers like the ones shown in the diagram.

