


Coat Rack with Bench


GYJ076

Assembly Instructions

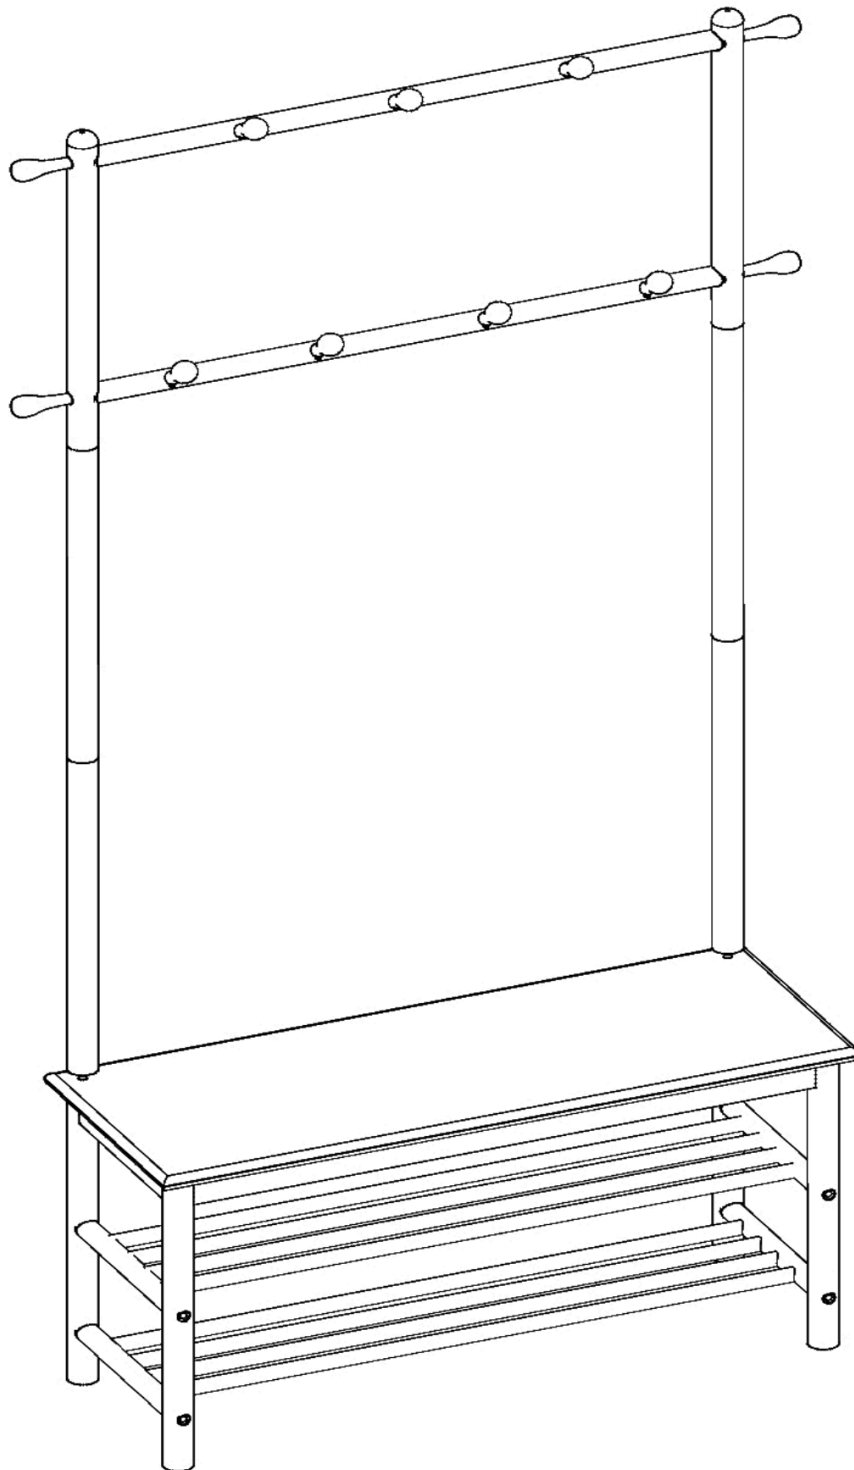


Parts List

A Bench Frame

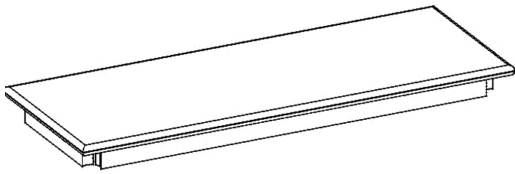

1 PC

B Shelf

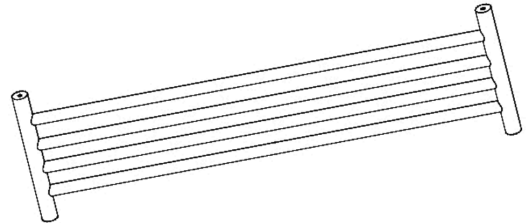


1 PC

C Leg 1



2 PCS


D Leg 2



2 PCS


Parts List (continued)

E Column 1

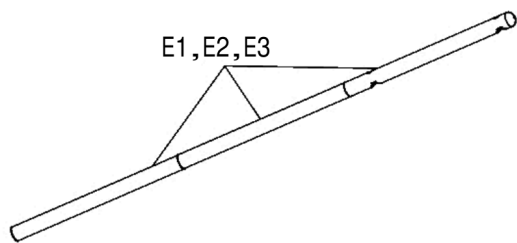


1 set: E1, E2, E3

F Column 2

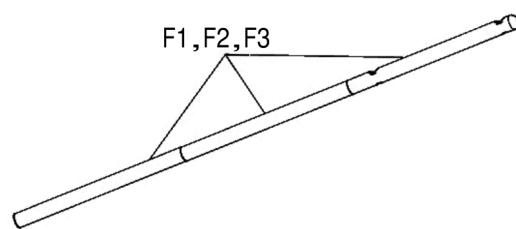


1 set: F1, F2, F3

G1 Crossbar 1

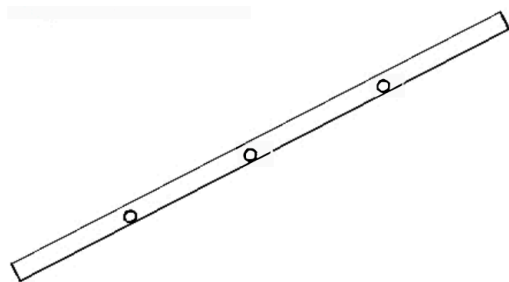

1 PC

G2 Crossbar 2

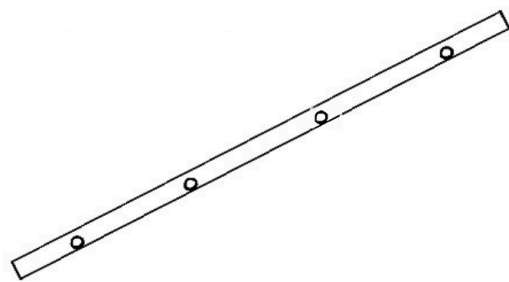

1 PC

Parts List (continued)

H Long Hook



4 PCS


J Short Hook



7 PCS

Hardware & Tools

1 Flat-Head Screw



7 × 50

9 PCS

2 Hex Socket Head Screw



1/4 × 50

4 PCS

3 Spring Washer



1/4 × 8

4 PCS

Hardware & Tools (continued)


4 Flat Washer



1/4 × 13

4 PCS

5 Hex Socket Head Screw



5/16 × 35

2 PCS

6 Flat Washer




5/16 × 19

2 PCS

Hardware & Tools (continued)

7 Hex Keys

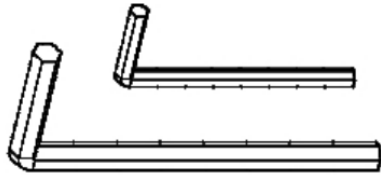


#4 + #5

1+1 PCS

Tools - reuse as needed


8 Foot Pad

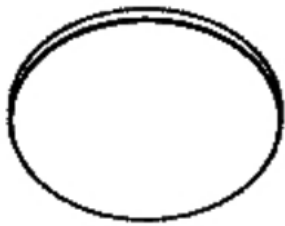

8 PCS

Step 1



Join column sections E1, E2, E3 in order, then F1, F2, F3, as shown. Section 1 is at the bottom, section 2 in the middle, and section 3 at the top.

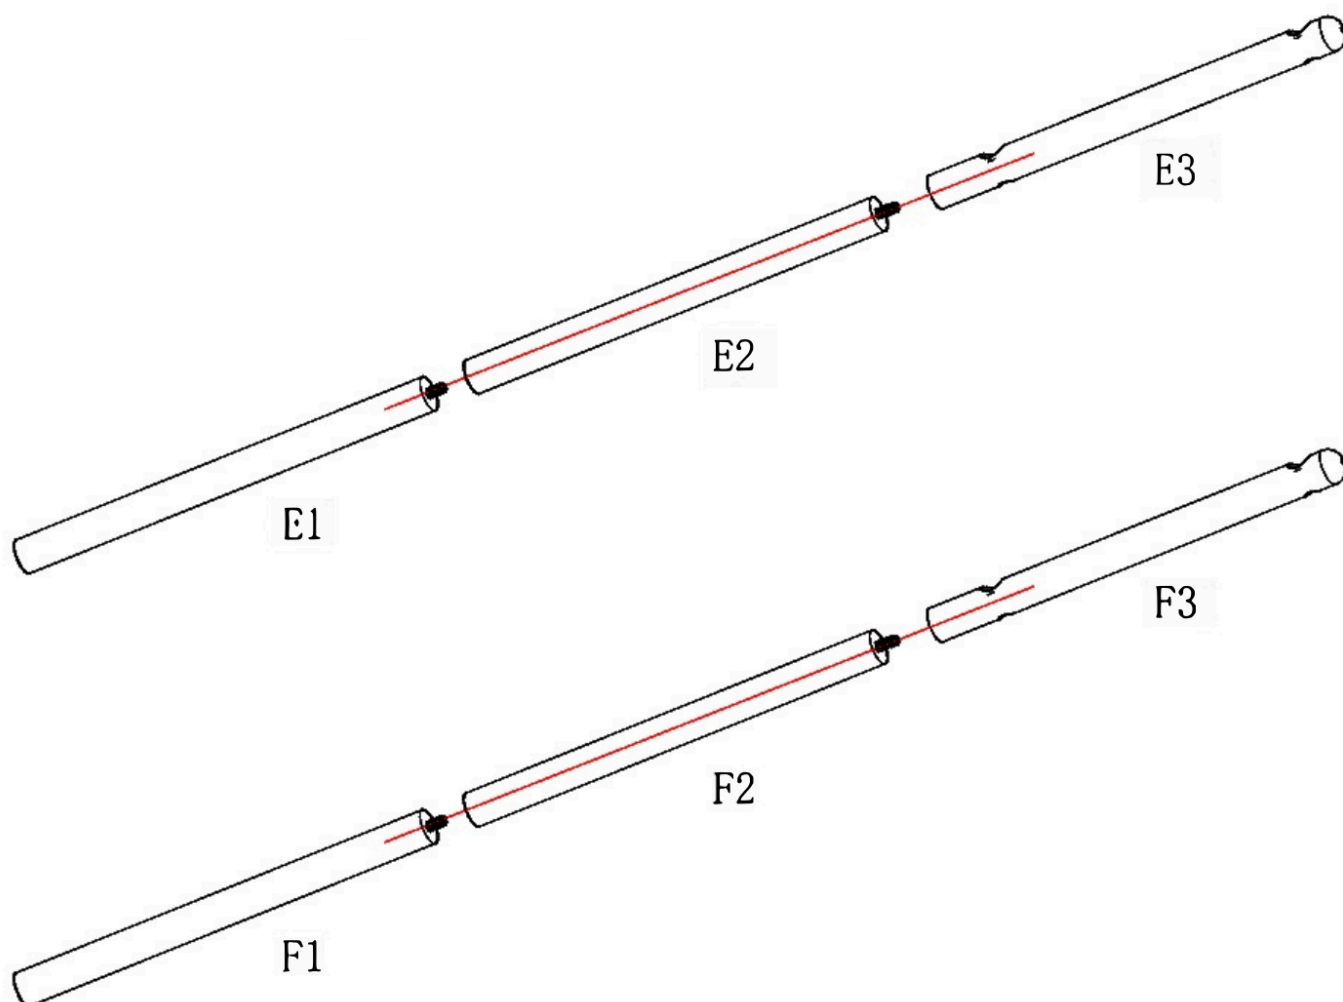

Step 2

Tighten short hooks J into the holes in crossbars G1 and G2.
You may choose either crossbar for the upper or lower position.


Short hooks: J × 7.

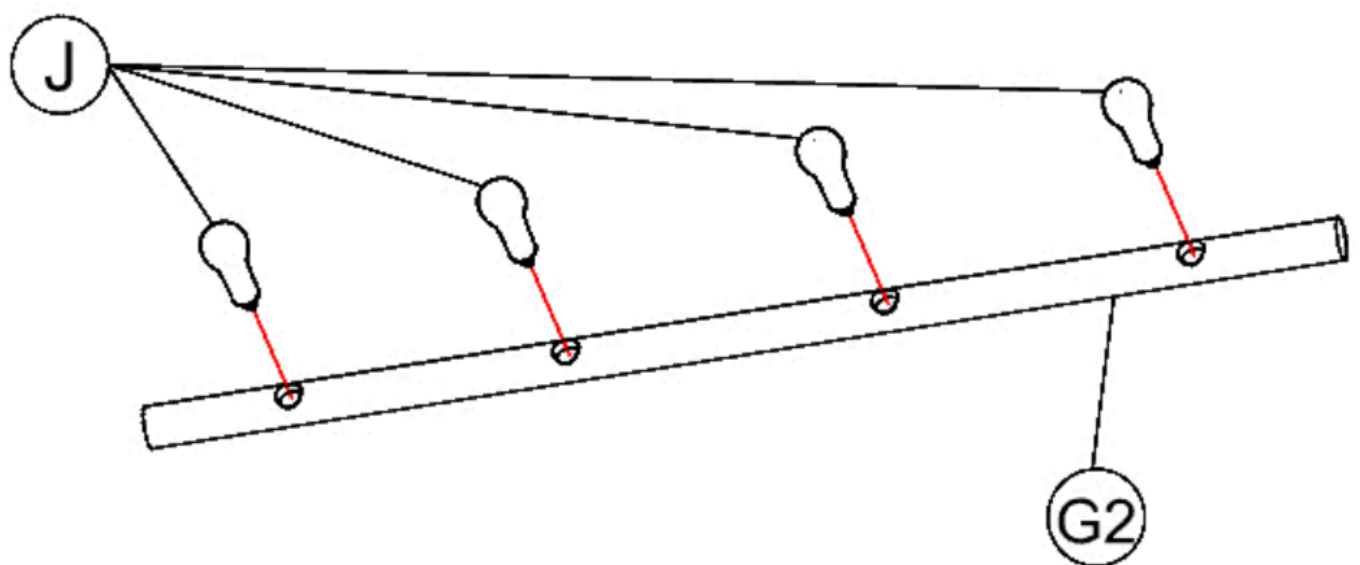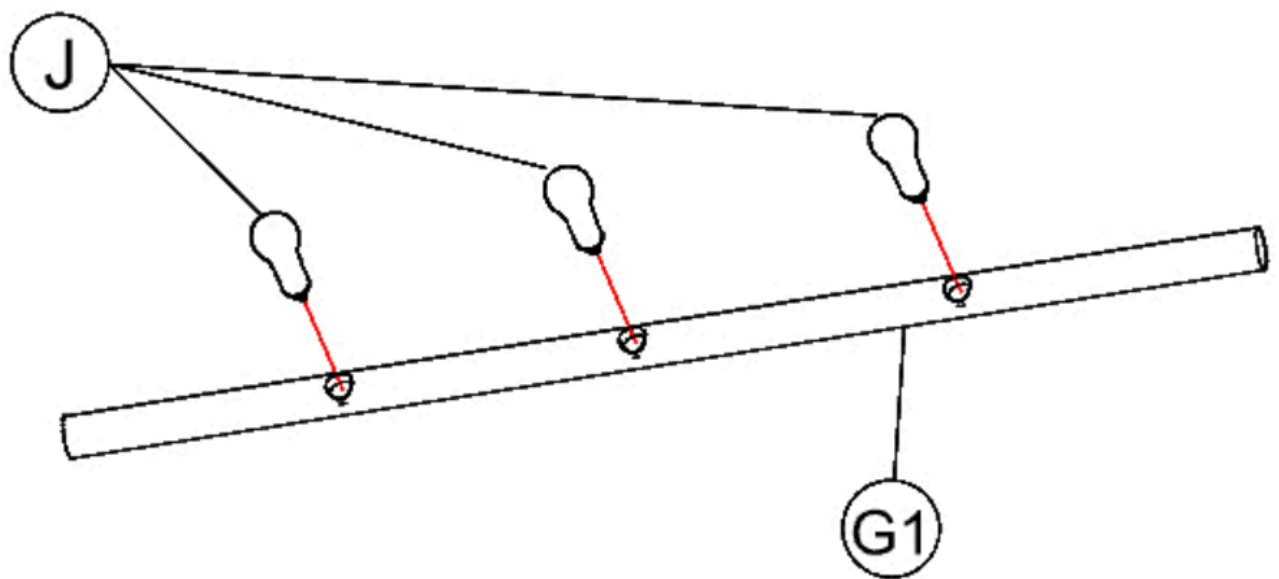

Step 3

Use long hooks H to connect crossbars G1 and G2 to columns E and F, as shown.
The small hole in E3 must face outward.


Long hooks: H × 4.

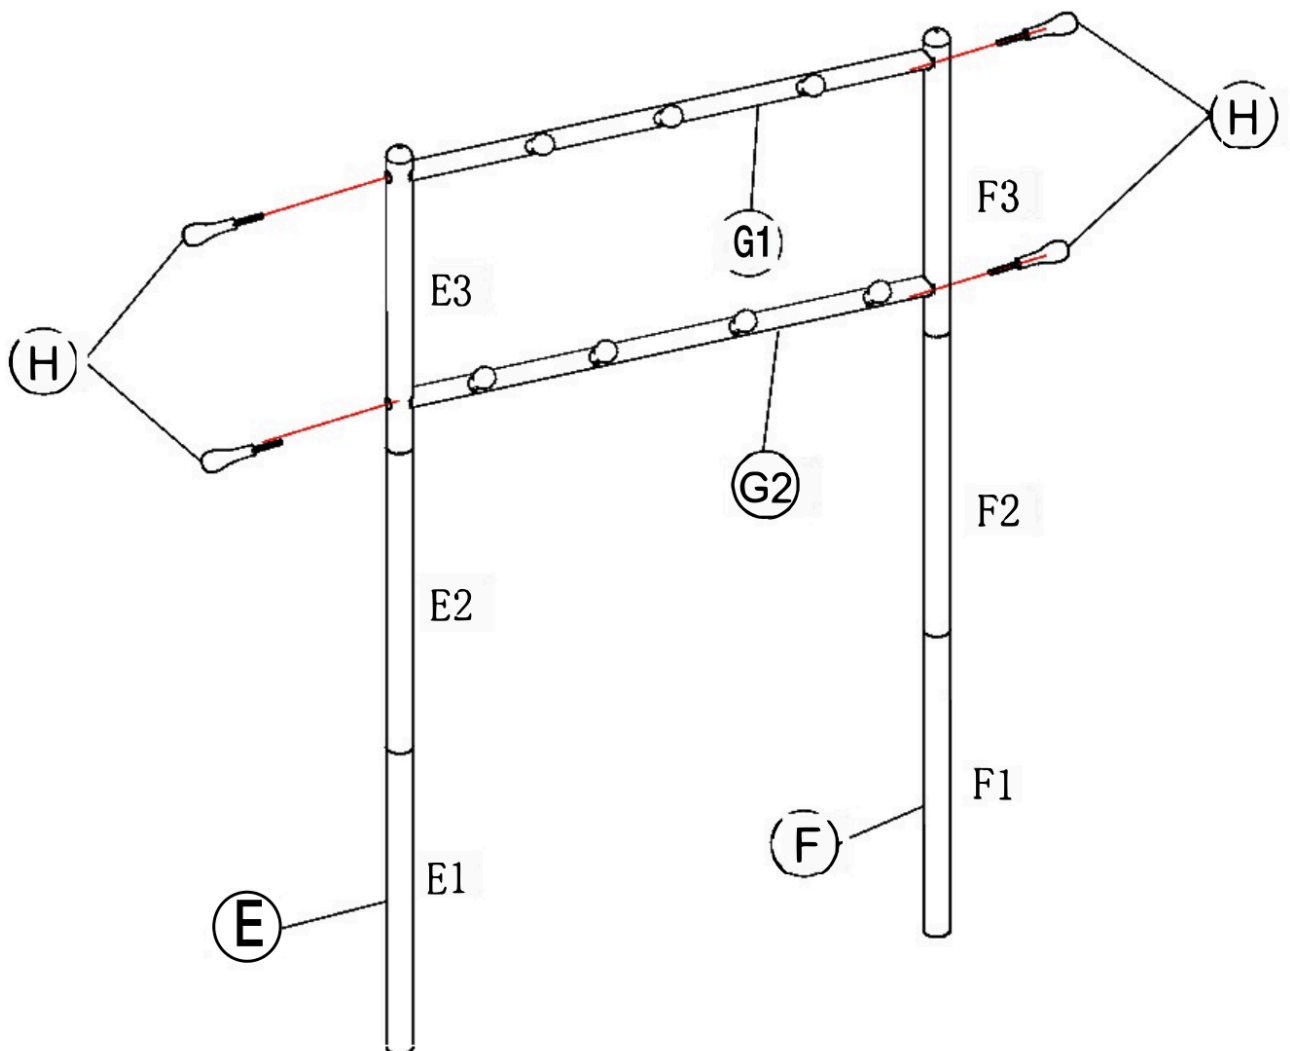

Step 4

Lay the assembly flat. Attach bench frame A to columns E and F with screws 5 and washers 6, as shown. Use hex keys 7.


Screws 5 × 2; washers 6 × 2. Tools: 7.

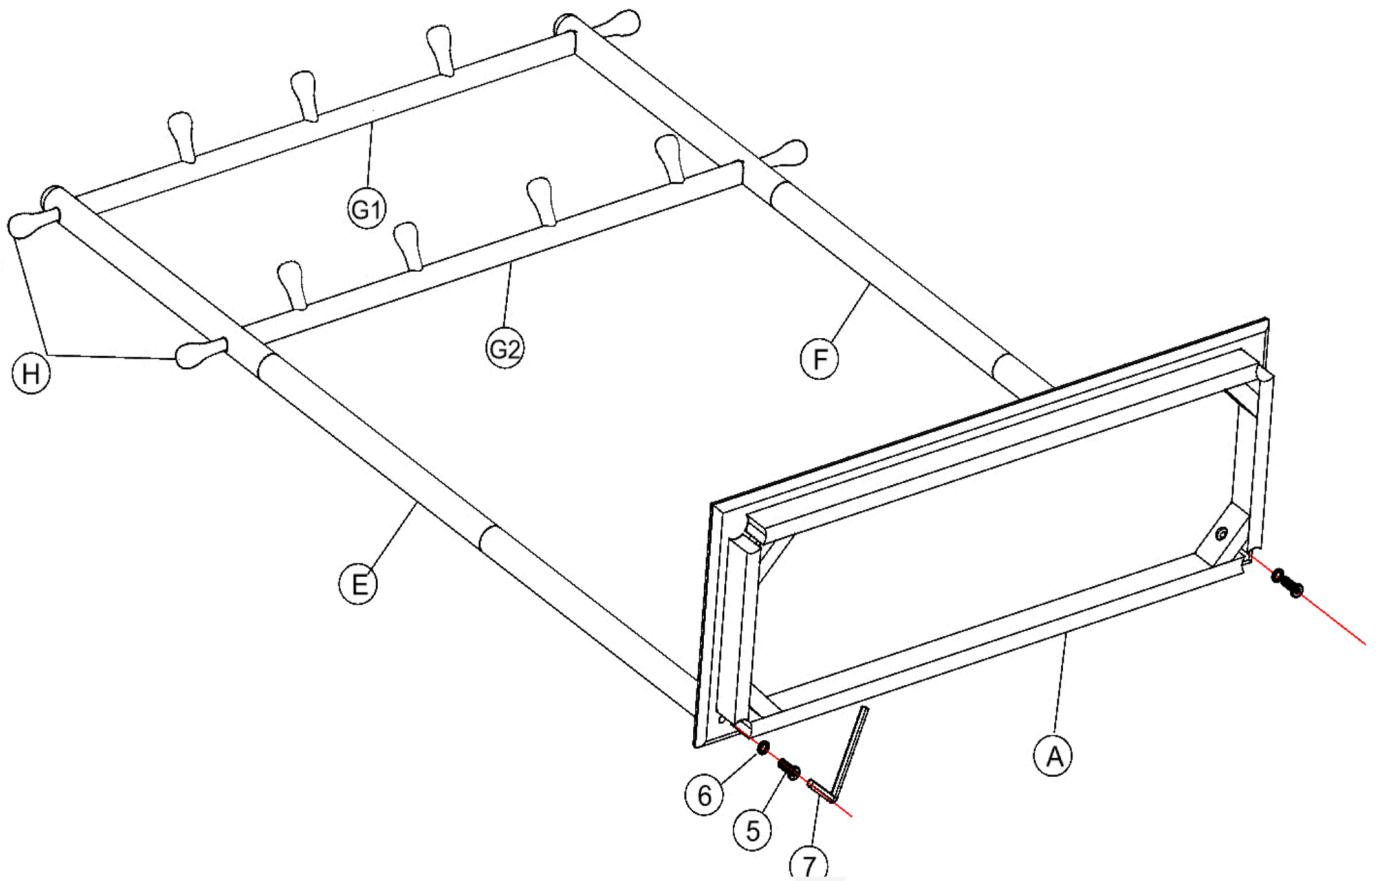

Step 5

Attach legs C and D to shelf B using screws 1 and hex keys 7.
Check the direction of the through-holes before assembly.
The end with the hole must face upward. Leave the screws slightly loose until all assembly steps are complete, then tighten.

Tools: 7.

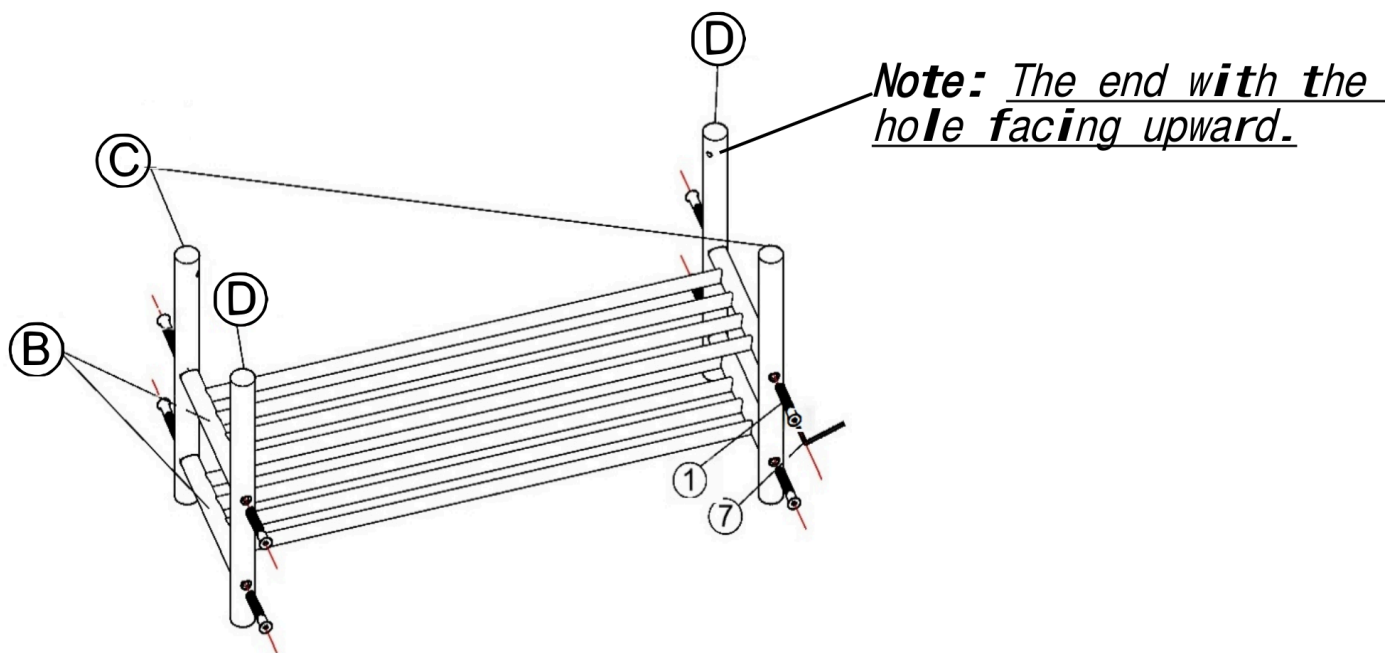

Step 6

Lay the assembly flat. Attach bench frame A to legs C and D with screws 2, spring washers 3 and flat washers 4.

Fit each spring washer 3 first, followed by flat washer 4.

Use hex keys 7. Finally, attach foot pads 8 to the four legs to complete assembly.

Screws 2 × 4; spring washers 3 × 4; flat washers 4 × 4.

