

# ASSEMBLY INSTRUCTIONS


## DINING CHAIR

### ASSEMBLY REQUIREMENTS:

2-Person Assembly

30 Minutes  
Assembly Time  
Per Chair  
(Approximate)

Tools Required (Not Provided):  
Pliers and Mallet

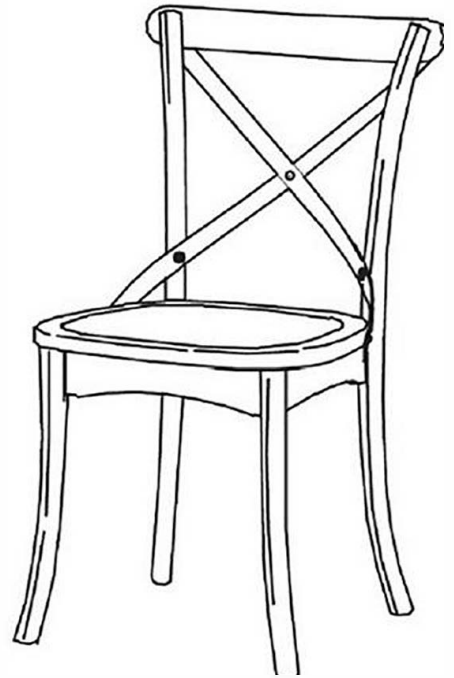

### Thank you for purchasing our product!

Please refer and use this assembly instruction to assemble the product.

We appreciate your business!

### ASSEMBLY PREPARATION

1. Remove all packaging materials, staples and packing straps from the carton.
2. Refer to Parts List and Hardware List and ensure they are complete before you start assembling.
3. Place all wooden parts on a clean, flat and soft surface (e.g. carpet or rug) to prevent parts from getting scratched.

### SAFETY PRECAUTION:

1. KEEP ALL HARDWARE PARTS OUT OF REACH OF CHILDREN.
2. DISPOSE PLASTIC PACKAGING MATERIAL IMMEDIATELY TO AVOID ANY RISK OF SUFFOCATION TO CHILDREN AND ANIMALS.

### TIPS FOR ASSEMBLY:

1. Allow ample room for assembly and in close proximity to where product will be placed.
2. Assemble the product on a surface that does not scratch or damage the exterior gloss and finish of the furniture.
3. Please check all of the parts and quantities are included before assembly. Contact customer service for missing parts.
4. Identify all of the parts, hardware and quantities required for each step.
5. During assembly, do not over-tighten any fittings as this may cause damage.
6. DO NOT USE POWER TOOLS TO ASSEMBLE THIS PRODUCT.
7. Always place the product on a flat surface.
8. Do not sit or stand on the partially assembled product; only use the product for which it is intended.

### CARE AND MAINTENANCE


- Use a slightly damp cloth to clean the product. Do not use bleach or abrasive cleaning material.
- Check all the fittings periodically and re-tighten as necessary. Do not use the product if any of the parts is damaged or broken.
- Never allow any kind of liquid to remain on your furniture. Absorption can cause wood to warp or delaminate.
- Do not place hot items (e.g. hot drinks) directly onto the wood surface.
- Do not drag and/or pull the furniture.

This product is for indoor and household use only - not for commercial use.

# ASSEMBLY INSTRUCTIONS


## DINING CHAIR

### STEP 4

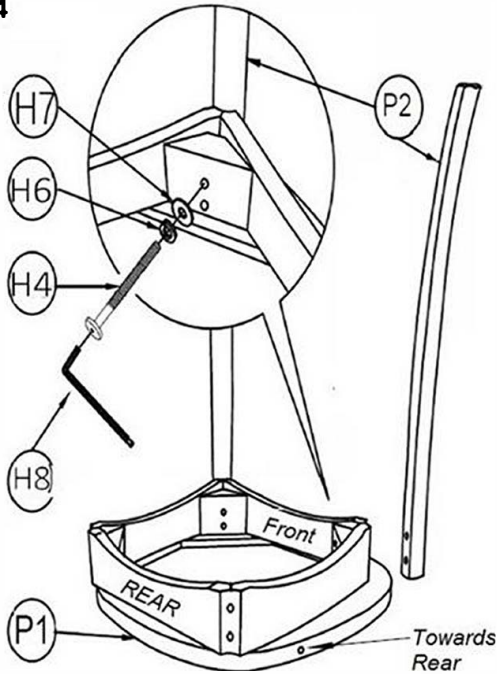


Place Chair Seat (P1) bottom side up as shown. Identify front and rear end of (P1). Align the screw holes of Front Leg (P2) to the screw holes on front corner block of (P1). Fasten (P2) to (P1) using JCBC Screw (H4) fitted Spring Washer (H6) and Flat Washer (H7). Use Allen Key (H8) to drive (H4). Do not tighten (H4) completely until both screws on each leg are in place.

### STEP 5

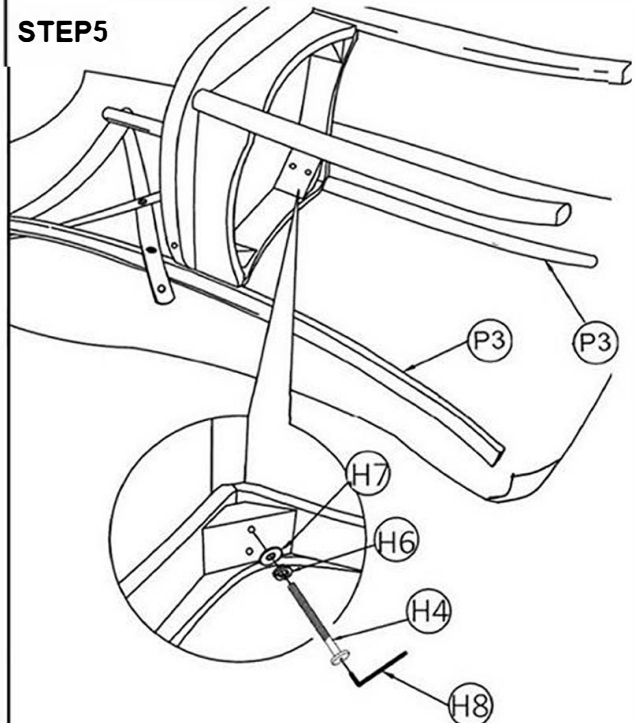


Place Back Leg assembly from STEP 3 as shown. Align screw holes on rear corner block of (P1) to the screw holes on back Leg (P3). Fasten (P1) to (P3) using JCBC Screw (H4) fitted with Spring Washer (H6) and Flat Washer (H7). Use Allen Key (H8) to drive (H4). Do not tighten (H4) completely until all of the screw on each leg are in place.

### STEP 6

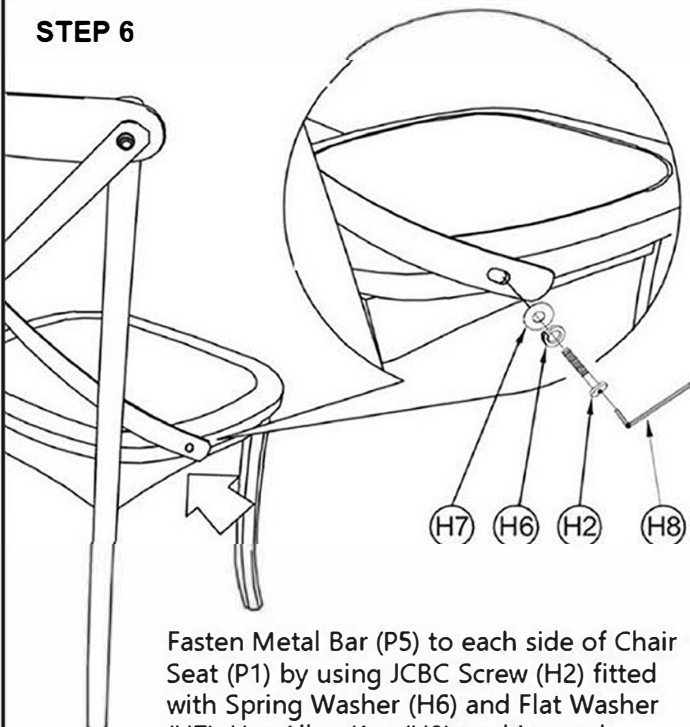

Fasten Metal Bar (P5) to each side of Chair Seat (P1) by using JCBC Screw (H2) fitted with Spring Washer (H6) and Flat Washer (H7). Use Allen Key (H8) to drive and tighten (H2). Tighten all of the screws used in each step at this time. Do not over-tighten.

### STEP 7

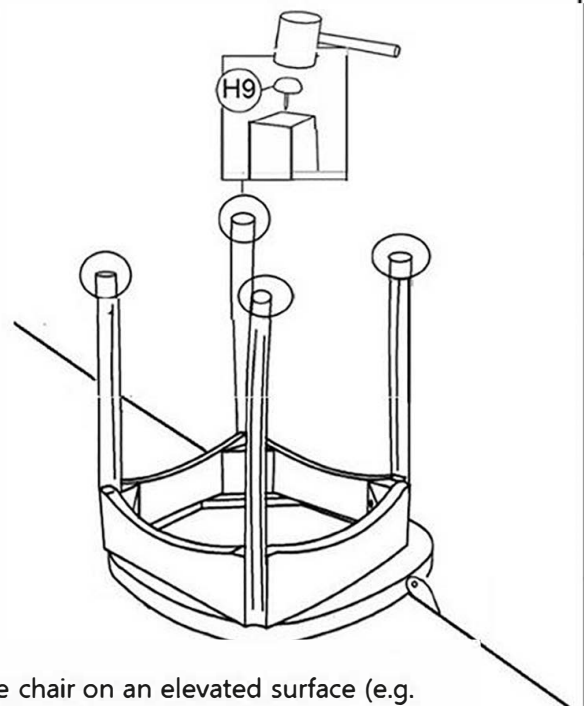

Place the chair on an elevated surface (e.g. table top) as shown. Use a mallet or hammer to affix Leg Glide (H9). Place the chair upright – the assembly of the chair is complete.










# ASSEMBLY INSTRUCTIONS

## DINING CHAIR

### PARTS LIST (FOR 2 CHAIRS)


NO.	DESCRIPTION	QTY.
P1	CHAIR SEAT	2
P2	FRONT LEGS	4
P3	BACK LEG LEFT & RIGHT	4
P4	BACK CAP RAIL	2
P5	METAL BAR	4

### HARDWARE LIST (FOR 2 CHAIRS)

NO.	DESCRIPTION	QTY.	EXTRA
H1	M6 x 10 JCBC SCREW 	2	1
H2	M6 x 20 JCBC SCREW 	8	1
H3	M6 x 45 JCBC SCREW 	4	1
H4	M6 x 70 JCBC SCREW 	16	1
H5	HEX NUT M6 	2	1
H6	SPRING WASHER 	28	2
H7	FLAT WASHER 	30	2
H8	ALLEN KEY 	1	
H9	LEG GLIDE 	8	2


\* Extra Hardware For Spare Use

### STEP 1

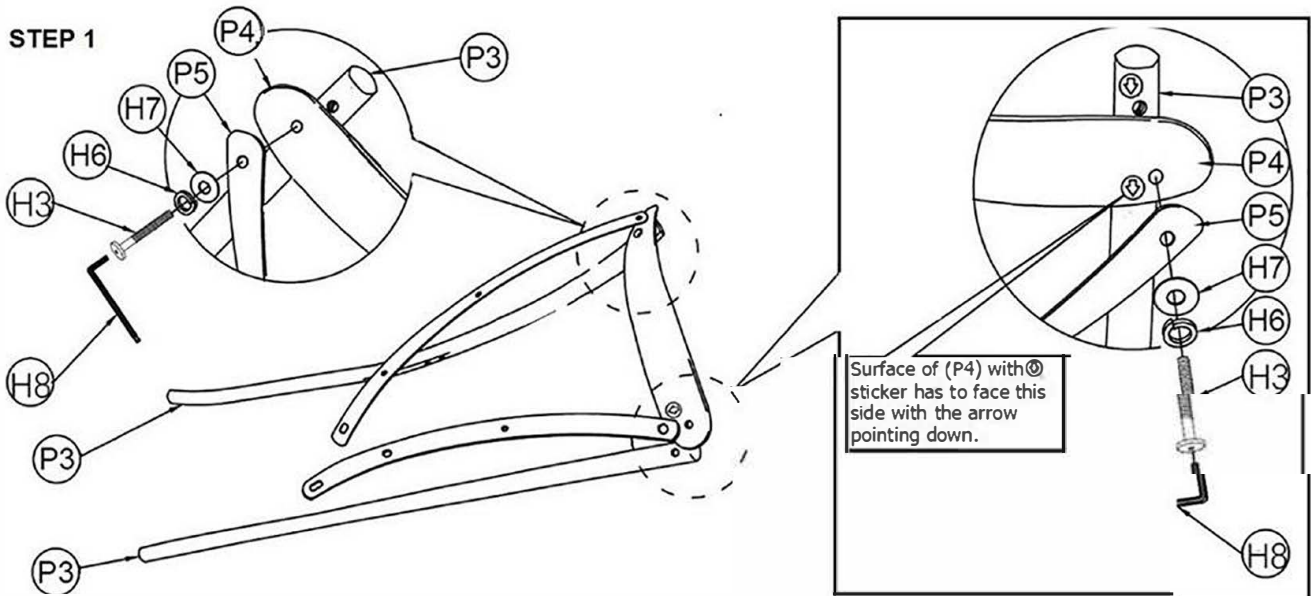


Place and assemble Back Cap Rail (P4) and Metal Bar (P5) to Back Legs (P3) as shown. Take note of the correct orientation of (P4) - ensure that the surface with the "arrow" sticker is facing the correct side as shown and the arrow is pointing downward - before placing (P5) over (P4). Fasten (P5) and (P4) to (P3) by using JCBC Screw (H3) fitted with Spring Washer (H6) and Flat Washer (H7). Use Allen Key to drive (H3). Do not tighten (H3) completely at this time.

### STEP 2

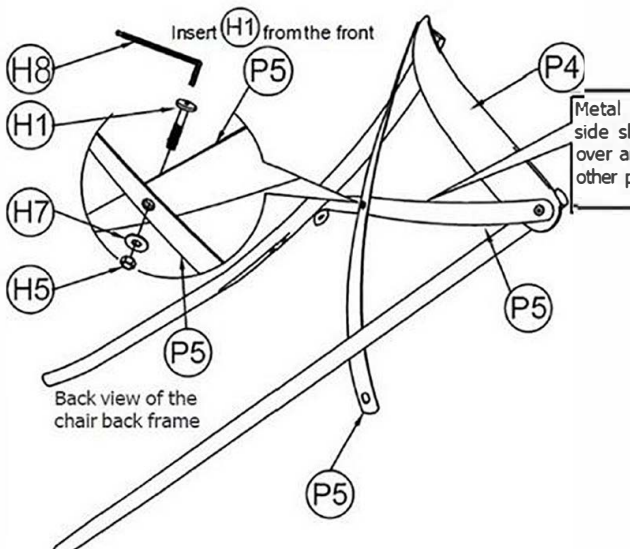

Position Metal Bars (P5) as shown - take note how the 2 Metal Bars have to overlap each other. Insert JCBC Screw (H1) from the front at the intersection and secure with Flat Washer (H7) and Hex Nut (H5). Use pliers to hold Hex nut and use Allen Key (H8) to drive (H1). Do not tighten (H1) completely at this time.

### STEP 3

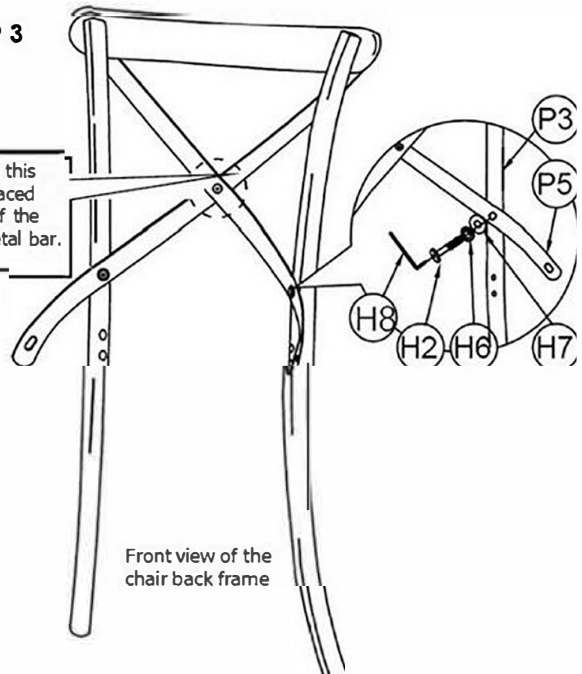

Use JCBC Screw (H2) fitted with Spring Washer (H6) and Flat Washer (H7) to fasten Metal Bars (P5) to Back Legs (P3). Use Allen Key (H8) to drive (H2) - do not tighten completely at this time.