

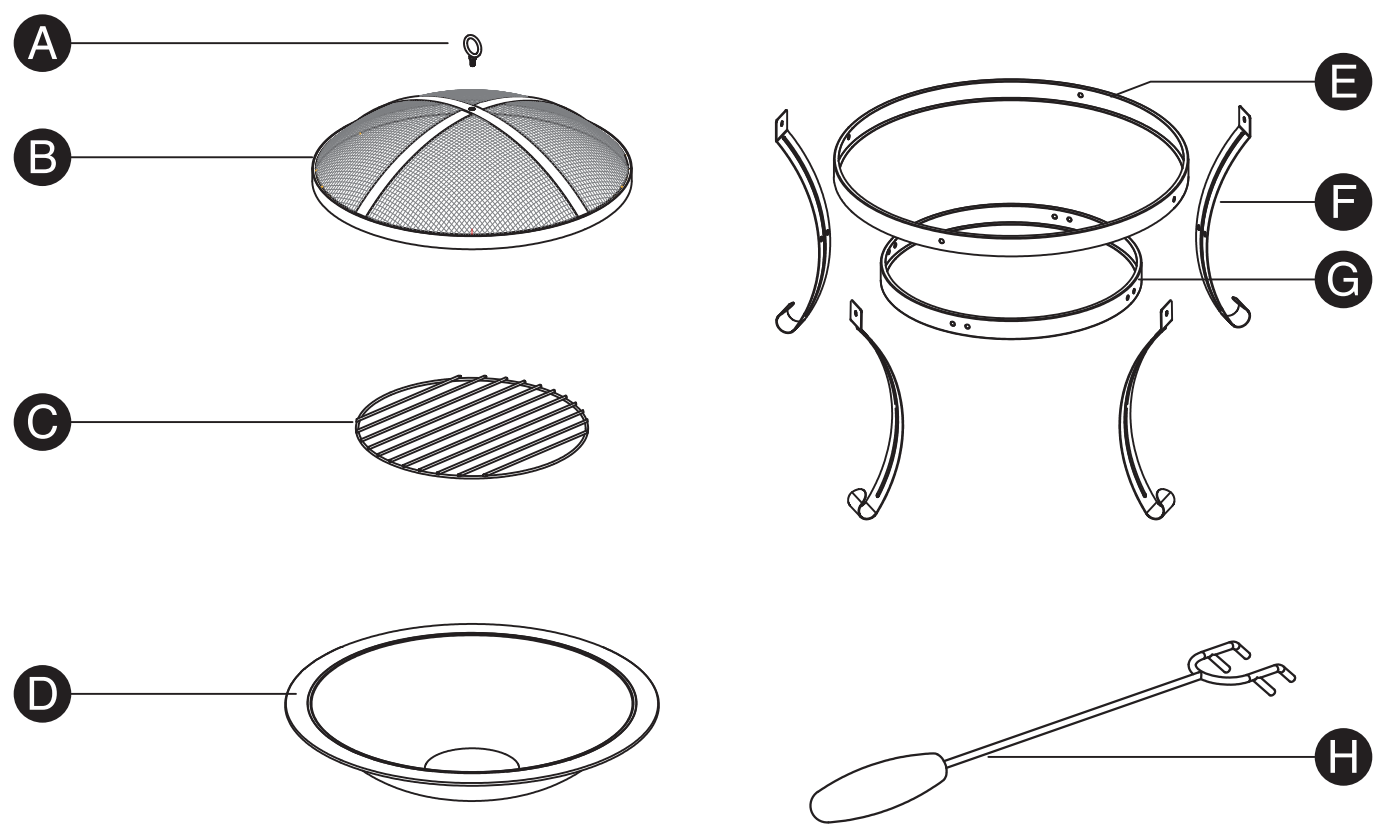
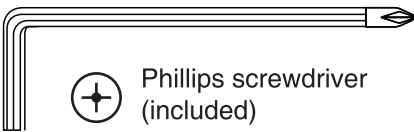





| PART | DESCAPTION         | QUANTITY |
|------|--------------------|----------|
| A    | Mesh Cover Bracket | 1        |
| B    | Mesh Cover         | 1        |
| C    | Log Grate          | 1        |
| D    | Fire Bowl          | 1        |
| E    | Bowl Support       | 1        |
| F    | Leg                | 4        |
| G    | Leg Support        | 1        |
| H    | Poker              | 1        |




| PART | DESCAPTION | QUANTITY | GIVE AWAY |
|------|------------|----------|-----------|
| AA   | M6 Bolt    | 12       | 2         |
| BB   | M6 Nut     | 12       | 2         |

1. Insert the Mesh Cover Bracket (A) into the hole in the mesh cover (B) and secure with M6 Nut (BB).


Tighten the nut with the wrench .

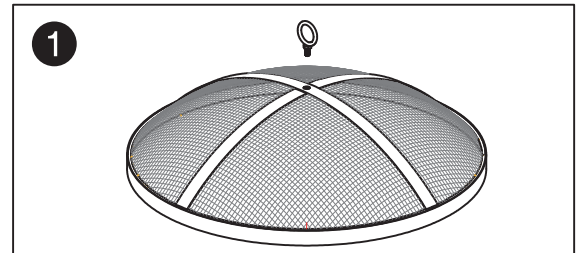

2. Attach the legs (G) to the ring (F、 H) using sets of nuts(AA) and bolts (BB).

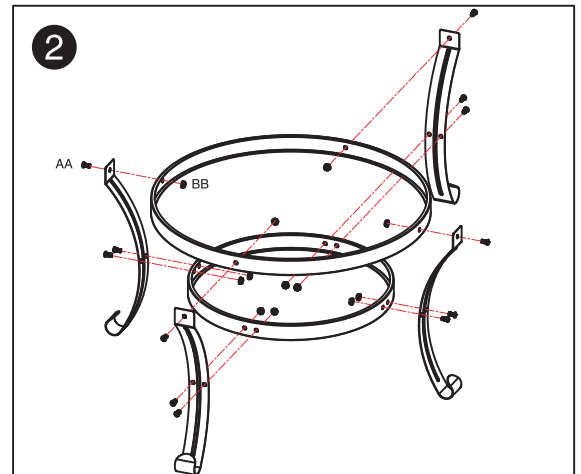

3. Insert Bottom Bowl.

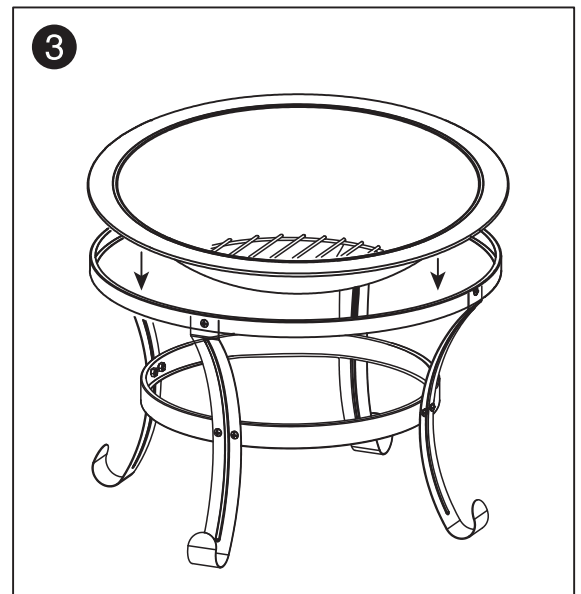

4. Place Spark Guard.

