



Salient® | K-9053

60" x 30" alcove shower base, left drain

Features

- Spacious shower base offers ample room for showering
- Safeguard® slip-resistant surface provides excellent traction underfoot
- Single threshold for alcove installation with three tile-in flanges



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

0	White
96	Biscuit
NY	Dune
58	Thunder Grey
7	Black Black



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-06-2026 16:14 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ASME A112.19.1/CSA B45.2

ASTM F462

Technical Information

All product dimensions are nominal.

Drain Location:	Left
Drain Hole Diameter:	3-3/8" (86 mm)
Shower Ledge Minimum Flat:	2-7/8" (73 mm)
Minimum Floor Load:	40 lbs/ft ²
Weight:	193 lbs (87.5 kg)

Material

- KOHLER® enameled cast iron

Recommended Products/Accessories

K-5557 Steam generator control kit

K-23726 Drain treatment

K-23725 Cast iron cleaner

K-9132 Round shower drain for use with plastic pipe, gasket included

K-706009-D3 56-5/8"-59-5/8" W x 74" H bypass shower door with 1/4"-thick Frosted glass

K-706009-L 56-5/8"-59-5/8" W x 74" H bypass shower door with 1/4"-thick Crystal Clear glass

K-706015-D3 56-5/8"-59-5/8" W x 74" H bypass shower door with 1/4"-thick Frosted glass

K-706015-L 56-5/8"-59-5/8" W x 74" H bypass shower door with 1/4"-thick Crystal Clear glass

Warranty

See website for detailed warranty information.

KOHLER® Enameled Cast Iron Bath and Shower Base

Lifetime Limited Warranty




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-06-2026 16:14 - US-CA

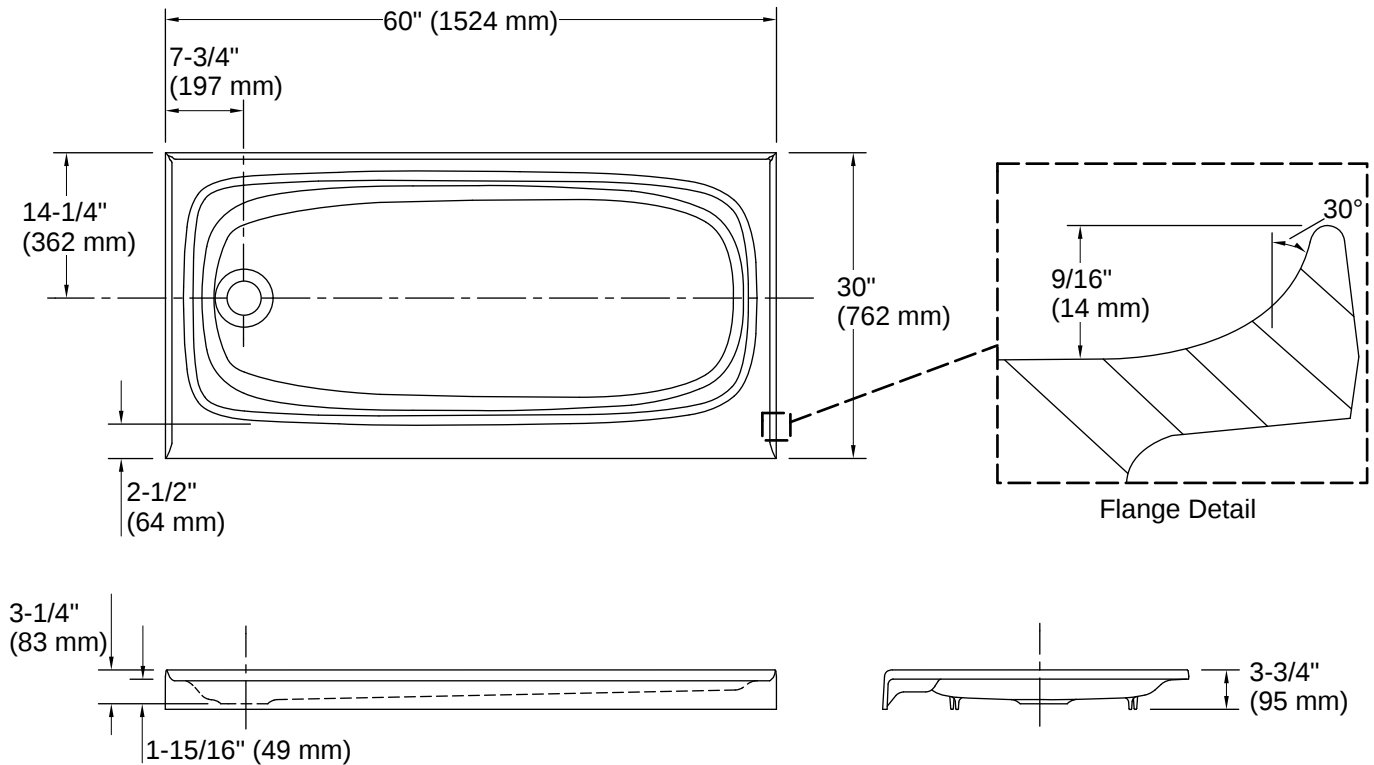

Installation

- Left drain

Installation Notes

Install this product according to the installation instructions.

Measure your actual product for rough-in details.

Shimming may be required to level the fixture.

Shimming may be required between the stud frame and the fixture.

Stud opening tolerance is + 1/4" (6 mm), - 0" (0 mm).

KOHLER steam generator/control kit is designed for use with this product. Kohler Co. shall not be responsible for problems encountered due to the installation and use of other manufacturer's steam generators.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-06-2026 16:14 - US-CA