



Elate® | K-33641-H

Single-function showerhead, 1.5 gpm

Features

- Full coverage spray produces an encompassing spray ideal for everyday use
- 1.5 gpm (5.7 lpm) maximum flow rate at 45 psi (3.1 bar)
- MasterClean™ sprayface features an easy-to-clean surface that withstands mineral buildup and maximizes spray performance
- Coordinates with other products in the Elate collection
- This product can help a building earn Water Efficiency points in LEED® Green Building Rating System



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|-----|-------------------------------|
| CP | Polished Chrome |
| BN | Vibrant Brushed Nickel |
| BL | Matte Black |
| 2MB | Vibrant Brushed Moderne Brass |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-06-2026 17:15 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards



ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

Technical Information

All product dimensions are nominal.

Flow Rate

Shower/Rainhead Rated 1.5 gpm (5.7 l/min)

Maximum Flow:

Handshower Rated Maximum 1.5 gpm (5.7 l/min)
Flow:

Material


- Durable material construction
 - KOHLER finishes resist corrosion and tarnishing
-

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty



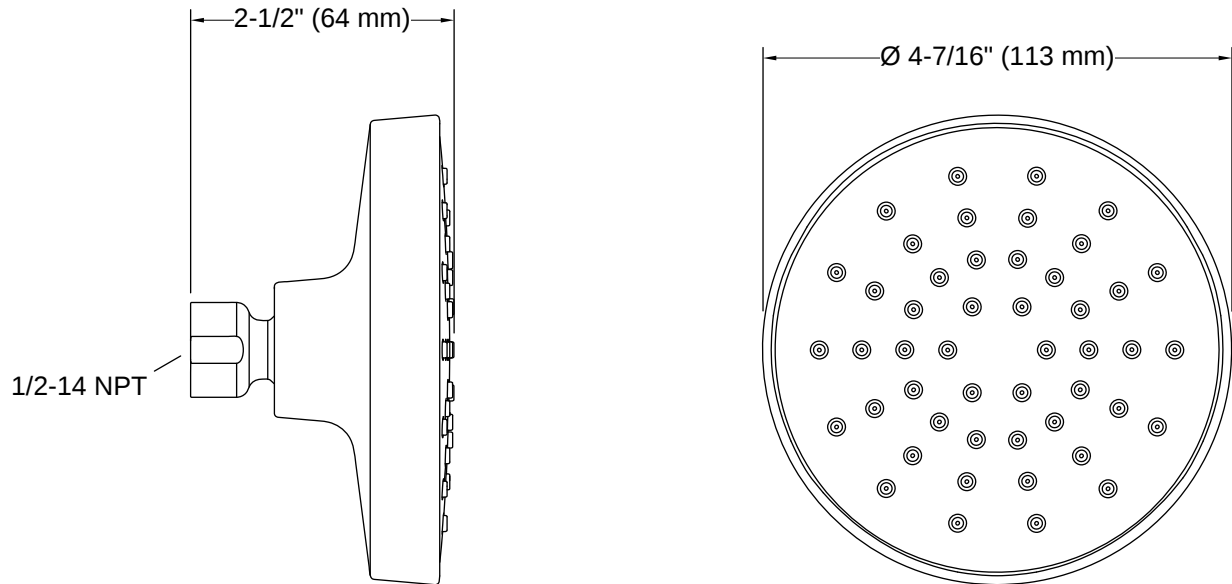

Installation

- Wall-mount
- 1/2" -14 NPT connection
- Shower arm and flange sold separately

Installation Notes

Install this product according to the installation instructions.

