


# USE AND CARE GUIDE

---

## 5 LIGHT WOOD BEAD CHANDELIER

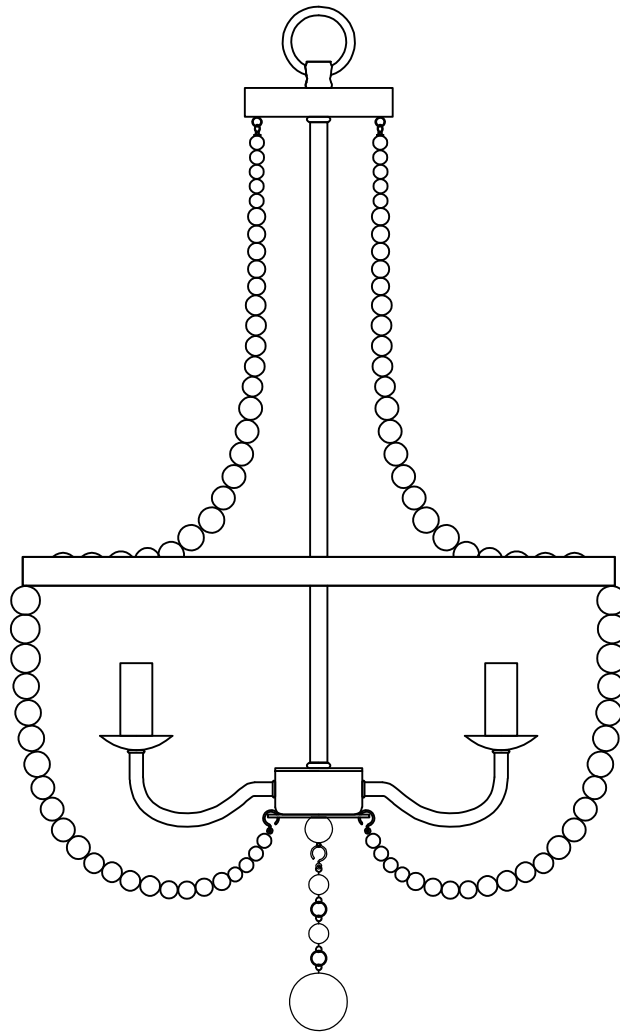

---

### ***THANK YOU***

We appreciate the trust and confidence you have placed in, through the purchase of this item. We strive to continually create quality products designed to enhance your home.

Thank you for choosing us!

# Table of Contents

---

Safety Information .....	2
Warranty .....	2
Pre-Installation .....	3, 4
Planning Installation .....	3
Package Contents .....	4
Assembly .....	5
Installation .....	6, 7
Care and Cleaning .....	7
Troubleshooting .....	7

## Safety Information

---

- ☐ Consult a qualified electrician with any electrical questions you may have.

## Warranty

---

### 1-YEAR LIMITED WARRANTY

#### WHAT IS COVERED

The manufacturer warrants this pendant to be free from defects in the materials and workmanship for a period of one (1) year from date of purchase. This warranty applies only to the original consumer purchaser and only to products used in normal use. If this product is found to be defective, the manufacturer's only obligation, and your exclusive remedy, is the repair or replacement of the product at the manufacturer's discretion, provided that the product has not been damaged through misuse, abuse, accident, modifications, alterations, neglect or mishandling. This warranty shall not apply to any product that is found to have been improperly installed, assembled, or used in any way not in accordance with the instructions supplied with the product. This warranty shall not apply to a failure of the product as a result of an accident, misuse, abuse, negligence, alteration, faulty installation, or any other failure not relating to faulty material or workmanship.

#### WHAT IS NOT COVERED

This warranty shall not apply to the finish on any portion of the product due to weathering, as this is considered normal wear. The manufacturer does not warrant and specifically disclaims any warranty, whether expressed or implied, other than the warranty contained herein. The manufacturer specifically disclaims any liability and shall not be liable for any consequential or incidental loss or damage, including but not limited to, any labor or expense costs involved in the replacement or repair of the product.


# Pre-Installation

## PLANNING INSTALLATION


Read all instructions before assembly.



To avoid damaging this product, assemble it on a soft, non-abrasive surface such as carpet or cardboard. Inspect each part for defects that may have occurred during shipping.



Keep your receipt and these instructions for proof of purchase.


 NOTE: This item requires the use of five 120V, 60Hz, 60-Watt max, candelabra base type B bulbs (not included). Do not exceed the recommended wattage.


## TOOLS REQUIRED


 Safety goggles


  Phillips screwdriver


  Flathead screwdriver

 Pliers


 Wire strippers


 Wire cutters


 Ladder


 Electrical tape


## HARDWARE INCLUDED


 NOTE: Hardware not shown to actual size.


 \_\_AA


 \_\_BB


 \_\_CC


 \_\_DD


 \_\_EE


 \_\_FF

 \_\_GG

 \_\_HH

 \_\_II


 \_\_JJ

 \_\_KK

Part	Description	Quantity	Part	Description	Quantity
AA	Wire nut	3	GG	Canopy	1
BB	Cross bar	1	HH	Screw Collar Loop	1
CC	Outlet box screw	2	II	Screw Collar Nut	1
DD	Lock nut	1	JJ	Chain	1
EE	Ground screw	1	KK	Quick link	2
FF	Nipple	1			

# Pre-Installation (continued)

## PACKAGE CONTENTS

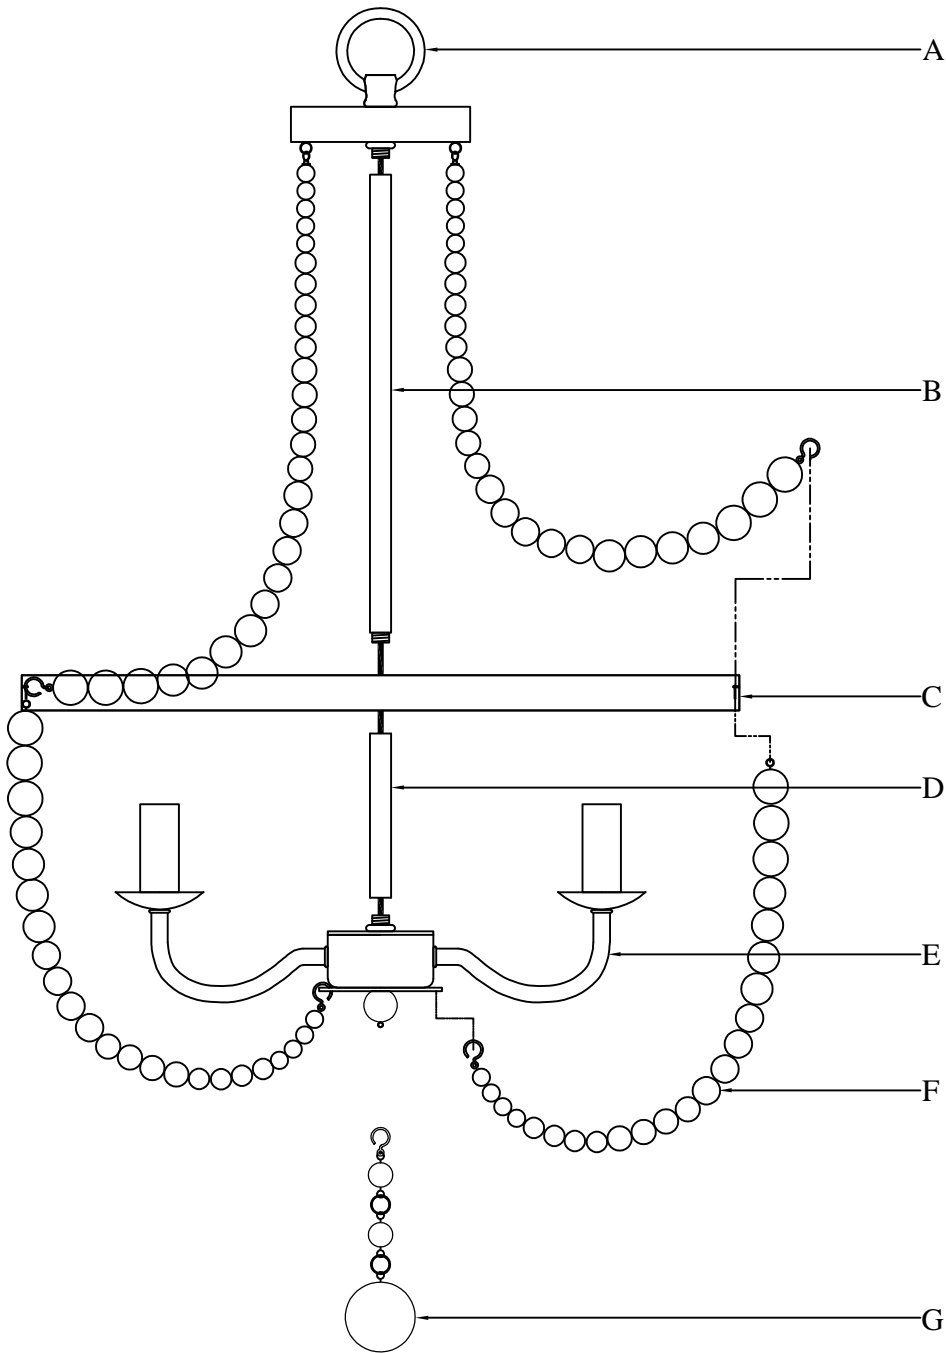


Part	Description	Quantity
A	Column assembly	1
B	Upper pole	1
C	Metal ring	1
D	Lower pole	1
E	Fixture body	1
F	Wood bead strings	28
G	Wood lower ball	1

# Assembly instructions


## 1. Assembling the fixture body

- Carefully unpack the fixture, lay out all parts on clean surface.
- Screw the lower pole (D) to top of the fixture body (E).
- Screw the metal ring (C) to top of the lower pole (D).
- Screw the upper pole (B) to top of the metal ring (C).
- Screw the column assembly (A) to top of the upper pole (B).
- Attach the wood bead strings on column assembly (A) to the metal ring (C).
- Attach the wood bead strings (F) to the metal ring (C) and fixture body (E) as shown.
- Attach the wood lower ball (G) to bottom of the fixture body (E).

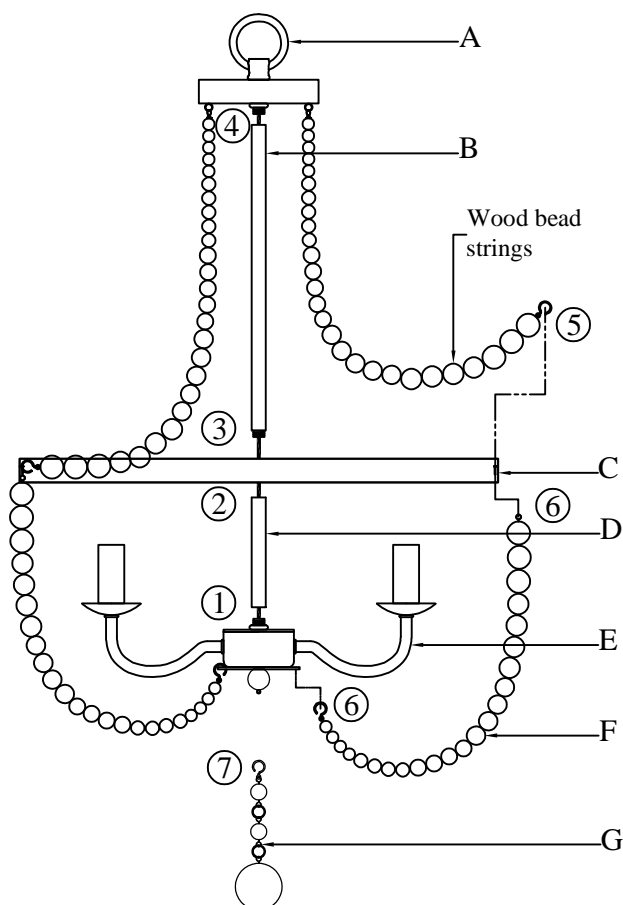

## 2 Preparing the light fixture to hang

- Attach the quick link (KK) to one end link of chain (JJ) and attach the quick link (KK) to the chain loop.
- Remove the excess chain links from the chain (JJ) in order to achieve the desired length for hanging the fixture .
- Thread the fixture wire and bare copper ground wire up through every other link in the chain (JJ).

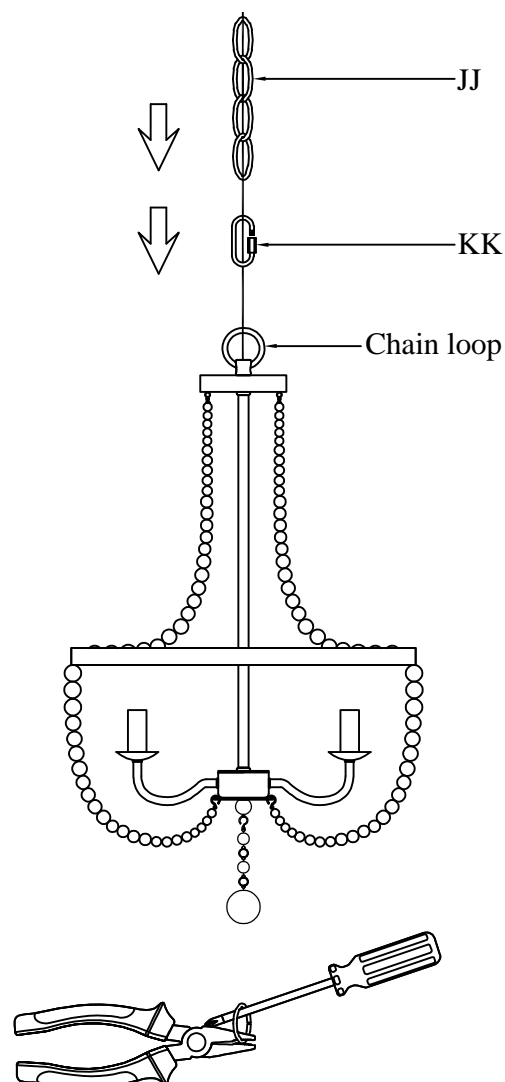

To open a chain link: Use a pair of pliers and a screwdriver as shown above to open a chain link. Wrap the jaws of the pliers with cloth to protect the finish of the chain.


# Installation instructions

## 1 Installing the cross bar





CAUTION: Ensure the power is off at the main fuse box prior to beginning installation.

- Turn off the switch at the wall.
- Turn the power off at the main fuse box.
- Install the cross bar (BB) with nipple (FF), lock nut (DD) to the outlet box using two outlet box screws (CC).
- Unscrew the screw collar nut (II) from the screw collar loop (HH).
- Attach the quick link (KK) to one end link of chain (JJ)
- Slide the screw collar nut (II) and then the canopy (GG) onto the end of the quick link (KK).
- Fasten the end link of quick link (KK) to the screw collar loop (HH).
- Insert the fixture wires up through the nipple (FF).

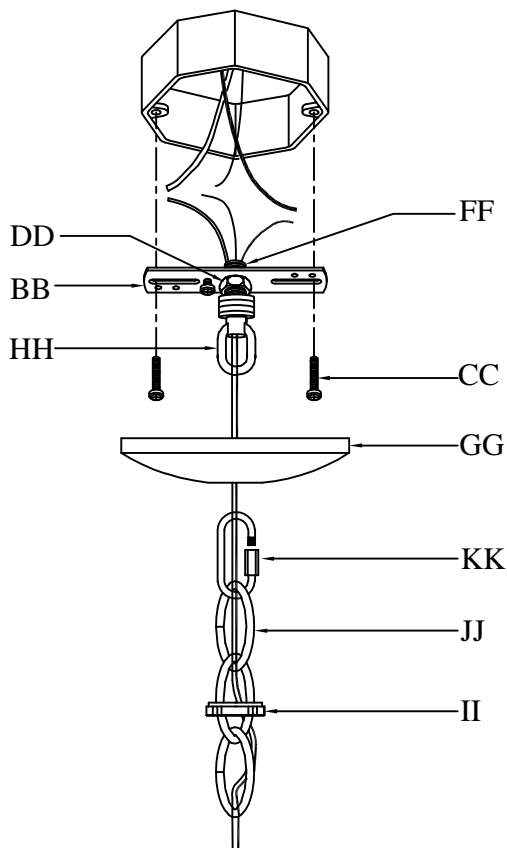

## 2 Connecting the wires


- Install the fixture bare copper ground wire (1) under the ground screw (EE) on the crossbar (BB).
- Connect the fixture bare copper ground wire (1) to the green (or bare, or green & yellow) supply ground wire (2) in the outlet box using a wire nut (AA).
- Connect the ribbed fixture wire (3) to the white (or ribbed) supply wire (4) in the outlet box using a wire nut (AA).
- Connect the smooth fixture wire (5) to the black (or red, or blue) supply wire (6) in the outlet box using a wire nut (AA).

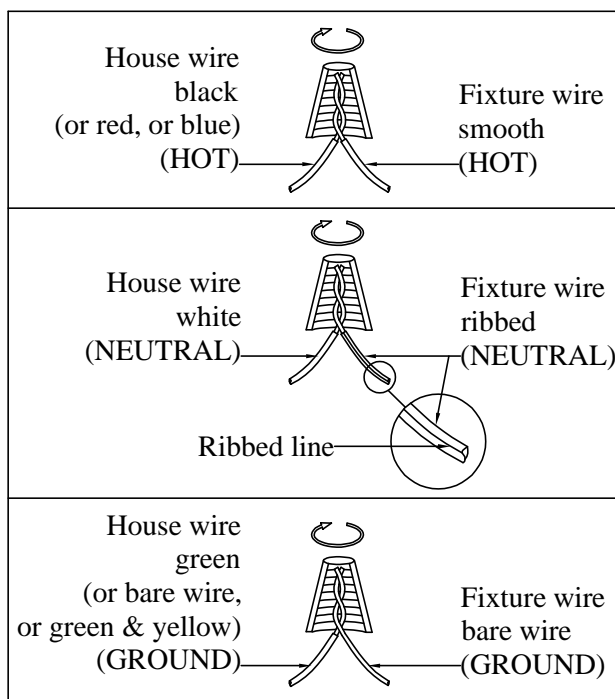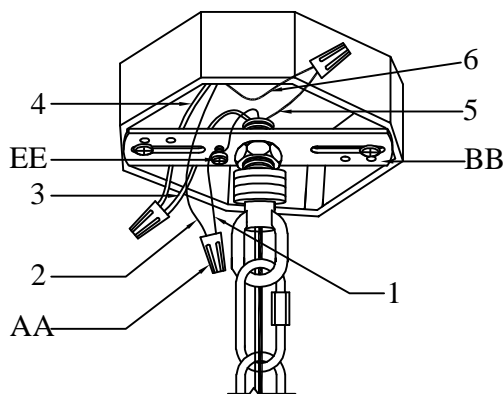

# Installation instructions (continued)

## 3 Hanging the light fixture & Installing the bulbs

- ❑ Push all excess wires into the outlet box.
- ❑ Raise the canopy (GG) to the ceiling and secure in place by screwing the screw collar nut (II) onto the screw collar loop (HH).
- ❑ Prior to installing the bulbs, please inspect sockets for silica packet, if packet is present, remove and throw away, do not expose to children and pets.
- ❑ Install one 120V, 60Hz, 60 Watt maximum candelabra base type "B" bulb (not included) into each socket.

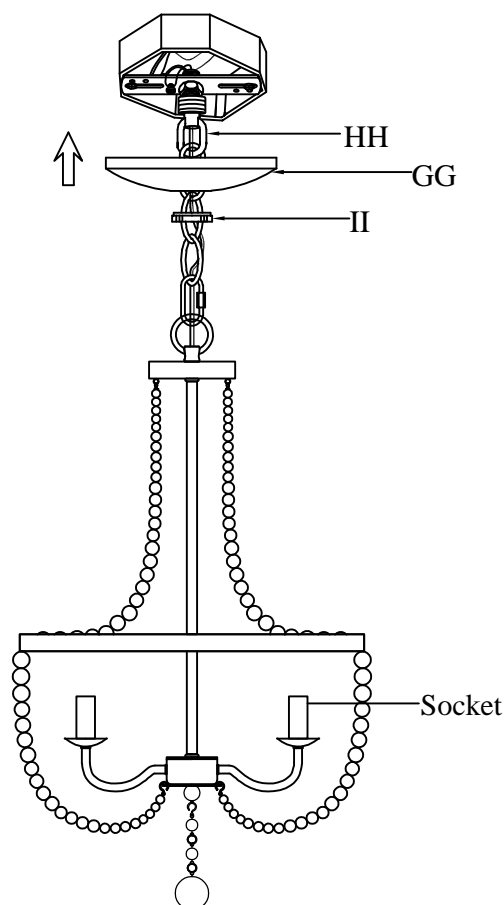

## Care and Cleaning

- ❑ Clean the light fixture with a soft, dry cloth. Do not use any cleaners with chemicals, solvents, or harsh abrasives.

## Troubleshooting

Problem	Possible Cause	Solution
The bulb will not light.	❑ The bulb is burned out.	❑ Replace the light bulb.
	❑ The power is off.	❑ Ensure that the power supply is turned on.
	❑ There is a faulty wire connection.	❑ Check the wiring.
	❑ The circuit breaker is off.	❑ Ensure that the circuit breaker is set in the on position.
The fuse blows or a circuit breaker trips when the light is turned on.	<ul style="list-style-type: none"><li>❑ There is an exposed wire.</li><li>❑ There are too many items on one circuit.</li></ul>	<ul style="list-style-type: none"><li>❑ Discontinue use of the light fixture.</li><li>❑ Contact a qualified electrician or call the Customer Service Team at 904-642-4340.</li><li>❑ Unplug other items on the circuit.</li></ul>