

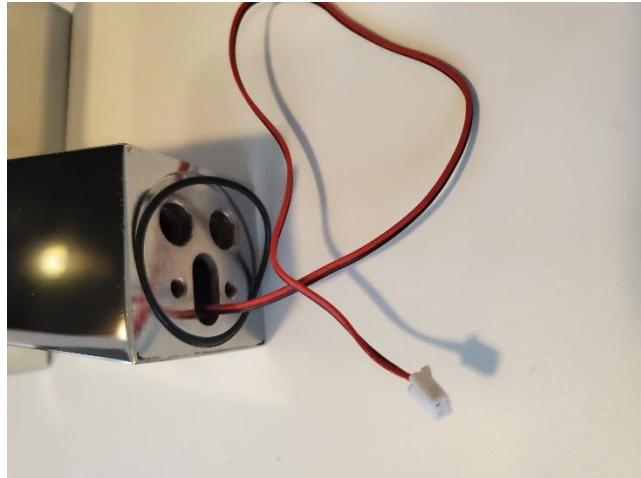
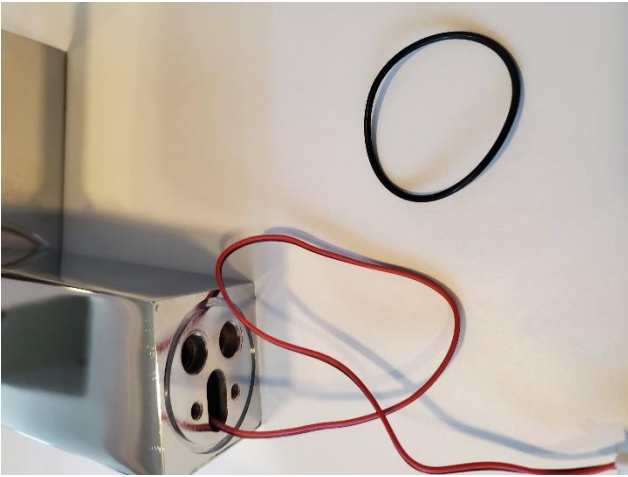


Faucet Installation Instructions


1. Place O-ring washer around bottom of faucet inside the groove and around the red wire.

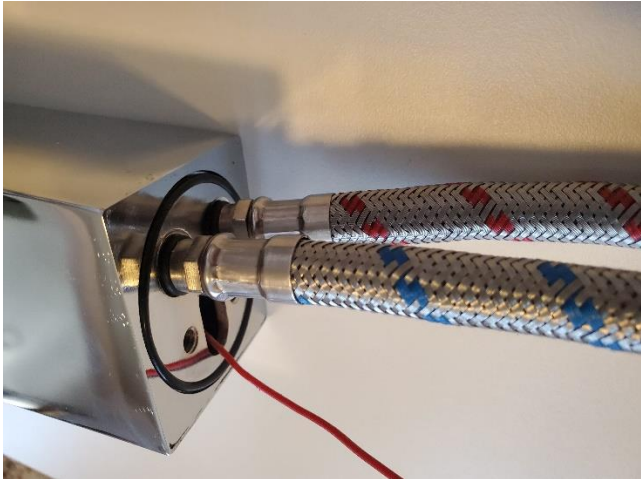


2. Screw hoses into the bottom of the faucet.

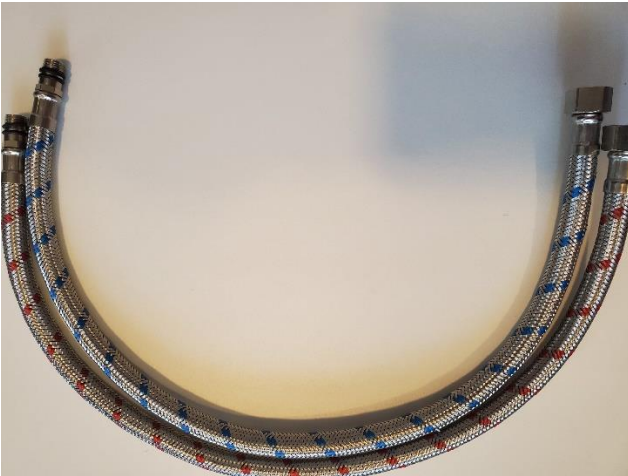

3. Screw long screws into their appropriate holes at the bottom of the faucet. Screw in the end of the screw with the missing threads into the bottom of the faucet.

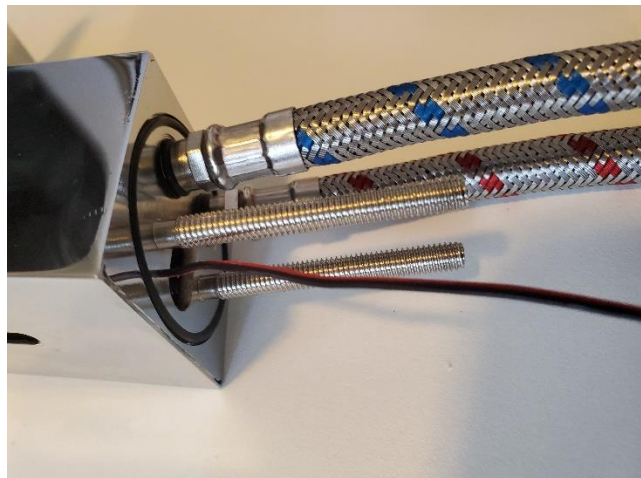

4. Place the faucet into its respective hole on the sink/vanity.

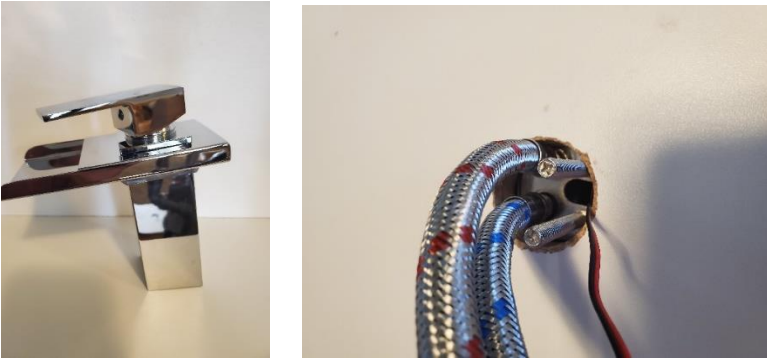

5. Place black semi-circle washer over screws sticking out from the bottom of the faucet. Then place the metal semi-circle washer over the screws sticking out from the bottom of the faucet. Screw the 2 bolts onto the screws to keep the semi-circle washers in place. Do not screw too tight as it may cause damage to the vanity top and/or sink.



6. Remove 4 screws to open the power pack and install 4 AA batteries.



7. Close the power pack by reinstalling the screws and hang the power pack where appropriate under the sink/faucet. Plug in the red wire into the power pack.



8. Attach the loose ends of the hose to their respective water source and turn on water.
9. *****Batteries not included*****
*****Requires 4 AA Batteries*****