




Product Assembly Manual

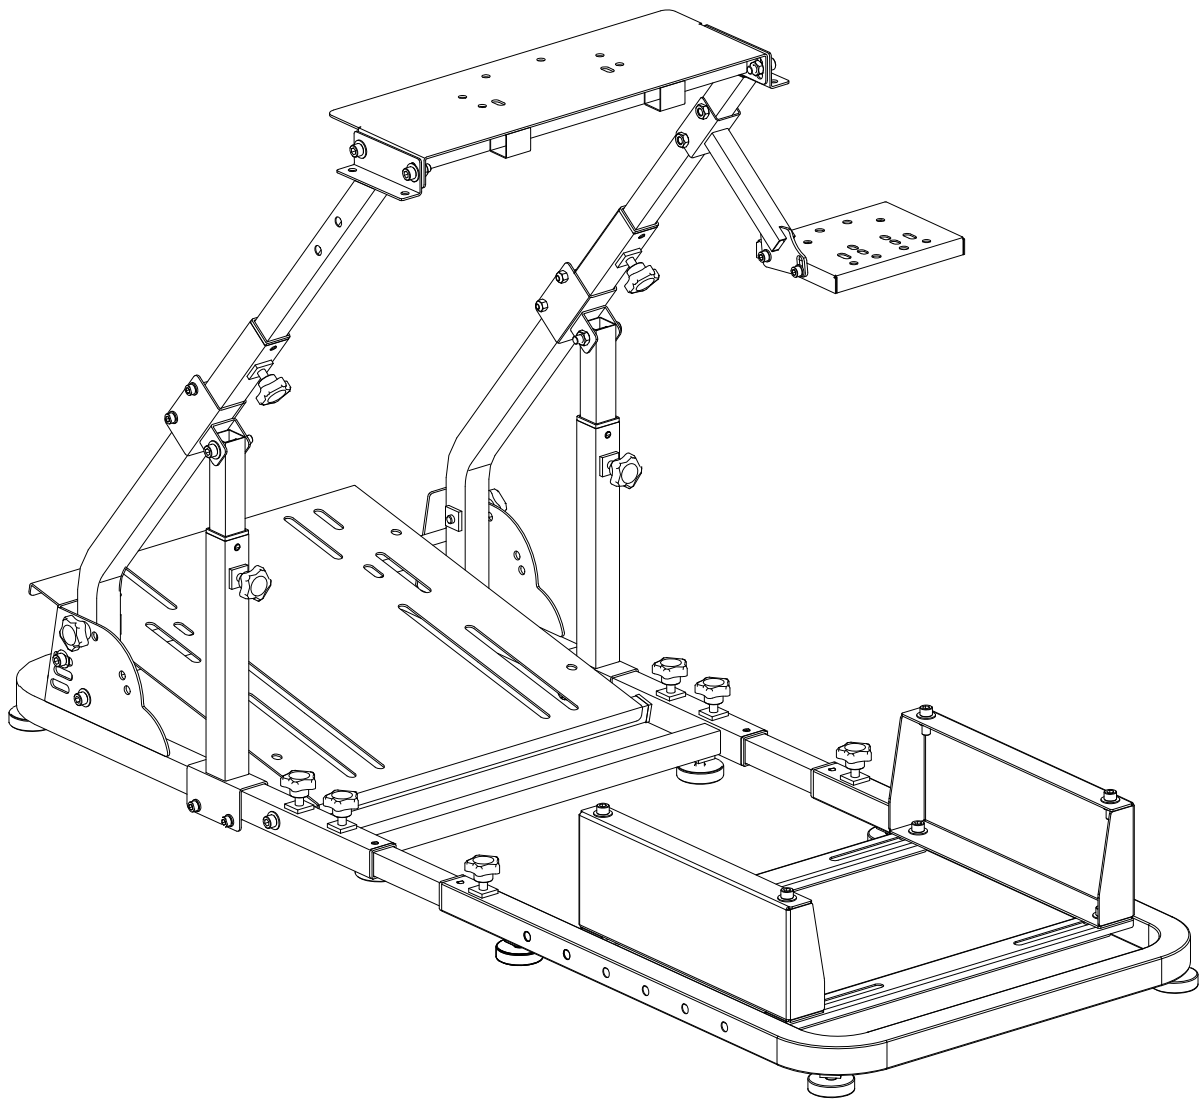


accessories explanation

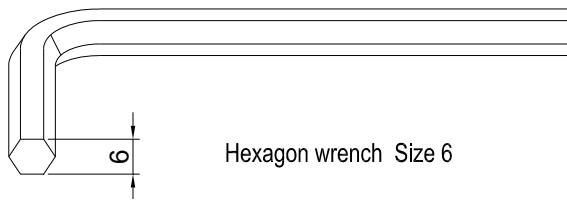


Hexagon wrench Size 6

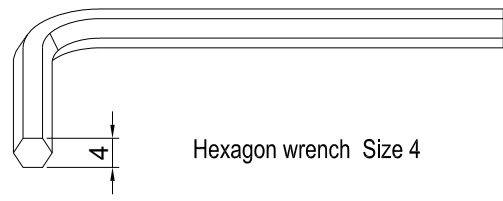


Hexagon wrench Size 4

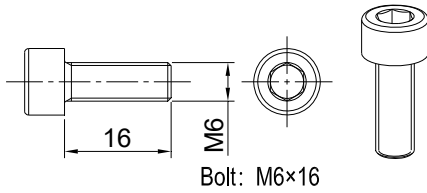


Bolt: M6x16

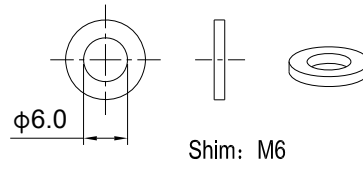


Shim: M6




Nut: M6

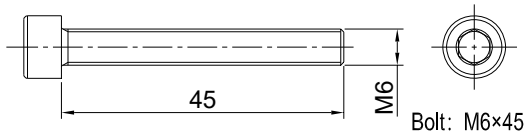


Bolt: M6x45

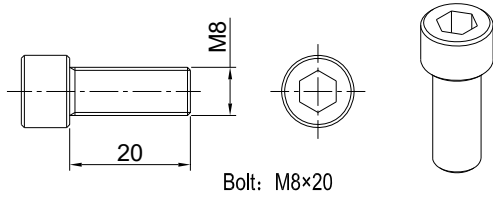


Bolt: M8x20

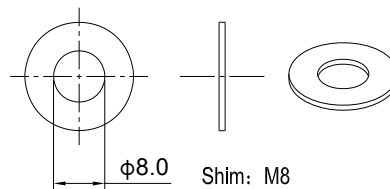


Shim: M8

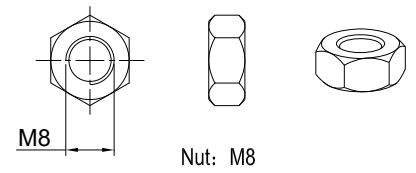


Nut: M8

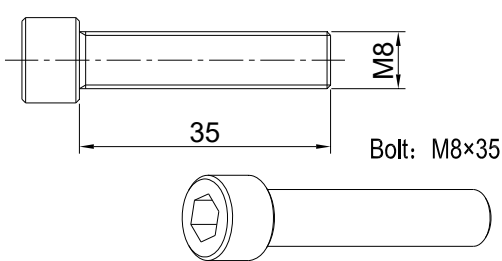


Bolt: M8x35

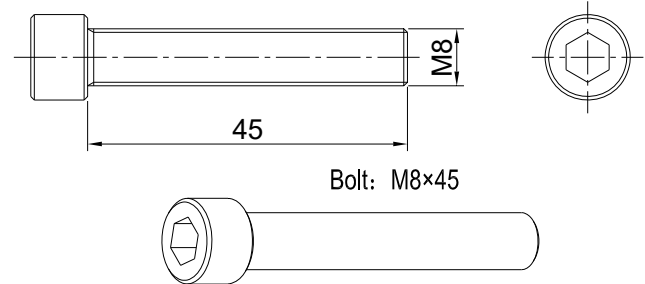



Bolt: M8x45



Handle Bolt: M8x15




Handle Bolt: M8x40

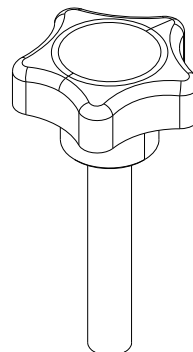


Assembly Processes


1. Assemble the anti-skid foot bolt(4 pcs)

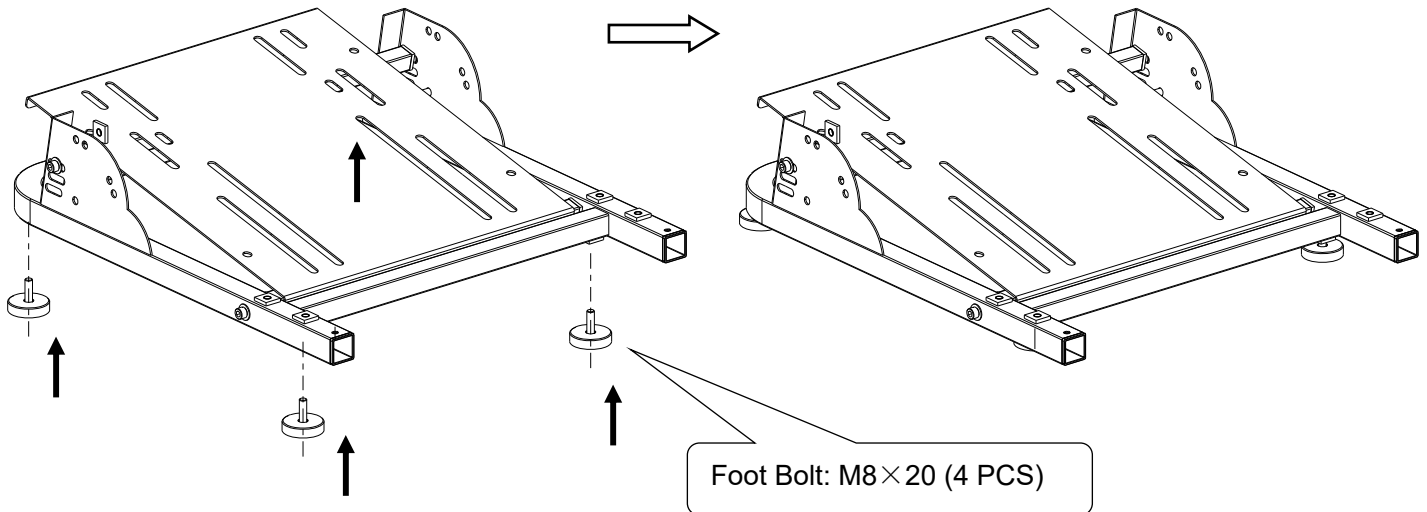


2. Assemble left and right adjustment stand

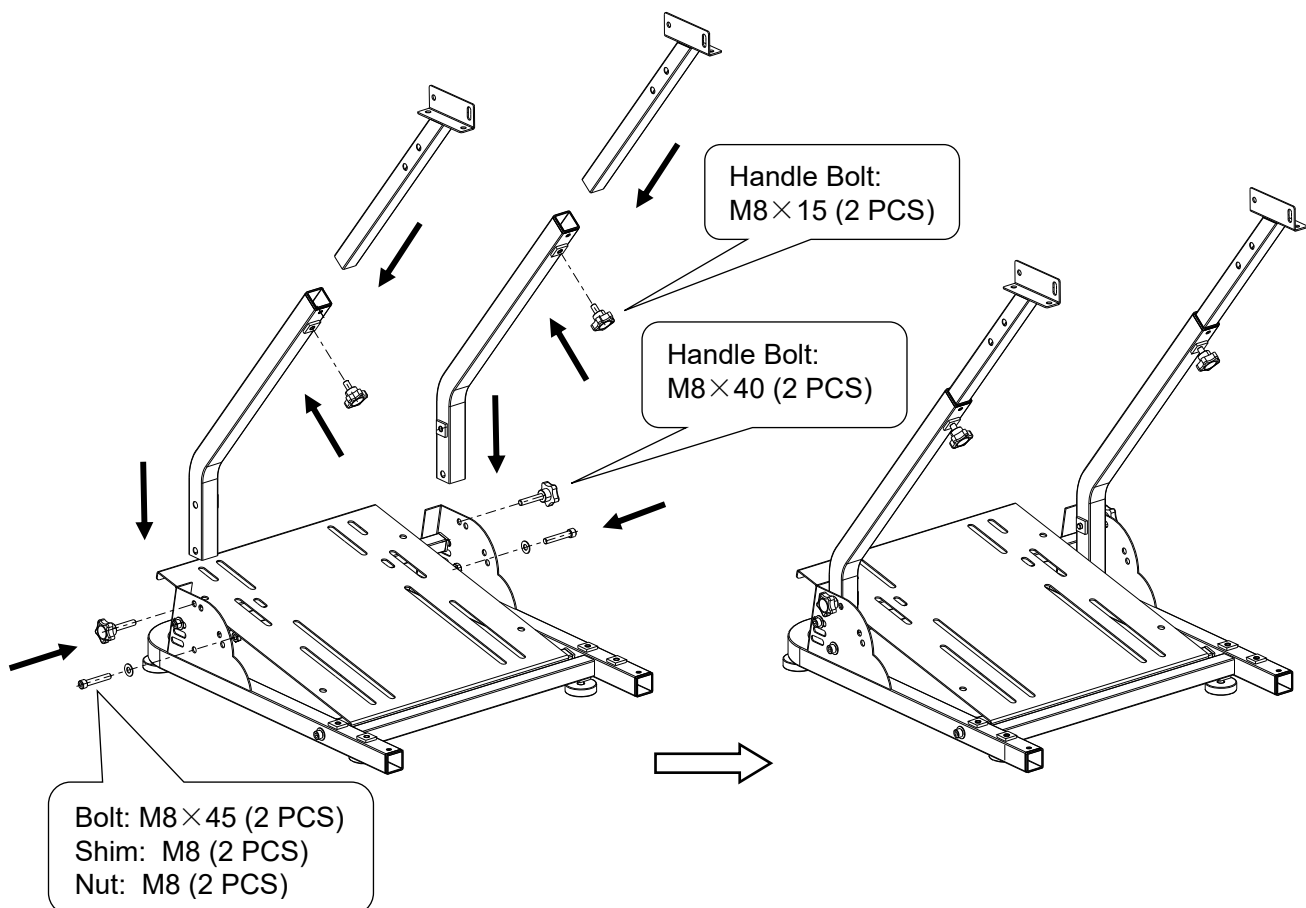

3. Assemble the steering wheel mounting stand

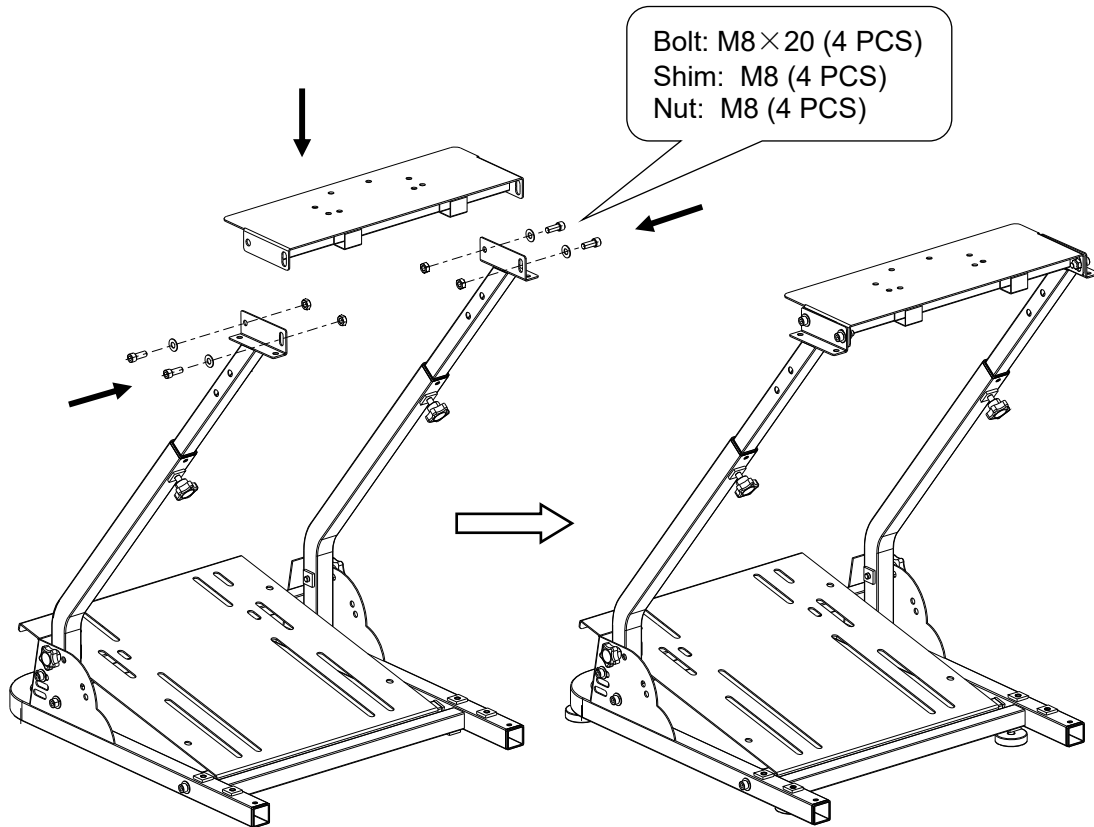


4. Assemble the elbow fixing stand on the left or right, as your like

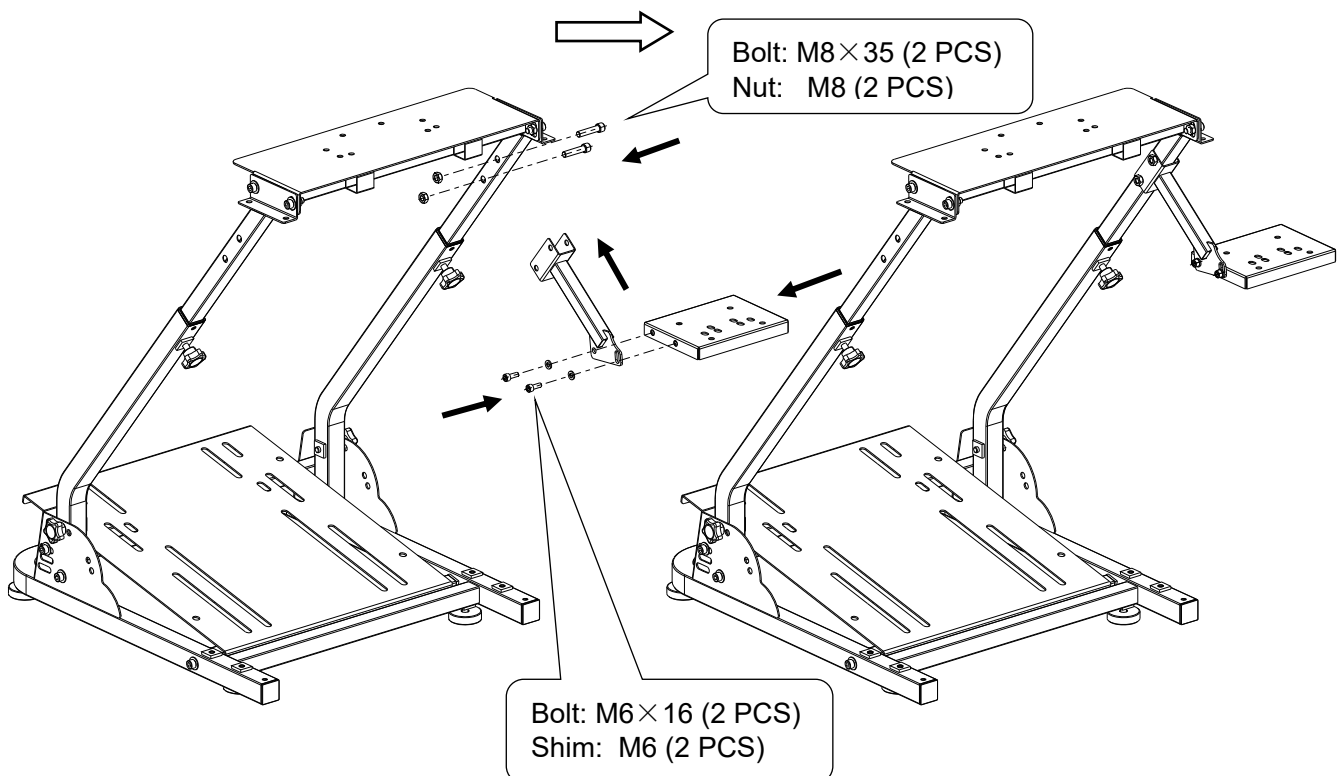


Racing Simulator Stand


5. Assemble two reinforcing bars with 8 pieces of the bolt (M6×45) 、 8 pieces of the shim (M6) and 8 pieces of the nut (M6)

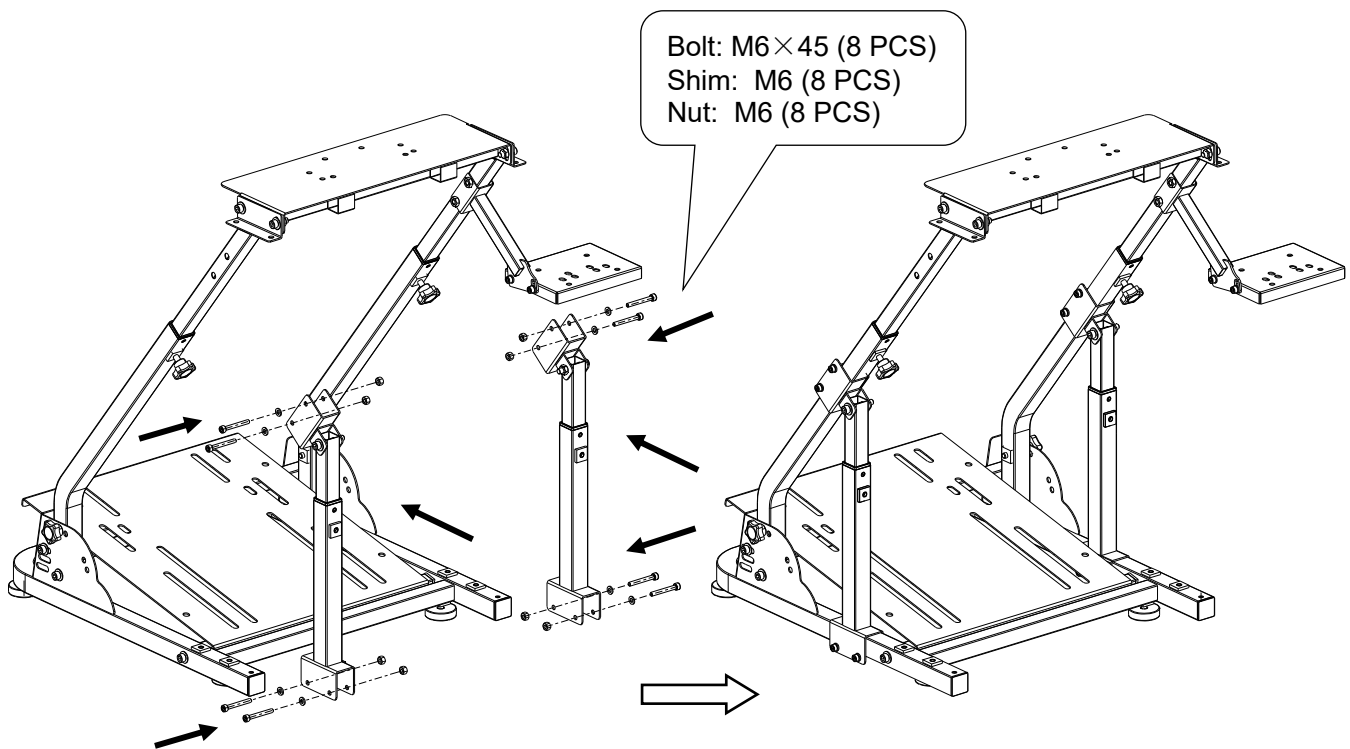


6. Secure the two reinforcement bars with 2 pieces of the Handle Bolt (M8×15)

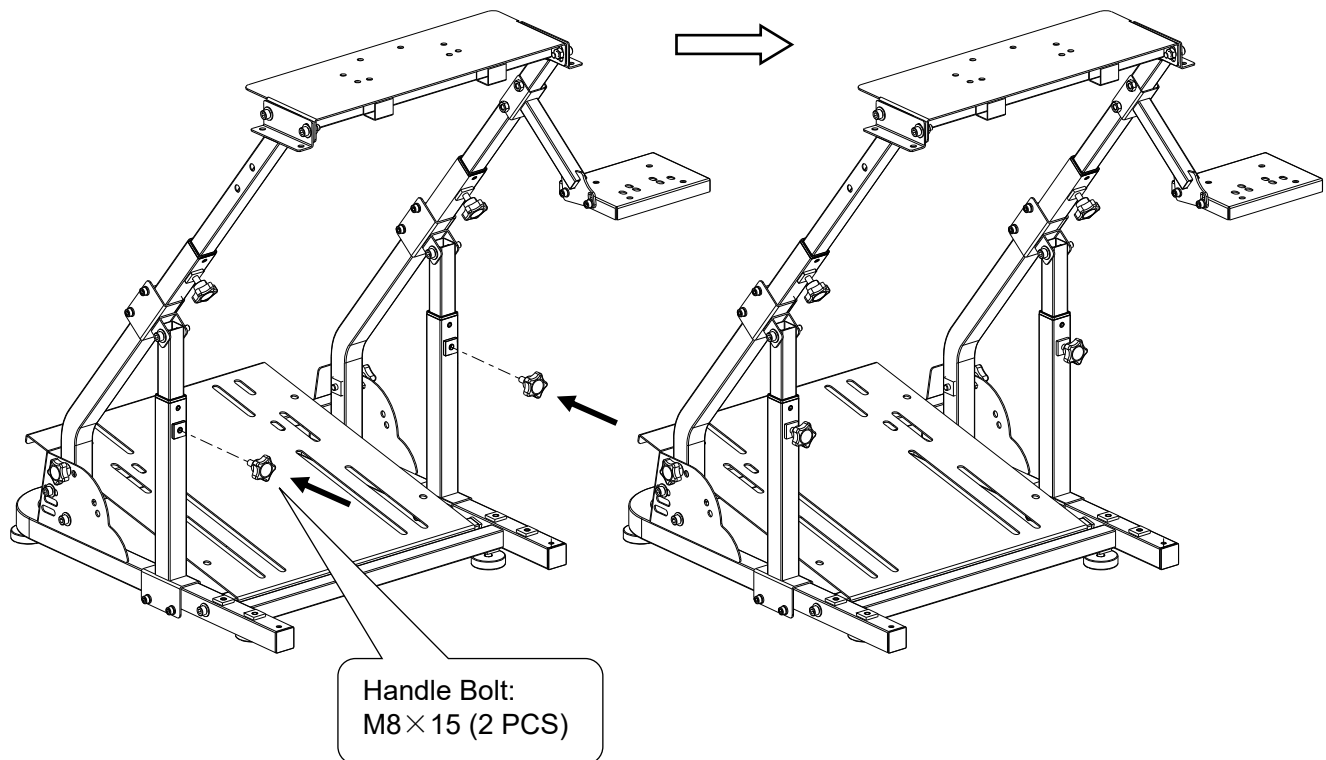

7. Assemble the anti-skid foot bolt(4 pcs) to the afterpart stand

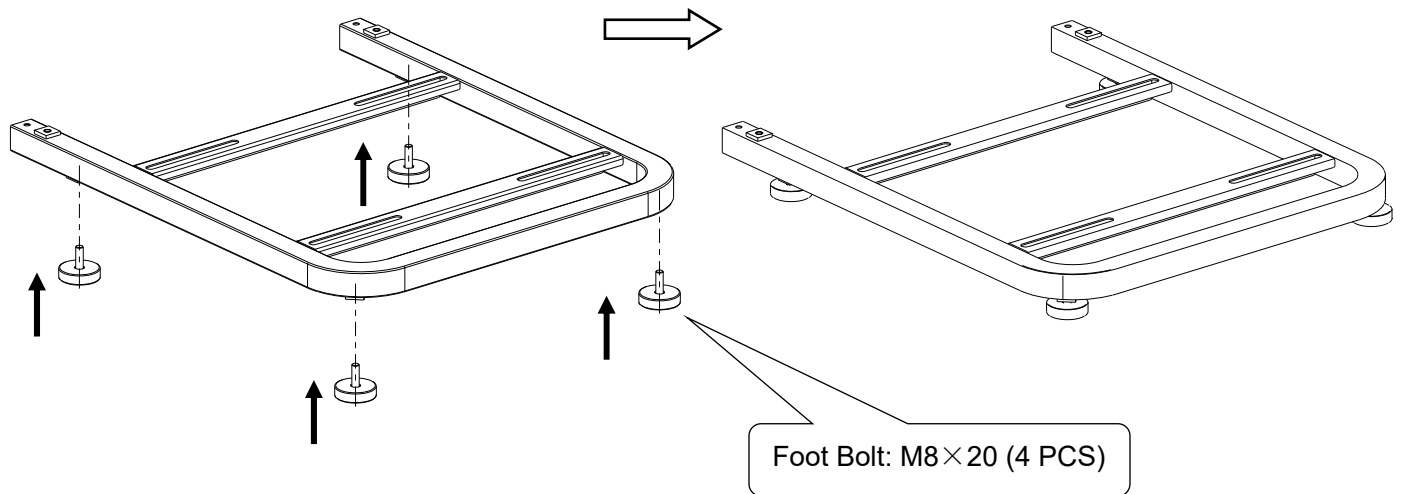

8. Assemble the seat mounting stand

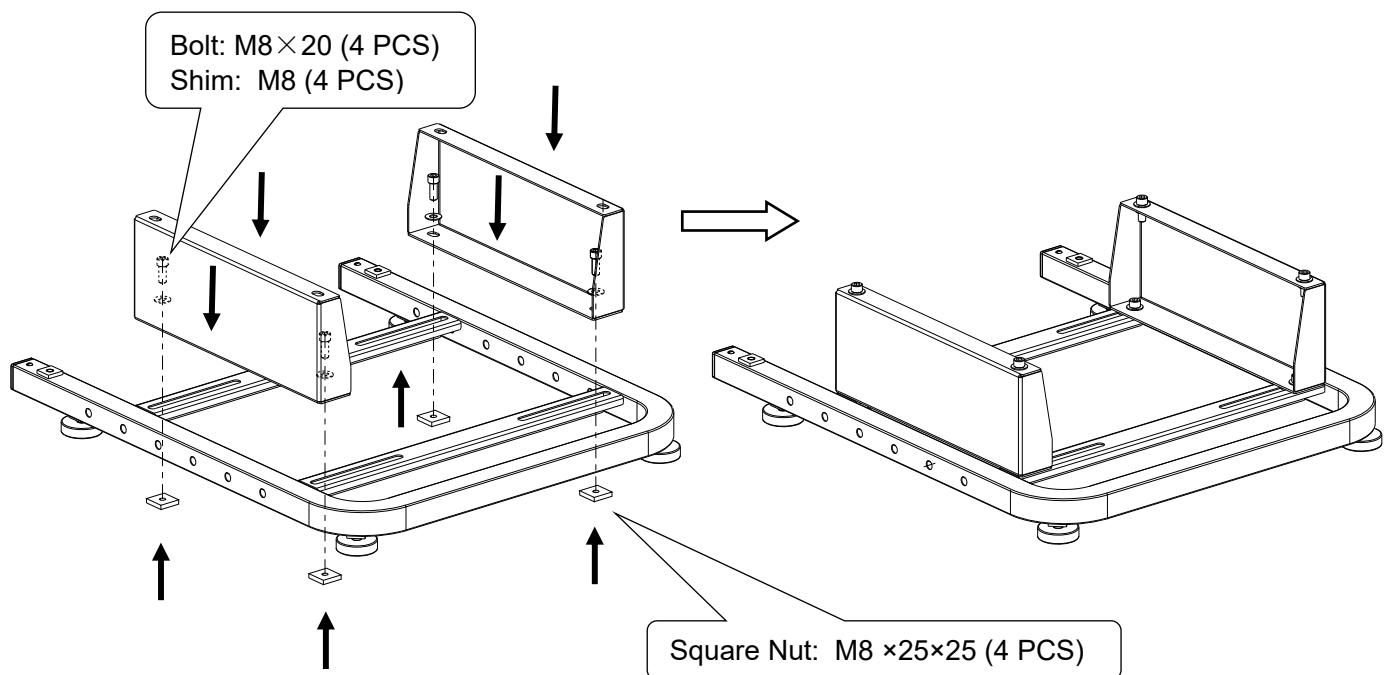

9 Connect the frontpart stand

