


Product Installation Instructions

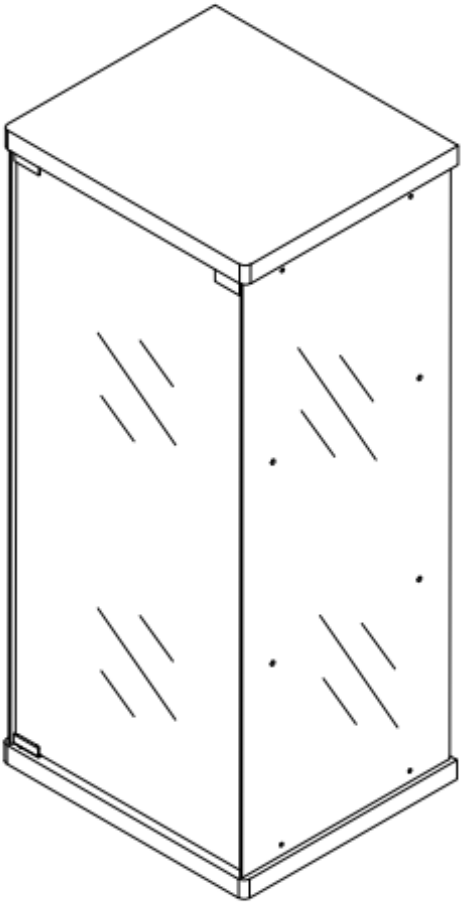





01x1




02x2




03x1



04x2



05x1




06x1

A		Non-slip pads (50x10mm)	4pcs +2pcs
B		Corner Bracket,,Screw (4x8mm)	12pcs +2pcs / 12pcs +2pcs / 24pcs +2pcs
C		Laminate support nail	8pcs +2pcs
D		Rebound device & Screw (3x16mm)	1pcs / 4pcs +2pcs
		Iron sheet	1pcs
		Hinge	2pcs / 1pcs / 1pcs
E		LED Strip Controlle	1pcs
F		AC/DC Adapter(12V⎓2.0A)	1pcs

G

 x2


 (3.5x14mm) x2

 x2


Anti Fall Hardware

 x4

 x2 (4x45mm)




1pcs

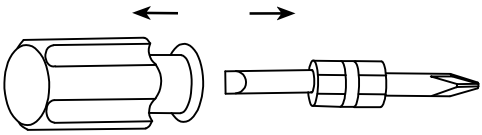


Double-head screwdriver, use as required

Product structure decomposition

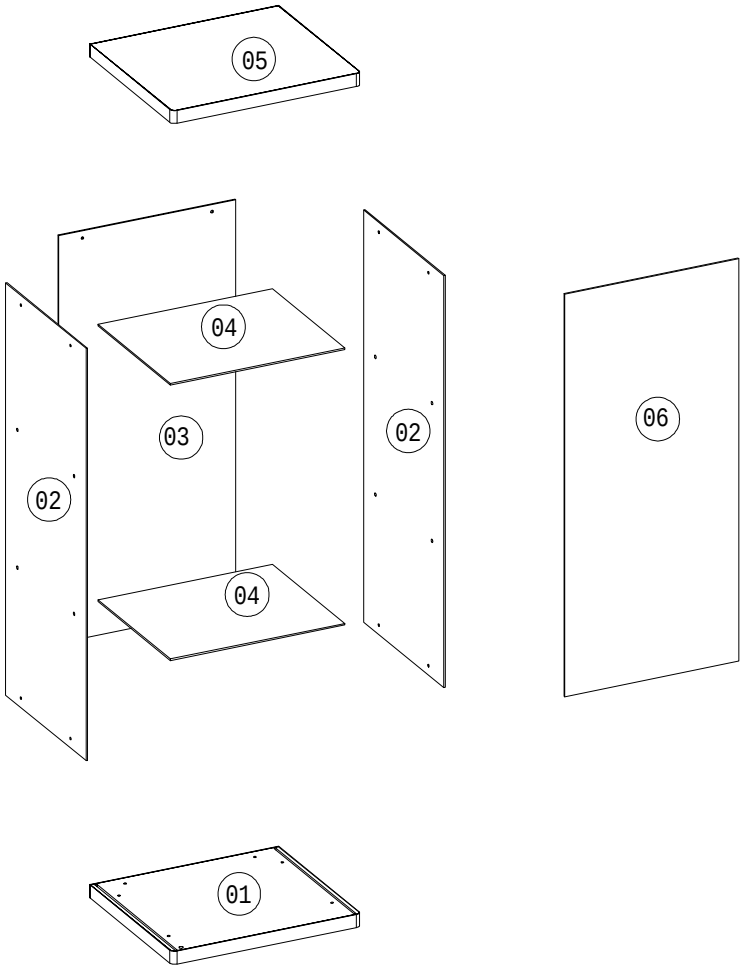


Step 1

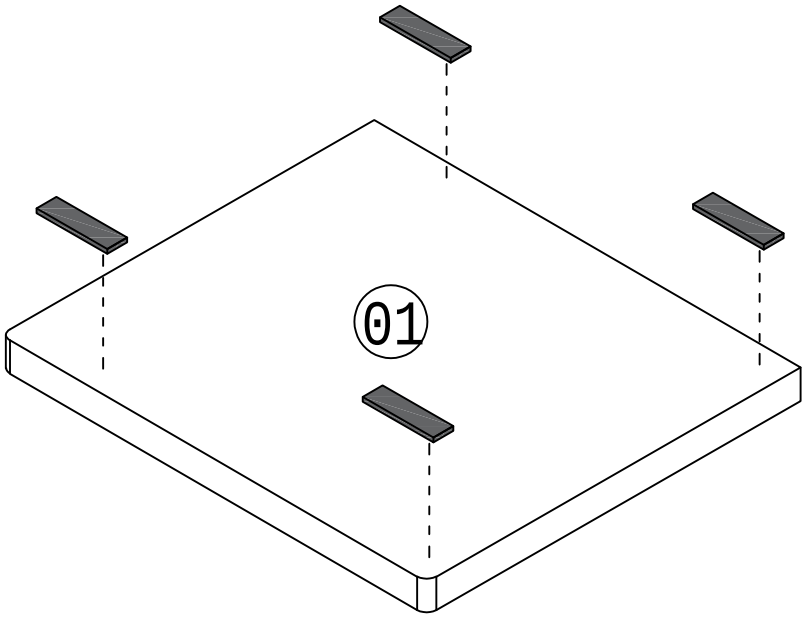


Step 2

Ⓑ x4 x4 x4

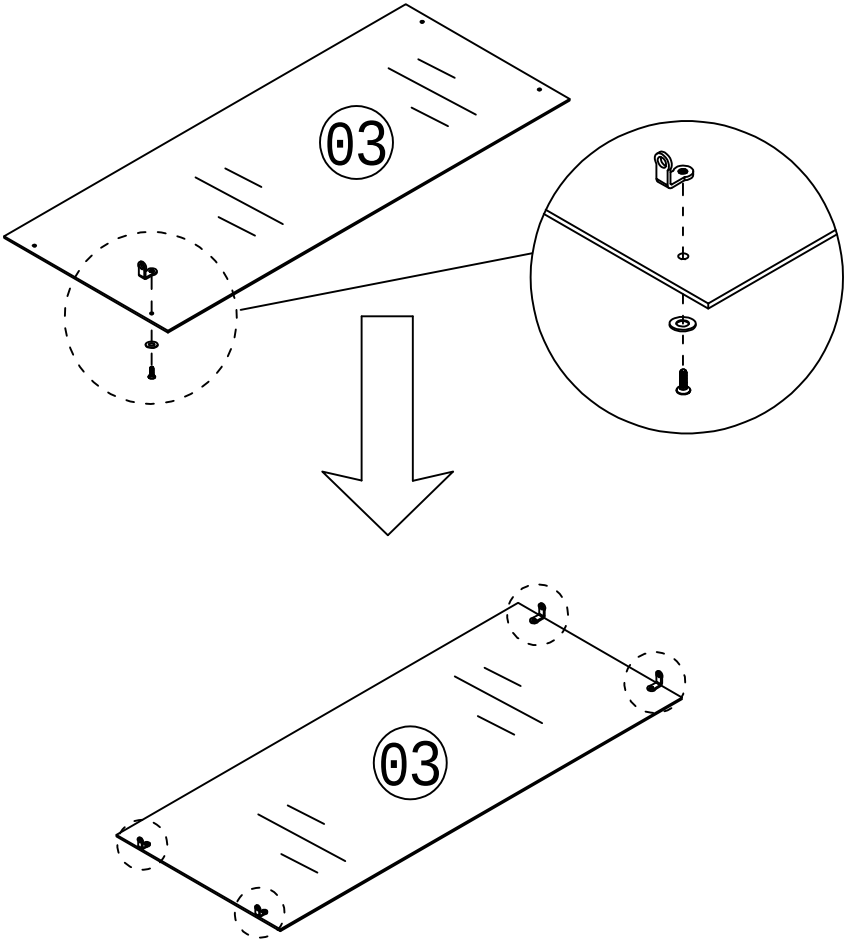



Install this hole



Step 3

B x2

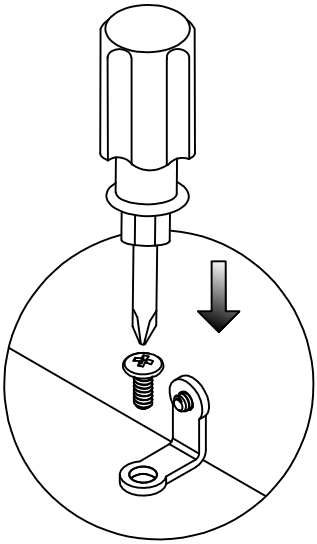


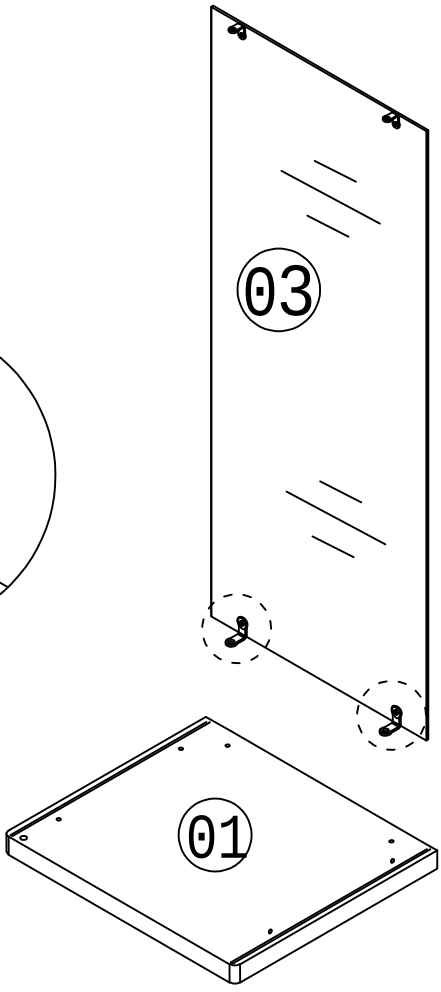


It is recommended to have two people assist with the installation.

Step 4


Ⓑ x4 x4 x4

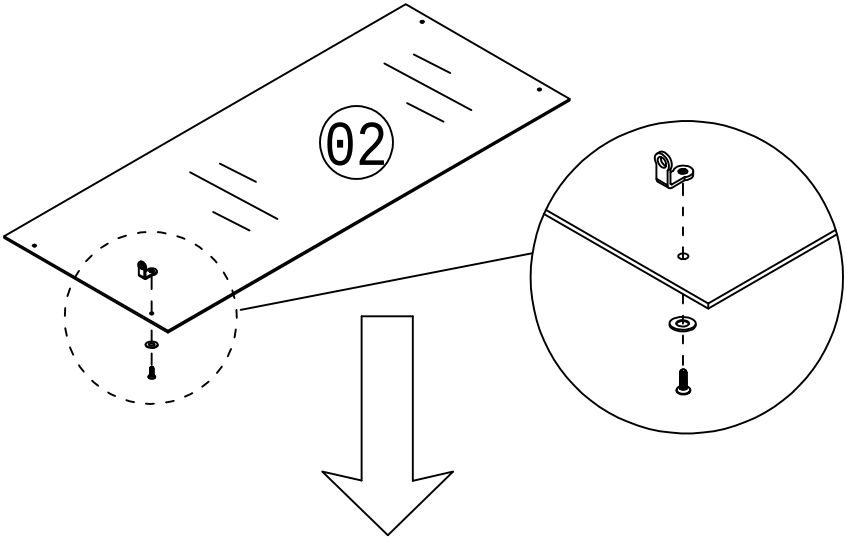

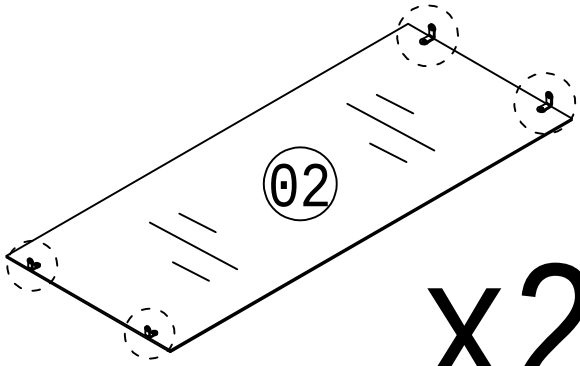


x2

Install this hole




Step 5


Ⓑ x4

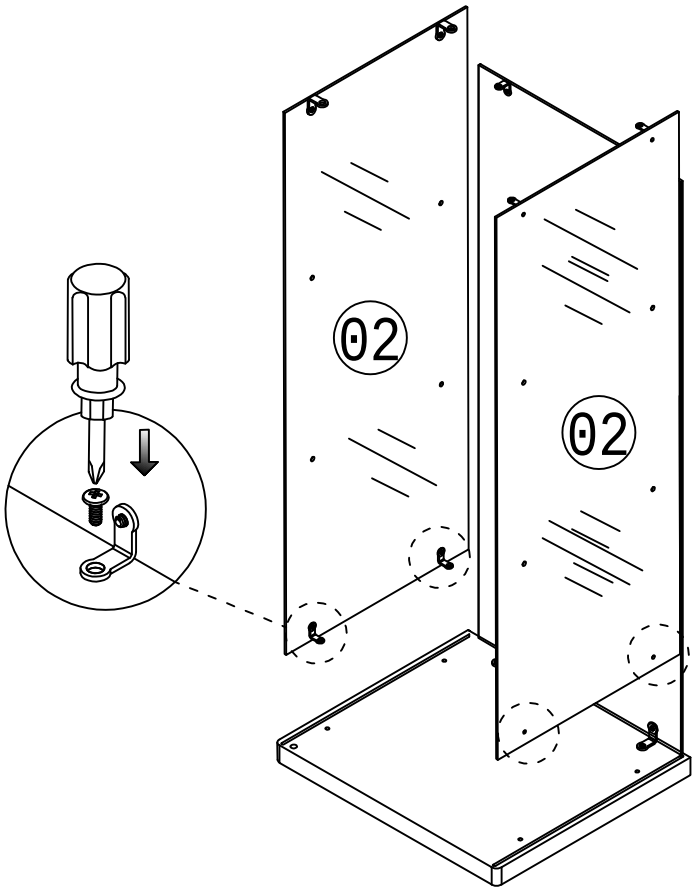

It is recommended to have two people assist with the installation.


Step 6



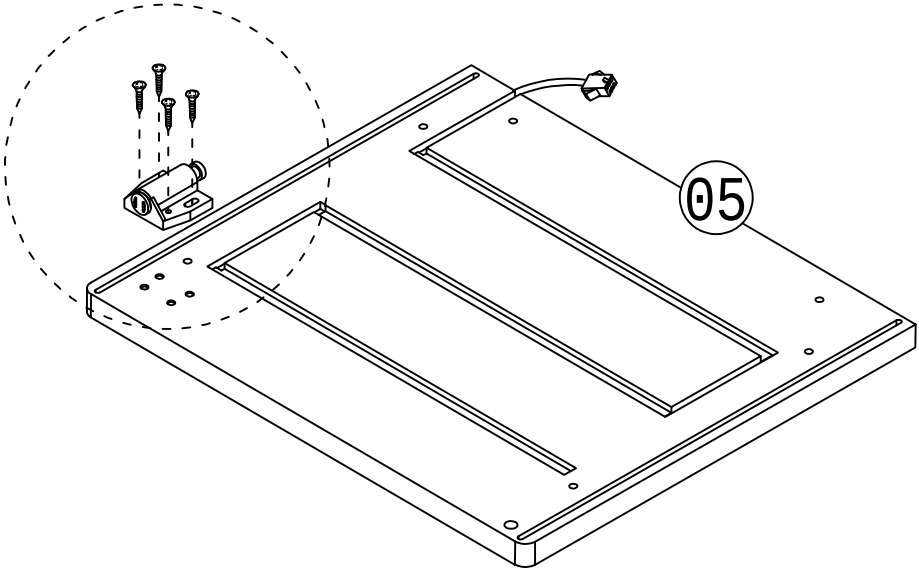


Step 7


Ⓑ x6

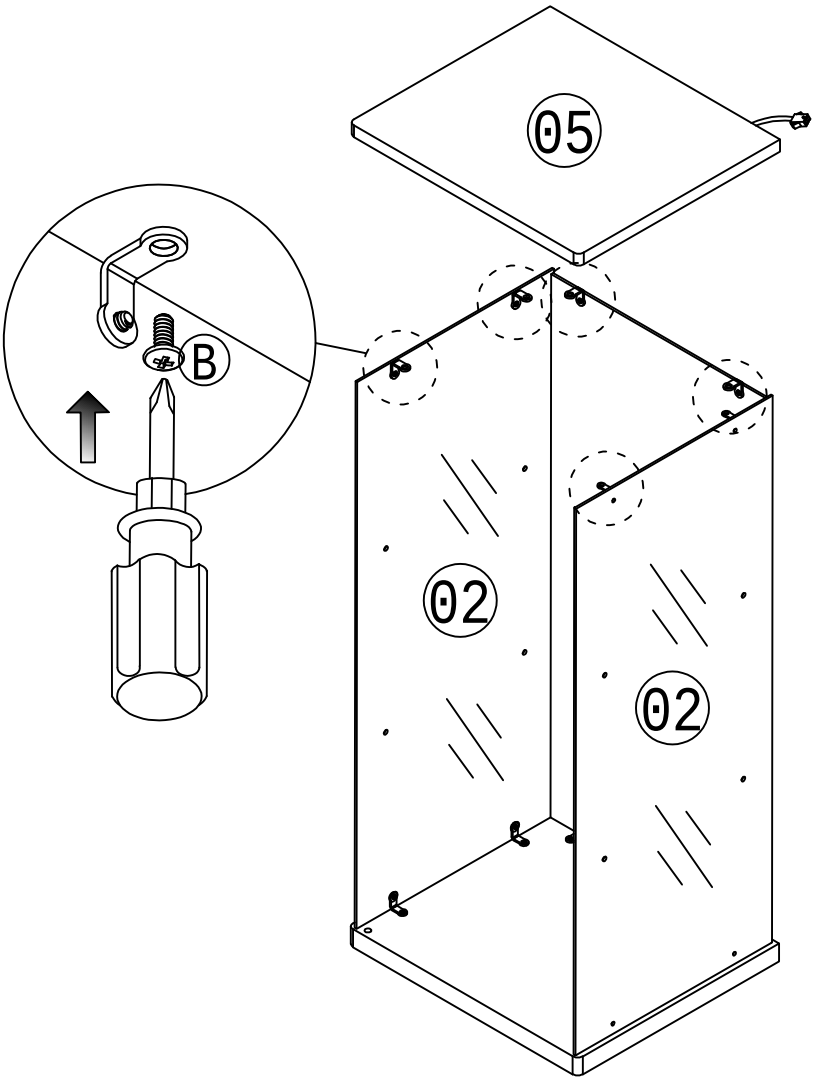


It is recommended to have two people assist with the installation.

Step 8



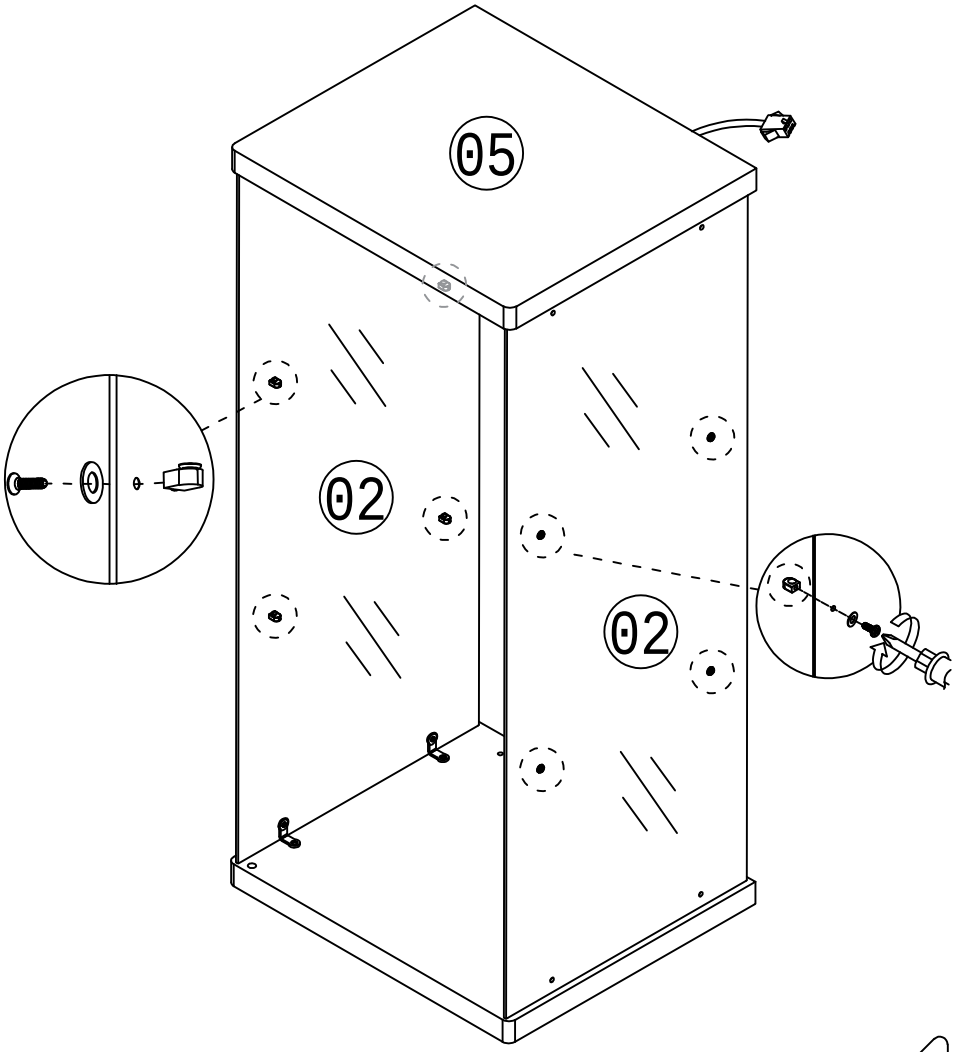


Step 9

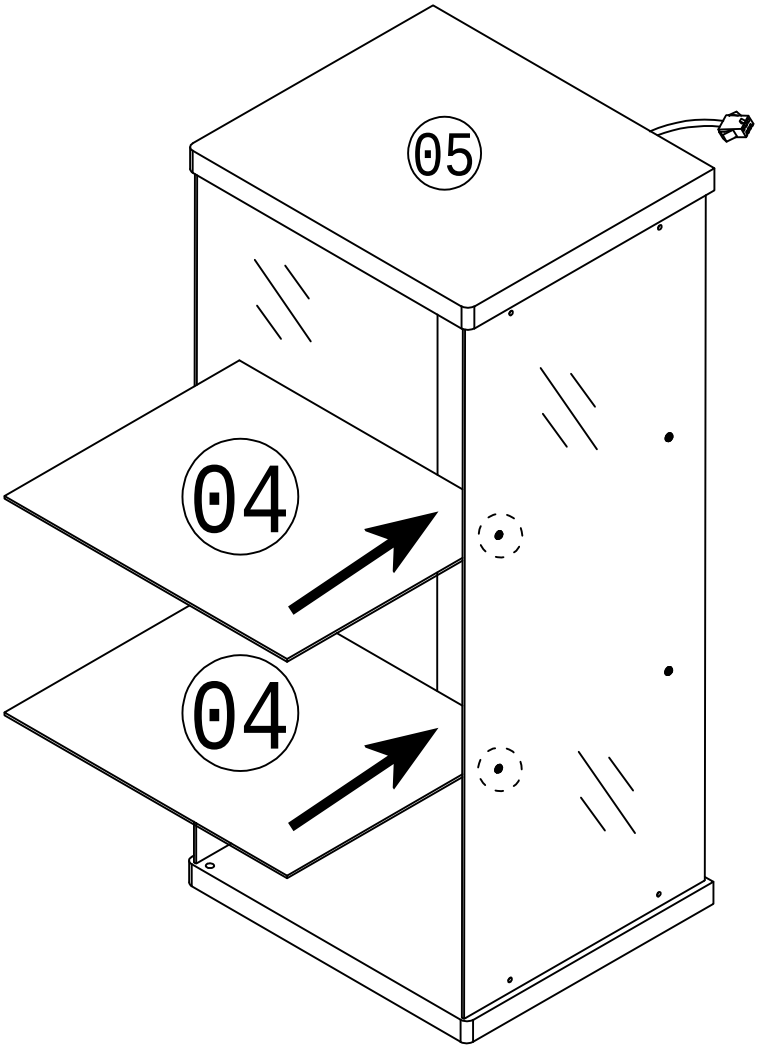


Step 10

First, completely unscrew the screws on the parts



Place the white gasket first, then install the hinge, and finally tighten the screws.




Ⓓ







Pay attention to the direction of the door hinge, and rotate the screws to compress the white gasket

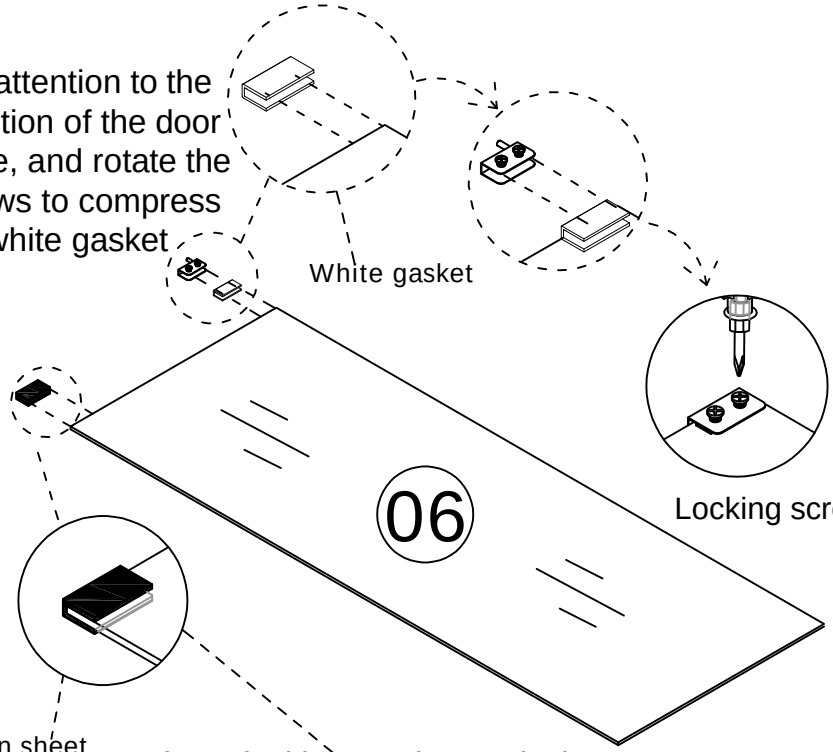


If you feel loose, please pinch the accessory before installation

Step 11




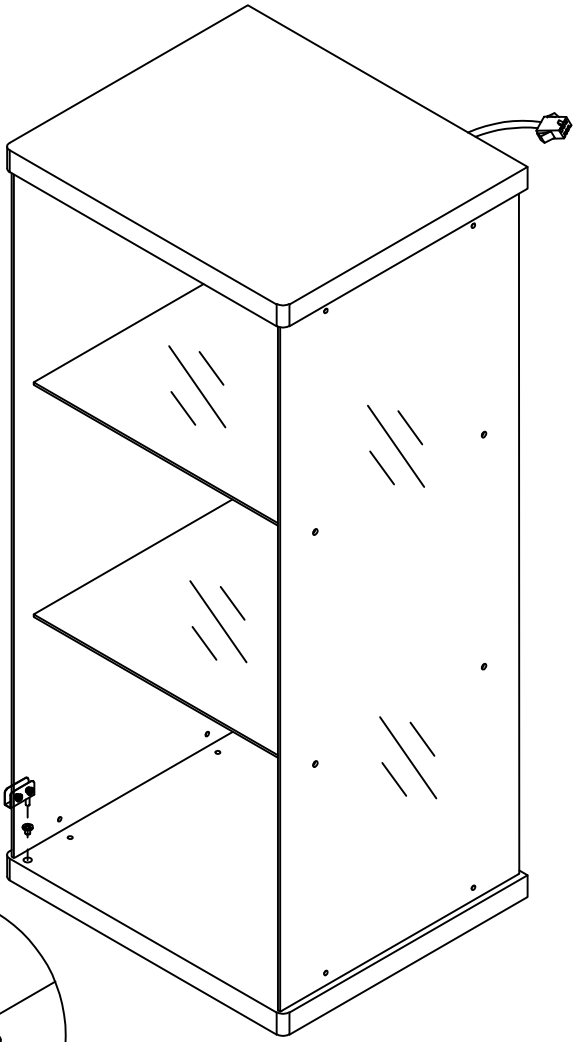




Step 12


Pay attention to the direction of the door hinge during installation




When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.



first




second



third

Locking screw

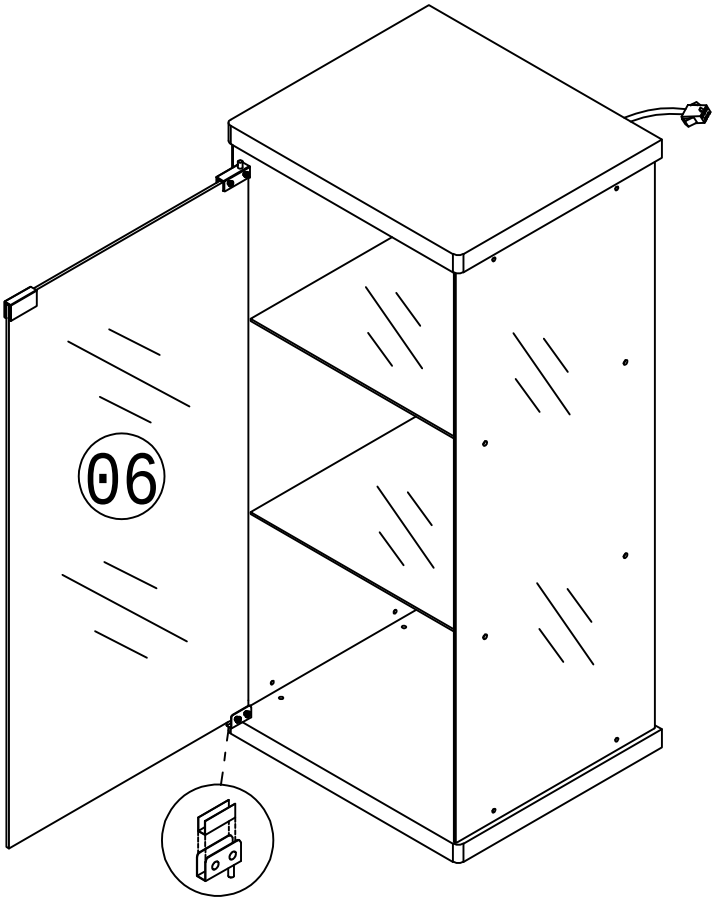


After aligning the glass door, tighten the screws to secure it.

Step 13


E

x1

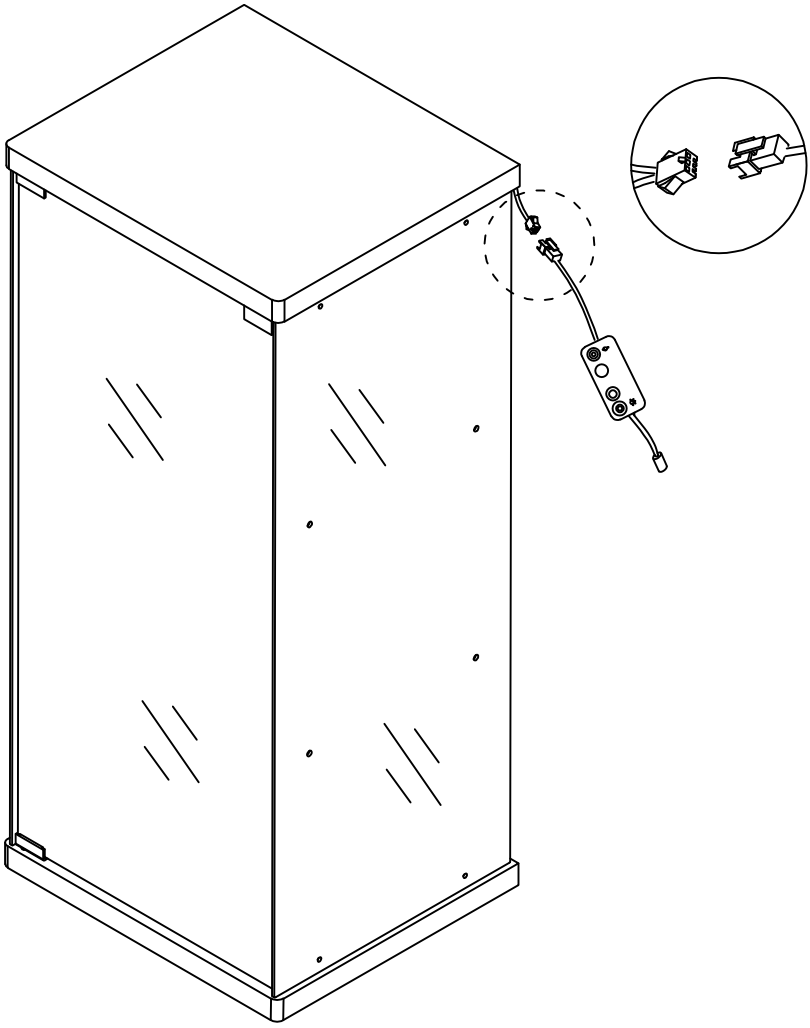

Step 14

Ⓕ x1

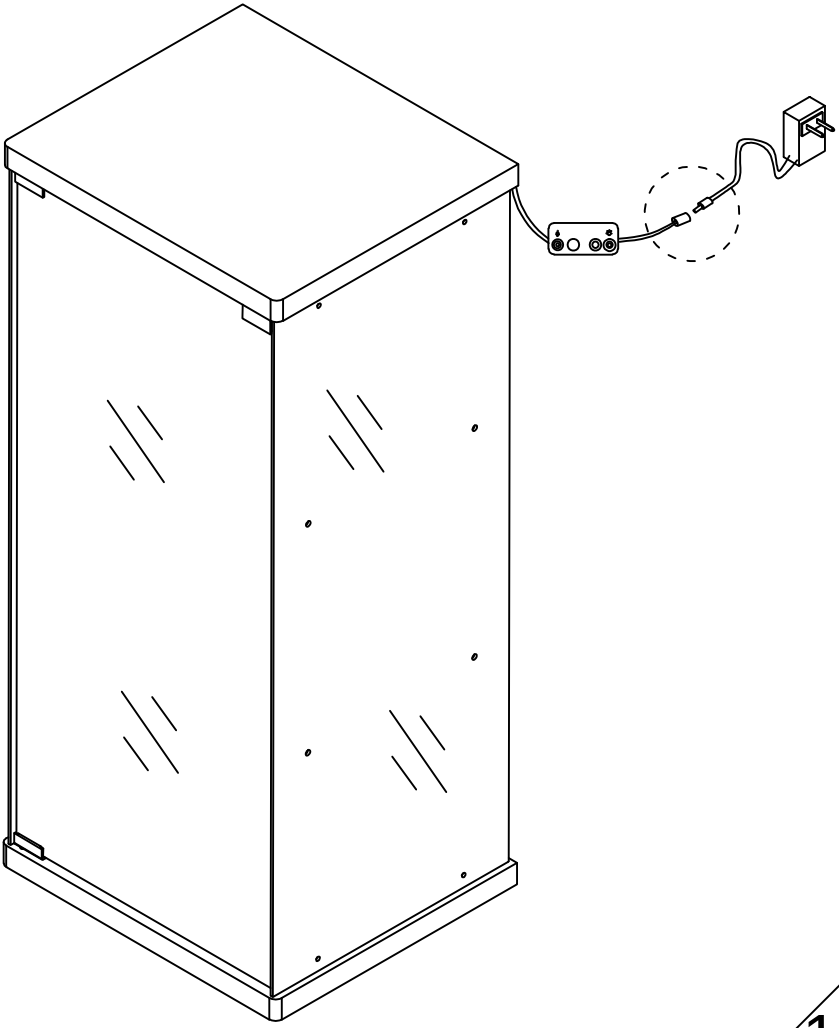



Step 15 Install as required


G x2 x2 x2

3.5x14mm 

Install the anti fall hardware on the cabinet as shown in the picture first

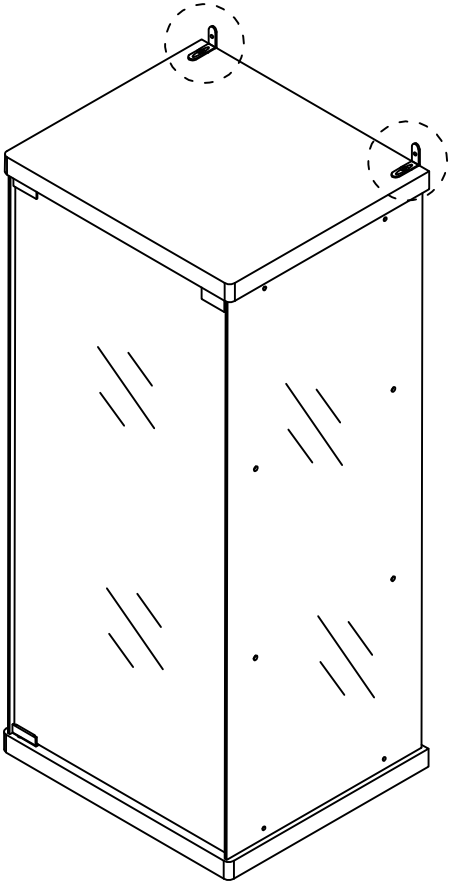






Then mark the wall with a pen through the holes in the anti-fall hardware


Step 17


G x2


x2 x2

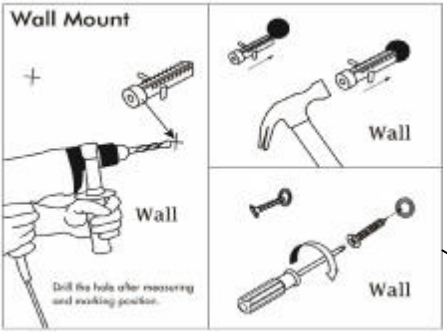

Drill the hole with an electric drill and punch in the colloidal particles

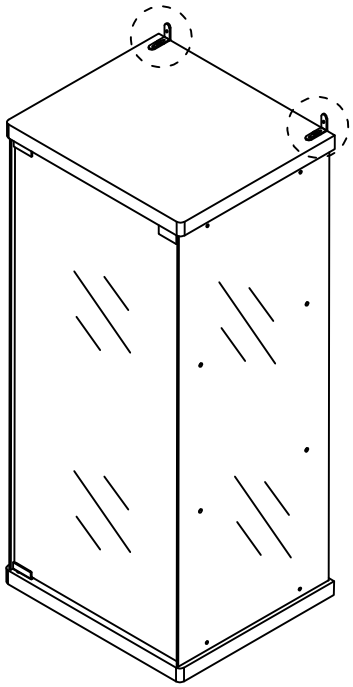






4x45mm

Fix the dressing table to the wall

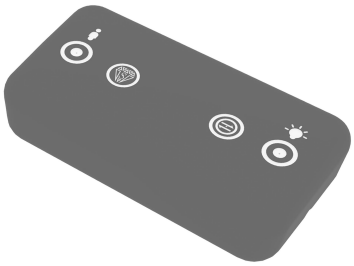

User's Guide

A25

Thank you for purchasing this product.

To use this product, please plug it into a 12V DC power supply.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. With 4 touch buttons, it can turn ON/OFF the light and turn ON/OFF the induction function, change light colors, and adjust the light luminance.

Operation



This touch button is the master switch of the smart box, which can turn off all functions of the box and control the light strips on/off operation. The operation that can be turned on and off with just a light tap.Press and hold to adjust the brightness. Upon first power-up,the default light will be set to white.



This touch button is used to turn on/off the induction function.

A.touch this button once to turn on the induction function (indicator light on). After the person leaves or remains stationary for more than 30 seconds, the light strip goes out; people and objects within a range of 1 meters move will light up the light strip.


B. Long press this button for 0.5 seconds to turn off the human body induction function(the indicator light goes out). At this point, Keep the light strip as it was before turning off and no longer be affected by humanand object activities. By default, induction function is enabled when powered on.



This touch button is the Dynamic Phantom Color Mode, which includes 5 magical lighting effects. Simply tap to cycle through the options.(Attention:This mode cannot adjust the brightness)



This touch button controls the single-color switching function of the light strips, offering 7 different colors to choose from.

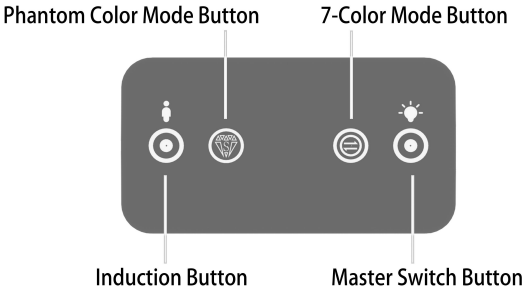

ATTENTION PLEASE

1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If you have any questions when installing, please feel free to contact us. Thank you.