

MODEL: 81436-OT (80778-OT)

STEP 1: OPEN, SORT, AND LAY OUT ALL PATS AND HARDWARE. IF YOU HAVE RECEIVED A COUPLE EXTRA, CONGRATS! YOU HAVE SOME SPARE!




 $\underline{\textbf{STEP 2:}}$ ATTACH THE LEGS INTO THE FRAME (PART "Y") .

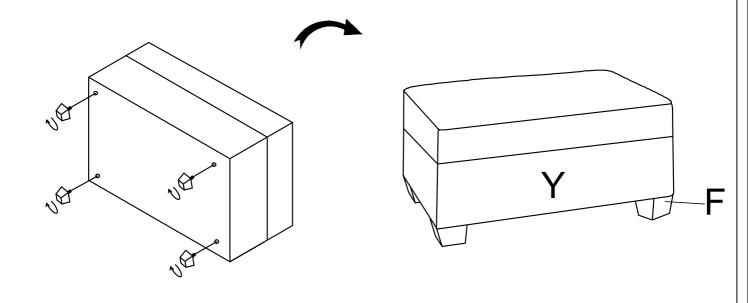

TROUBLESHOOT

- 1.Remove hardware from box and sort by size.
- 2.Please check to see that all hardware and parts are present prior start of assembly
- 3.Please follow attached instructions in the same sequence as numbered to assure fast css.assembly .

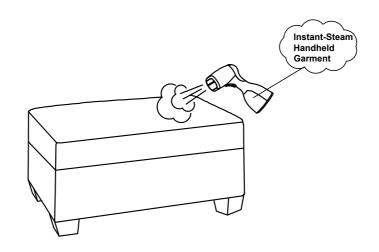


NOTE: It use Instant-Steam Handheld Garment release wrinkles, refresh upholstery in a few minutes.


Page 1 of 1

MODEL: 81436 (80778-B)


<u>STEP 1:</u> OPEN, SORT, AND LAY OUT ALL PATS AND HARDWARE. IF YOU HAVE RECEIVED A COUPLE EXTRA, CONGRATS! YOU HAVE SOME SPARE!

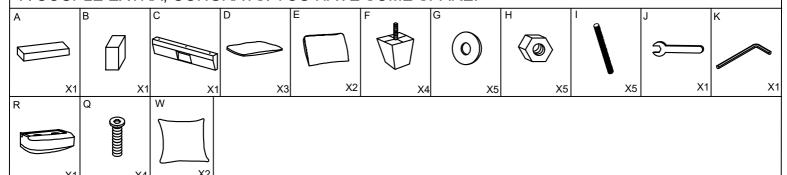

<u>STEP 2:</u> SCREW IN BOLTS (PART " I ") INTO THE BOTTOM OF THE SEAT BACKS (PARTS "B" AND PARTS "C").

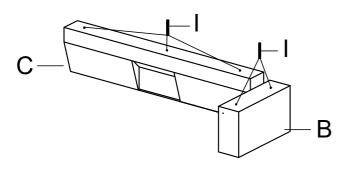


<u>STEP 3:</u> DETERMINE WHICH SIDE YOU WANT THE CHAISE ON. IF YOU WANT YOU SECTIONAL TO LOOK LIKE THIS: PROCEED TO STEP 4.

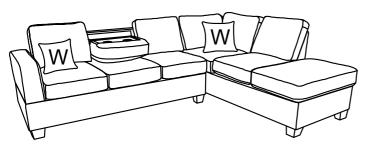


CHAISE ON THE RIGHT

(IF YOU WANT YOUR CHAISE ON THE OTHER SIDE: PLEASE TURN OVER THIS INSTRUCTIONS AND PROCEED TO STEP 3B.)


STEP 4: LOCATE THESE HOLES ON THE FRAME (PART "A")




<u>STEP 5:</u> INSERT BACKS WITH BOLTS INTO THESE HOLES AS SHOWN BELOW. USE ATTACH END BOLT ON WITH PART "A"



STEP 6: ATTACH THE LEGS TO THE TRIANGLE LEGS SUPPORTS ON THE BOTTOM OF THE FRAM (PART "A") .




STEP 7: ARRANGE SEAT AND BACK CUSHIONS ACCORDING TO DIAGRAM BELOW. HAVING TROUBLE PUTTING IT TOGETHER THERE ARE TROUBLESHOOTING TIPS AT THE BOTTOM OF PAGE .



Page 1 of 2

MODEL: 81436 (80778-B)


<u>STEP 3B:</u> DETERMINE WHICH SIDE YOU WANT THE CHAISE ON. IF YOU WANT YOU SECTIONAL TO LOOK LIKE THIS: PROCEED TO STEP 4.

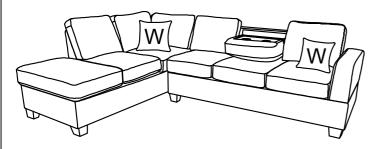


CHAISE ON THE LEFT

(IF YOU WANT YOUR CHAISE ON THE OTHER SIDE: PLEASE TURN OVER THIS INSTRUCTIONS AND PROCEED TO STEP 3 .)


STEP 4B: LOCATE THESE HOLES ON THE FRAME (PART "A")

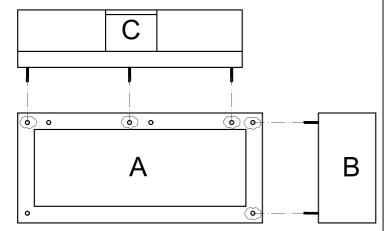


<u>STEP 5B:</u> INSERT BACKS WITH BOLTS INTO THESE HOLES AS SHOWN BELOW. USE ATTACH END BOLT ON WITH PART "A"



STEP 6B: ATTACH THE LEGS TO THE TRIANGLE LEGS SUPPORTS ON THE BOTTOM OF THE FRAM (PART "A").

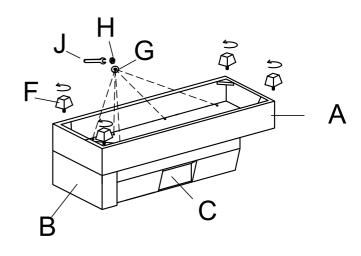

STEP 7B: ARRANGE SEAT AND BACK CUSHIONS ACCORDING TO DIAGRAM BELOW.HAVING TROUBLE PUTTING IT TOGETHER THERE ARE TROUBLESHOOTING TIPS AT THE BOTTOM OF PAGE.



TROUBLESHOOT

- 1.Remove hardware from box and sort by size.
- 2.Please check to see that all hardware and parts are present prior start of assembly .
- 3.Please follow attached instructions in the same sequence as numbered to assure fast & css.assembly.




NOTE: It use Instant-Steam Handheld Garment release wrinkles, refresh upholstery in a few minutes.


Page 2 of 2

MODEL: 81436 (80778-A)


<u>STEP 1:</u> OPEN, SORT, AND LAY OUT ALL PATS AND HARDWARE. IF YOU HAVE RECEIVED A COUPLE EXTRA, CONGRATS! YOU HAVE SOME SPARE!

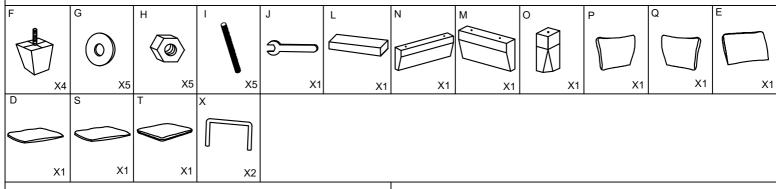


<u>STEP 2:</u> SCREW IN BOLTS (PART " I ") INTO THE BOTTOM OF THE SEAT BACKS (PARTS "N" PARTS "O" AND PARTS "M").

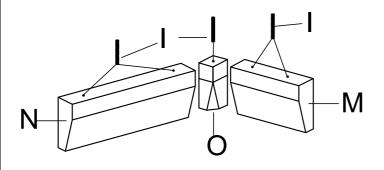


<u>STEP 5:</u> INSERT BACKS WITH BOLTS INTO THESE HOLES AS SHOWN BELOW. USE ATTACH END BOLT ON WITH PART "L"



STEP 3: DETERMINE WHICH SIDE YOU WANT THE CHAISE ON. IF YOU WANT YOU SECTIONAL TO LOOK LIKE THIS: PROCEED TO STEP 4.

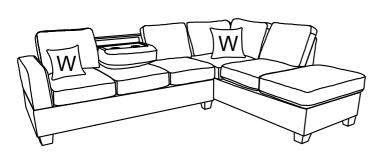


STEP 6: ATTACH THE LEGS TO THE TRIANGLE LEGS SUPPORTS ON THE BOTTOM OF THE FRAM (PART "L") .




CHAISE ON THE RIGHT

(IF YOU WANT YOUR CHAISE ON THE OTHER SIDE: PLEASE TURN OVER THIS INSTRUCTIONS AND PROCEED TO STEP 3A .)

STEP 4: LOCATE THESE HOLES ON THE FRAME (PART "L")

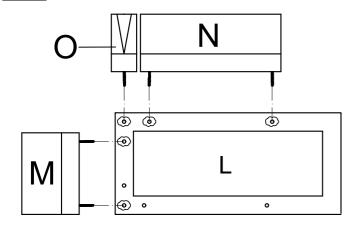


STEP 7: ARRANGE SEAT AND BACK CUSHIONS ACCORDING TO DIAGRAM BELOW. HAVING TROUBLE PUTTING IT TOGETHER THERE ARE TROUBLESHOOTING TIPS AT THE BOTTOM OF PAGE.



Page 1 of 3


MODEL: 81436 (80778-A)

STEP 3A: DETERMINE WHICH SIDE YOU WANT THE CHAISE ON. IF YOU WANT YOU SECTIONAL TO LOOK LIKE THIS: PROCEED TO STEP 4.

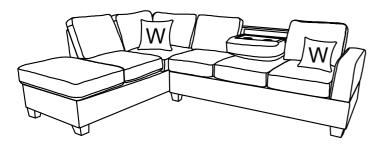


CHAISE ON THE LEFT


(IF YOU WANT YOUR CHAISE ON THE OTHER SIDE: PLEASE TURN OVER THIS INSTRUCTIONS AND PROCEED TO STEP 3.) STEP 6A: ATTACH THE LEGS TO THE TRIANGLE LEGS SUPPORTS ON THE BOTTOM OF THE FRAM (PART "L").




STEP 4A: LOCATE THESE HOLES ON THE FRAME (PART "L")

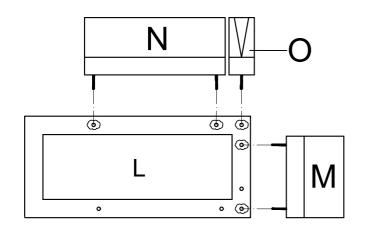

STEP 7A: ARRANGE SEAT AND BACK CUSHIONS ACCORDING TO DIAGRAM BELOW. HAVING TROUBLE PUTTING IT TOGETHER THERE ARE TROUBLESHOOTING TIPS AT THE BOTTOM OF PAGE.




STEP 5A: INSERT BACKS WITH BOLTS INTO THESE HOLES AS SHOWN BELOW. USE ATTACH END BOLT ON WITH PART "L"

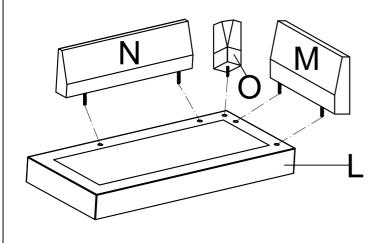

TROUBLESHOOT

- 1.Remove hardware from box and sort by size.
- 2.Please check to see that all hardware and parts are present prior start of assembly.
- 3. Please follow attached instructions in the same sequence as numbered to assure fast
 - & css.assembly.



NOTE: It use Instant-Steam Handheld Garment release wrinkles, refresh upholstery in a few minutes.

Page 2 of 3

CHAISE + SOFA (SECTIONAL)

CHAISE + SOFA CAN BE ATTACHED TOGETHER BY "n" SHAPE AS THE DRAWINGS SHOWN BELOW.

