

SentinelPro™ Diverter Trim, Shower and Tub Package (Valve not included)

FEATURES:

- CPT-5001: Shower Valve Trim
- S-2272-E2: 2.0 GPM (7.6 L/min) Flow Rate Shower Head
- S-2500: Shower Arm and Flange
- VS-100-PC: Hand Held Shower with Pause/Trickle Button
- VS-115: Supply Ell with Wall Flange
- S-1556: Diverter Tub Spout
- CPT-1183: Transfer Valve Trim (Valve not included)
- 69 in. Metal Stainless Steel Hose

VALVE OPTIONS:

- CPV-TP: Thermostatic/Pressure Balancing Valve
Sweat & Thread Connections
- CPV-TP-PXC: Thermostatic/Pressure Balancing Valve
PEX F1807 Crimp Inlet Connections
- CPV-TP-PXE: Thermostatic/Pressure Balancing Valve
PEX F1960 Cold-Expansion Inlet Connections
- CPV-TV: Two-Way Diverter Valve for use with CPT-1183

STOCK FINISHES:



PC

WARRANTY:


Visit www.speakman.com for full product warranty information

- See Speakman.com For Warranty Information



Information continues on next page

SentinelPro™ Diverter Trim, Shower and Tub Package (Valve not included)

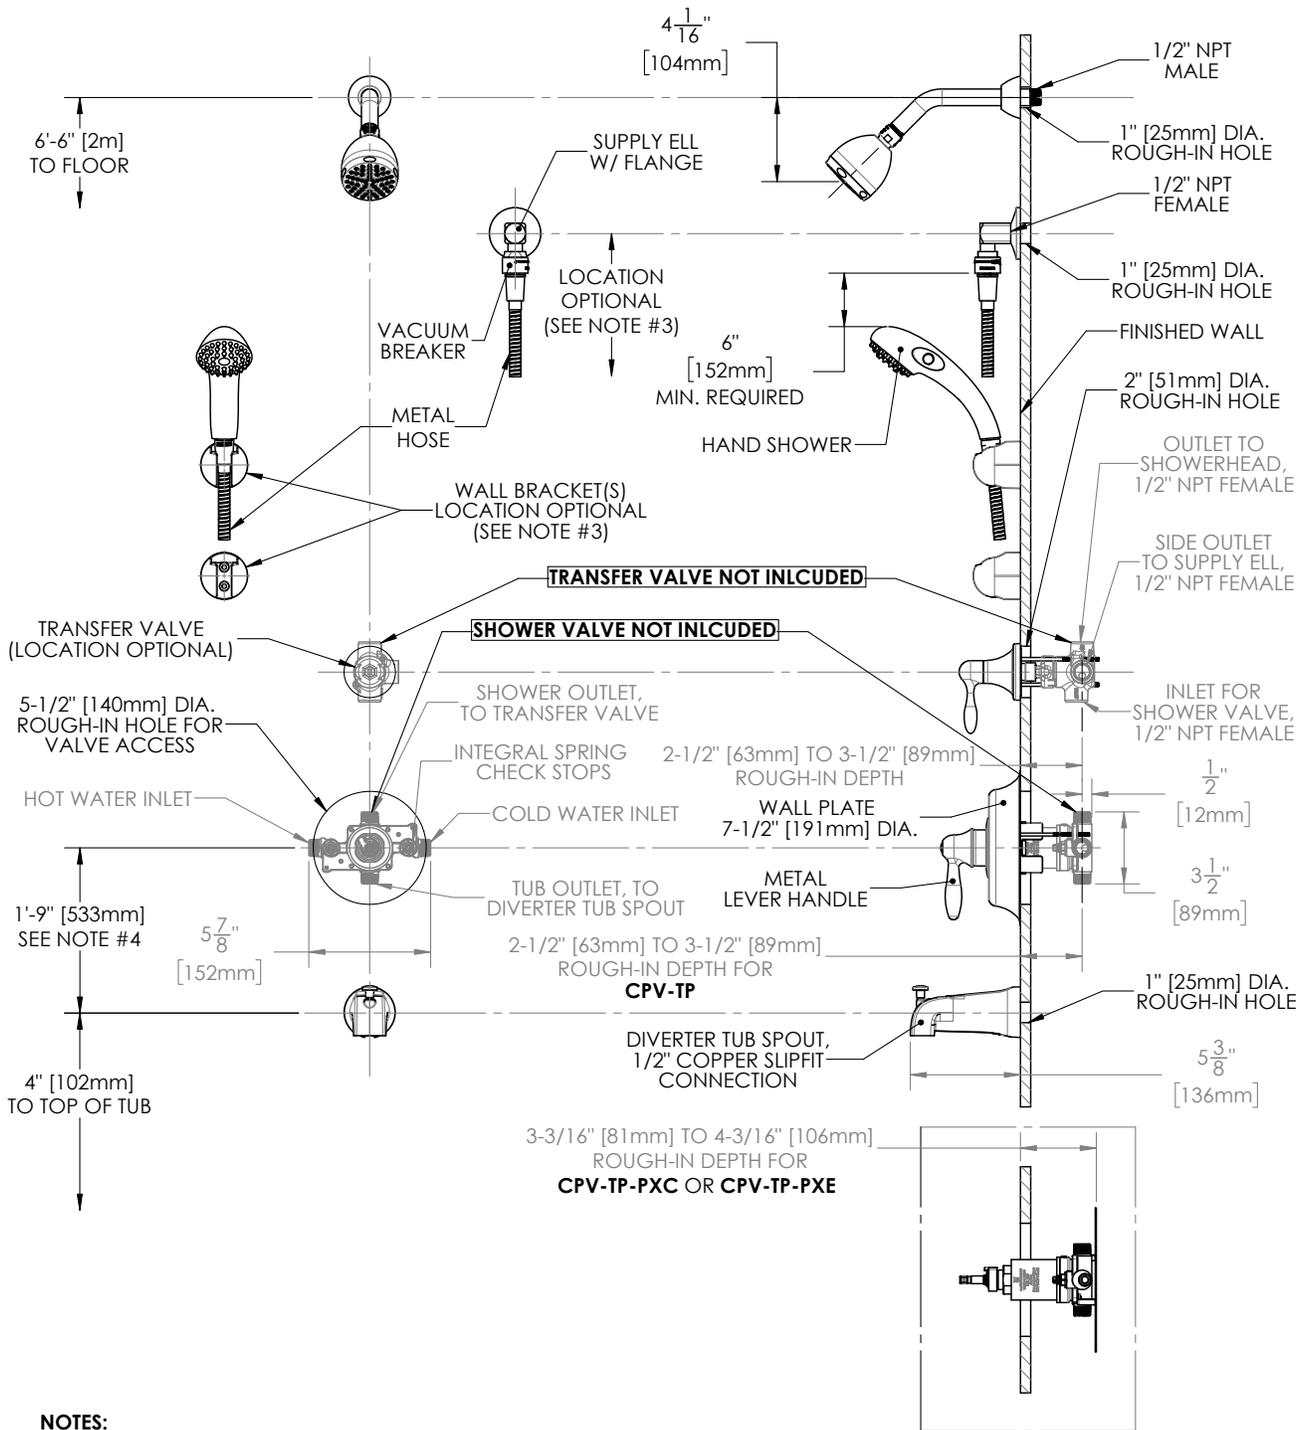

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] UNLESS OTHERWISE SPECIFIED AND ARE SUBJECT TO CHANGE WITHOUT NOTICE.
2. ALL INLETS AND OUTLETS ARE 1/2" FEMALE COPPER SWEAT AND 1/2" MALE NPT UNLESS OTHERWISE SPECIFIED.
3. THE LOCATIONS OF THE WALL BRACKETS(2) AND SUPPLY ELL ARE OPTIONAL, BUT RESTRICTED BY THE 69" HOSE LENGTH RUNNING FROM THE SUPPLY ELL CONNECTION TO THE HAND SHOWER AND THE 6" MINIMUM REQUIREMENT BETWEEN THE IN-LINE VACUUM BREAKER AND TOP OF THE HAND SHOWER (HAND SHOWER ADJUSTED TO HIGHEST POSITION).
4. FOR ADA MOUNTING LOCATIONS CONSULT ADAAG, ANSI A117.1, OR STATE REGULATIONS.

Architect/Engineer Approval Space:

P: 800-537-2107
 F: 800-977-2747
 W: WWW.SPEAKMAN.COM
 R: 01-JANUARY 2019