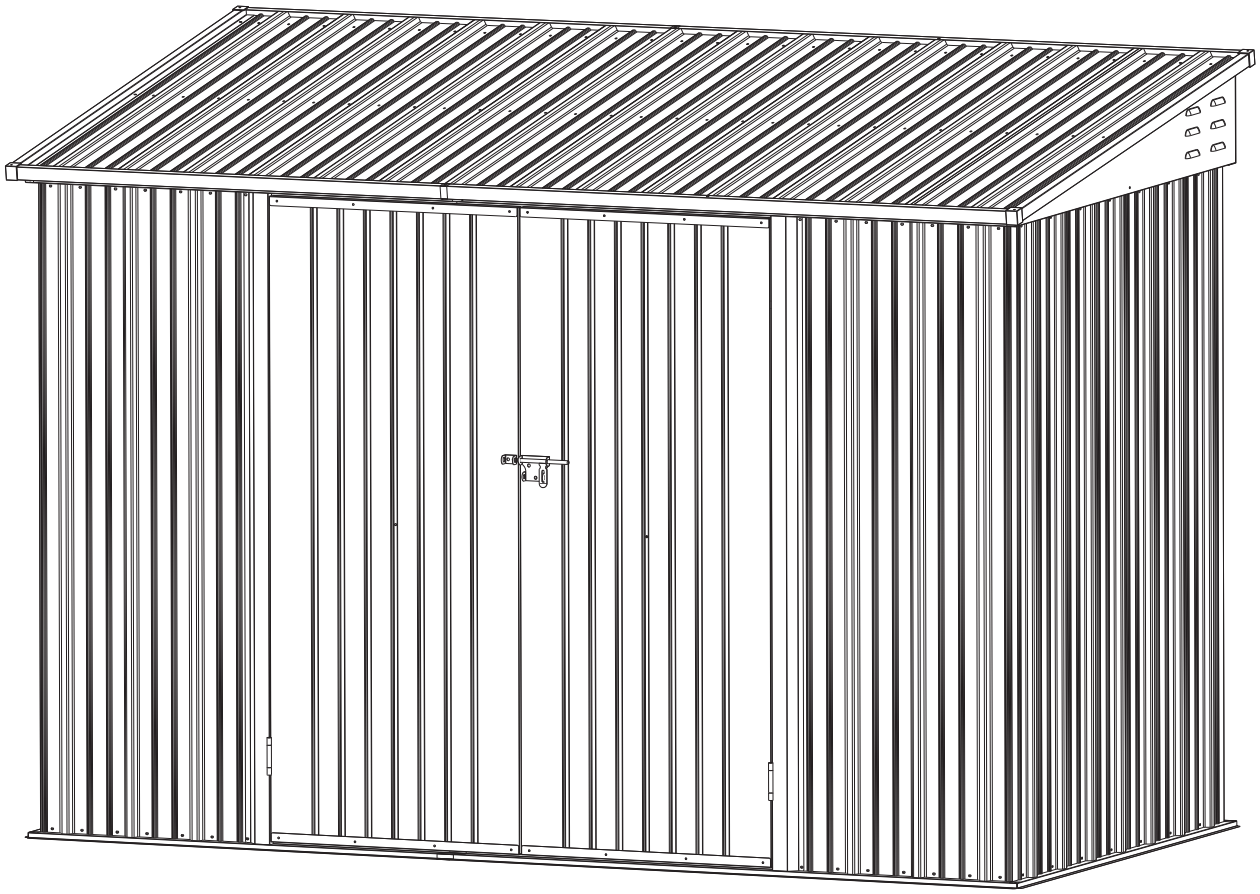
METAL GARDEN SHED-10X5FT

Instructions for Assembly





ASSEMBLY INSTRUCTIONS

Requires two people and takes 2-3 hours for Installation.

WARNING

Please read the instruction manual carefully before assembly.
Please assembly strictly in accordance with the instrution.
Please double-check to ensure that all parts of the package contents intact.
To avoid injury, work gloves are recommended during assembly.

BEFORE YOU BEGIN

Owner's Manual
Before beginning construction, check local building codes regarding footings, location and other requirements. Study and understand this owner's manual. Important information and helpful tips will make your construction easier and more enjoyable.
Assembly Instructions: Instructions are supplied in this manual and contain all appropriate information for your building model. Review all instructions before you begin, and during assembly, follow the step sequence carefully for correct results.
Parts and Parts List: Check to be sure that you have all the necessary parts, you're your building.
Separate contents of the carton by the part number while reviewing parts list.
The first few steps show how to join related parts to make larger sub assemblies which will be used later.
Familiarize yourself with the hardware and fasteners for easier use during construction.
These are packaged within the carton. Note that extra fasteners have been supplied for your convenience.

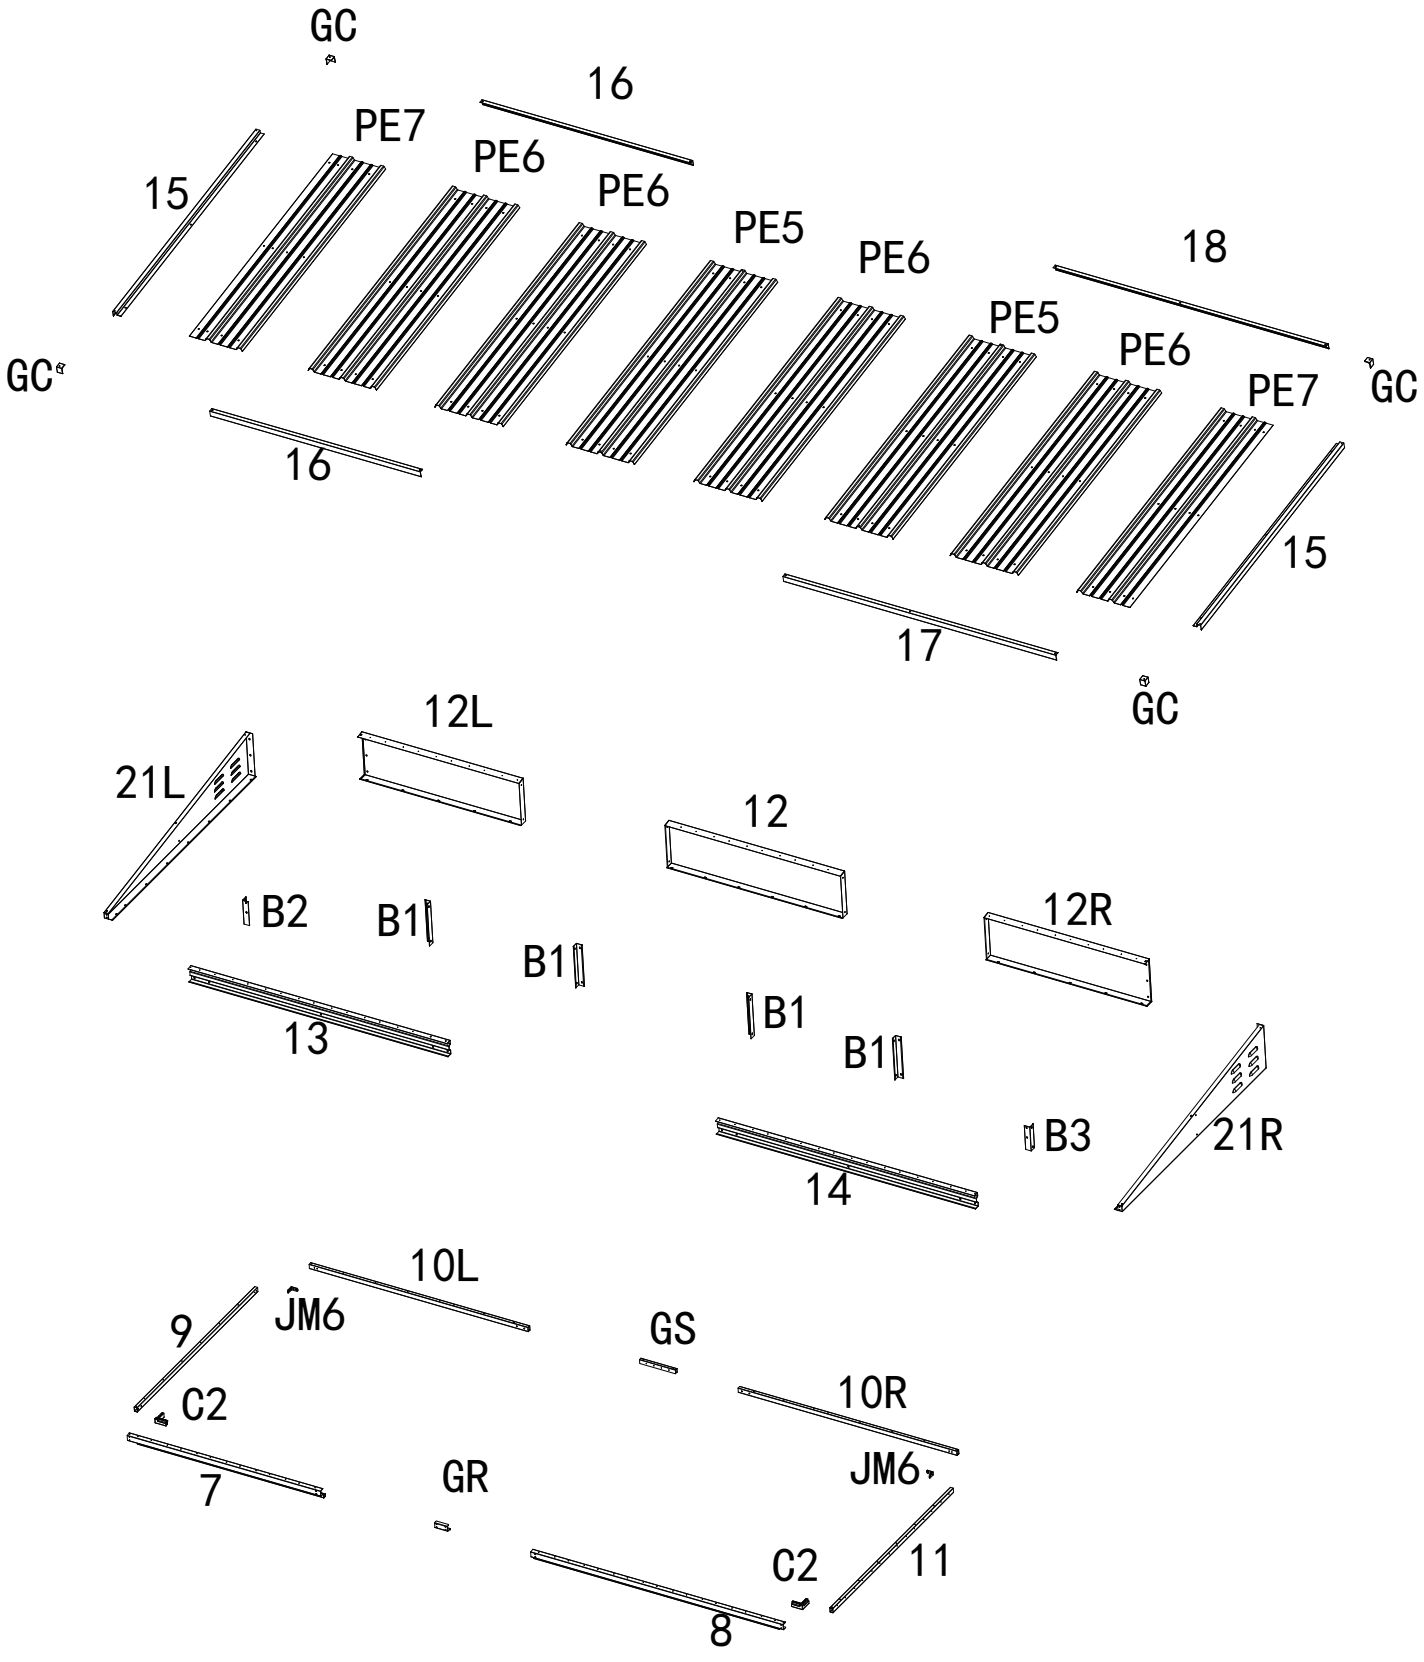
PLAN AHEAD

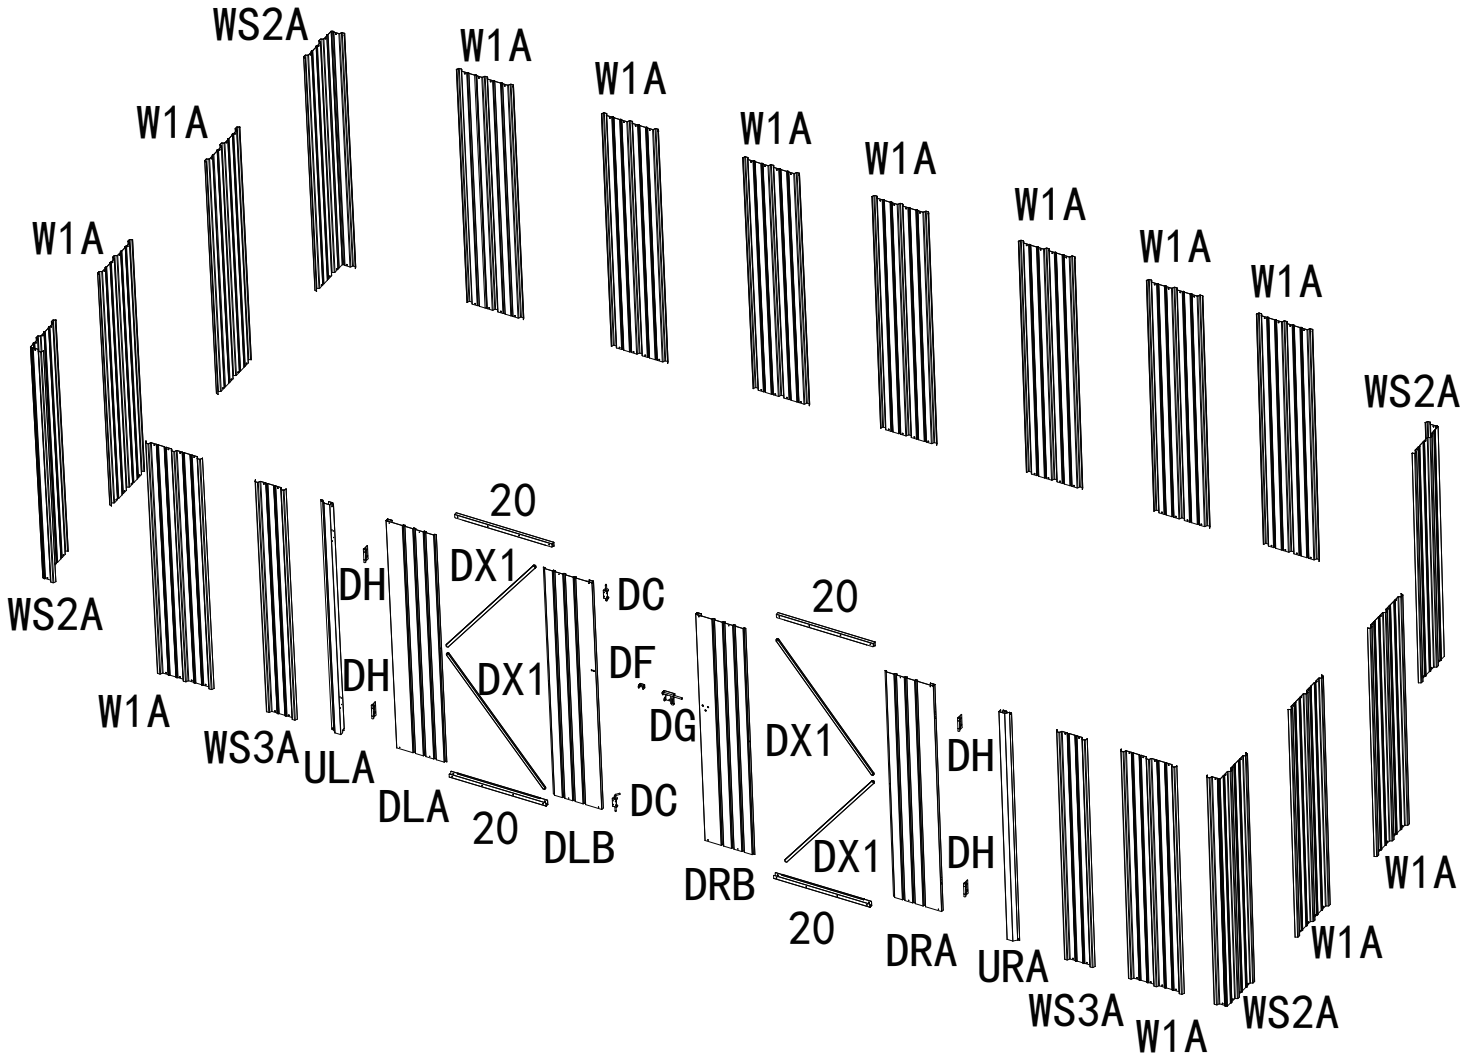
Watch the Weather: Be sure the day you select to install your building is dry and calm. Do not attempt to assemble your building on a windy day. Be careful on wet or muddy ground.
Teamwork: Whenever possible, two or more people should work together to assemble your building. One person can position parts or panels while the other is able to handle the fasteners and the tools.
Tools and Materials: These are some basic tools and materials you will need for the construction of your building. Decide which method of anchoring and the type of foundation you wish to use in order to form a complete list of the materials you will need.


CARE & MAINTENANCE

Finish: For long lasting finish, periodically clean and wax the exterior surface. Touch-up scratches as soon as you notice them on your unit. Immediately clean the area with a wire brush; wash it and apply touch-up paint per manufacturer's recommendation.
Roof: Keep roof clear of leaves and snow with long handled, soft-bristled broom. Heavy amounts of snow on roof can damage building making it unsafe to enter. In snow country, Roof Strengthening Kits are available for most Arrow Buildings for added protection against heavy snow accumulation.
Doors: Always keep the door tracks clear of dirt and other debris that prevent them from sliding easily. Lubricate door track annually with furniture polish or silicone spray. Keep doors closed and locked to prevent wind damage
Fasteners: Use all washers supplied to protect against weather infiltration and to protect the metal from being scratched by screws. Regularly check your building for loose screws, bolts, nuts, etc. and retighten them as necessary.
Moisture: A plastic sheet (vapor barrier) placed under the entire floor area with good ventilation will reduce condensation.
Other Tips....
Wash off inked part numbers on coated panels with soap and water.
Silicone caulking may be used for watertight seals throughout the building.
Do not store swimming pool chemicals in your building. Combustibles and corrosives must be stored in air tight approved containers.










Exploded view
















WS2A
W1A
W1A
W1A
W1A
W1A
W1A
W1A
W1A
W1A
WS2A
WS2A
W1A
WS3A
ULA
DLA
DLB
DRB
DRA
URA
WS3A
W1A
WS2A
W1A
20
20
20
DH
DH
DX1
DX1
DC
DF
DG
DC
DX1
DX1
DH
DH









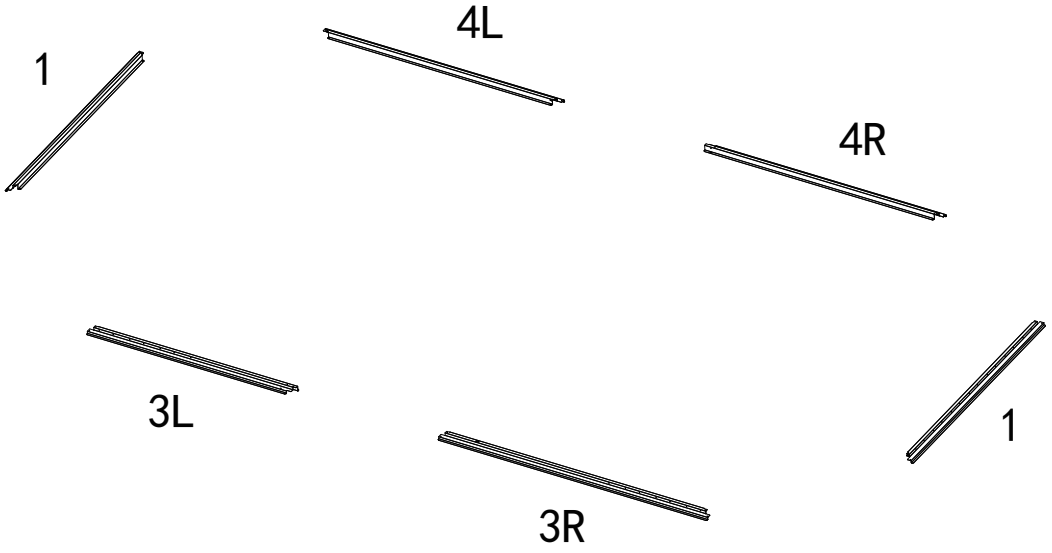

1
4L
4R
3L
3R
1






PARTS LIST


NO.	PART	Qty.
1		2
3L		1
3R		1
4L		1
4R		1
7		1
8		1
10L		1
10R		1
9		1
11		1
13		1
14		1
15		2
16		2


NO.	PART	Qty.
17		1
18		1
12		1
12L		1
12R		1
B1		4
B2		1
B3		1
DX1		4
20		4
DLA		1
DLB		1
DRA		1
DRB		1
PE7		2


PARTS LIST

NO.	PART	Qty.
C2		2
PE5		2
PE6		4
ULA		1
URA		1
W1A		13
WS2A		4
WS3A		2
21L		1
21R		1
GS		1
GR		1
GC		4
JM6		2


NO.	PART	Qty.
DC		2
DG		1
DF		1
DH		4
F1		332
F2		28
F3		32
F4		5
S1		32
S2		309
F6		4

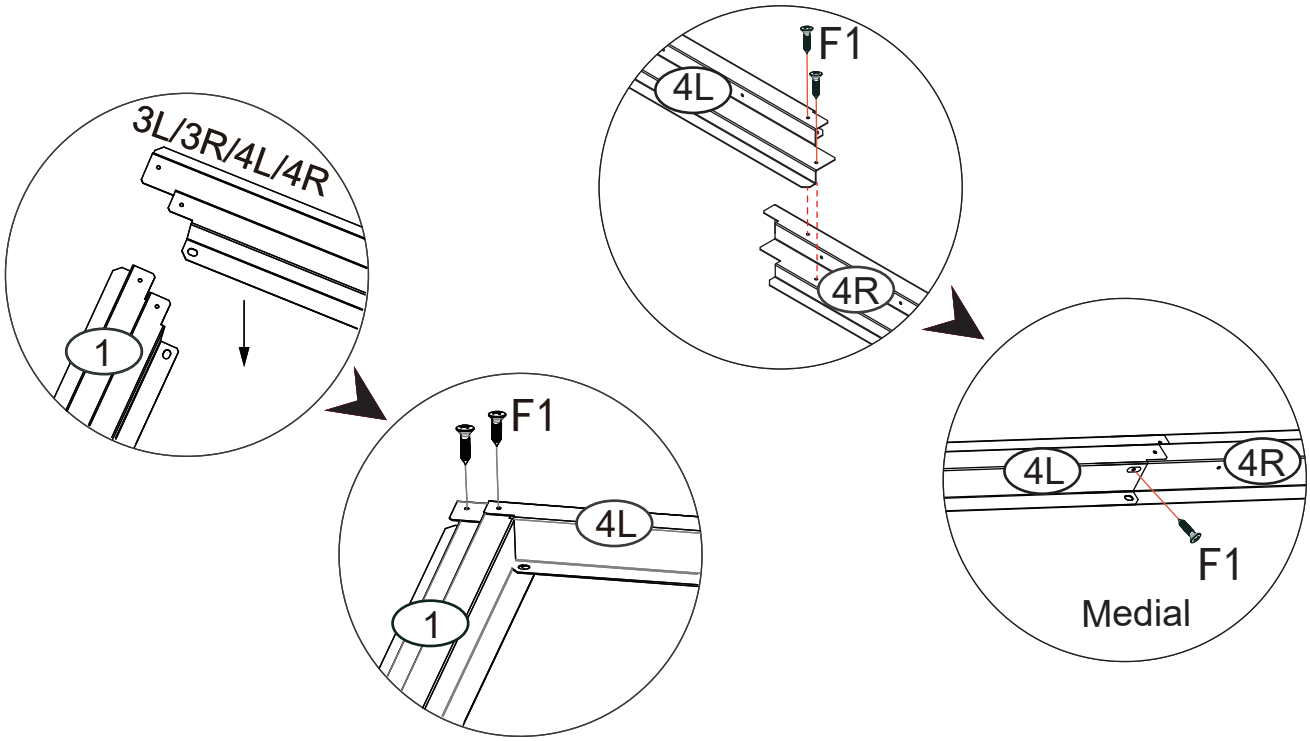

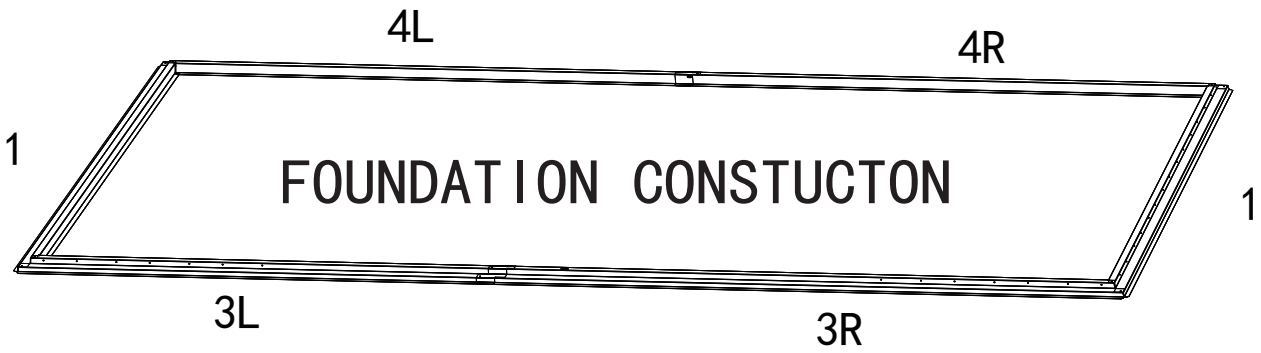

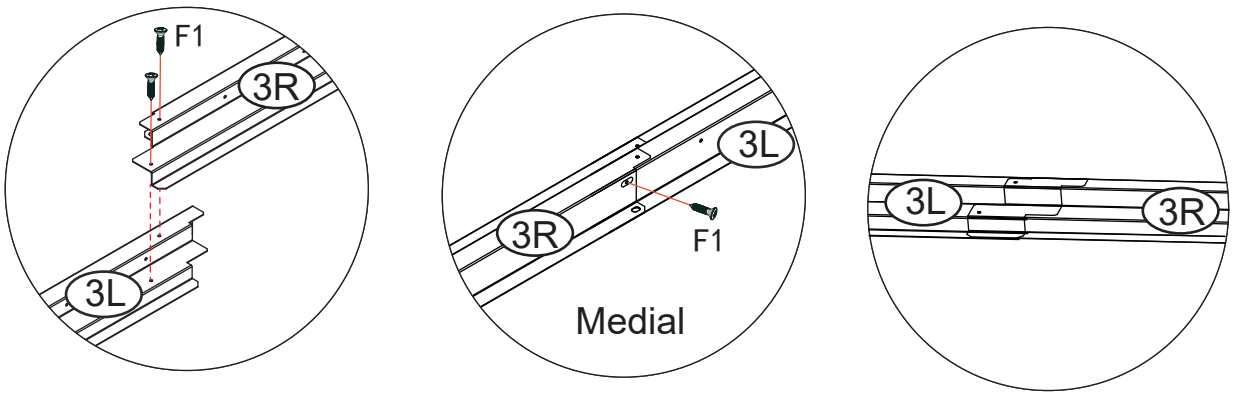



1	3L	3R	4L	4R	F1
2 PC	1 PC	1 PC	1 PC	1 PC	14 PC

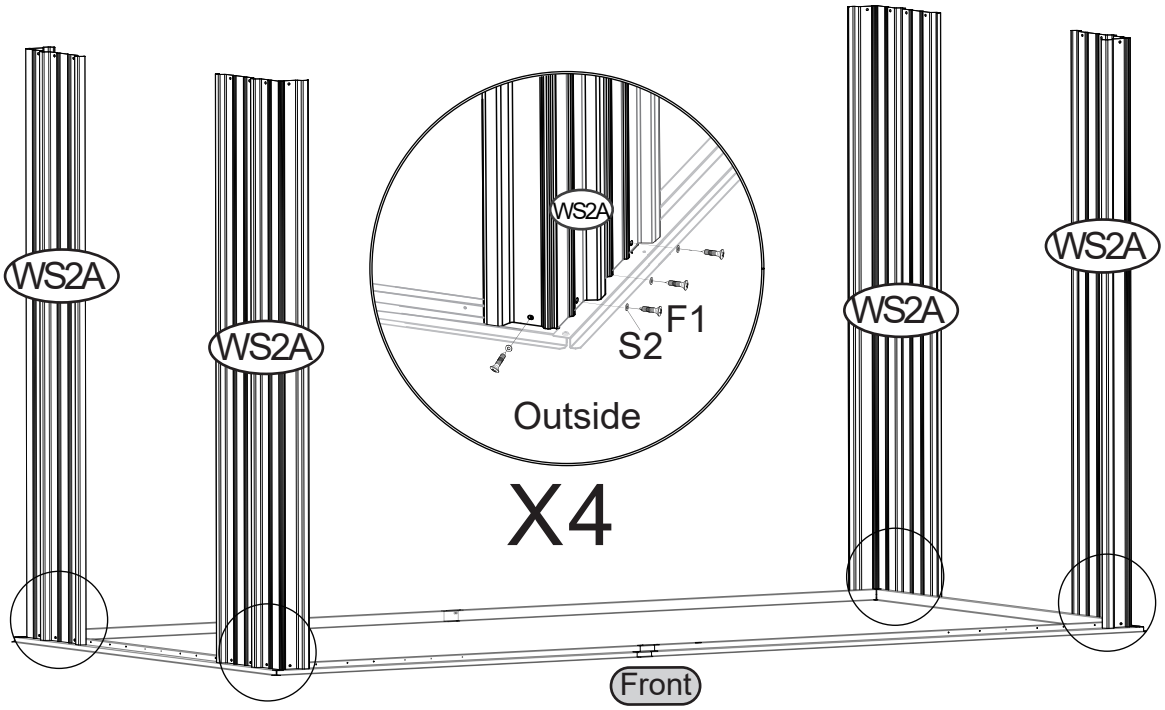





WS2A	W1A	F1	S2
4 PC	4 PC	32 PC	32 PC

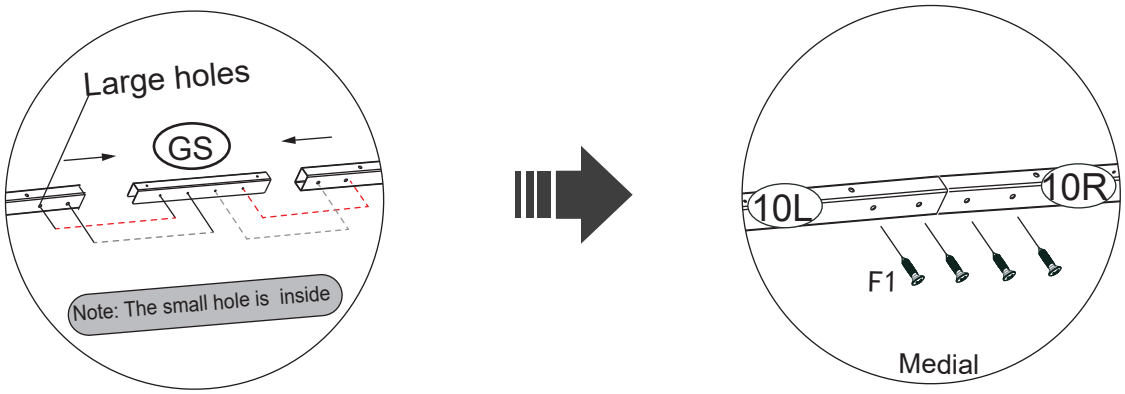

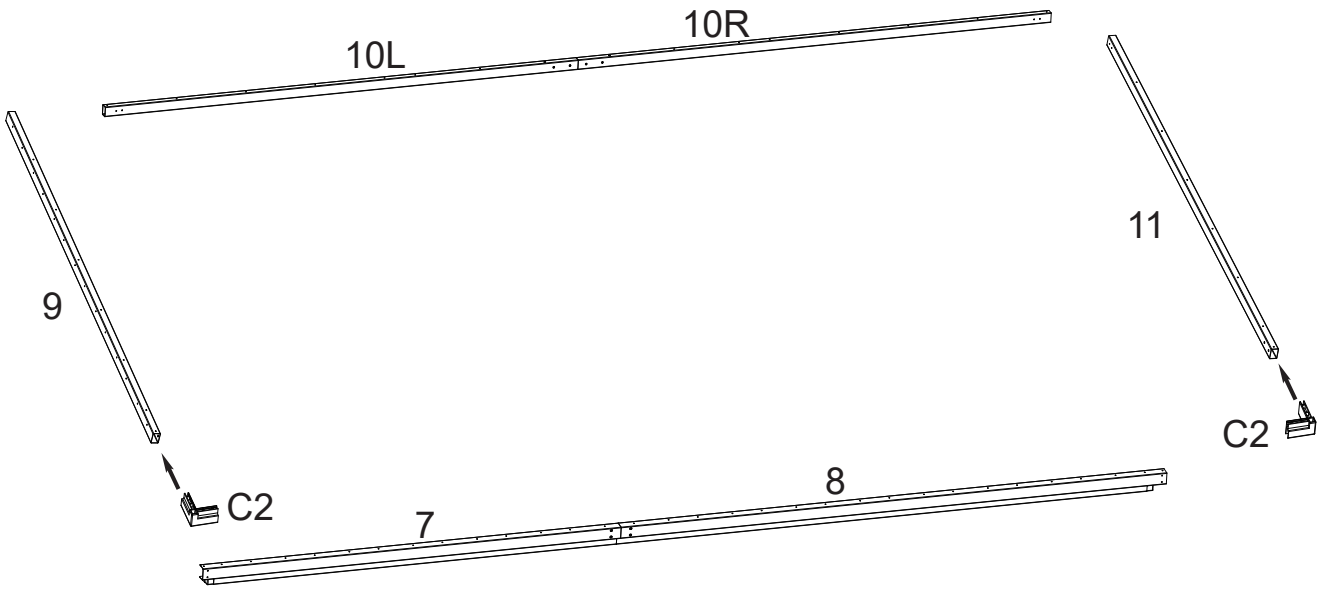


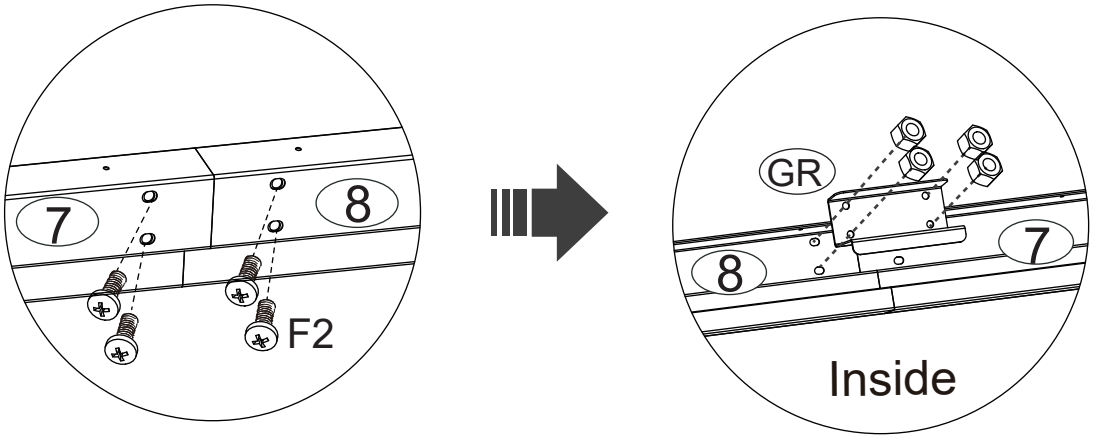


7&8	9&10L&10R&11	GS	GR	C2	F2	F1
EA 1 PC	EA 1 PC	1 PC	1 PC	2 PC	4 PC	4 PC

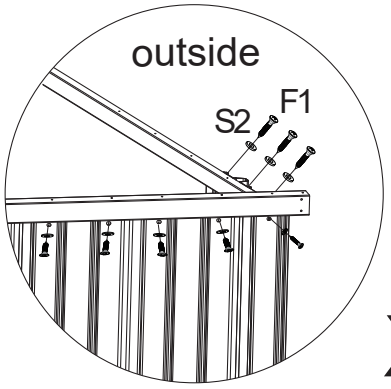


X4

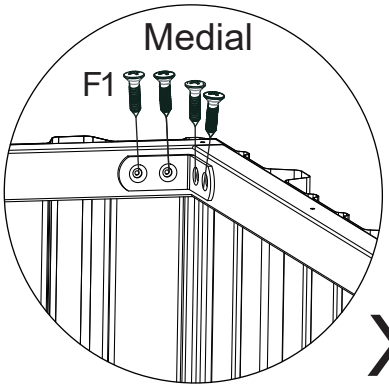


X2

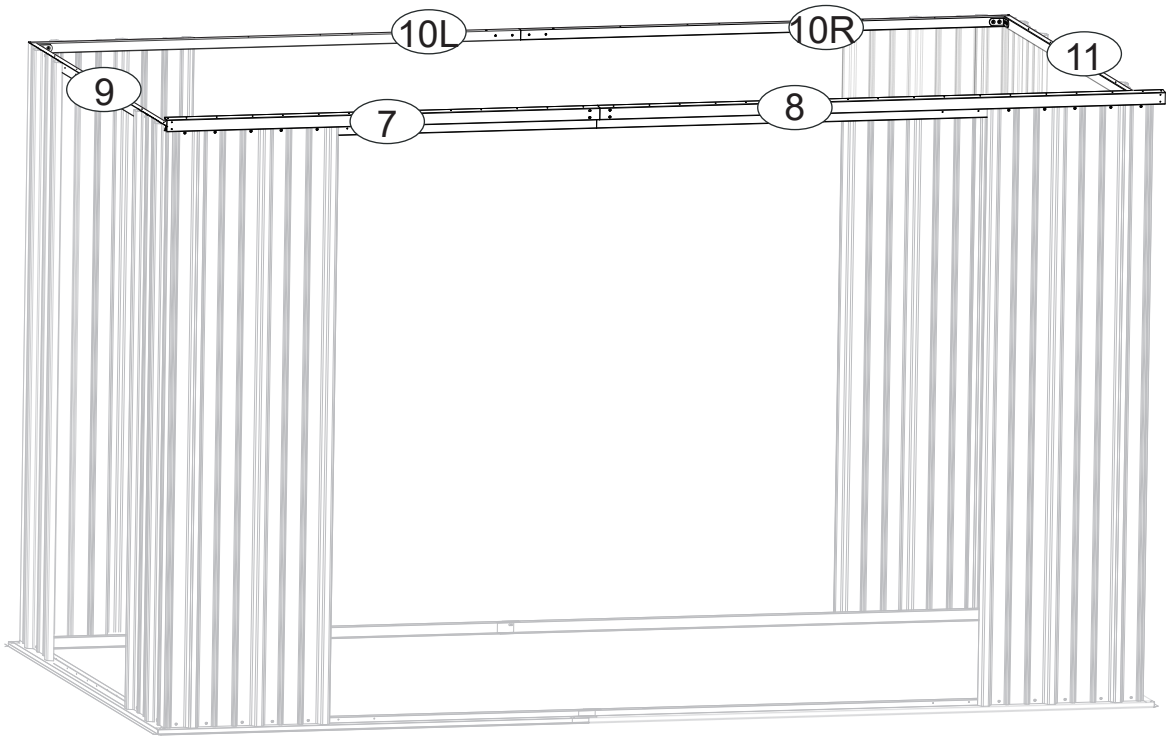

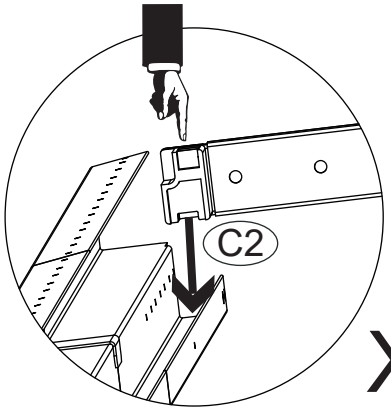

X2

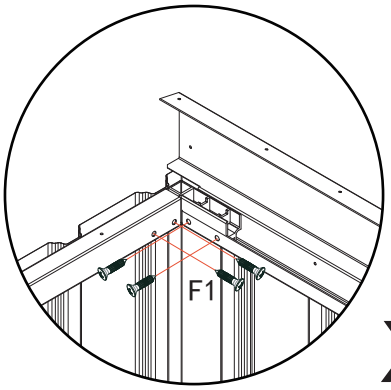



X2


Tips:


1.Install Part7 & 8 Firstly
2.Insert Part C2 With 9 → Bottom of Part 7
3.Insert Part C2 With 11 → Bottom of Part 8
4.Install Part 10L&10R With JM6
(Note: Part 7&8、10L&10R already connected in previous Step)


JM6	F1	S2
		
2 PC	44 PC	32PC

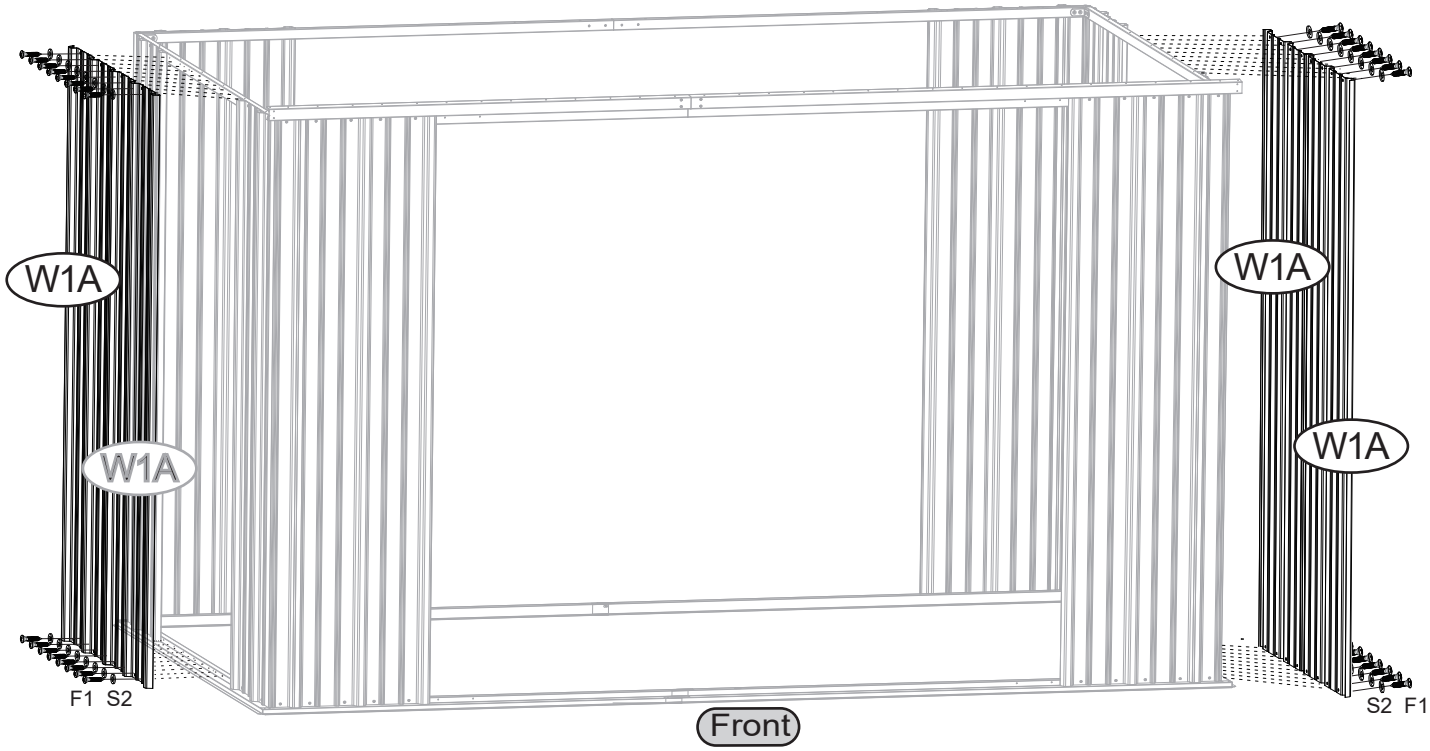



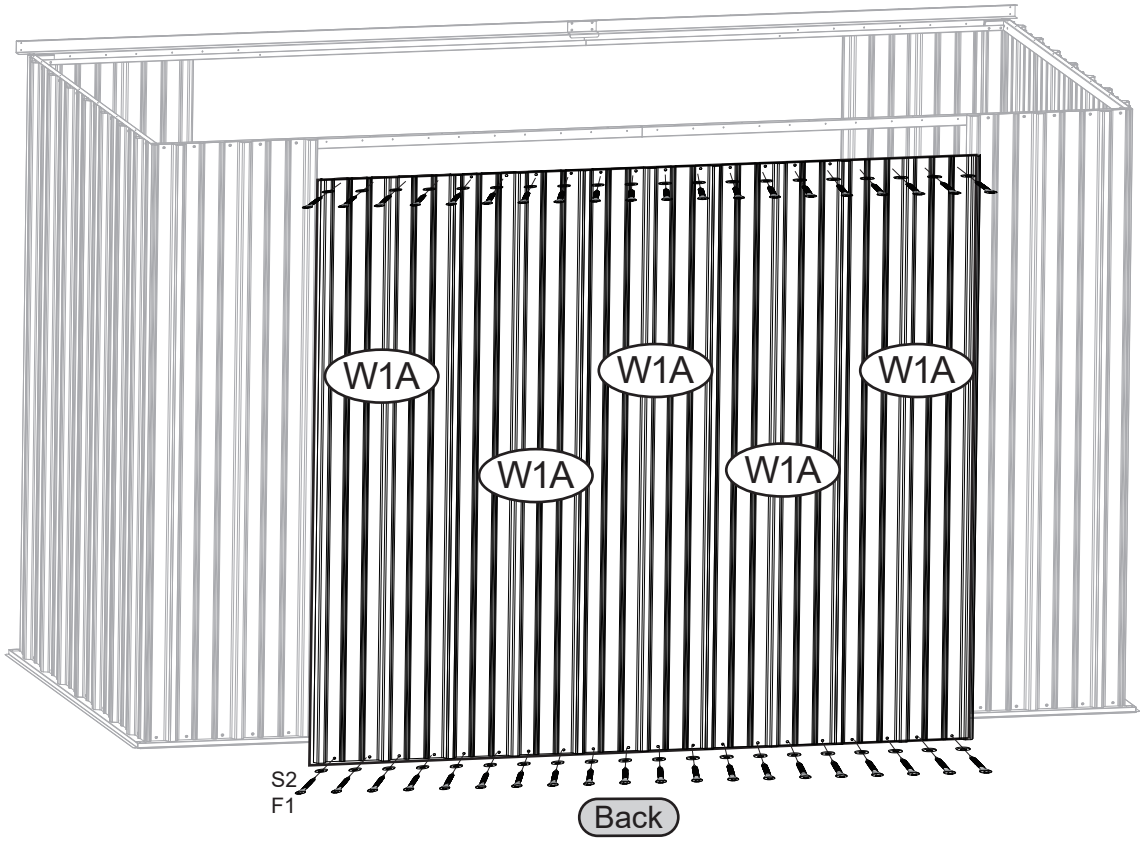



W1A	F1	S2
		
9PC	72 PC	72PC

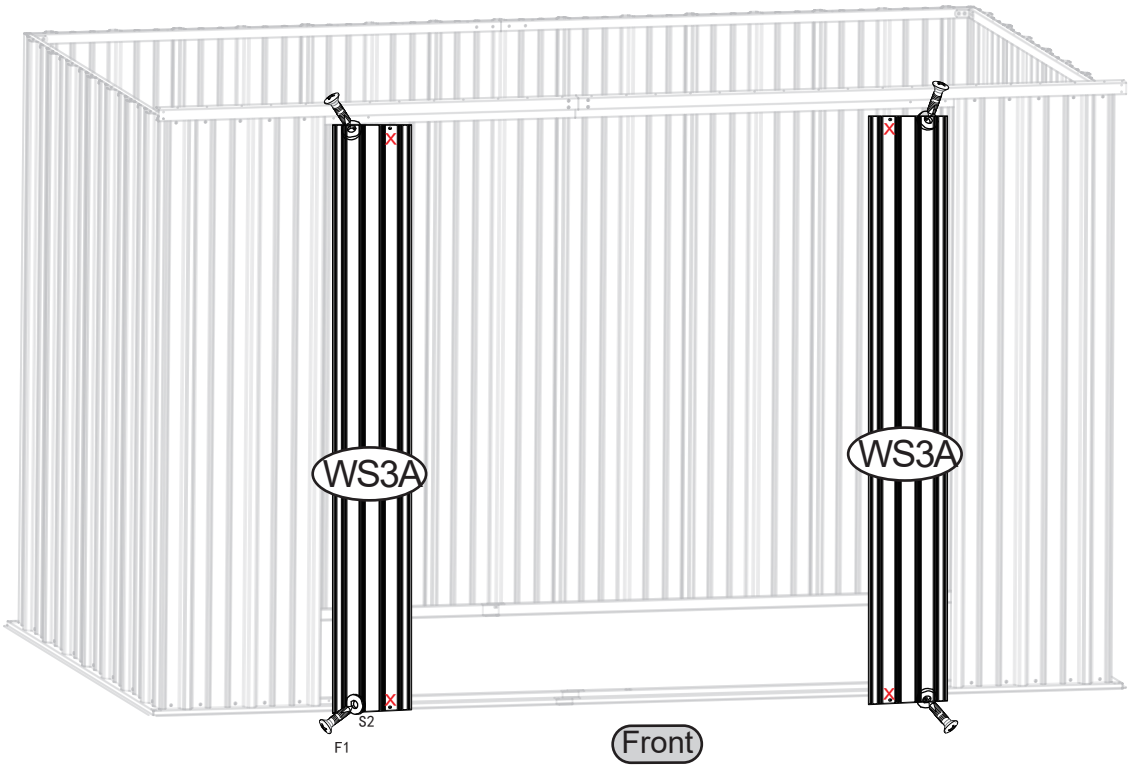


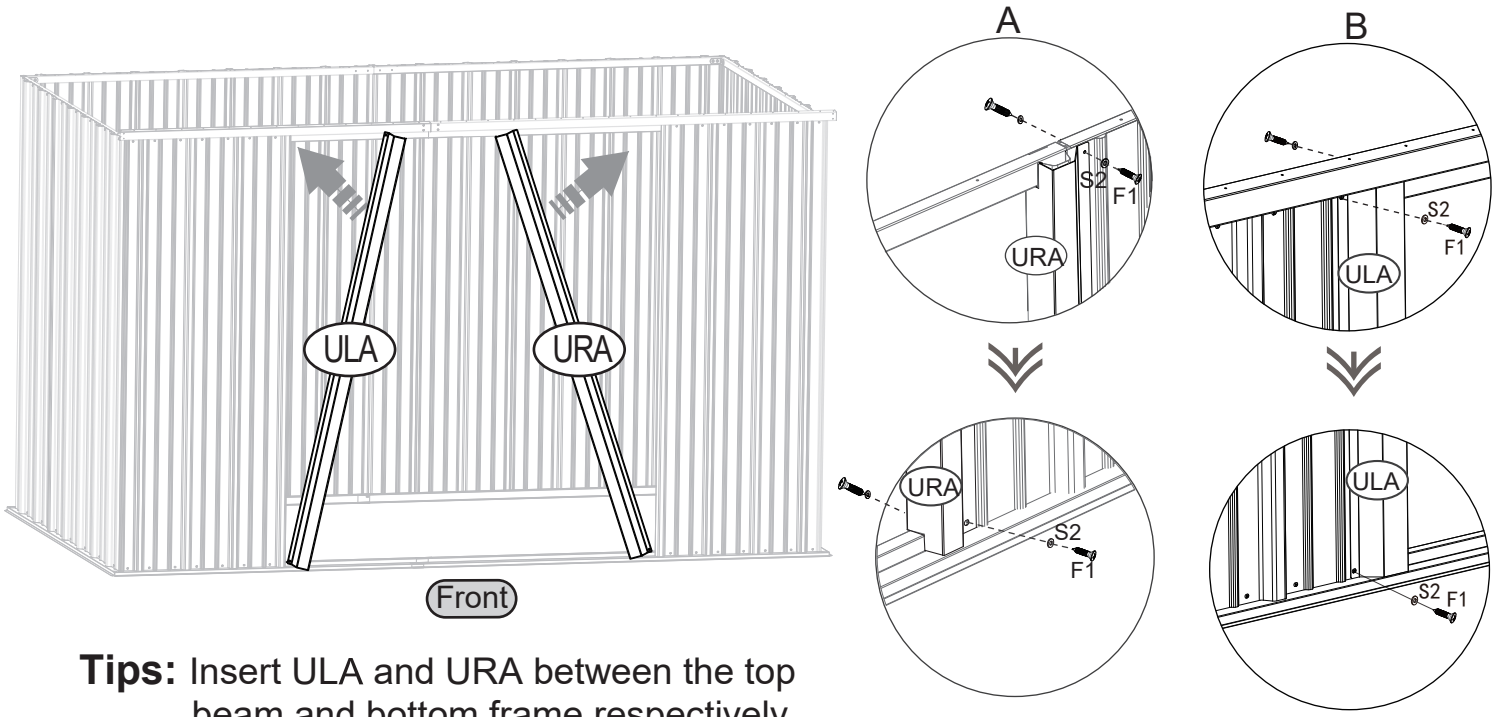



Tips: Insert ULA and URA between the top beam and bottom frame respectively, and then push them to the corresponding position.

WS3A	ULA	URA	F1	S2
				
2 PC	1 PC	1 PC	12 PC	12PC




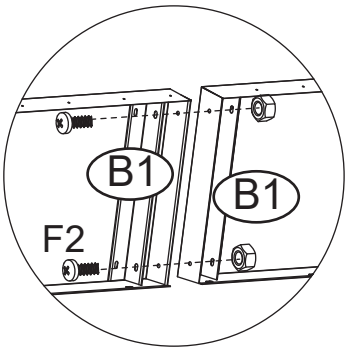


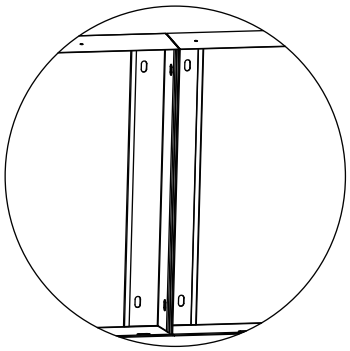


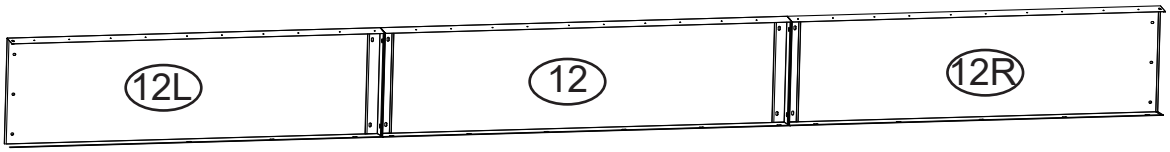


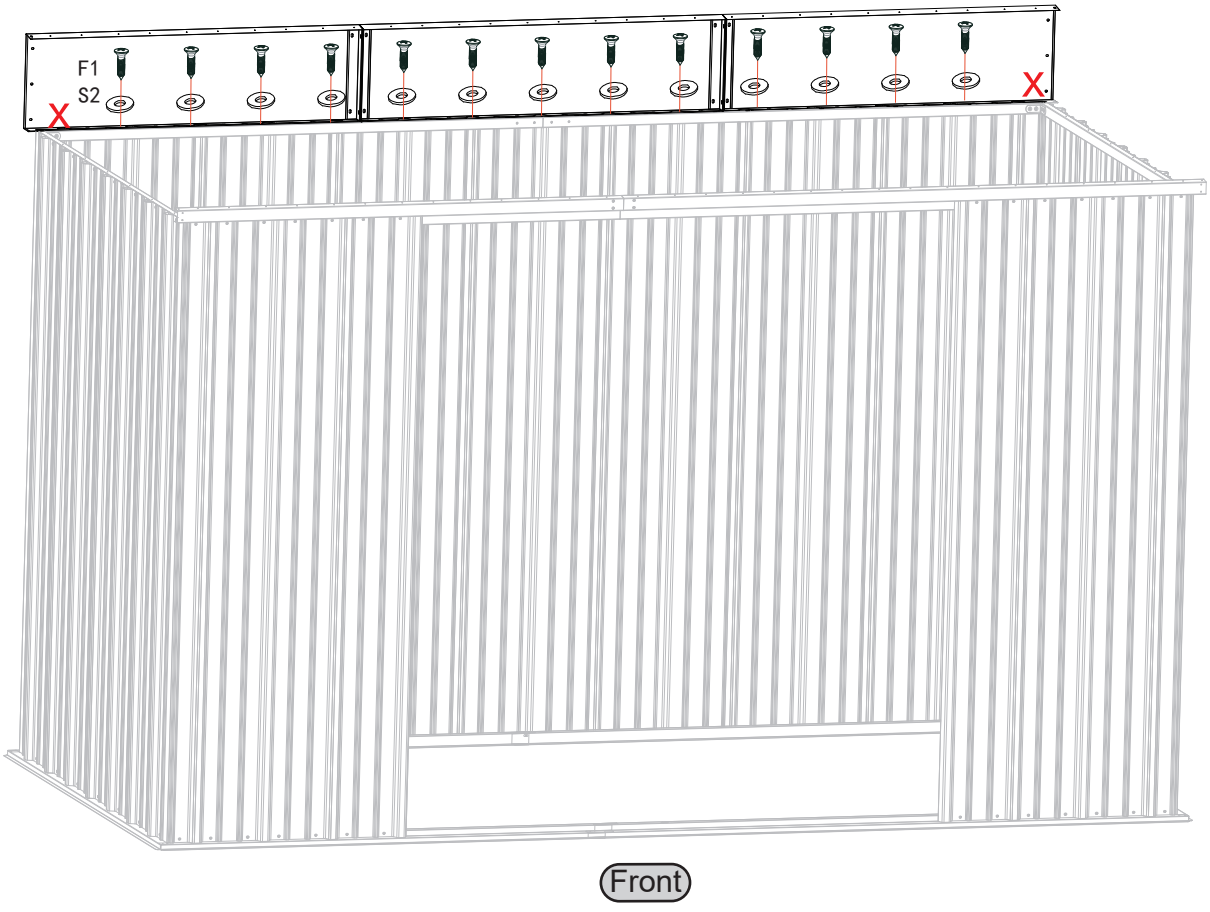






Front


12L	12	12R	B1	F2	F1	S2
						
1PC	1 PC	1 PC	4 PC	4 PC	13PC	13PC

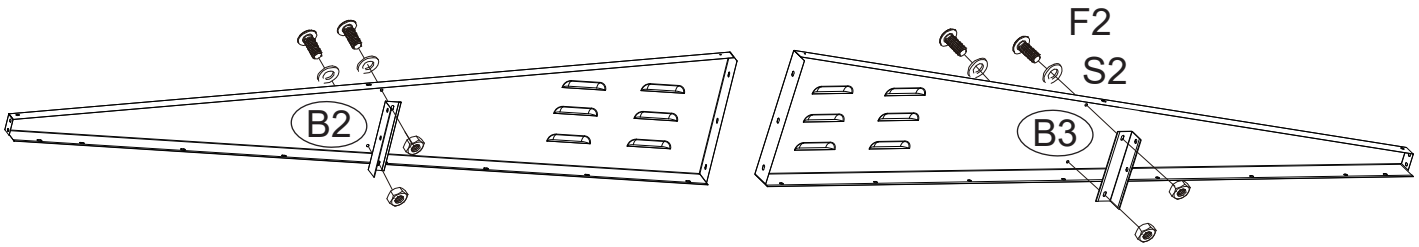


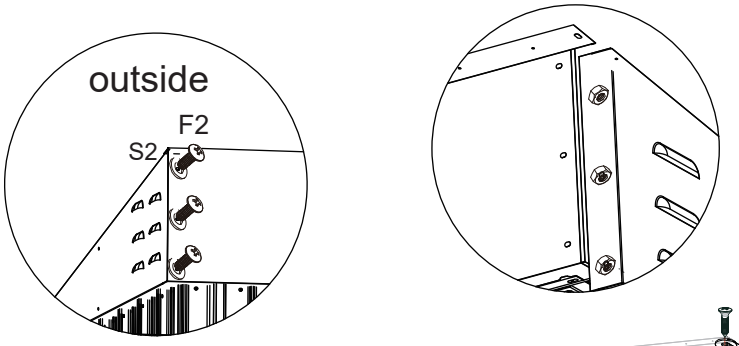


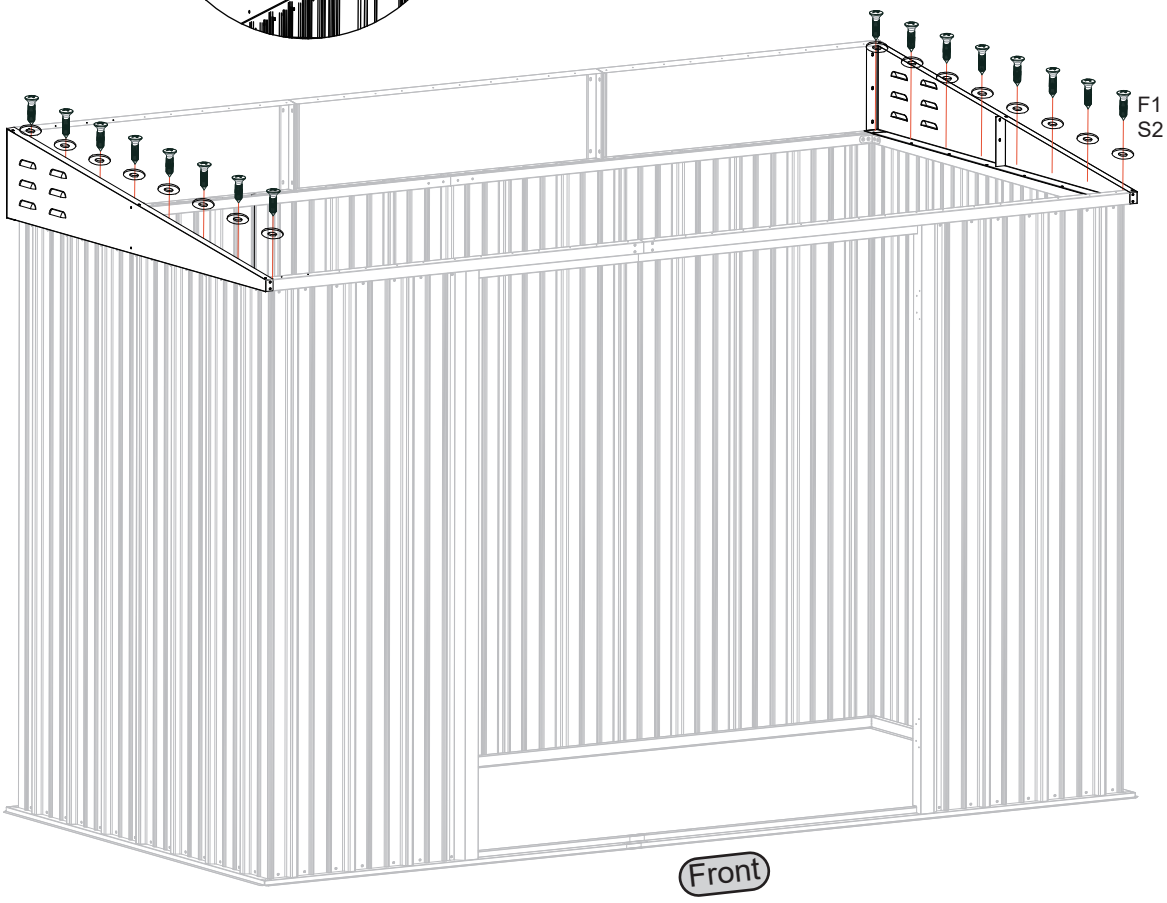


21L	21R	B2	B3	F2	F1	S2
						
1PC	1 PC	1 PC	1 PC	10 PC	16PC	26PC

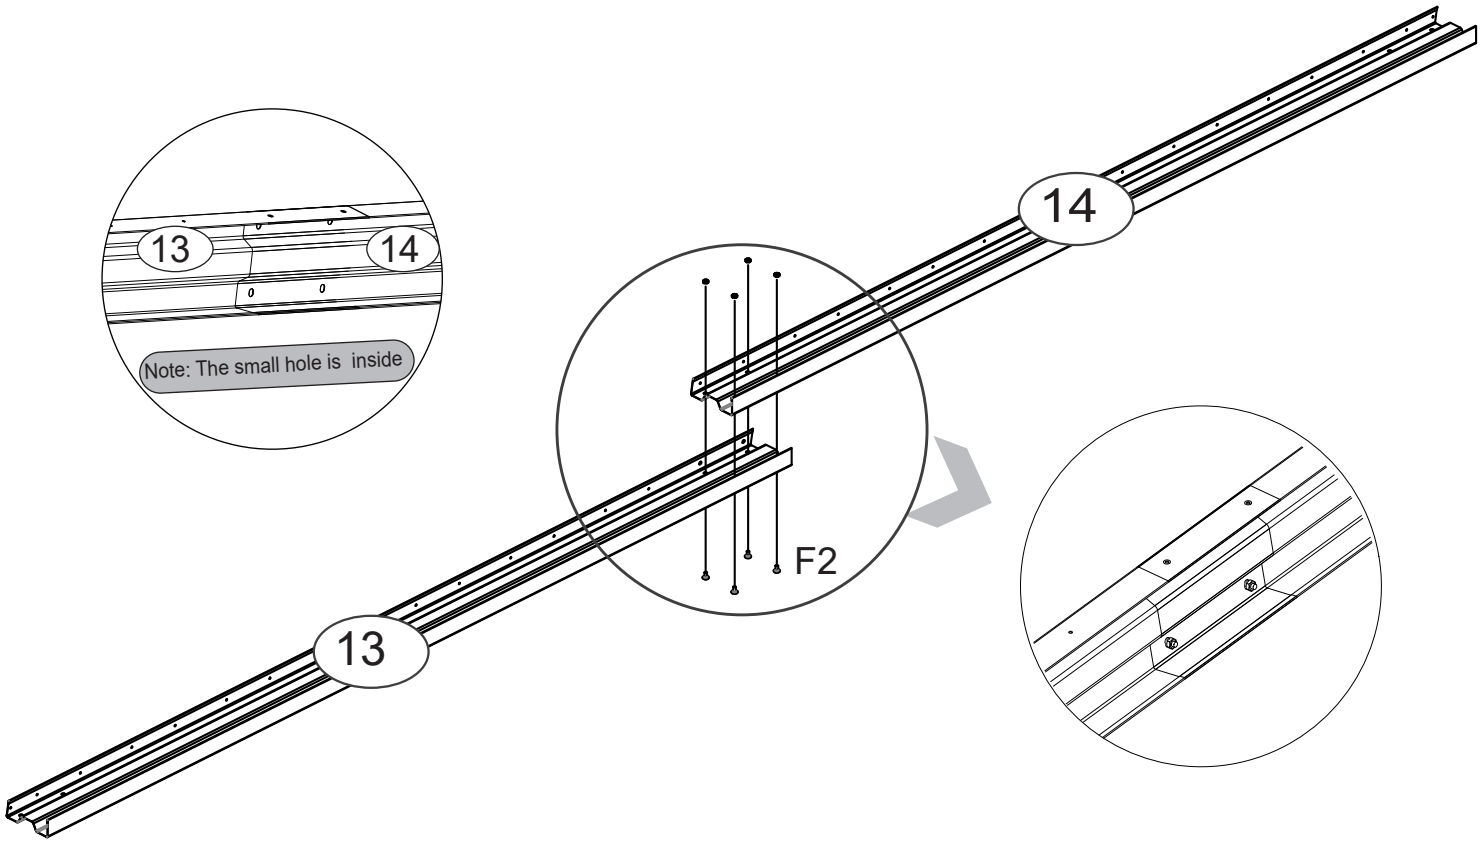

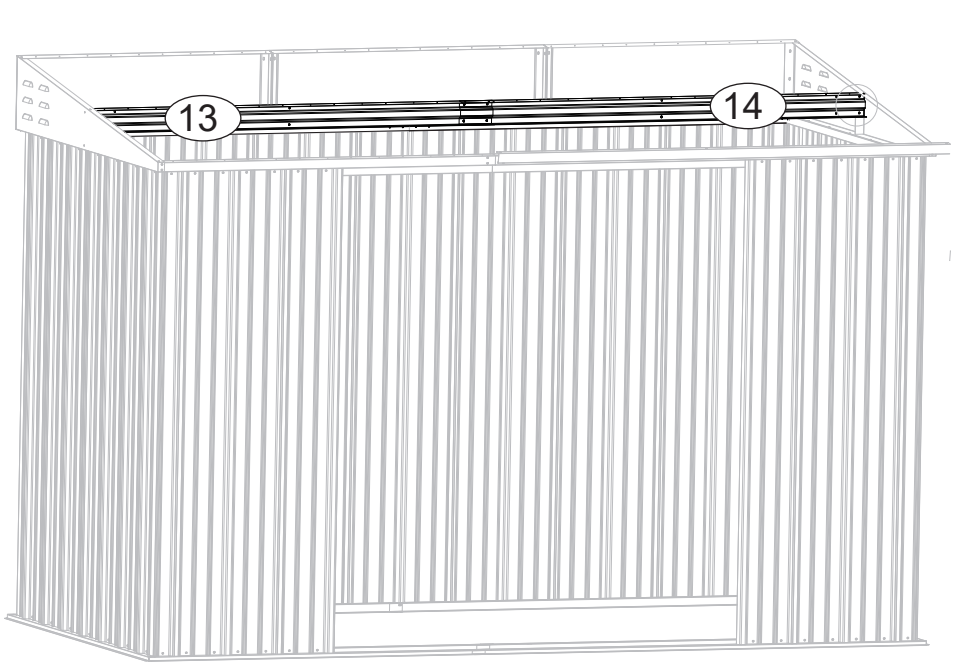









Tipe:




The holes on Part 13 are large


Part 14 is pressed into P13


13	14	F2
		
1 PC	1 PC	8 PC

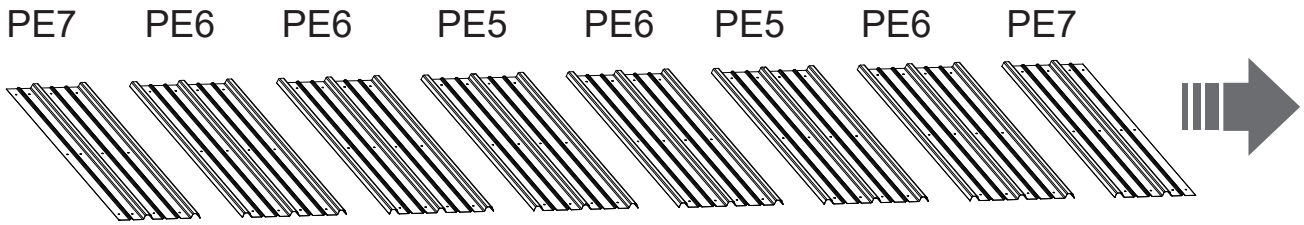


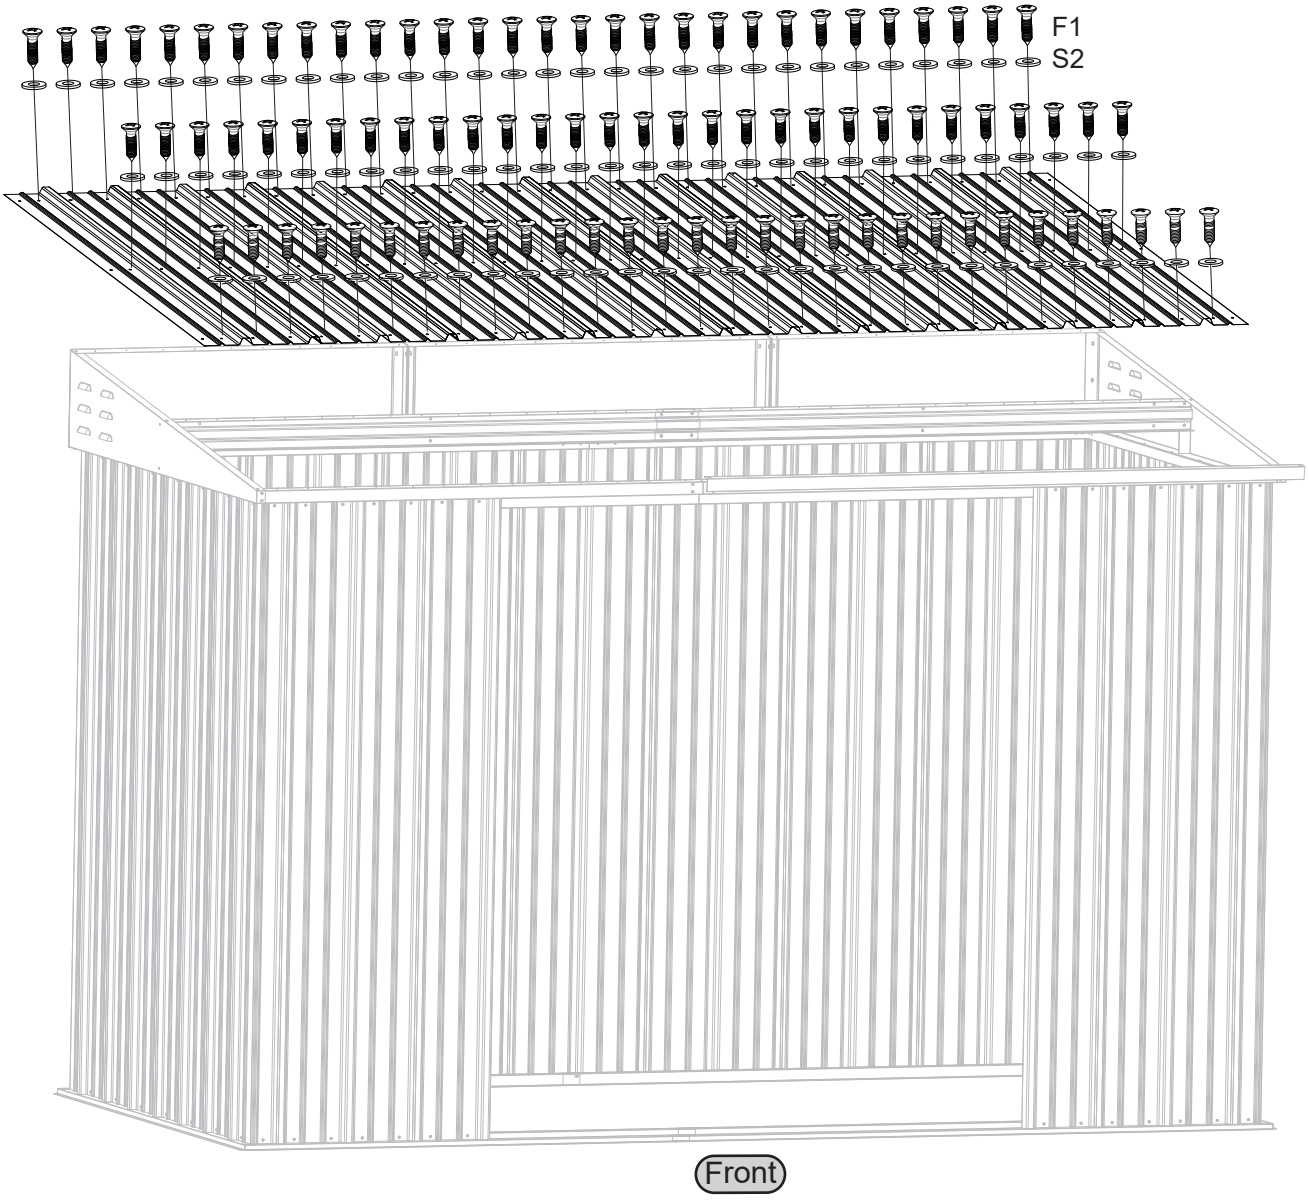






PE5	PE6	PE7	F1	S2
				
2 PC	4 PC	2 PC	90 PC	90PC

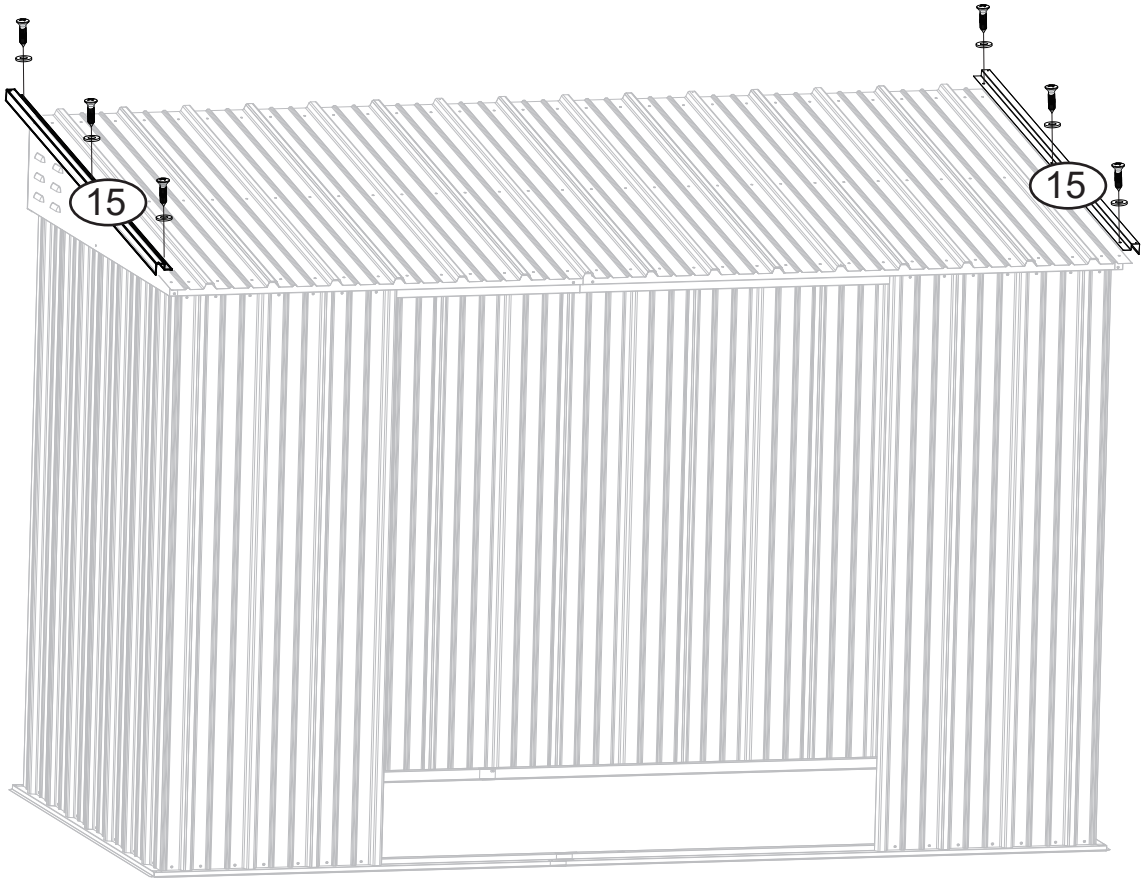


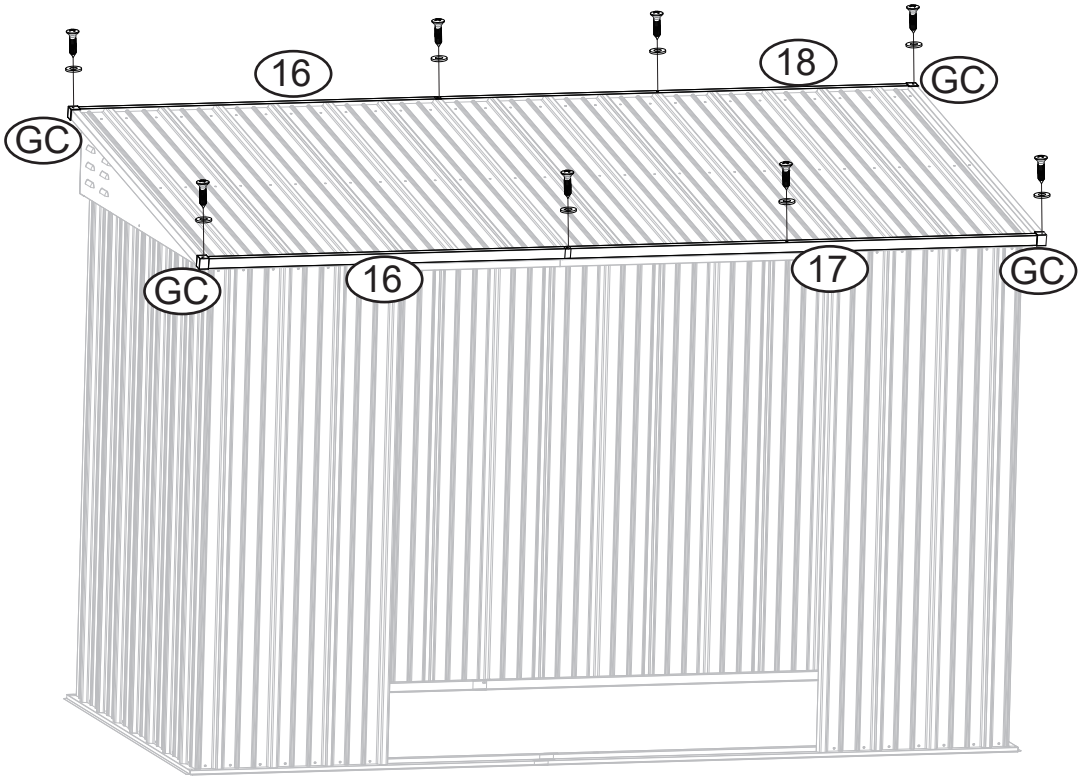







15	16	17	18	GC	F1	S2
						
2PC	2 PC	1 PC	1 PC	4 PC	14 PC	14PC

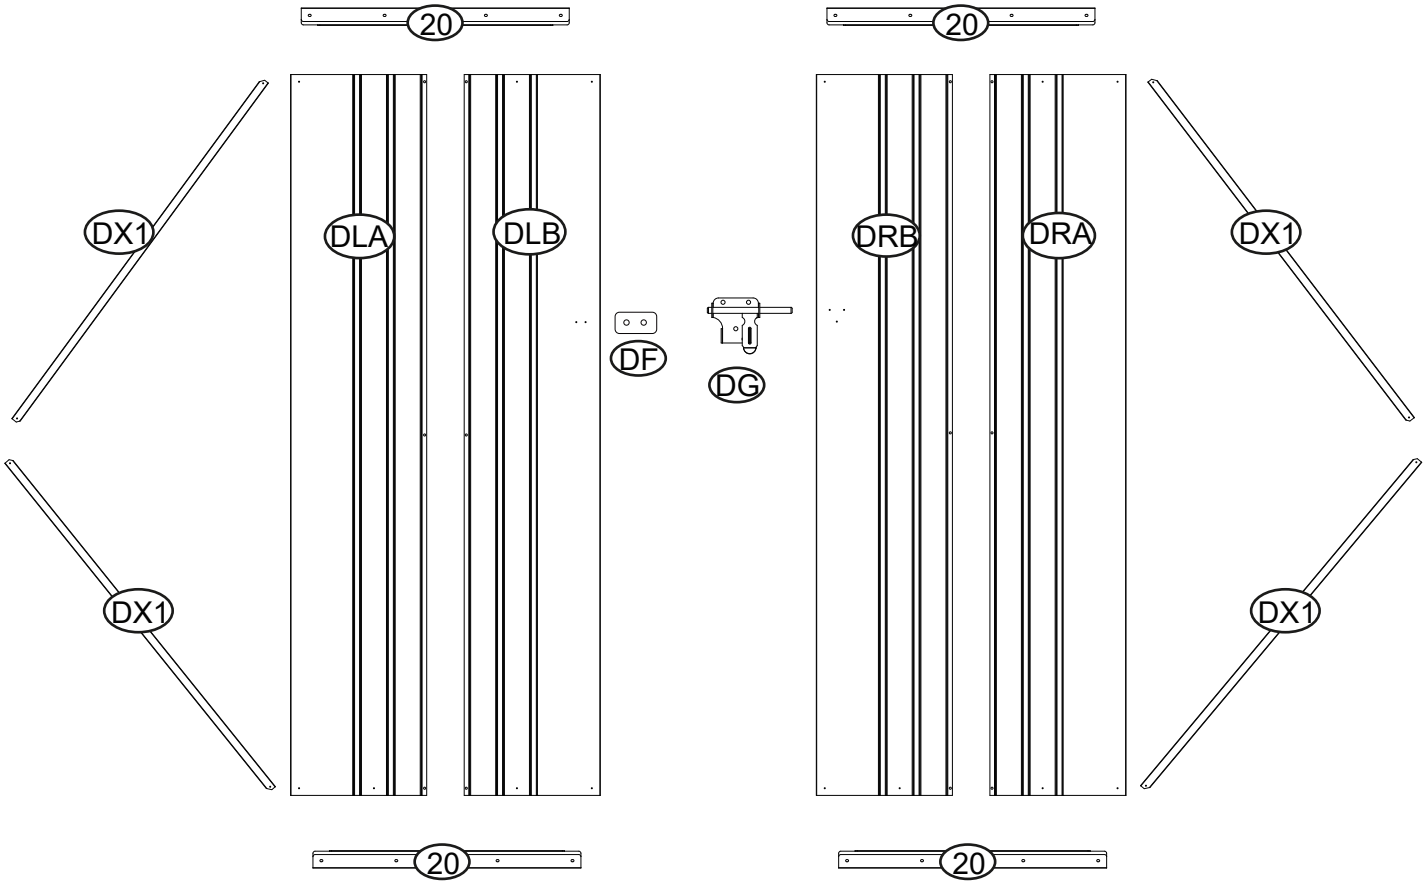

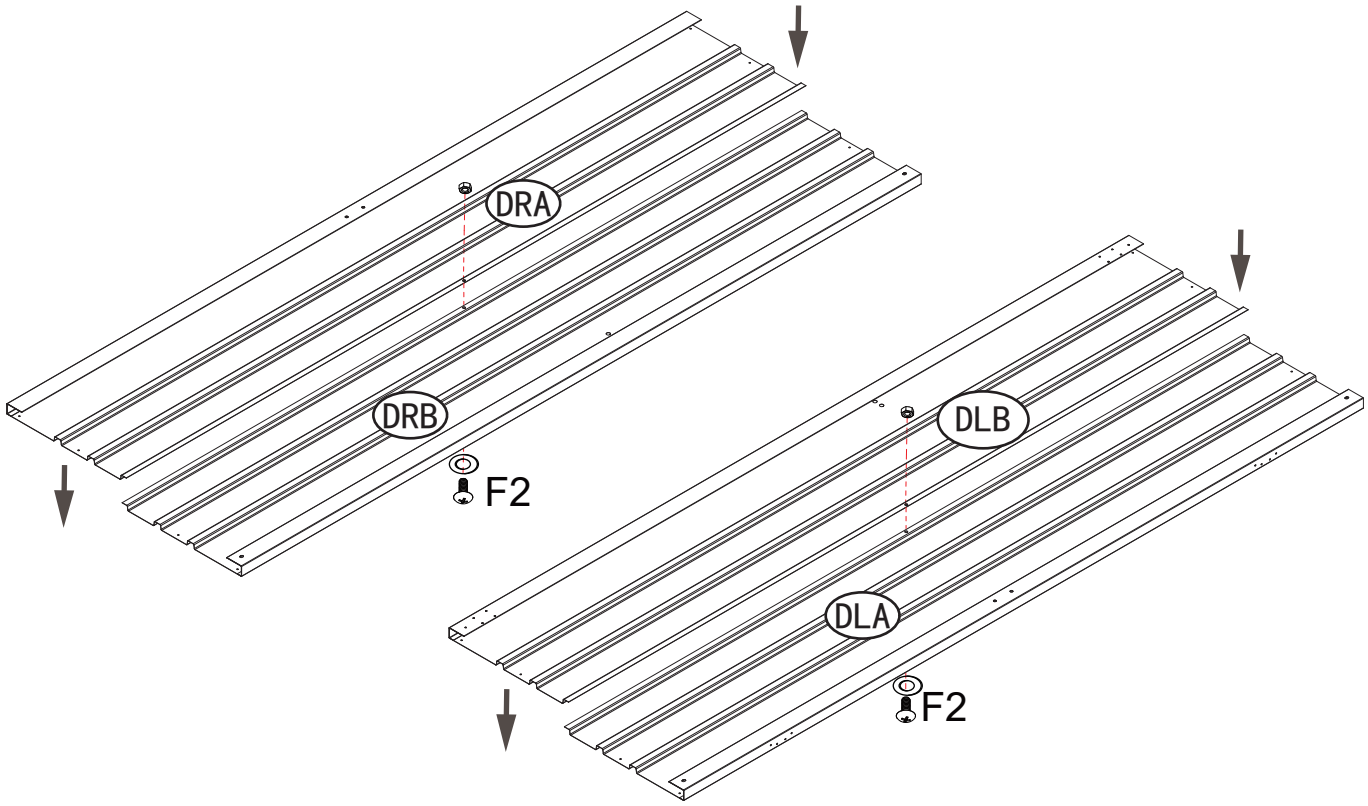


DLA	DLB	DRA	DRB	F2	S2
1 PC	1 PC	1 PC	1 PC	2 PC	2PC

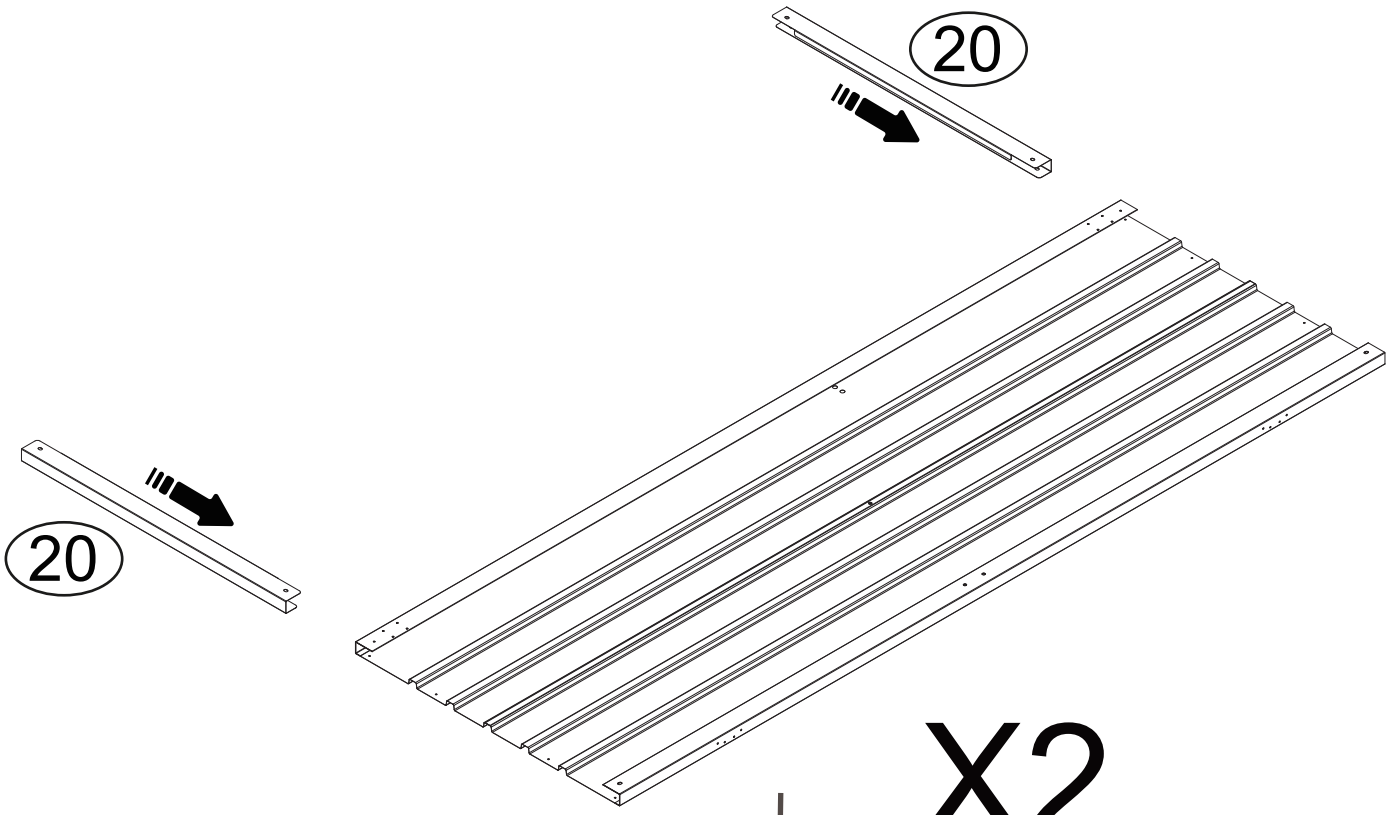


X2

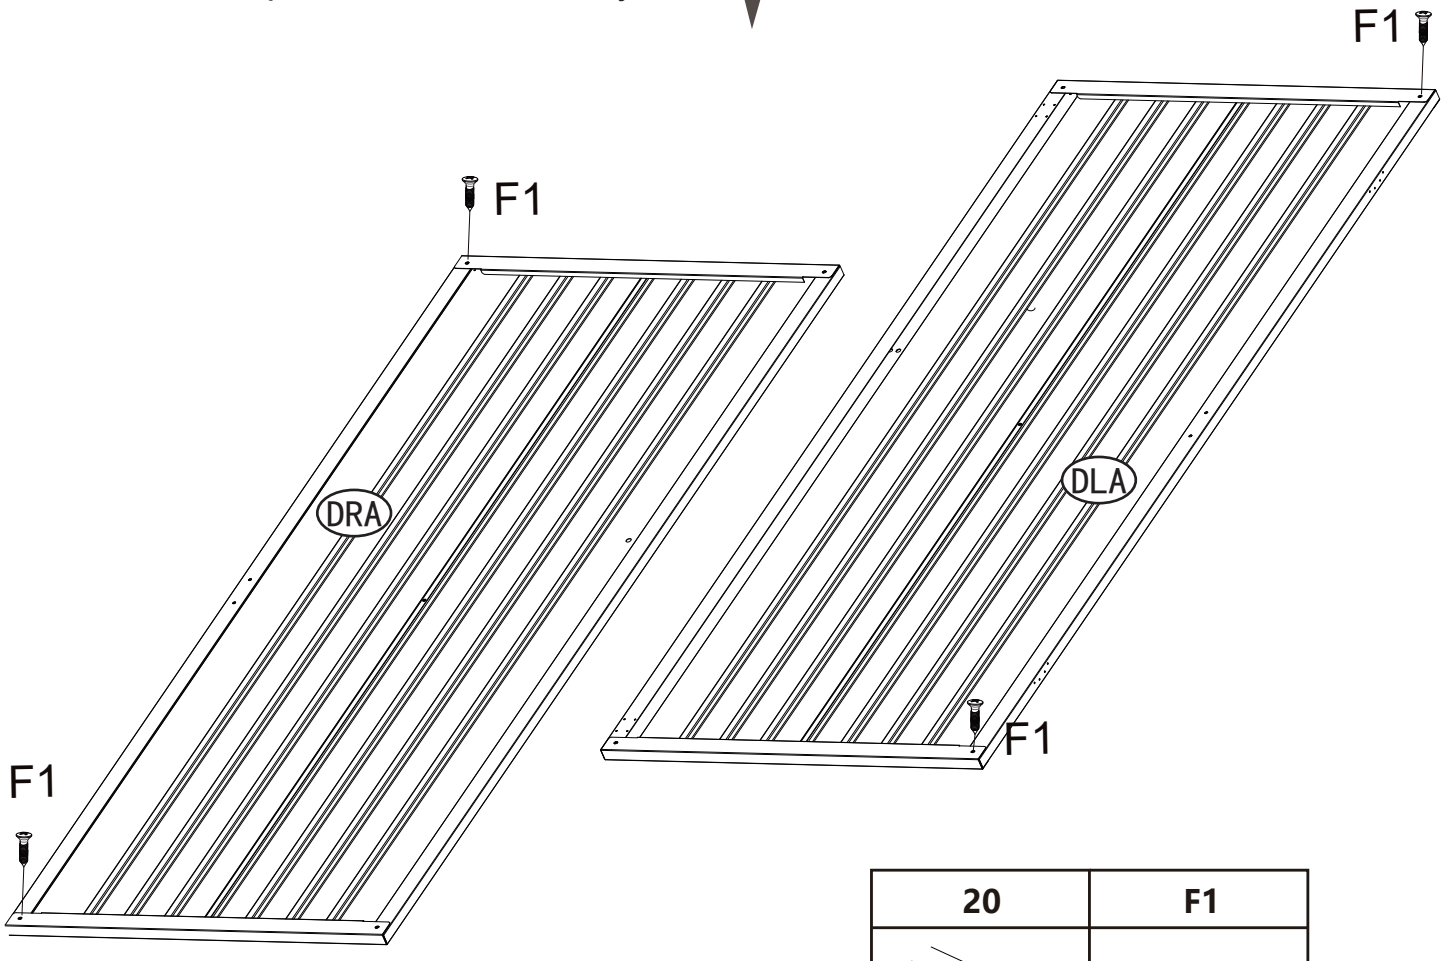
The other door operates the same way




20	F1
4PC	4 PC

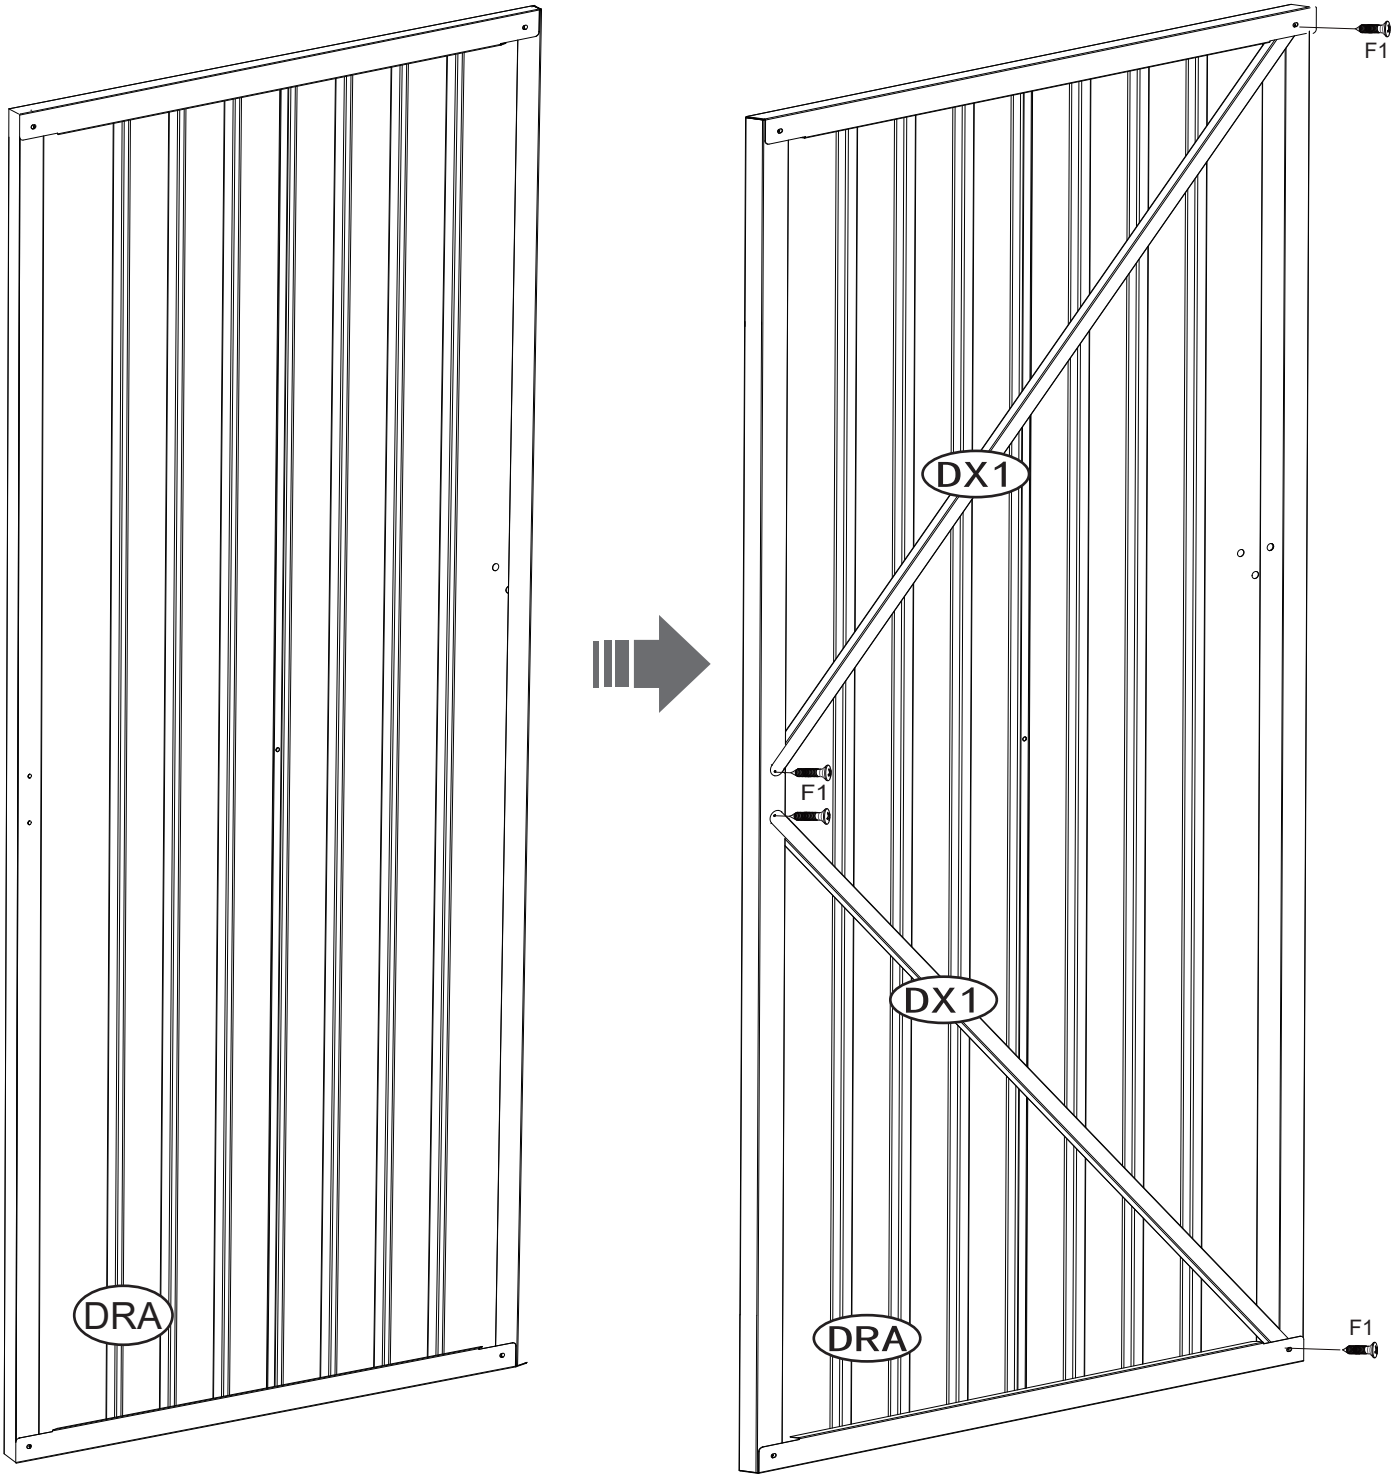


DX1	F1
2 PC	4 PC

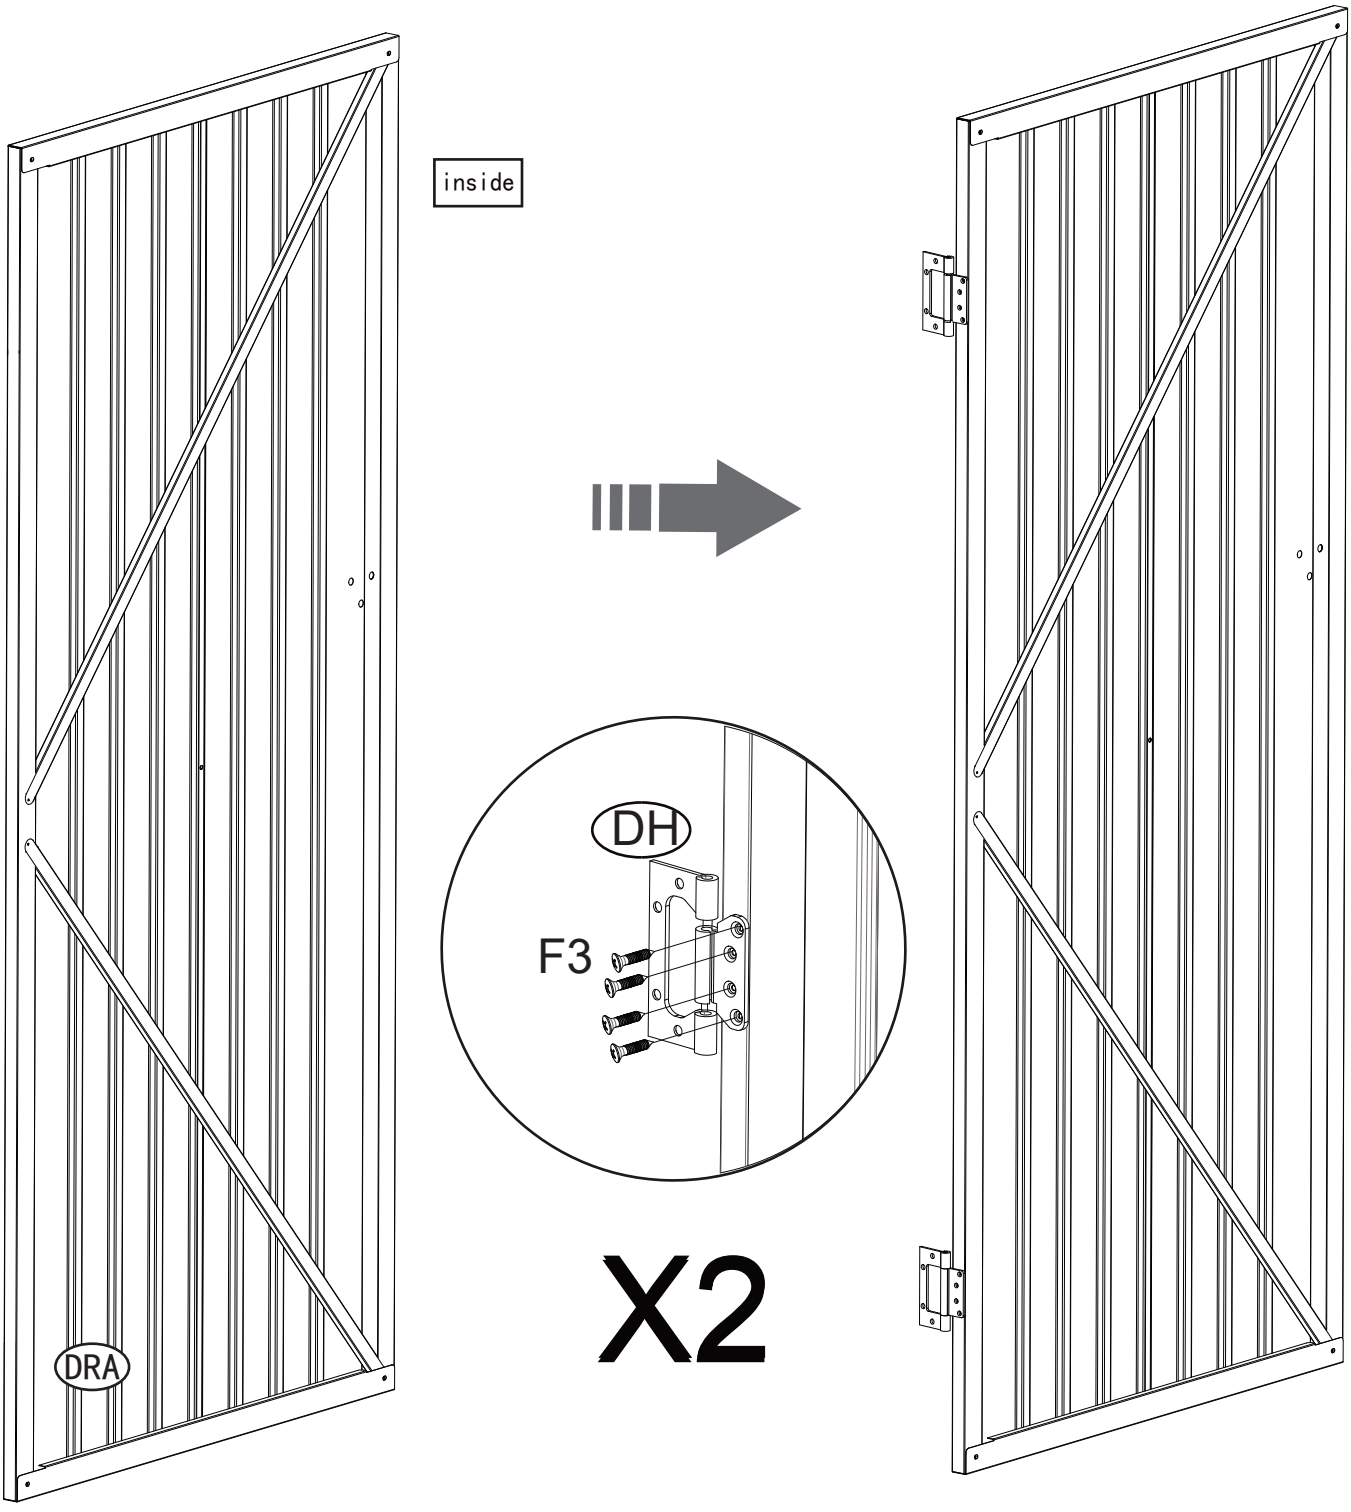



DH	F3
2 PC	8 PC

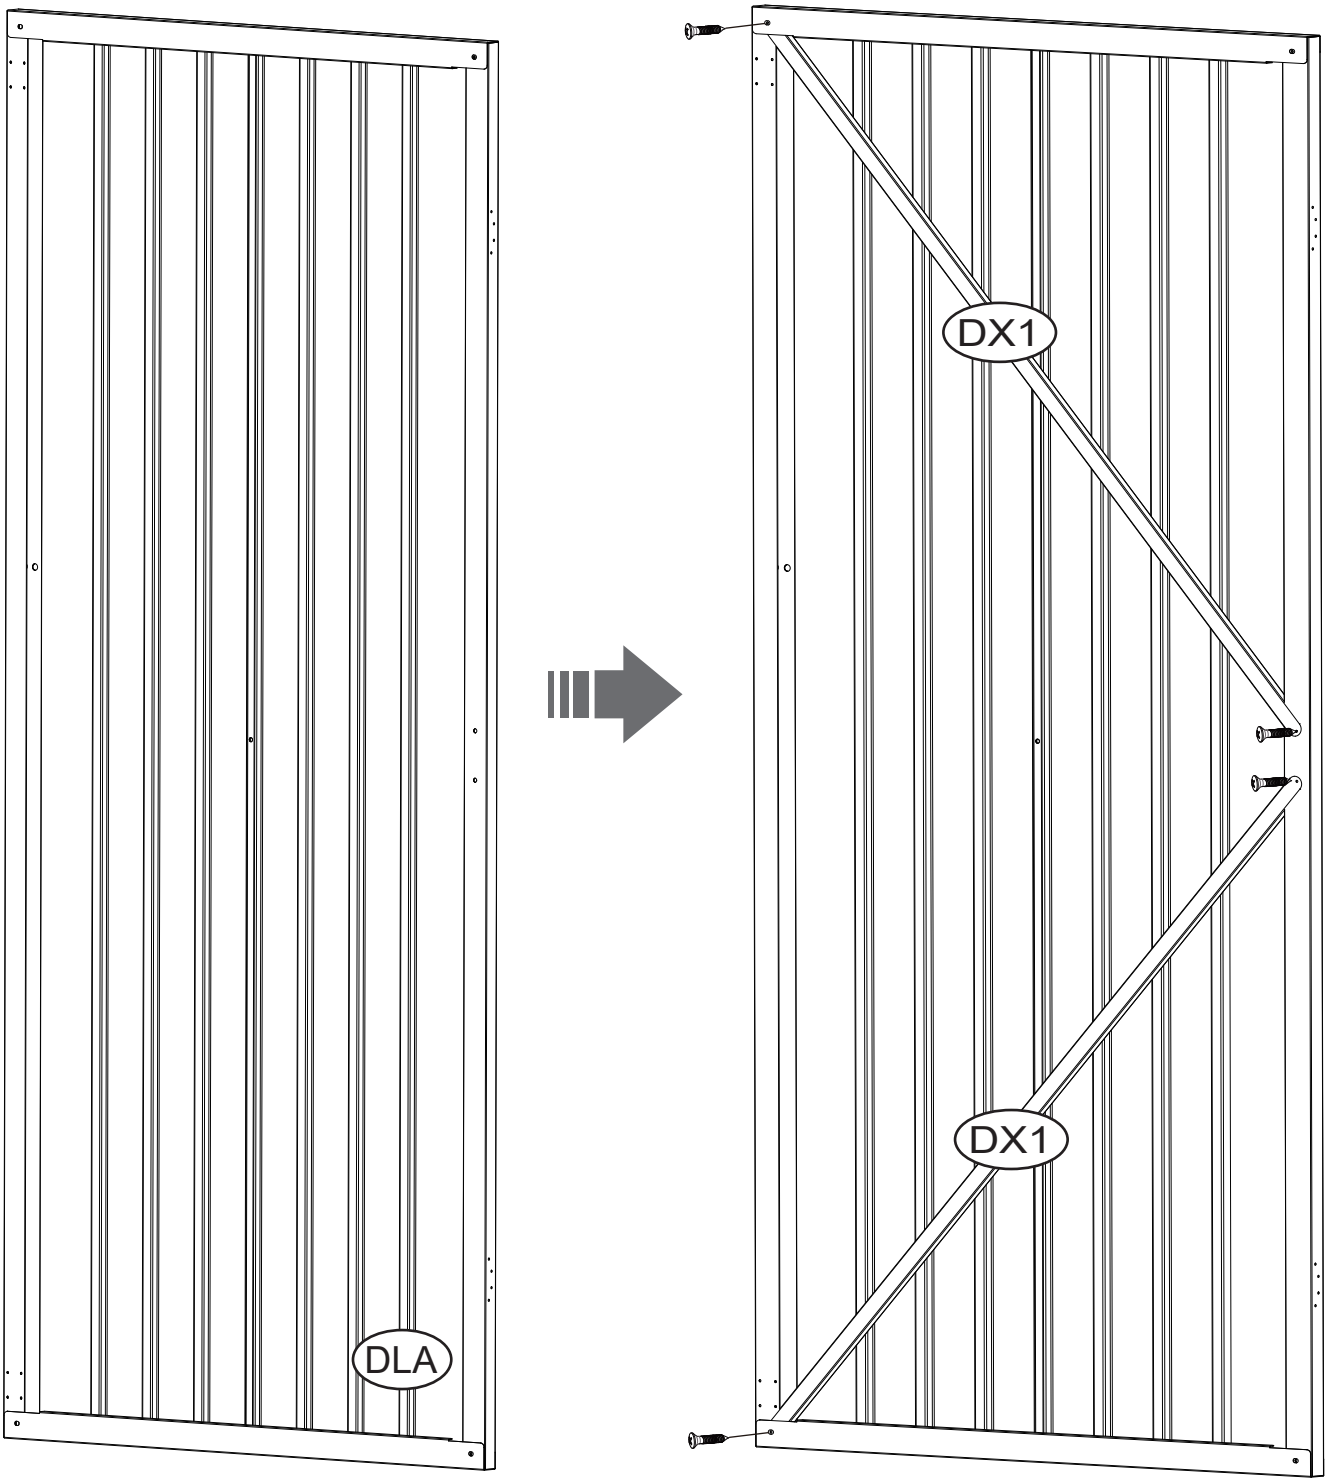


DX1	F1
2 PC	4 PC

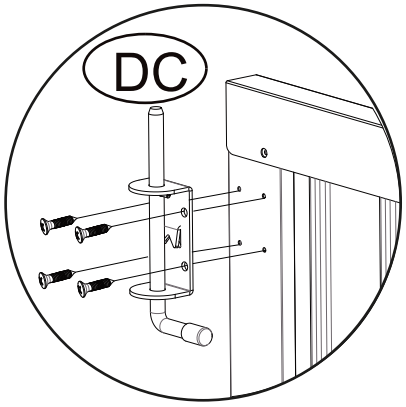


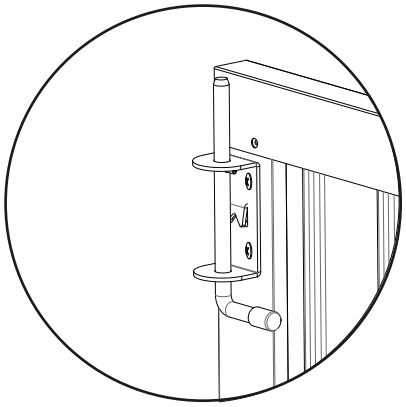


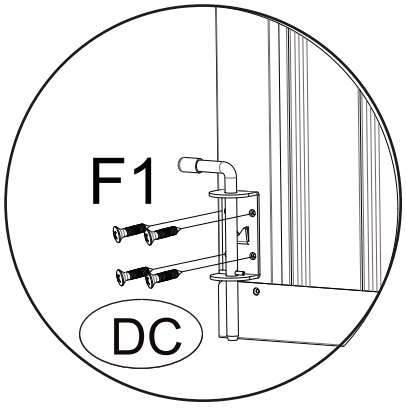

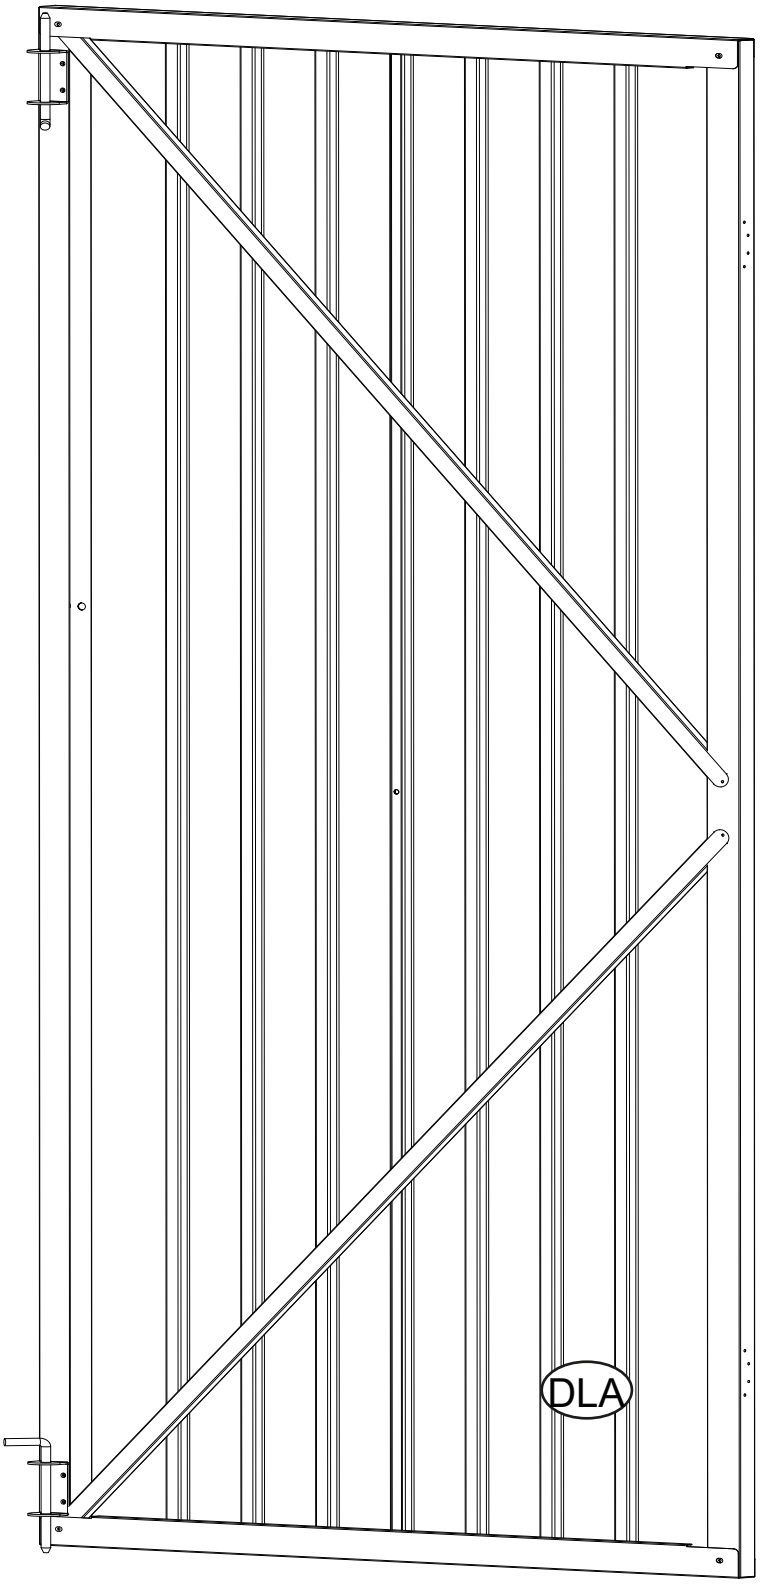



DC	F1
	
2PC	8PC

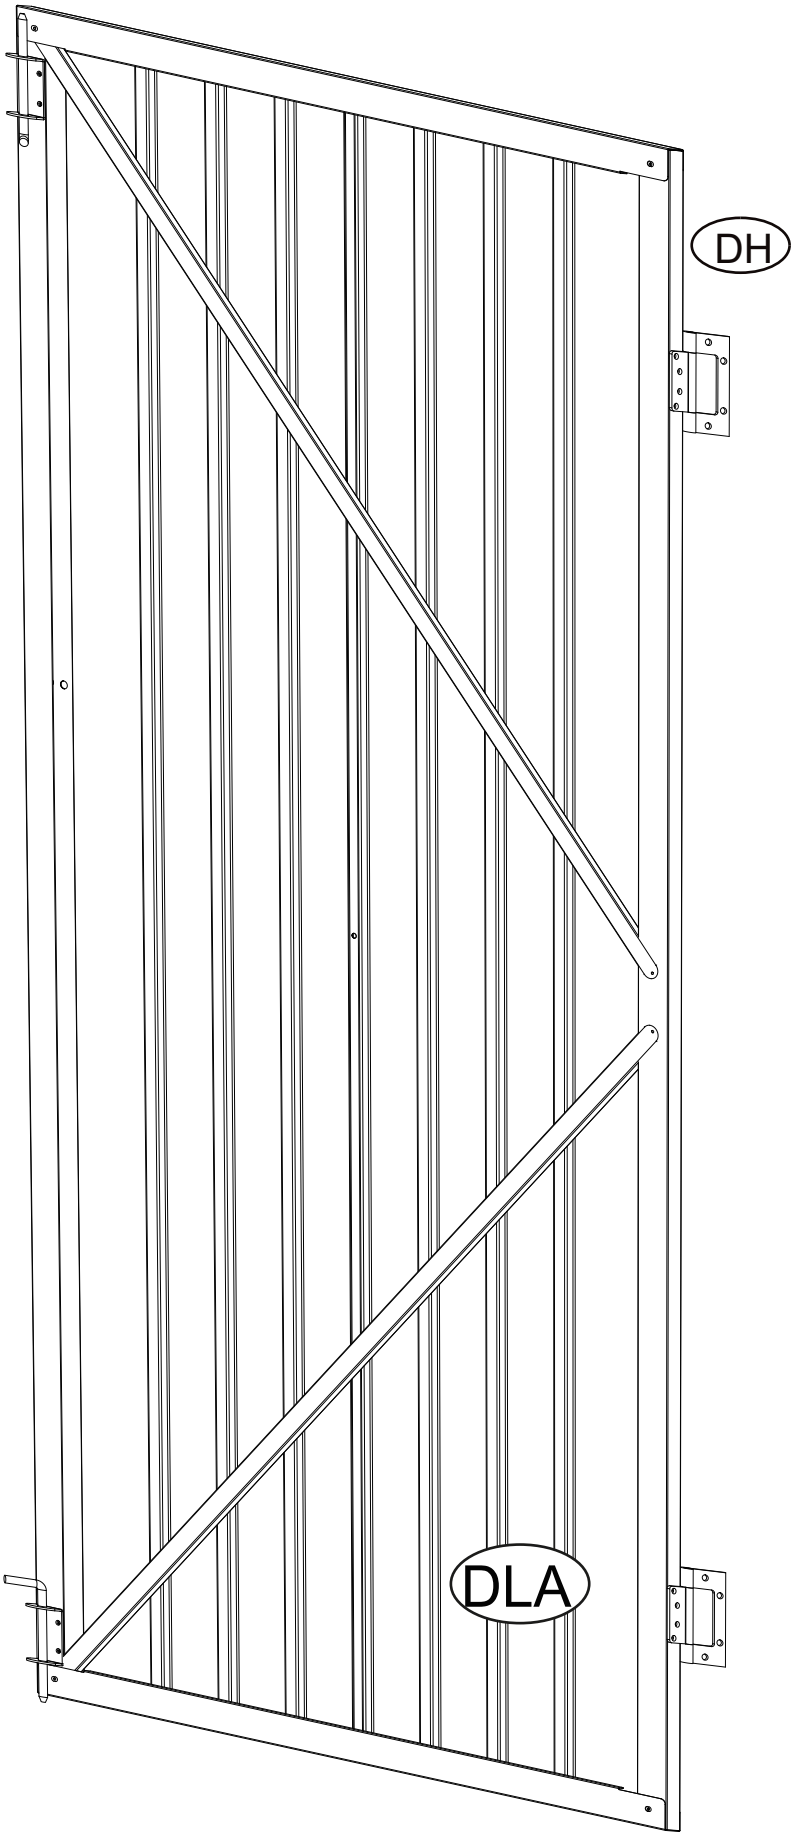


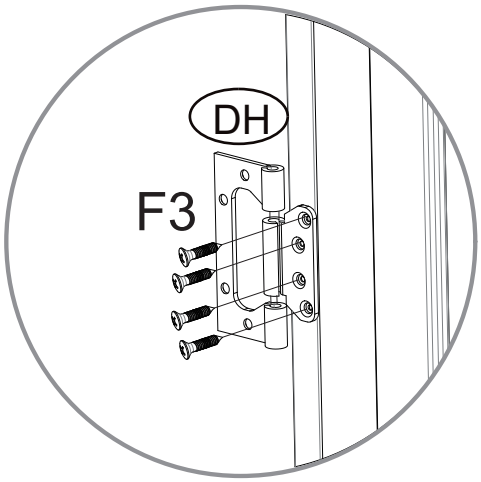



X2


DH	F3
	
2 PC	8PC


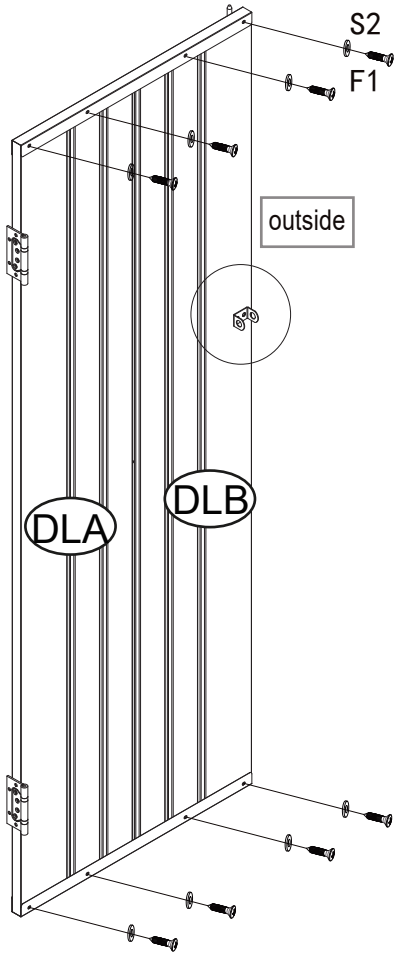


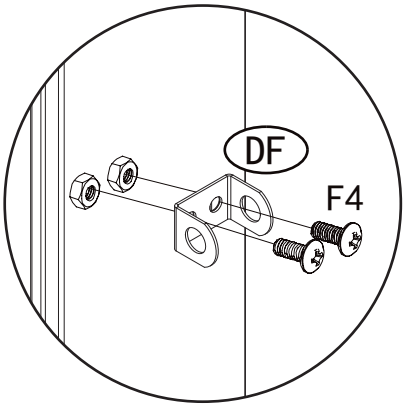



DF	F4	F1	S2
			
1 PC	2 PC	8 PC	8PC

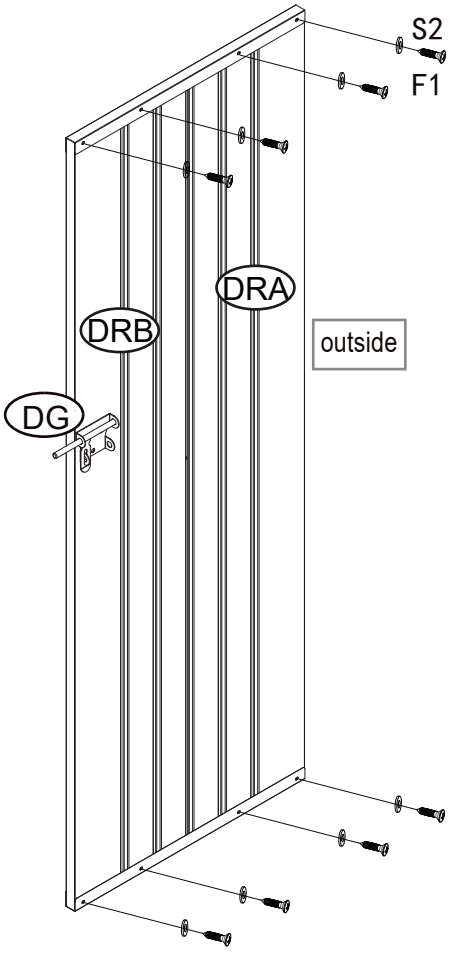

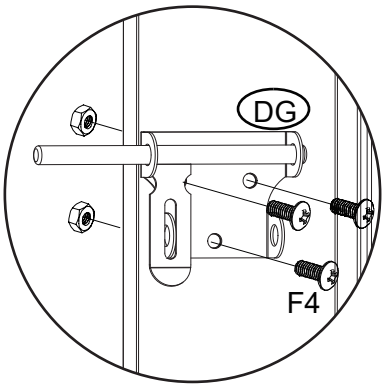



DG	F4	F1	S2
			
1 PC	3 PC	8 PC	8PC

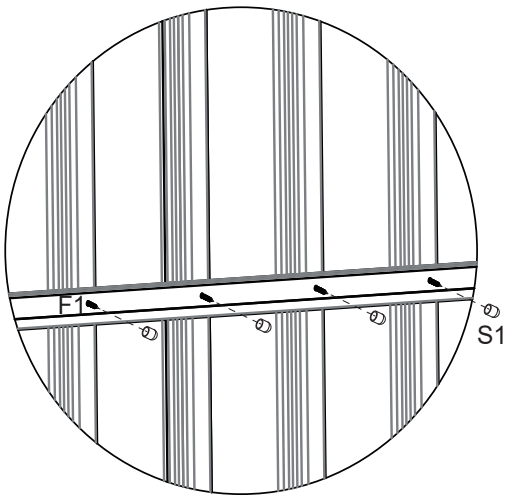


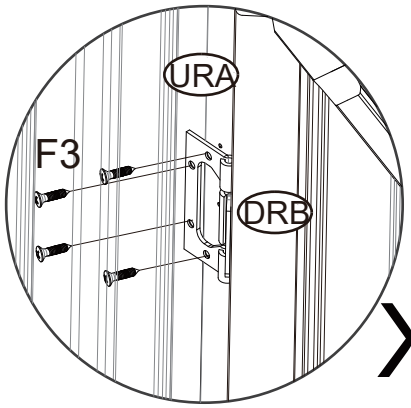



X4

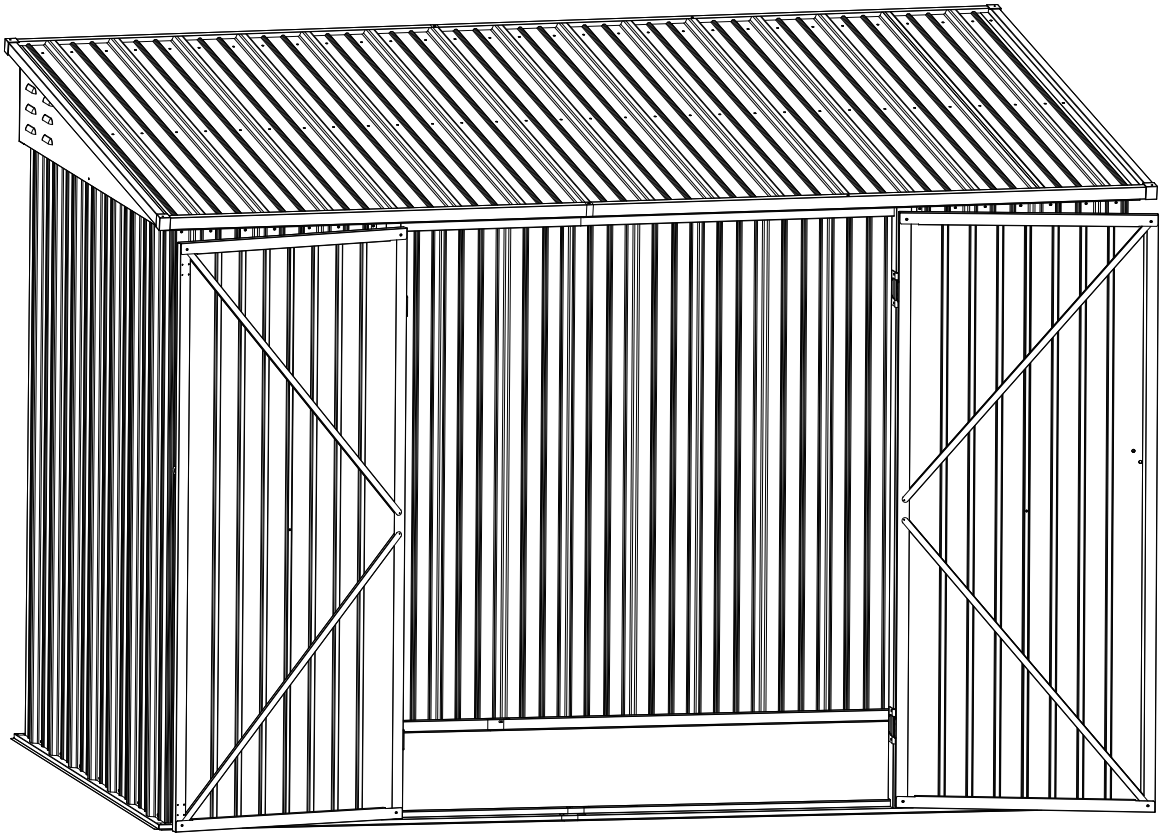


S1	F3
	
32PC	16PC


F6
x4

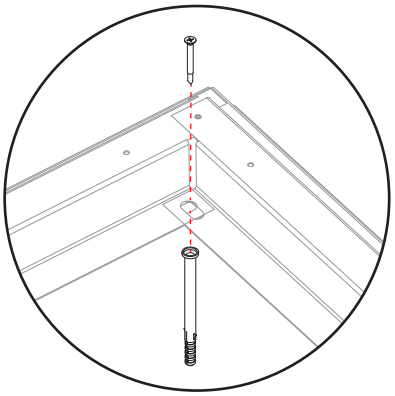

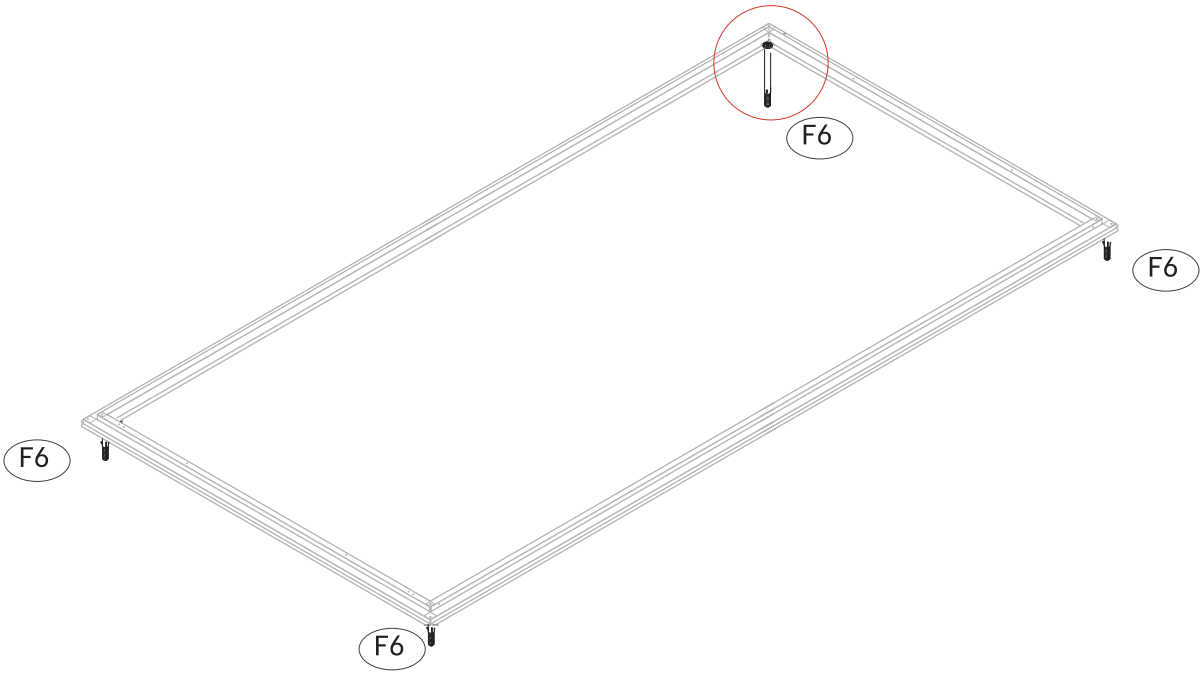
F6
F6
F6
F6

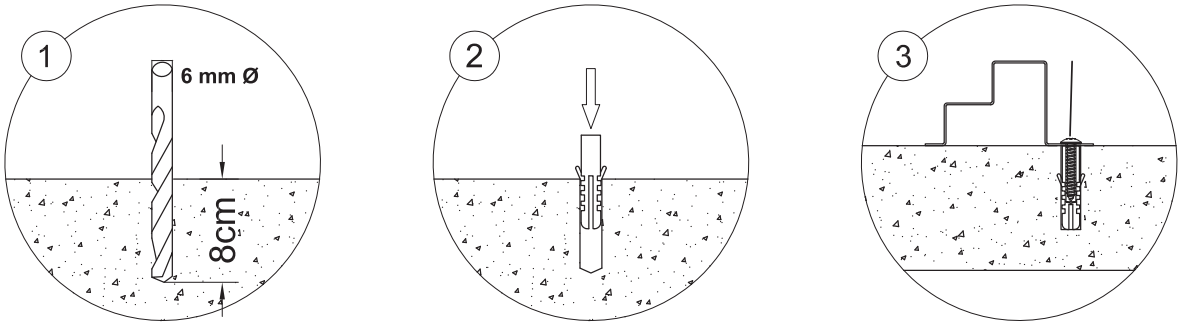
1
6 mm Ø
8cm
2
3


L=80mm
D= Ø 6 mm

