

Installation Steps



Simply align the caster wheels and the buckle, and press by hand.



1. Inserte la varilla de hierro de la rueda en la hebilla de la rueda



2. Lay the two gray squares as a base and connect them using universal wheel clasps.



3. Install two black mesh pieces on top



4. Install a square black mesh on the first layer, a mesh with a door on the left side, and a round snap on top.



5. Install the splash guard. First, align the splash guard in place, then install the tool from step two, and finally, tighten it according to step three.



6. Install the second layer: install a black mesh at the back and right side, a transparent box at the front, and an acrylic sliding cat door panel on the left side.




7. Install the third layer as shown in the figure: install a transparent box in the front, black mesh on the back and left side, and mesh with a door on the right side.



8. Install two black mesh panels at the top.



9. Install the upper triangular eaves, insert two triangular pieces at the back, install the black frame mesh in the middle, and secure it with clips.

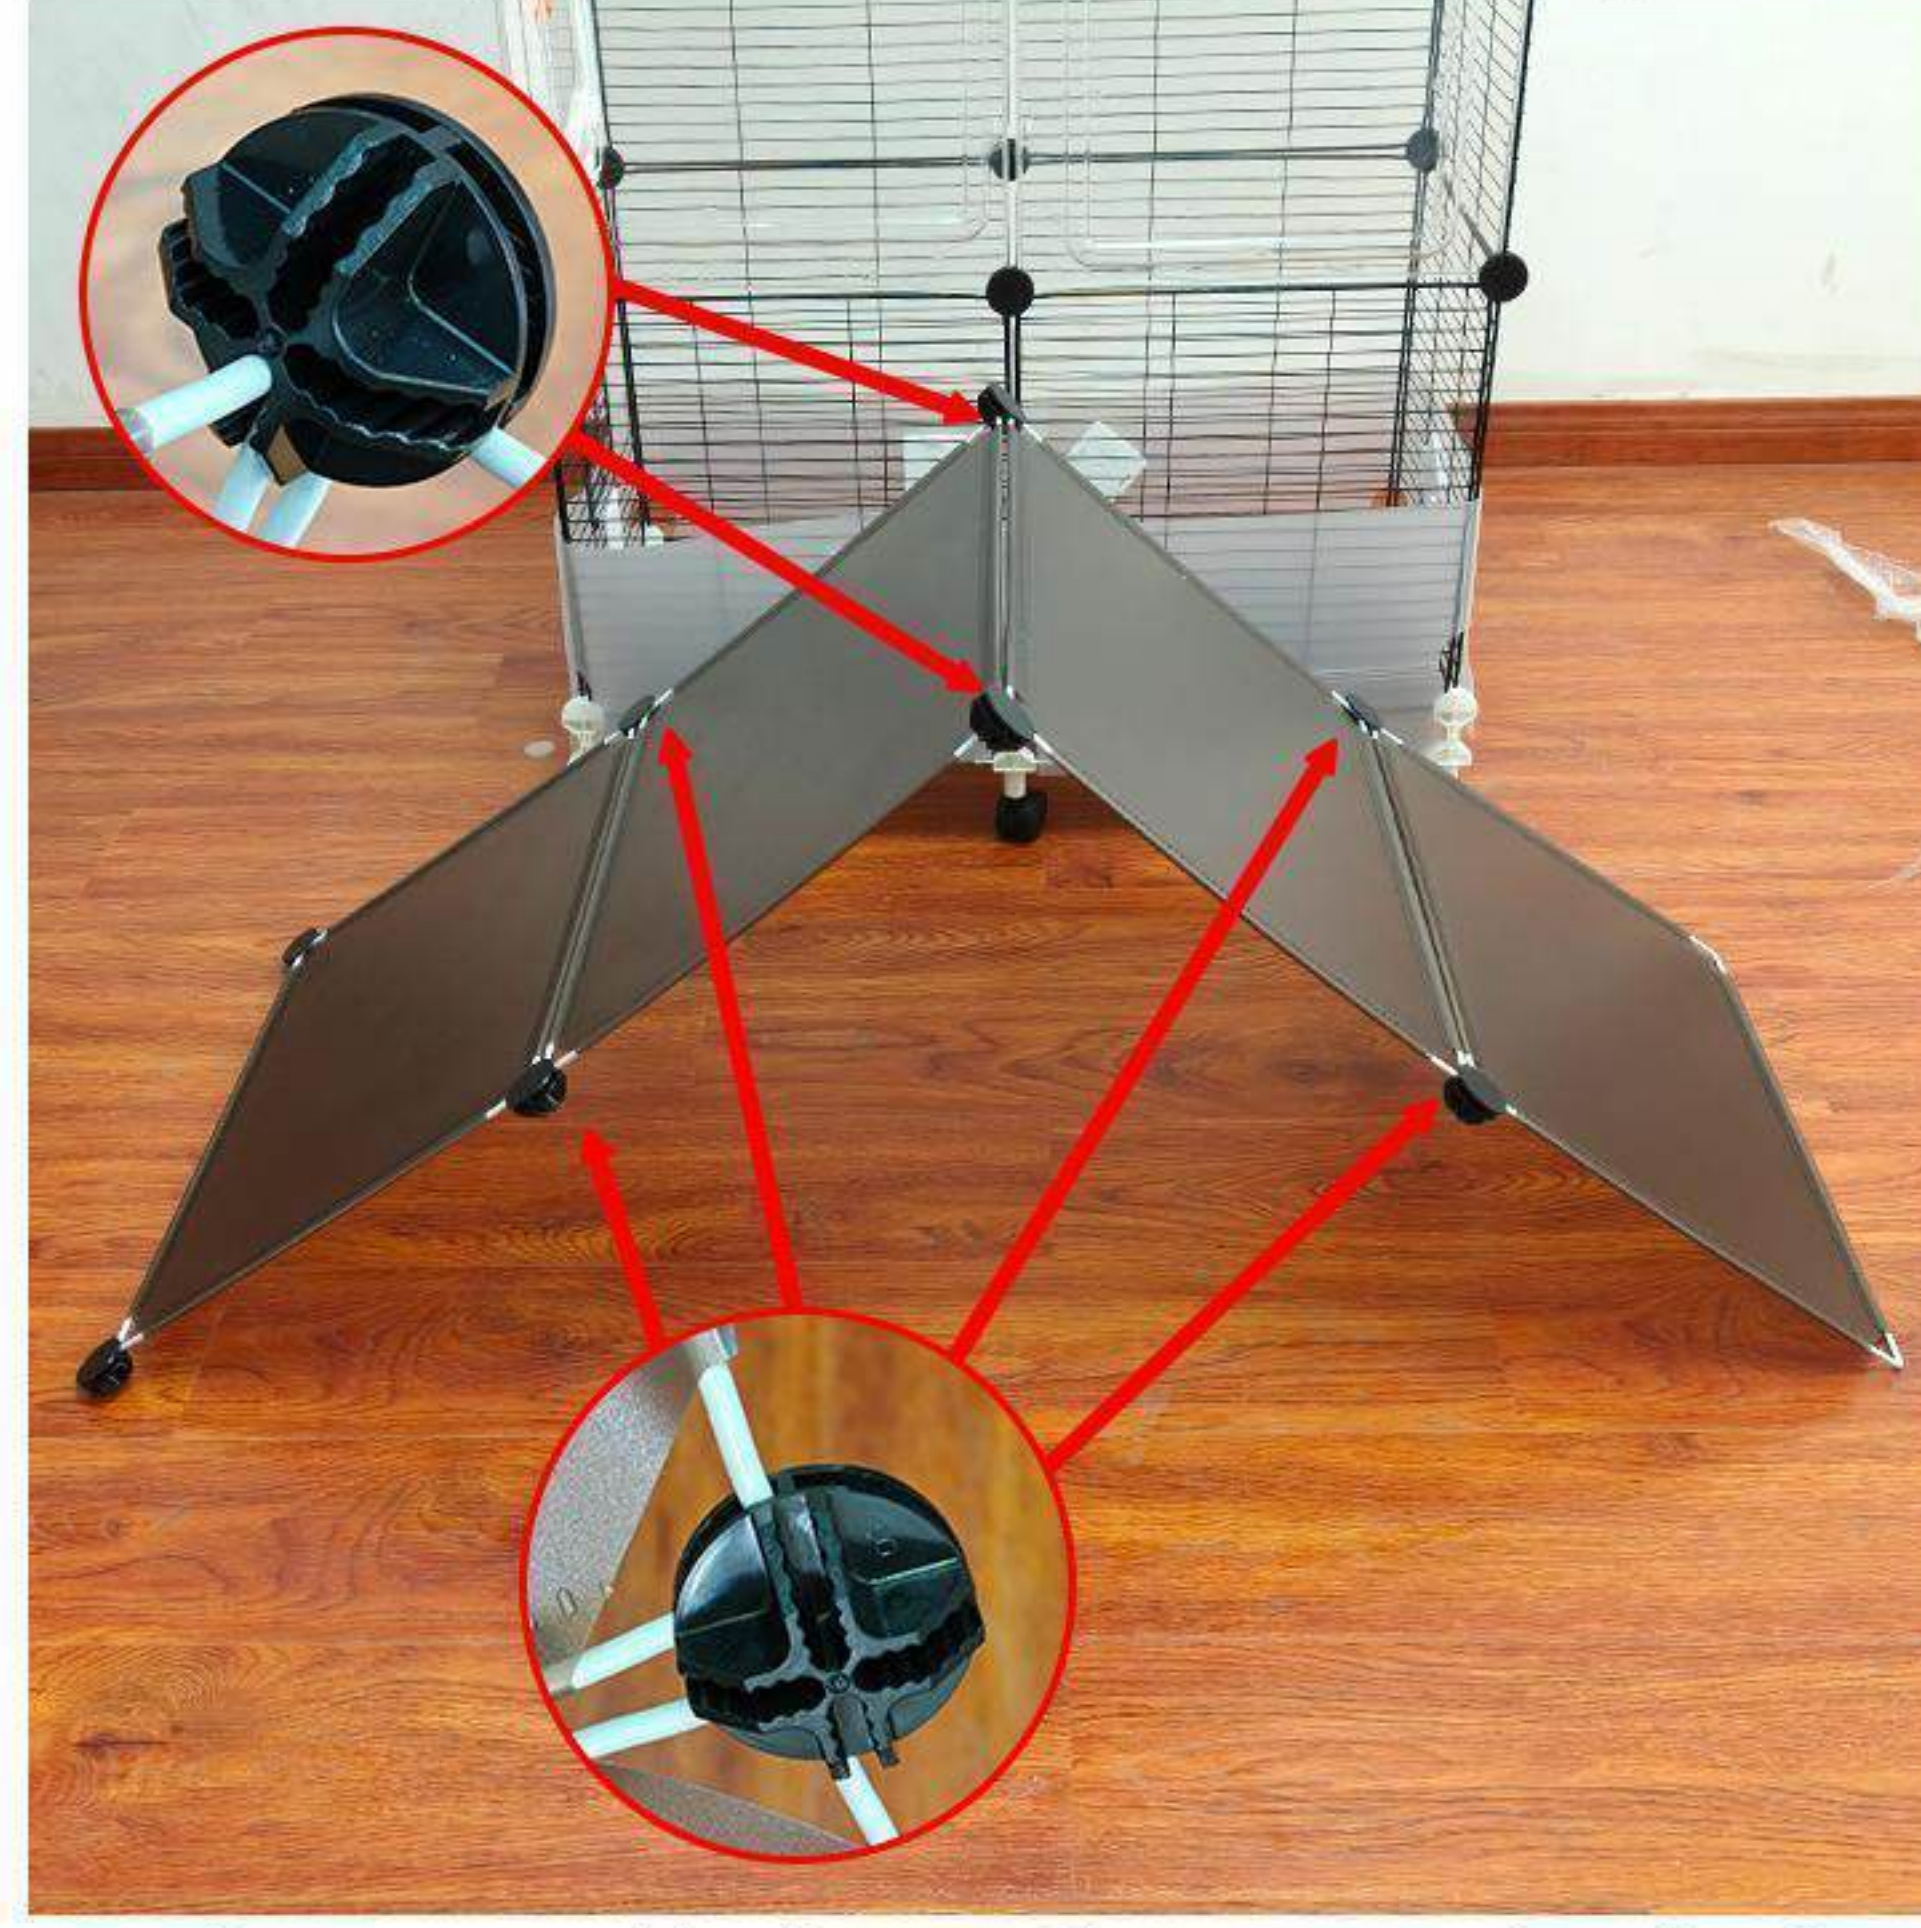

10. First, assemble the roof by connecting the four large gray pieces using clips.



11. Simply place the assembled roof on top.



12. Finally, just insert the bottom tray.