

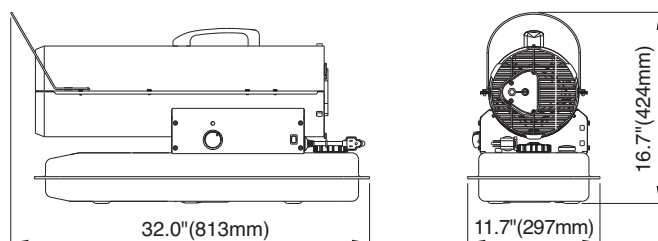


**NEVER LEAVE THE HEATER  
UNATTENDED WHILE BURNING!**

### 13. SPECIFICATIONS



**DFA50 / DFA80T Models**

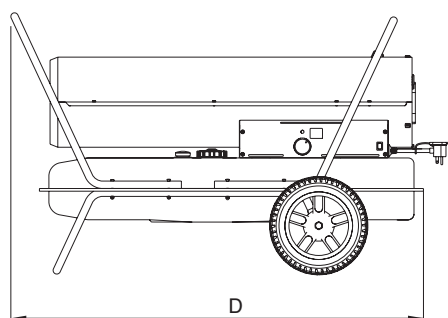

|   | DFA135C      | DFA180CV<br>DFA220CV |
|---|--------------|----------------------|
| D | 36.1"(918mm) | 41.8"(1,062mm)       |
| W | 21.5"(547mm) | 23.1"(587mm)         |
| H | 24.6"(625mm) | 26.1"(664mm)         |

**DFA135C / DFA180CV / DFA220CV Models**

| MODEL                                              |      | DFA50                           | DFA80T                          | DFA135C                         | DFA180CV                          | DFA220CV                          |
|----------------------------------------------------|------|---------------------------------|---------------------------------|---------------------------------|-----------------------------------|-----------------------------------|
| BTU/Hr.                                            | HIGH | 50,000                          | 80,000                          | 135,000                         | 180,000                           | 220,000                           |
|                                                    | LOW  | N/A                             | N/A                             | N/A                             | 140,000                           | 180,000                           |
| Fuel Consumption<br>- Gal./Hr(ℓ./Hr)               | HIGH | 0.38(1.44)                      | 0.60(2.27)                      | 1.02(3.86)                      | 1.36(5.15)                        | 1.66(6.28)                        |
|                                                    | LOW  | N/A                             | N/A                             | N/A                             | 1.06(4.01)                        | 1.36(5.15)                        |
| Fuel Tank Capacity - Gal.(ℓ)                       |      | 5.0(18.9)                       | 5.0(18.9)                       | 10.0(37.9)                      | 13.0(49.2)                        | 13.0(49.2)                        |
| Fuel Tank Capacity<br>- Gal.(kgf/cm <sup>2</sup> ) | HIGH | 3.8(0.27)                       | 3.8(0.27)                       | 5.5(0.39)                       | 6.5(0.46)                         | 8.5(0.60)                         |
|                                                    | LOW  | N/A                             | N/A                             | N/A                             | 4.5(0.32)                         | 6.5(0.46)                         |
| Volt/Hz                                            |      | 120Vac/60hz                     | 120Vac/60hz                     | 120Vac/60hz                     | 120Vac/60hz                       | 120Vac/60hz                       |
| Amps.                                              |      | 1.6                             | 1.6                             | 2.5                             | 3.2                               | 3.7                               |
| Phase                                              |      | 1                               | 1                               | 1                               | 1                                 | 1                                 |
| Size(D×W×H), Inch(mm)                              |      | 32.0×11.7×16.7<br>(813×297×424) | 32.0×11.7×16.7<br>(813×297×424) | 36.1×21.5×24.6<br>(918×547×625) | 41.8×23.1×26.1<br>(1,062×587×664) | 41.8×23.1×26.1<br>(1,062×587×664) |
| Weight Lbs.(kg)                                    |      | 26.9(12.2)                      | 26.9(12.2)                      | 51.4(23.3)                      | 57.3(26.0)                        | 59.5(27.0)                        |