

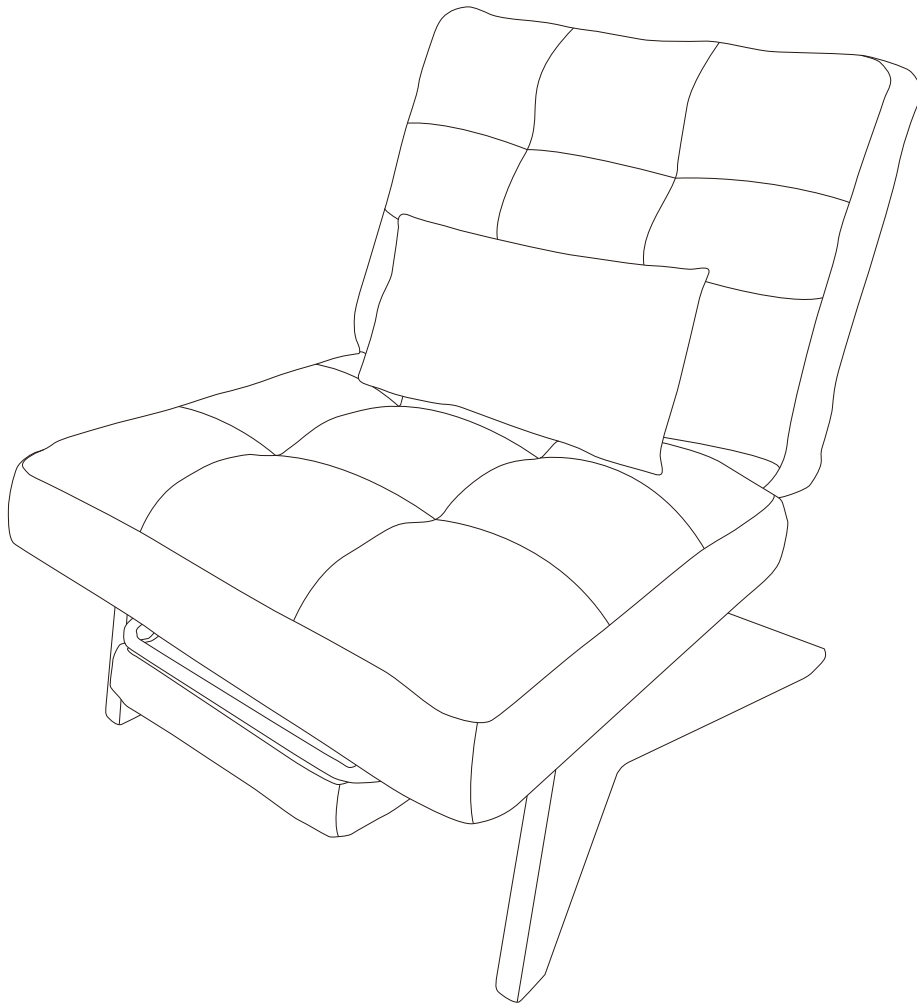







Assembly Instructions




PARTS CHECKLIST


 L R Ax2PCS	 Bx1PC	 Cx1PC	 Dx1PC	 Ex1PC	
 Fx1PC	 M8*55 Gx4PCS	 M6*25 Hx6PCS	 Ix1PC	 Jx1PC	 Kx4PCS

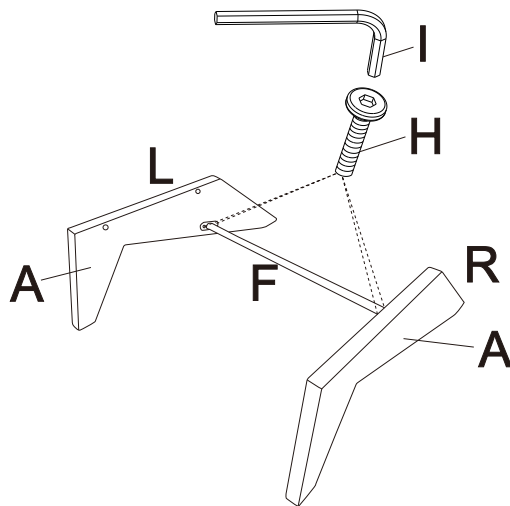


Step 1: Connect Crosspiece [F] to Armrests [A] with Screw [H]. And tighten them by 100%.

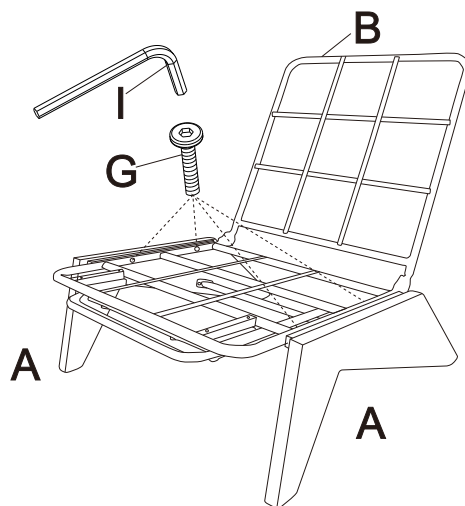


Step 2: Connect steel frame [B] to the armrests [A] with Screw [G]. Tighten them by 100%.

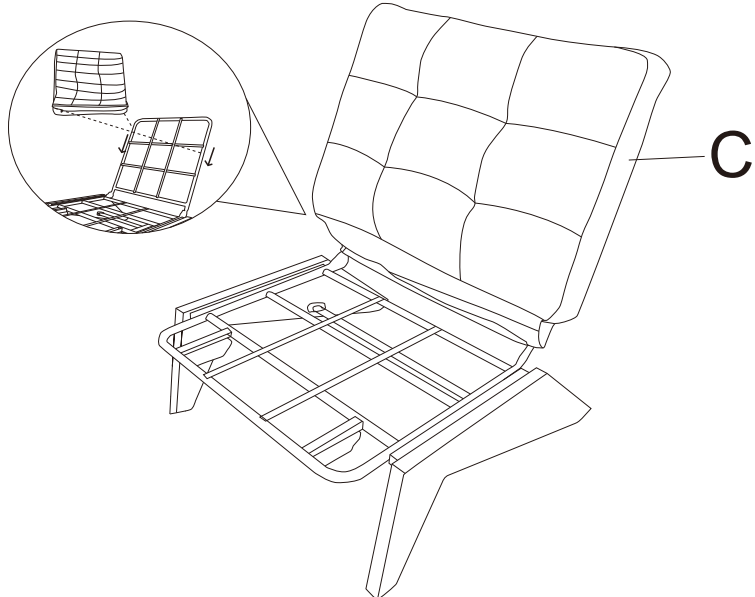


Step 3: Taken back cushion[C] and seat cushion[D] from bag,insert the back cushion [C] into the steal frame.

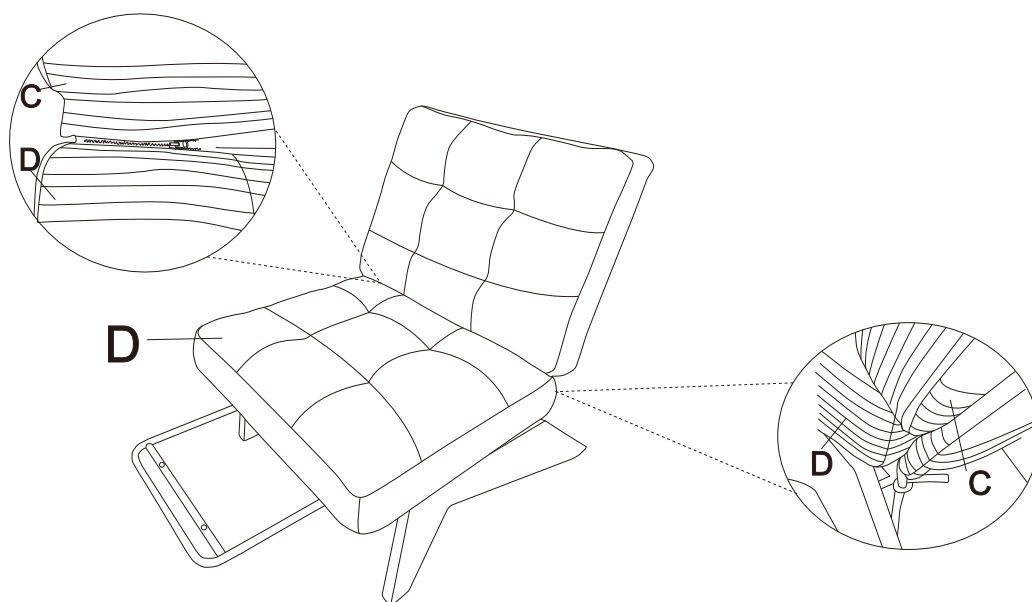

Step 4: Combine the zipper between seat cushion and back cushion.

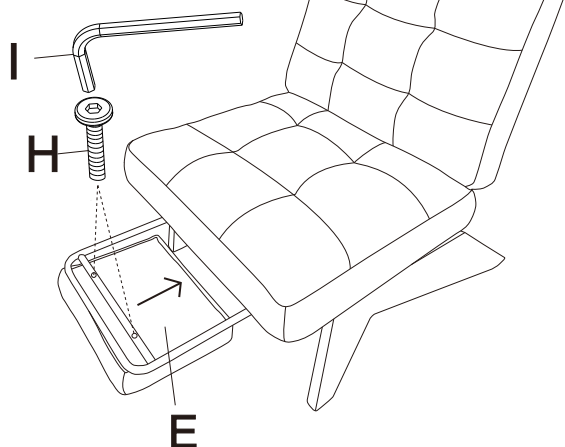

Step 5: Combine the footrest[E] to the seat frame with screws[H],and tighten by 100%

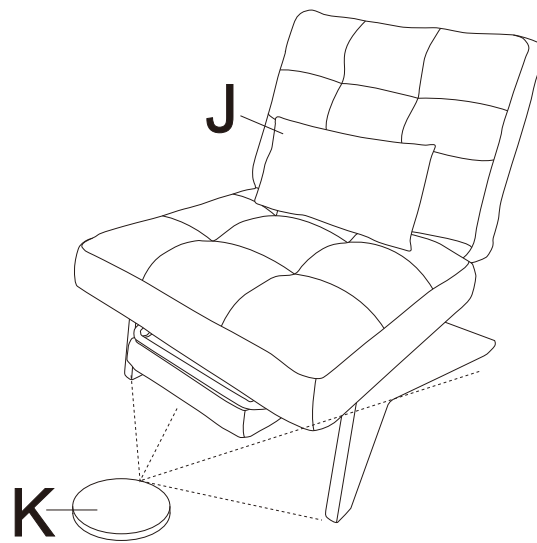

Step 6: Install the footpads[K] to the bottom of legs.

