


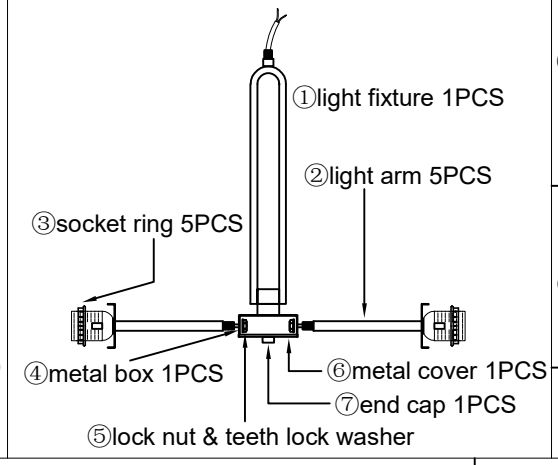


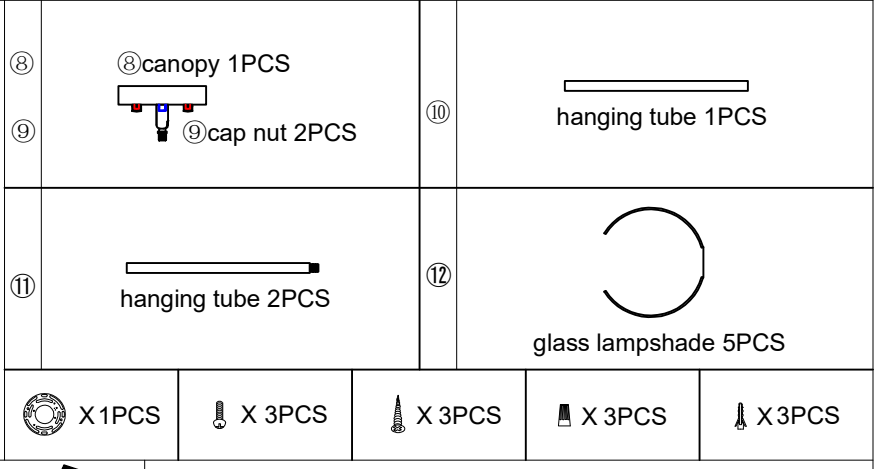


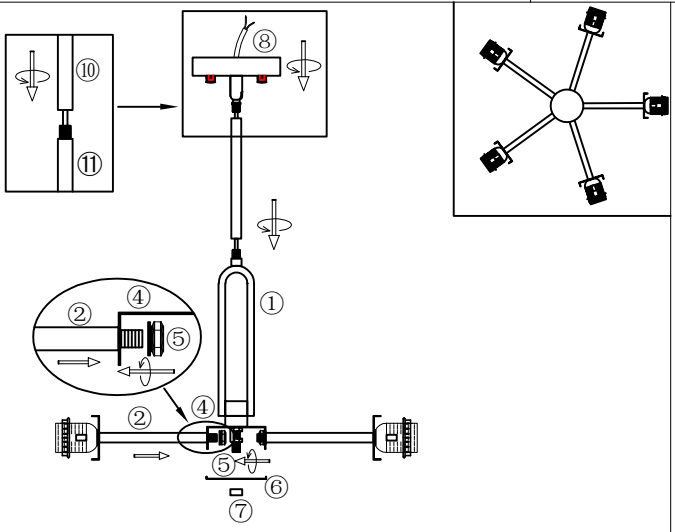

1.Rotate to remove out the end cap ⑦ and cover ⑥ from box ④, adjust the light arm ② vertical to the fixture, and fasten it with lock nut & teeth lock washer ⑤.
2.Close back the cover ⑥ to the box ④ with end cap ⑦.
3.Let the wire of the fixture ① go through the hanging tube ⑪ and tube ⑩, canoy ⑧, rotate to fasten all parts to the fixture.

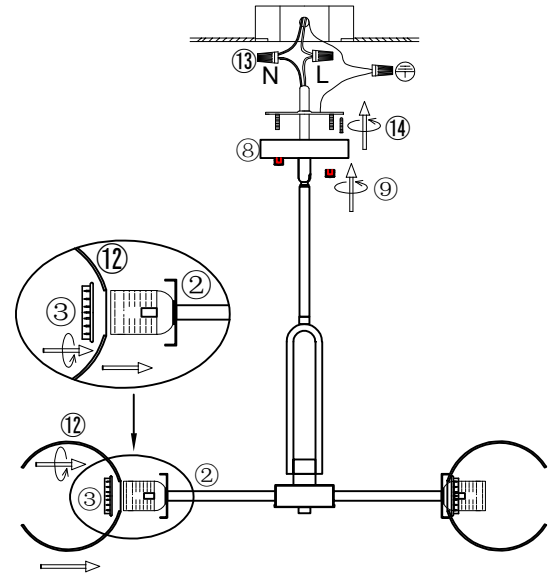

4.Install the bracket to the ceiling junction box with screw ⑭.
5.Connect the wire to the home line with cap connector ⑬.
6.Install the fixture to the bracket with cap nut ⑨.
7.Remove out the socket ring ③ from bulb holder and install the lampshade ⑫ to the fixture with socket ring ③.

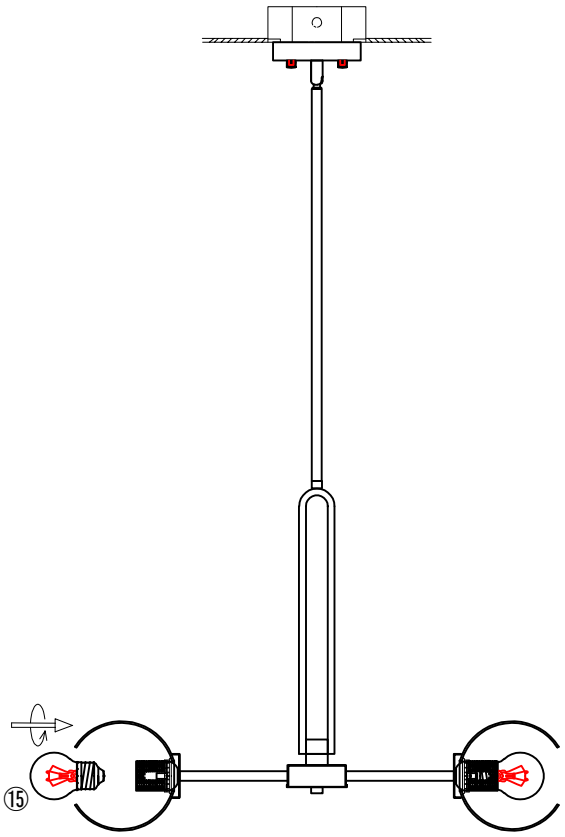

8.Install the bulb ⑮.(bulbs are not included in the package)

ZJD00337-5

Please read carefully before installation!!!
Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !