

# Dog Kennel

## Assembly Instructions

2.06 X 2.06 X 1.72M

---



**Please read this entire guide before assembly.**









# CHAIN LINK DOG KENNEL WITH ROOF ASSEMBLY INSTRUCTIONS





SIZE: 206 X 206 X 122CM + 50CM

## TOOLS NEEDED

| Adjustable Wrench                                                                 | Pliers                                                                            | Hammer                                                                             | Tape Measure                                                                        |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|  |  |  |  |

## CHECK THE PARTS BEFORE ASSEMBLY

| SKETCH                                                                              | LENGTH   | DESCRIPTION                        |
|-------------------------------------------------------------------------------------|----------|------------------------------------|
|    | 1,220 MM | Corner Post<br>A X 3               |
|    | 1,220 MM | Corner Post for Gate<br>B X 1      |
|     | 1,910 MM | Connection Tube<br>C X 7           |
|    | 1,910 MM | Connection Tube for Roof<br>D X 2  |
|  | *** **   | Right Gate Frame Tube<br>E X 1     |
|  | *** **   | Left Gate Frame Tube<br>F X 1      |
|  | *** **   | Short Gate Frame Tube<br>G X 2     |
|  | 1,070 MM | Gate Post<br>H X 1                 |
|  | 975 MM   | Tension Rod for Gate<br>I X 2      |
|  | *** **   | Mesh Piece for Gate<br>J X 1       |
|  | 1,200 MM | Tension Rod for Mesh Roll<br>K X 2 |
|  | *** **   | Mesh Roll<br>L X 1                 |
|  | 500 MM   | Support Post<br>M X 2              |

| Clamp<br>X 4                                                                       | Bolt & Nuts<br>X 3                                                                  | Clip<br>X 14                                                                        | Tie Wire<br>X 1                                                                     | Latch<br>X 1                                                                         | Tarpaulin<br>X 1                                                                      | Elastic Ball<br>Strip X 8                                                             |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |  |  |

### STEP 1. Assembling the Kennel Frame.


Gather the following items:

3 X Corner Post "A"


1 X Corner Post for Gate "B"

4 X Connection Tubes "C"

Place the tubes on a level surface like the following:

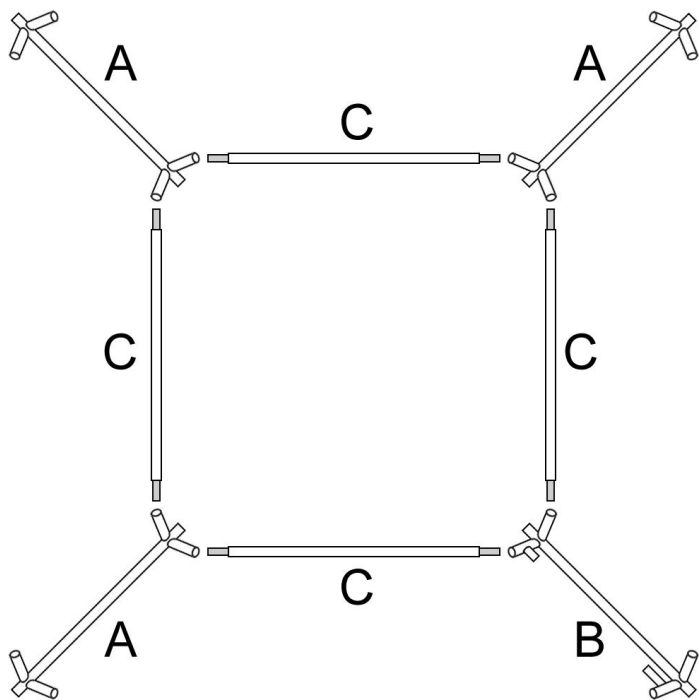

Stand up the "A" and "B" tubes and push these Tubes together. Please make sure that the end with a longer hinge tube of Post for Gate "B" is on the top .

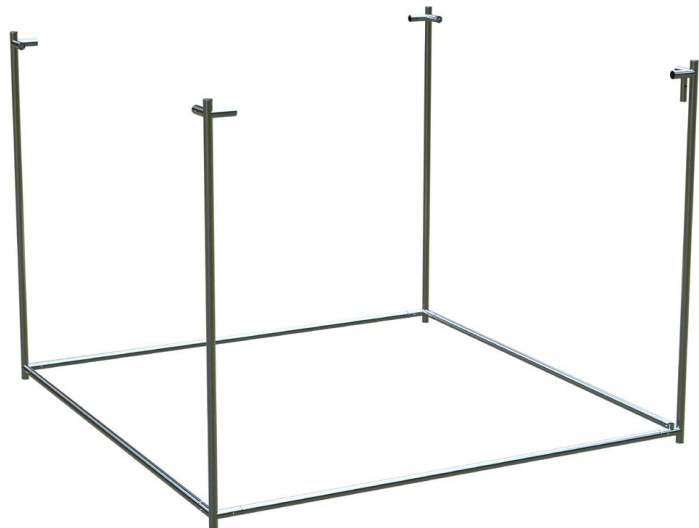


### STEP 2, Gather the following items:

2 X Connection Tube "C"

2 X Connection Tube for Roof "D"

Install the tubes in between the "A" and "B" according to the picture.

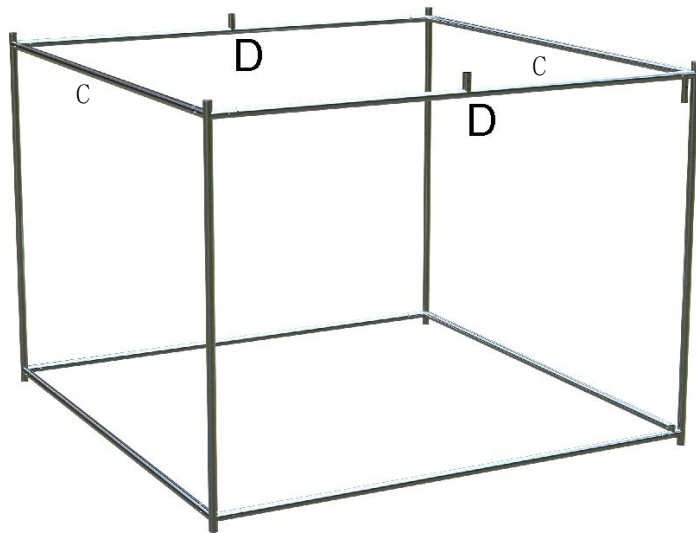


### STEP 3 Assemble the Gate. Gather the following items:


|                                  |                                 |          |
|----------------------------------|---------------------------------|----------|
| Right Frame Tube<br>"E" X 1      | Left Frame Tube<br>"F" X 1      |          |
| Short Gate Frame Tube<br>"G" X 2 | Tension Rod for Gate<br>"I" X 2 |          |
| Mesh Piece for Gate<br>"J" X 1   | Clip X 6                        | Tie Wire |

Make up the gate frame with 1 X Right Frame Tube "E", 1 X Left Frame Tube "F" and 2 X Short Gate Frame Tube "G".


Please notice: the Right Frame Tube "E" is with a longer end.

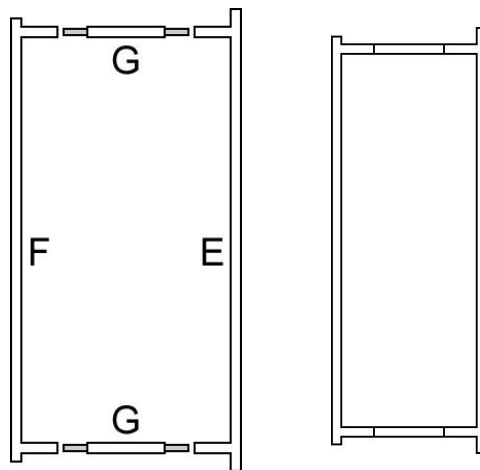


**Install the Mesh Piece to the Gate Frame** with 2 Tension Rods "I" and 6 Clips. Slip a Tension Rod down through the first diamonds of the Mesh Piece.

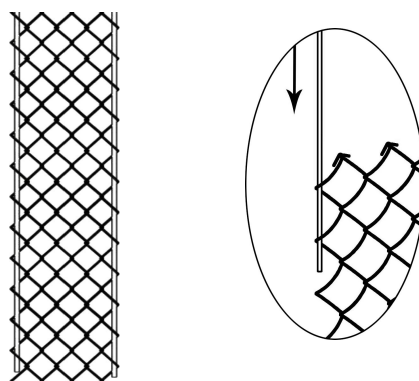


Install the Mesh Piece to the frame.

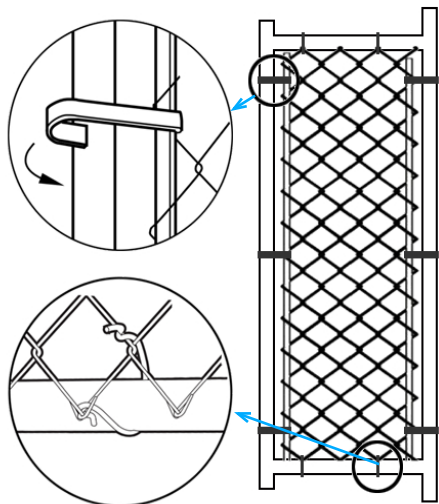


#### STEP 4, Installing the Gate to the frame.

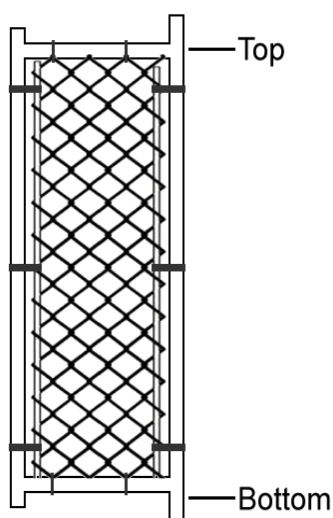


Firstly, orient the top of the Right Frame Tube “E” toward the upper hinge tube on the Corner Post for Gate “B” and then make the hinge tube inserted.

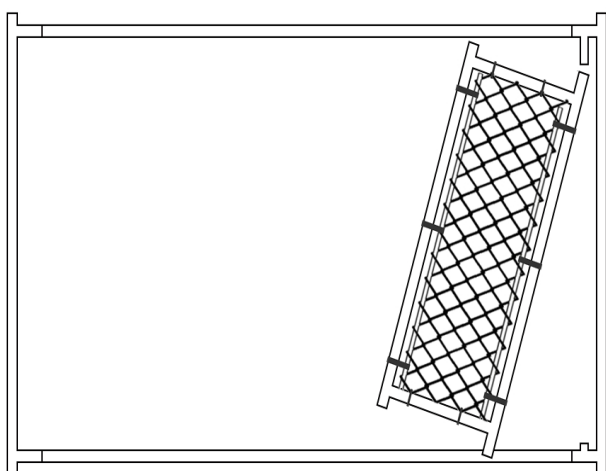

There is the gap between the bottom of the Gate Tube “E” and the lower hinge tube on Post “B” if the upper hinger tube is fully in.

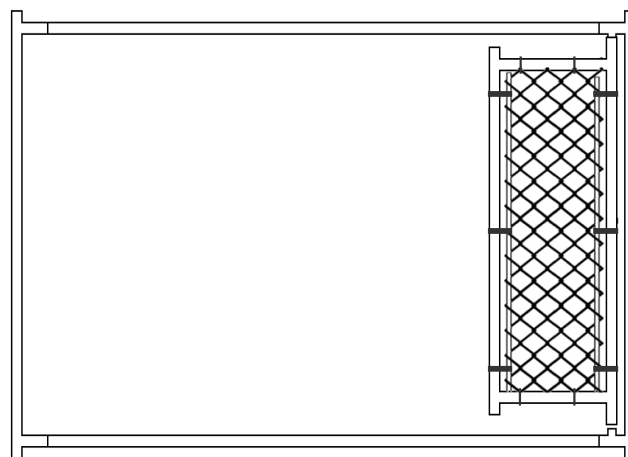

Make the lower hinge tube of “B” inserted in the bottom end of the Tube “E”. Put the bolt into the hole in the upper hinge tube of “B” ,and with nuts.

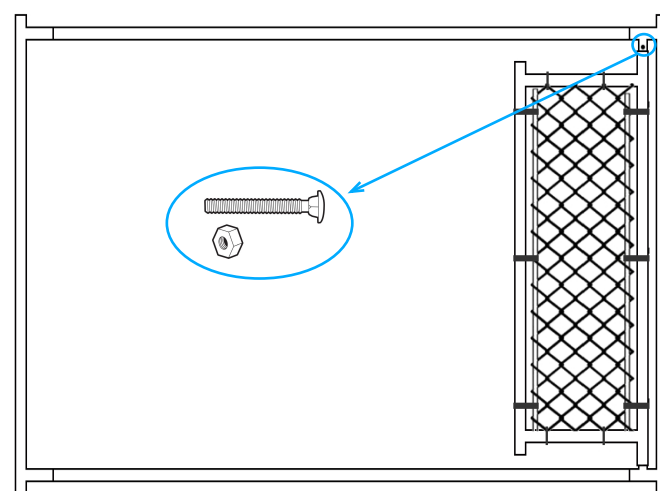


#### Step 5. Installing the Gate Post.

Install Gate Post Tube “H” on the frame with 4 Clamps and 2 Bolts and Nuts.

**Tips:** Please make sure that the Gate Post is parallel to the corner posts while vertical to the Connection Tubes. In that way the Gate can be opened and closed smoothly.

Set the gate Latch at your desired height on the latch post and tighten.

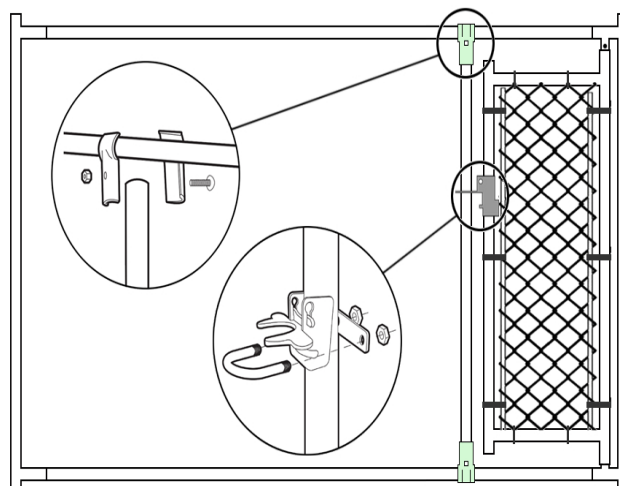





**STEP 6, Add fence fabric.** Gather the following items:

|                 |                     |
|-----------------|---------------------|
| 8 X Clips       | 2 X Tension Rod "K" |
| *** X Tie Wires | 1 X Mesh Roll       |

Slip the Tension Rod "K" down through the first diamonds of the Mesh Roll Fabric.

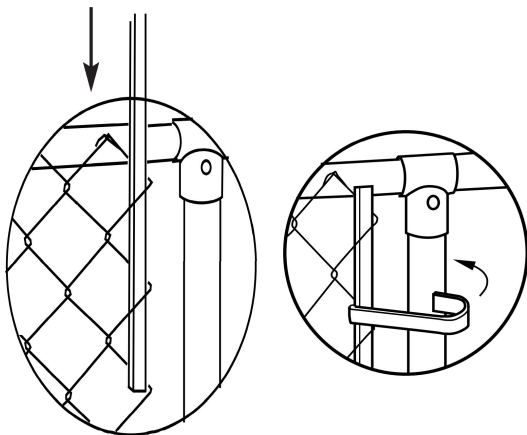


Start at a post next to the gate. Connect the Mesh Roll Fabric to the Gate Post Tube by clipping the Tension Rod to the post. Unroll the fabric around the kennel. Loosely add a tie wire to the top frame about every 5 feet to keep the fabric from falling down.

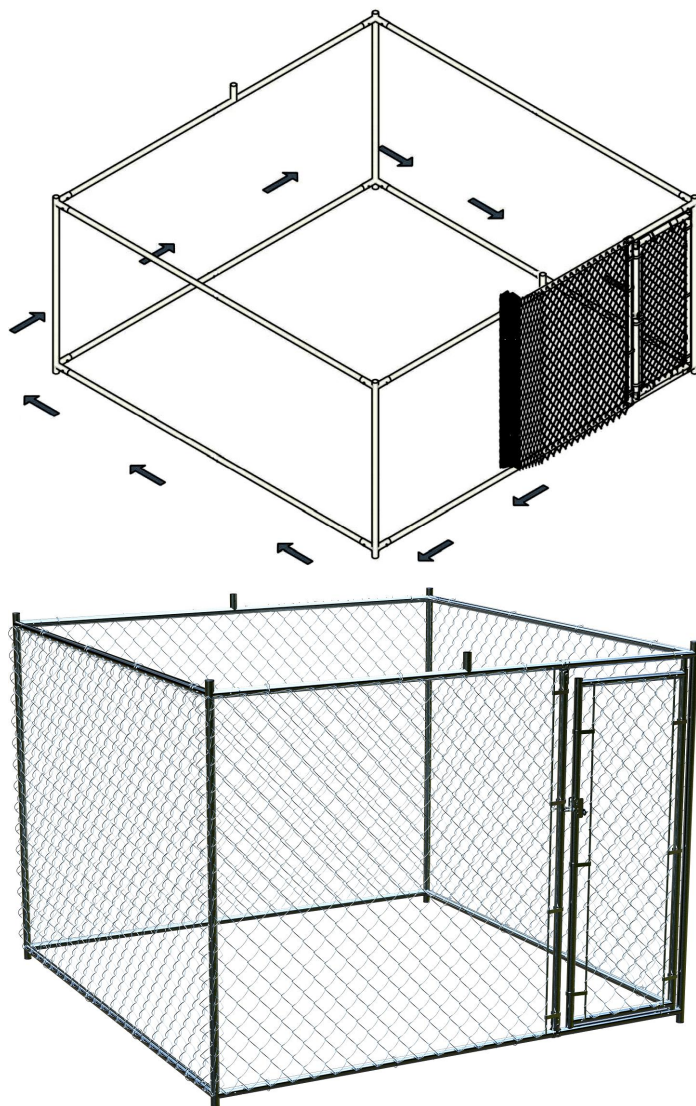


**STEP 7: STRETCH THE FABRIC**


Fasten the chain link to the frame at every vertical post using the Tie Wire provided. It's suggested to use 5 ties per vertical post and 4-5 ties between each post on the bottom and top.

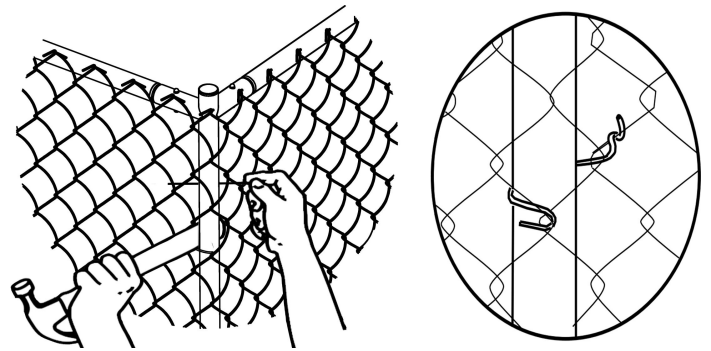

You may have excess chain link picket when you reach the end of the kennel frame. If so, detach excess chain link by using a pair of pliers to straighten knuckle at the top and bottom of the chain link and twist out picket. To terminate, slip the Tension Rod "K" through the end of the chain link, have the 4 clips ready on the tension bar and clip around the hinge post.

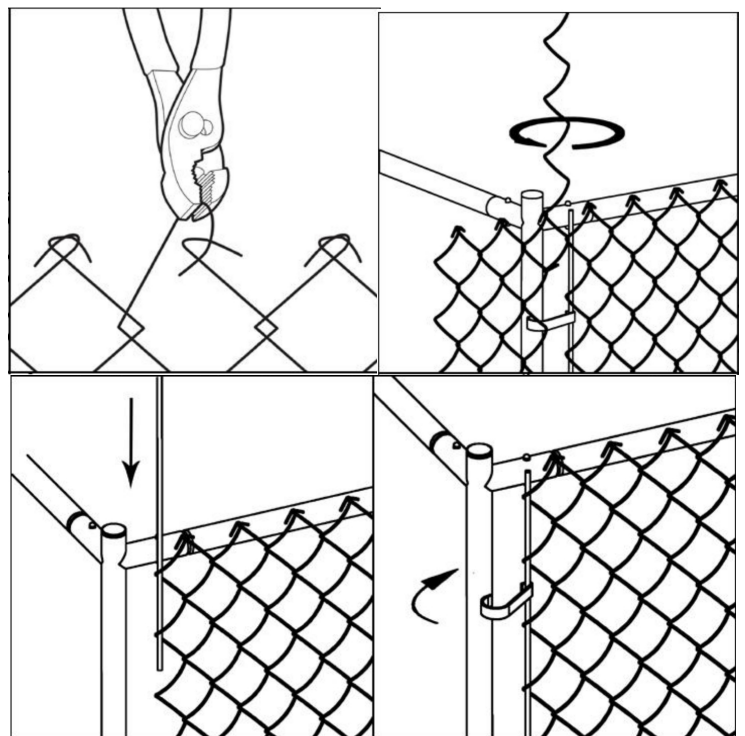



**STEP 8, Secure the fabric to the framework using the Aluminum Tie Wires provided.** Attach one end of a tie wire to the fabric. Wrap the tie around the framework and back to a different link in the fabric.

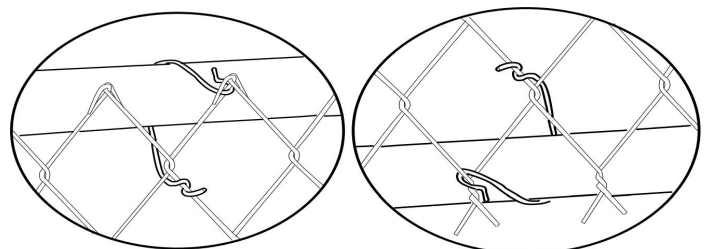


### STEP 9, Installing the Roof.

Gather 2 X Support Tube “M” and 1 X Connection Tube “C”.



Put the Swedged end of the Support Tube “M” into the joint tube of the Connection Tube “D”.

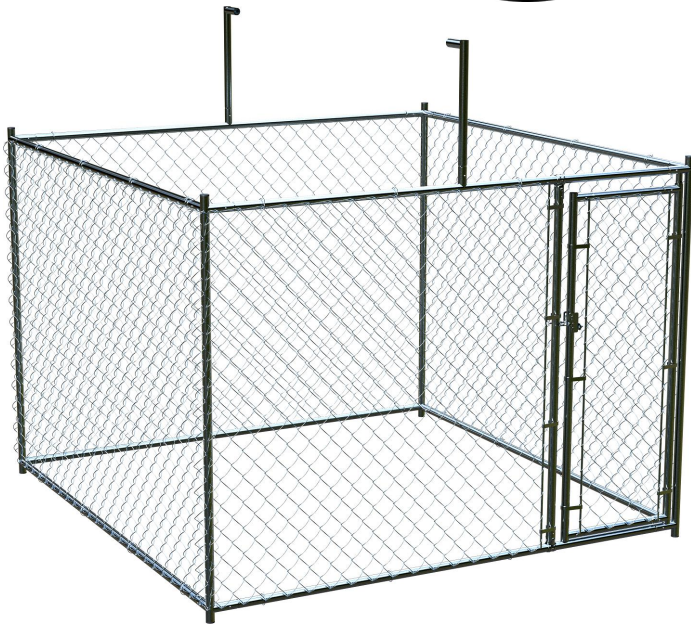

Add the Connection Tube “C” in between the Support Tube “M”.

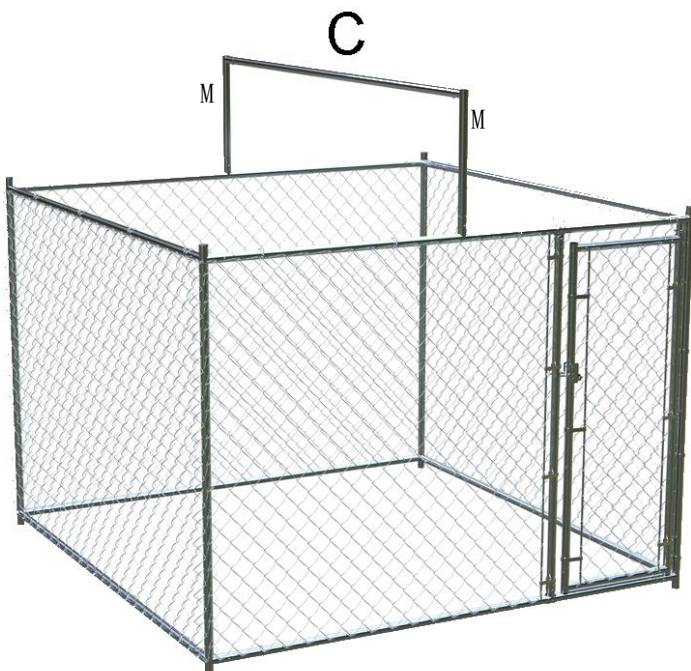

### STEP 10, Cover the Frame with the Tarpaulin and Tied with Elastic Ball Strip.

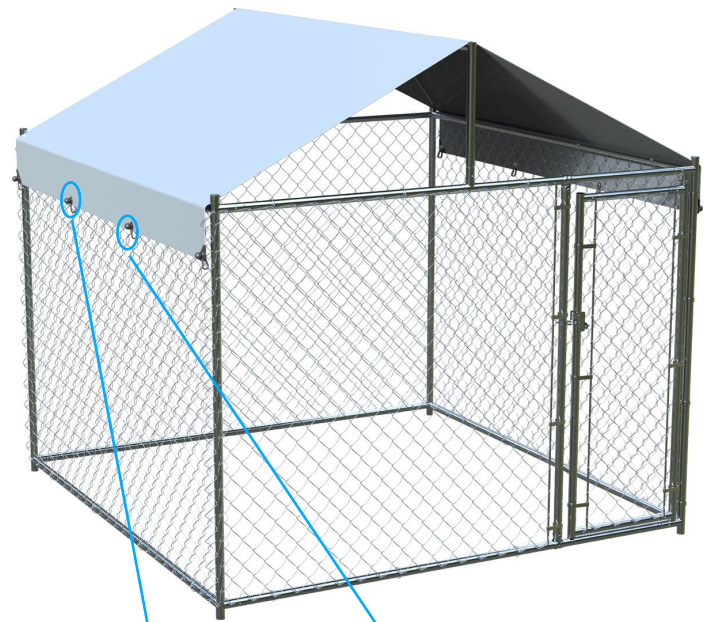

Tips: Make sure the Elastic Ball Strap to be in tension pulling the Tarpaulin.