


## REPLACING SWITCH


**Step 1.** Remove the screw at the bottom of the front cover, then unscrew the front part.




**Step 2.** Remove the filter set.

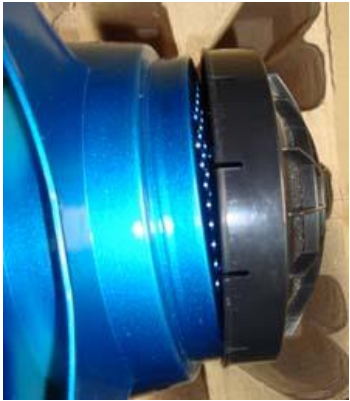


**Step 3.** Remove the screw from the bottom housing, then lift up the upper housing.

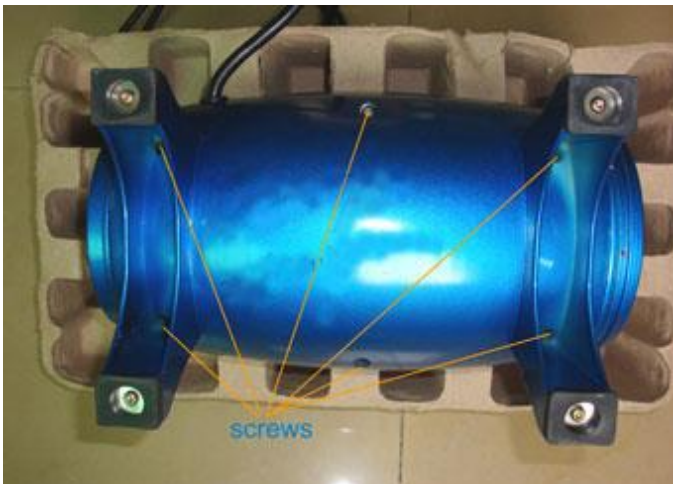


**Step 4.** Use the screw-driver to pry up the knob.

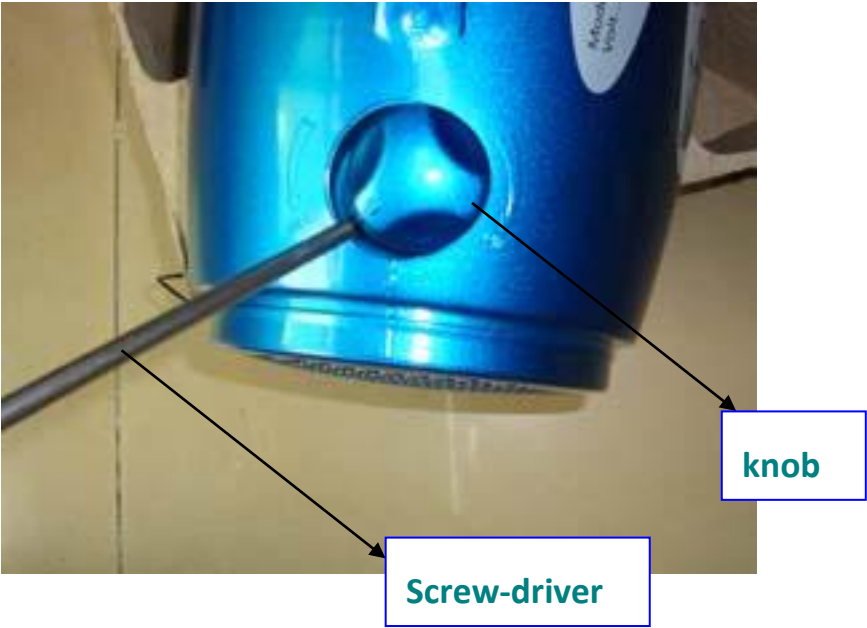


**Step 5.** Remove the screw of the switch, then take down the switch.

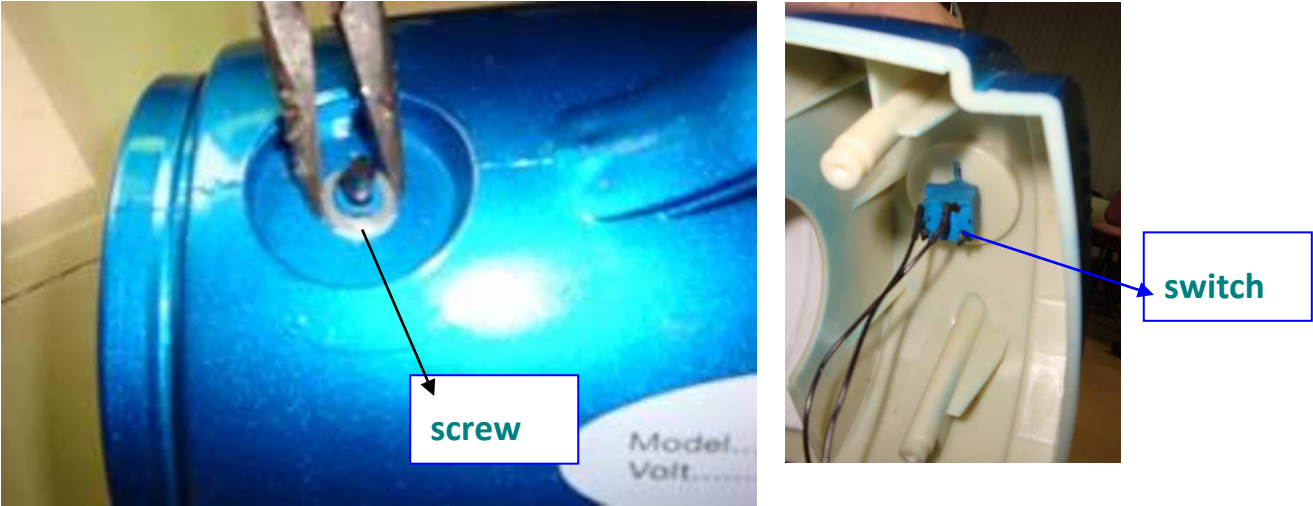


**Step 6.** Remove 2 screws of the connectors of the voltage adjuster.

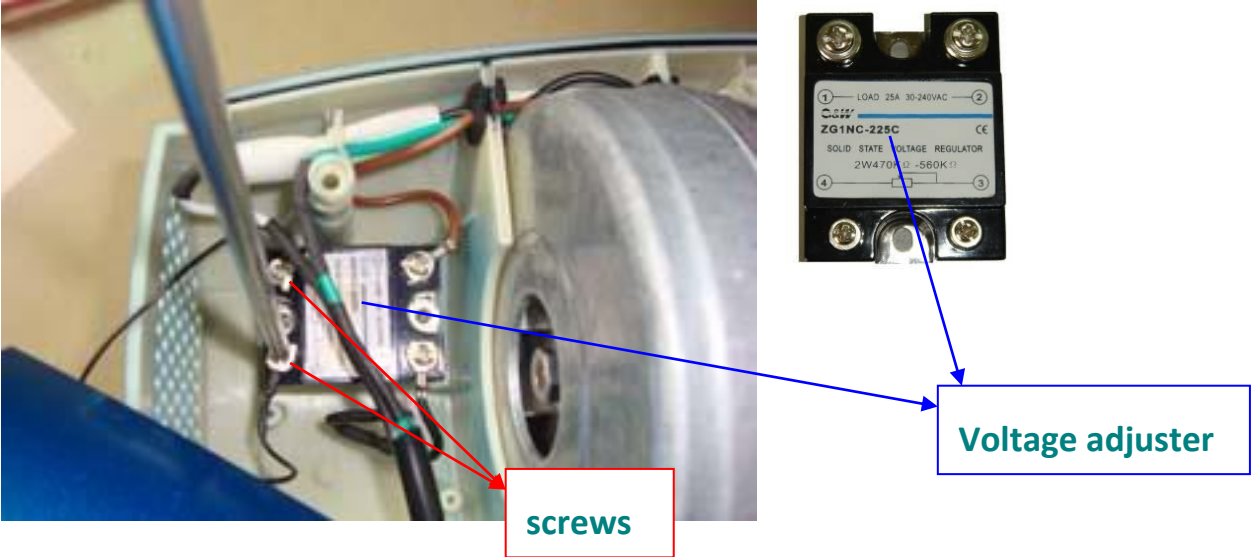


**Step 7.** Solder the wire of the switch.

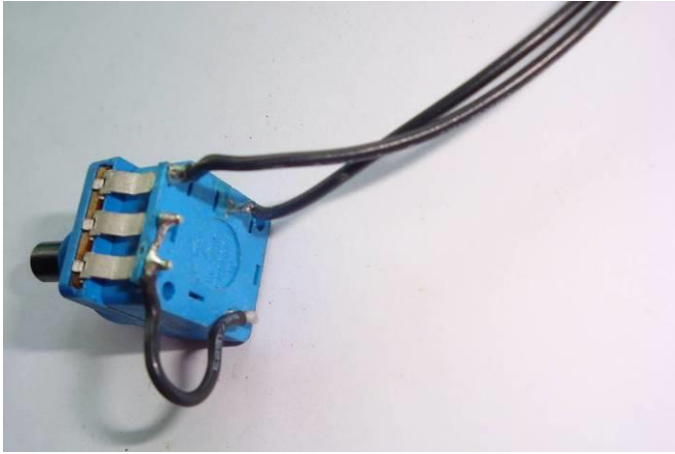

**Step 8.** Replace the new switch. The connectors 3 and 4 of the voltage adjuster connect with the wire of the switch.

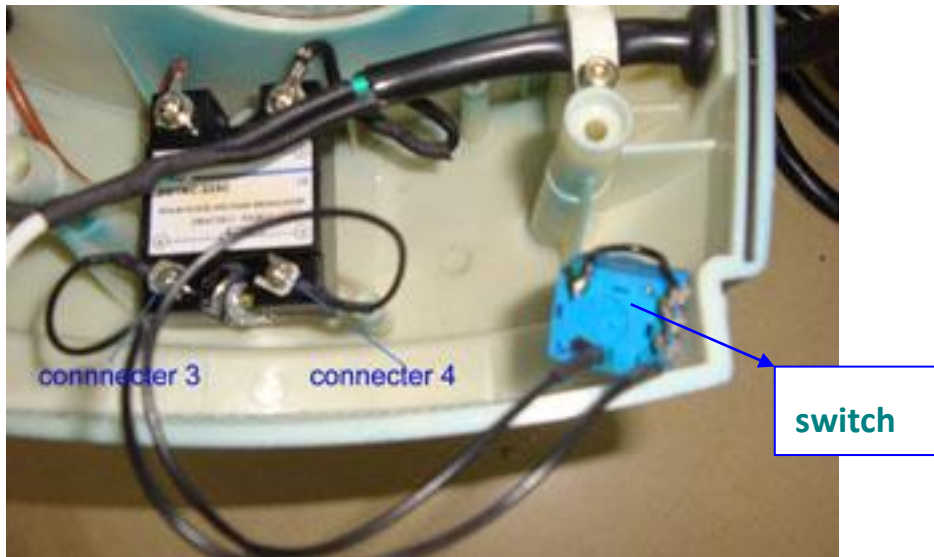

**Step 9.** Put the switch into the upper housing and replace the screw.

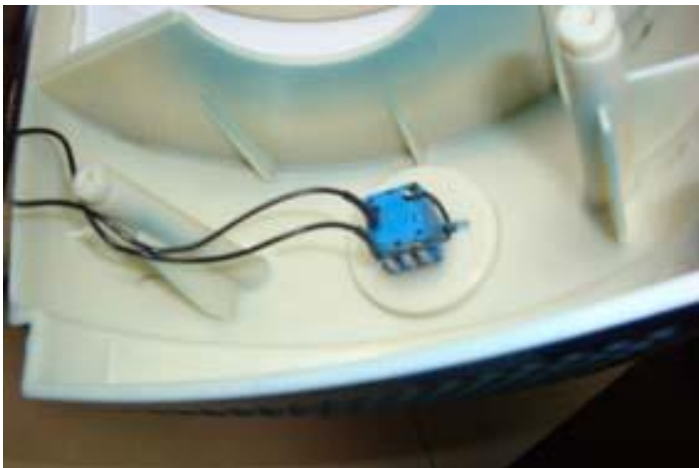

**Step 10.** Re-assemble the dryer in reverse order.

