

EI1499

EL1499A

4" Low Voltage New Construction
Housing with 12V Thermally Protected
Magnetic Transformer


PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

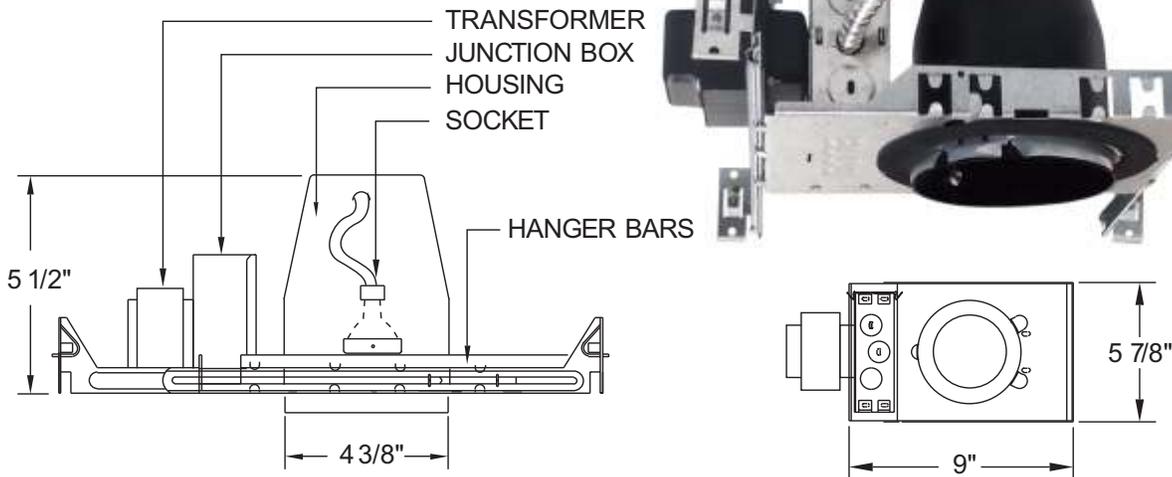

PRODUCT SPECIFICATIONS

- Single wall construction.
- 5 1/2" height allows for use in 2 x 6 construction.
- Adjustable housing accommodates up to 1 1/4" ceiling thickness.
- Housing meets restricted air flow requirement (per ASTM E-283).
- CA Title 24 compliant (as low efficiency luminaire).
- Trims sold separately.

Lamp: 50W Max 12V MR16 GU/GX5.3 bi-pin

Transformer: 120V/12V Magnetic AC.

Lamp Holder: MR16 GU/GX5.3 bi-pin socket.

Labels: U.L. listed for damp locations
U.L. listed for feed through

Note: Use only dimmers specifically designed for use with magnetic transformer. Low voltage luminaires may produce audible sound when use with dimmers.

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockouts. Maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: Captive bar hangers span 24" and can be repositioned 90°. Housing accommodates various ceiling thickness.

Mounting Frame: Stamped galvanized steel construction for corrosion resistance

CATALOG NUMBER

Example: EL1499
EL1499A

See trims page for variety of trims available

2042 East Vernon Avenue, Vernon, CA 90058 • Tel: (323) 231-2600 Fax: (323) 231-3200 • www.elcolighting.com
© ELCO LIGHTING 2015 All Rights Reserved. Rev. March 2016. ELCO Lighting reserves the right to make specification and design changes without notice.

ELCO
LIGHTING

