







Installation Notes


Please check whether the product is in good condition before installation, and then install it, if you have any questions, please contact our customer service, we will provide you with a 100% satisfactory solution.

Hardware Accessories			
A		X 2	
B		X 2	
C		X 2	


Auxiliary installation tools (self-provided)	
electric drill	
hammer	
Phillips screwdriver	

Installation method 1: floor installation

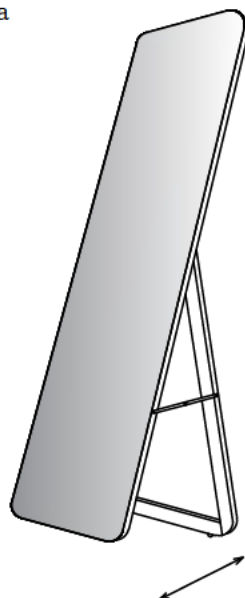


Warm reminder: there is a protective film on the mirror surface, please tear it off before use.




Screw the adjuster feet (A) into the screw holes at the bottom of the rear stand of the product.



wall

1		Measure the hole spacing and height between the hanging pieces, and use an electric drill to drill holes on the solid wall.
2		Knock the expanded rubber (B) into the drilled hole with a hammer.
3		Screw the self-tapping screw (C) into the expansion rubber (B) with a cross screwdriver, leaving the 5MM screw head on the external mirror surface.

B C



Installation method two: wall-mounted installation

1. Use a cross screwdriver to unscrew the screws of the hinge and the two-section connecting rod, and separate the front frame from the rear bracket.

