
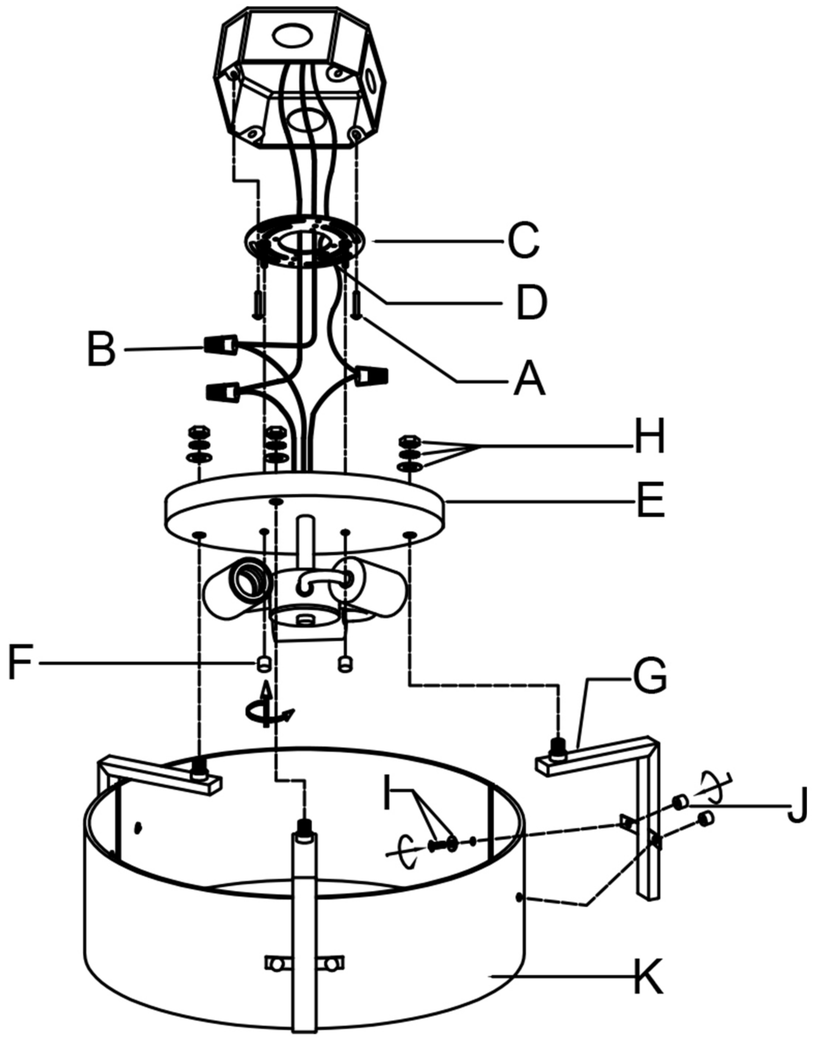


Package Include:


A	Junction box screws	×2
B	Wiring cap	×3
C	Mounting plate	×1
D	Green screw	×1
E	Back plate	×1
F	Black Nuts	×2
G	Metal frame	×3
H	Washers and nuts	×3
I	Screws	×6
J	Gold nuts	×6
K	Glass panel	×3

Step 1:

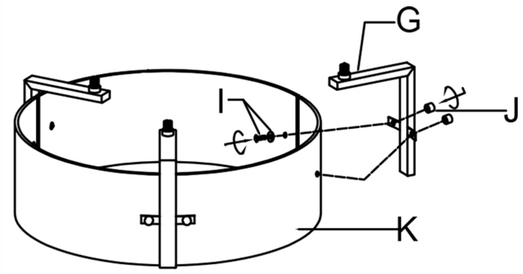

Secure the glass panel **(K)** to the metal frame **(G)** using screws **(I)** and gold nuts **(J)**.

Step 2:

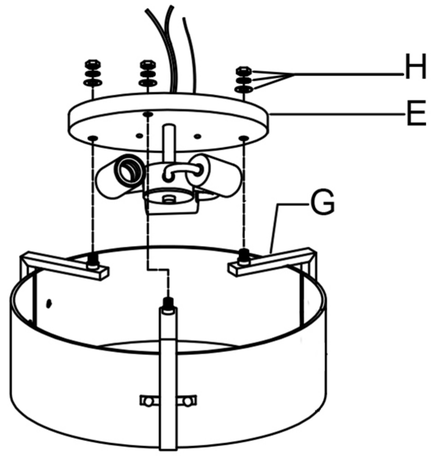

Using washers and nuts **(H)**, attach the metal frame **(G)** to the backplate **(E)** and tighten.

⚠ SAFETY PRECAUTIONS:


Turn off the main power supply before installing the fixture.

Confirm the supply voltage matches the light's requirement (e.g., 120V).

This fixture is for indoor use only.


Installation must be carried out by qualified electrical personnel.

Step 3:

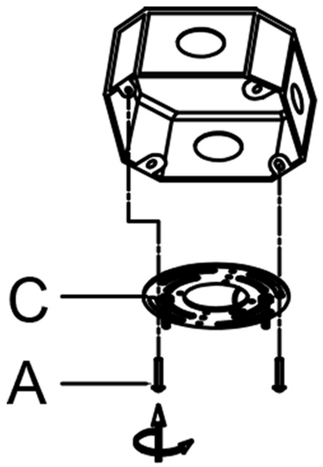


Secure the mounting plate **(C)** to your ceiling junction box using screw **(A)**.

Step 4:

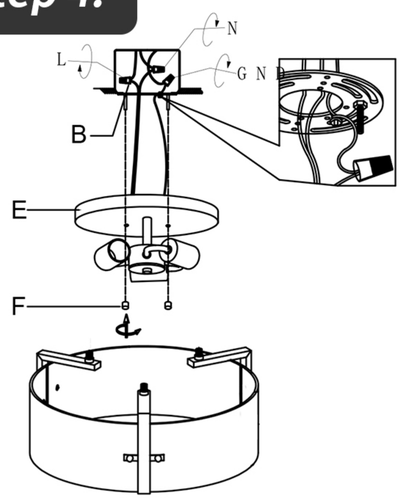

Connect the positive and negative electrodes of the wire wrap them with electrical tape and connect them with wiring cap**(B)**
Carefully install the backplate **(E)** and tighten it using the black nut **(F)**.

Step 5:

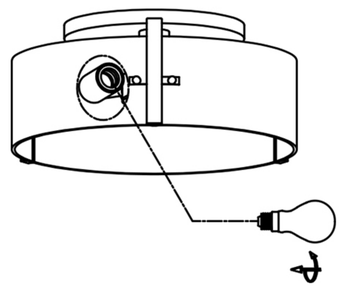

Use only a bulb that does not exceed the maximum recommended wattage (e.g., Max 60W)marked on the fixture.
(Bulb not included)