

# Recliner Cover

\*Keep labels on during installation.




To remove wrinkles, tumble dry low with a damp towel.

- 1 LOCATE** the "Front of Cover", "Left Arm", and "Right Arm" position labels.



- 2 Recline the chair and raise the footrest.** Starting at the inside of the seat cushion, drape the right arm cover over the right chair arm, **TUCKING** it into the seat cushion seam. Pull down the side and tuck under the chair. Repeat with the left arm cover.

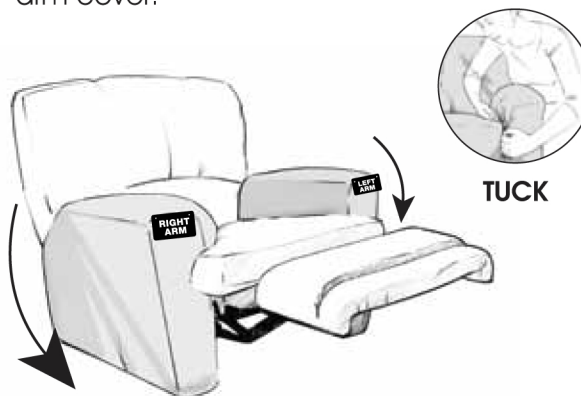

- 3** Place the center cover on top of the chair, and pull the front down towards the seat, **SMOOTHING** the fabric as you go. **TUCK** the front elastic into the seat cushion seam.




**TUCK FRONT COVER**


- 4** Pull the back of the center cover down towards the floor. Secure elastic anchors under the chair feet.



- 5** Find the "Bottom of footrest" label. Fit it snugly around the bottom of the footrest and pull toward the seat back. **TUCK** any extra fabric into the seat cushion seams.

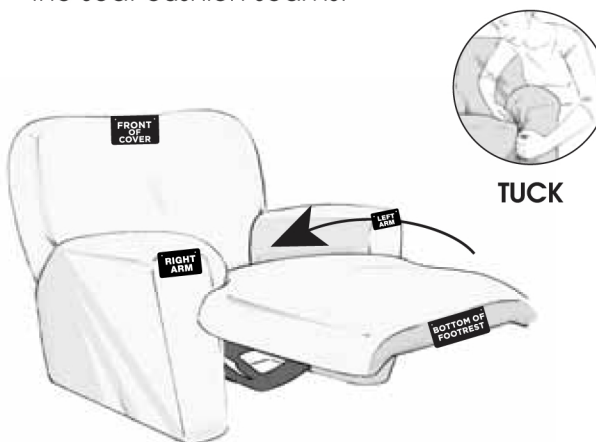

- 6 SMOOTH** any wrinkles and **TUCK** excess fabric securely into furniture seam.

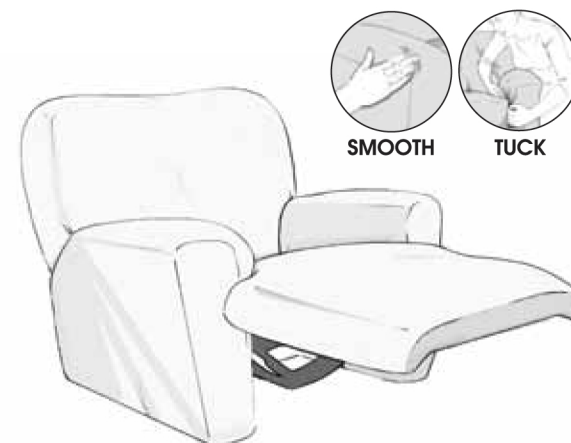

\*When installation is complete, use scissors to remove tags.