

ASSEMBLY INSTRUCTIONS

Caution:

- **FOR YOUR SAFETY:** Turn off the power to main electric circuit/ fuse box before beginning work.

Important Safety Instructions:

- **Professional installation is recommended for hardwired lighting. Incorrect installation can lead to fires.**
- These instructions are provided for your safety. It is very important that they are read carefully and completely before assembling fixture.
- We strongly recommend that two people install the lighting fixture.
- This fixture has been rated for up to (5) **40-watt maximum TYPE B bulbs** (not included) or (5) **9-watt compact fluorescent light bulbs** (not included). To avoid the risk of fire, do not exceed the recommended wattage.
- This lighting fixture is intended for indoor, residential use.

Warning:

- **To reduce the risk of fire, electrical shock or personal injury, do not turn on lighting fixture until light bulb is installed and assembly is complete.**
- **Always turn off the lighting fixture and allow it to cool before replacing the light bulb.**








Care instructions:


- Do not polish or use harsh cleaners as they may damage the finish.
- Wipe clean with a non-colored, lint-free soft, dry cloth.

Pre-assembly:






- Remove all parts and hardware from box along with any plastic protective packaging.
- Check that all parts listed are included.
- Do not discard any contents until after assembly is complete to avoid accidentally discarding small parts or hardware.

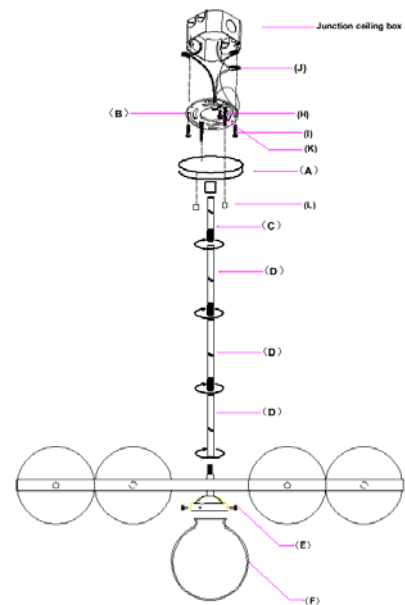Component List


Part code	Component	Description	Qty
A		Ceiling cap	1
B		Crossbar	1
C		Inner tube L152	1
D		Inner tube L305	3
E		Mounting screw for glass shade	15
F		Glass shade	5
G		Bulb	Not included




Hardware List

Part code	Component	Description	Qty
H		Mounting screw G5/32-T32 L30	2
I		Mounting screw G8/32-T32L32	2
J		Plastic wire nut connector	3
K		Ground screw	1
L		Nut cover	2

Step 3: Connect the ceiling cap (A) with crossbar (B), tighten by using the nut cover (L) and 2 mounting screws (I).

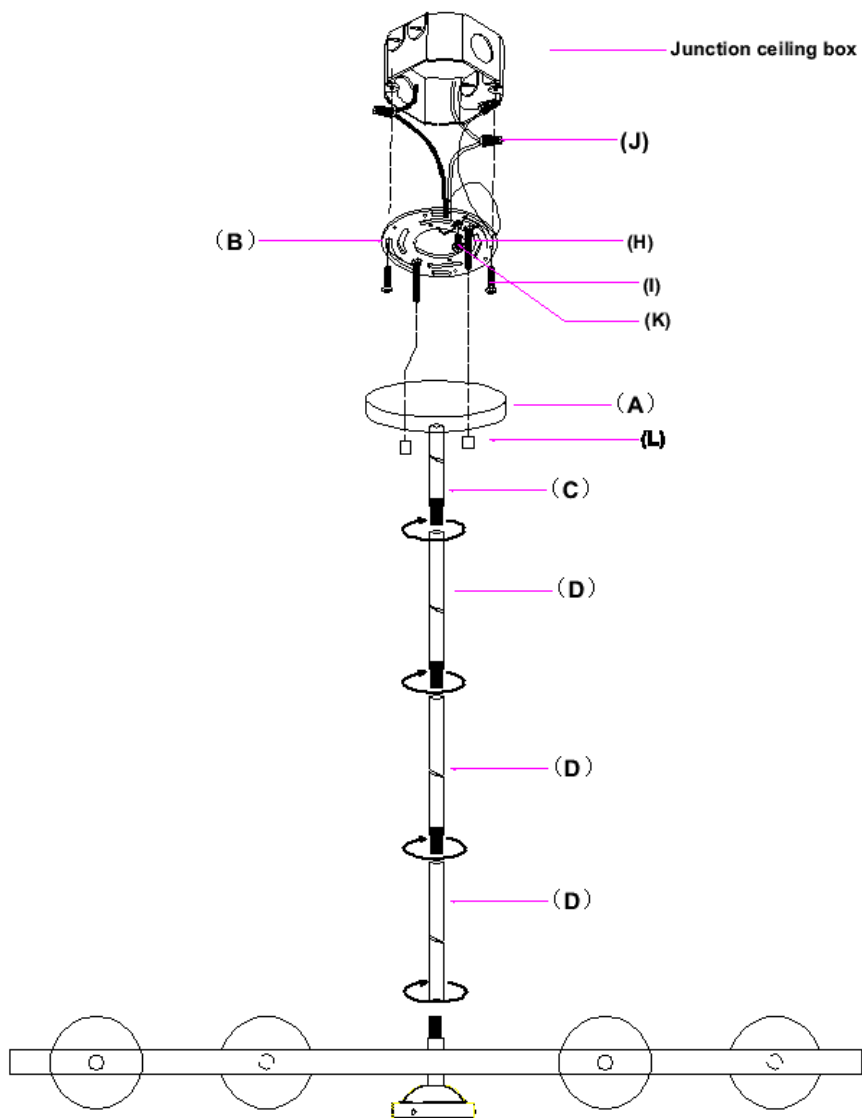

- **Step 4:** UPDATE: After installing the bulb, securely connect the glass shade (F) with the glass shade mounting screw (E).

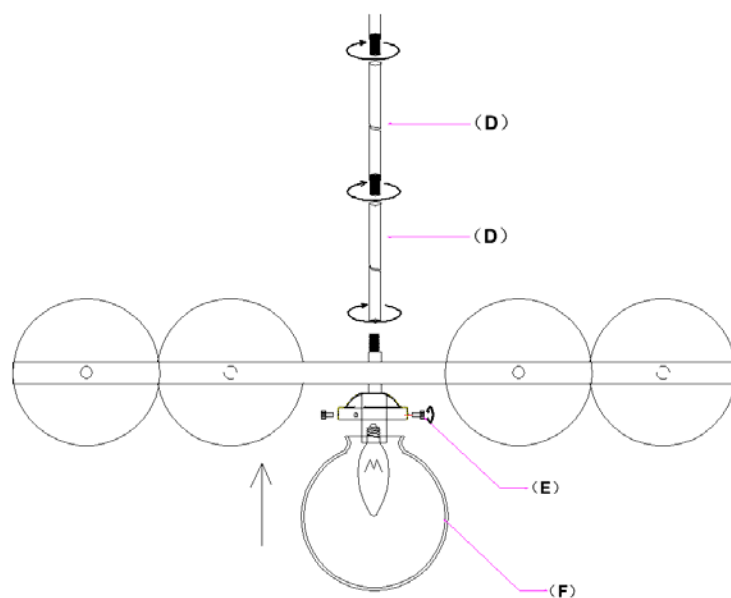

Thank you for your purchase