


edishinē

Wall Light

[Instruction Manual]




Please pay attention to the warning signs
Read the instructions with caution before operating
and keep it properly

WARNING:

Risk of fire. Min 167°F/75°C supply conductors. Consult a qualified electrician to ensure correct installation. Before installation, please turn off the main power of the circuit breaker to prevent possible electric shock.

Packing List

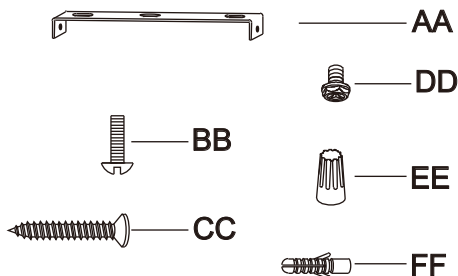

AA/DD are pre-installed on the base plate.

Part	Description	Quantity
A	Lamp Body	1
AA	Mounting Bracket	1
BB	Bracket Screws	2
CC	Mounting Screws	2
DD	Grounding Screw	1
EE	Wire Connectors	3
FF	Wall Anchors	2

Installation Instructions

FIG.1. Turn the wall switch to the "OFF" position.

Depending on which type of fuse box in your home.

FIG.2. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or turn off the individual switch that supplies power to where the fixture will be installed.

OR

FIG.3. Either turn the main (Master) switch to the "OFF" position to cut off the power supply of the entire home, or unscrew the fuse that supplies power to where the fixture will be installed.




FIG.1 WALL SWITCH




FIG.2 BREAKER PANEL





FIG.3 FUSE BOX

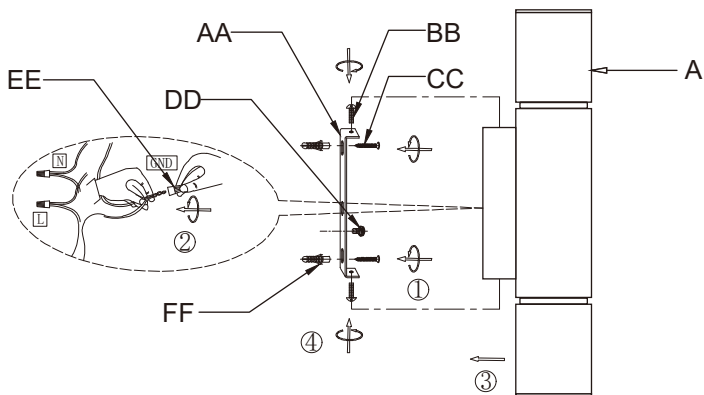

ASSEMBLING THE FIXTURE

1. Secure the mounting bracket to the junction box with screws.
2. Connect the fixture's positive/neutral and ground wires to the pre-wired leads in the junction box.
3. Hold the fixture upward and align it with the holes on the mounting bracket.
4. Secure the fixture to the mounting bracket with screws.

IMPORTANT SAFETY INSTRUCTIONS

This portable lamp has a polarized plug (one blade is wider than the other) as a safety feature to reduce the risk of electric shock. This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless the plug can be fully inserted. Do not alter the plug.

Specifications:

- Input Voltage: 108-135VAC, 60Hz
- Output: 27-40VDC, 300mA Constant Current,
- Max. Output Power: 15W

One Year Limited Warranty

Supported by our professional R&D team and QC team, we provide One Year Warranty for materials and workmanship from the purchase date. Please note that the warranty does not cover damage caused by personal misuse or improper installation.

Please attach your Order ID and Name so that our dedicated customer service team can help you better.



Made in China