

# Primme® Manual | K-76317

Urinal flushometer, 0.125 gpf

## Features

- Fixture-mount design.
- Chloramine resistance on all rubber components exposed to waterway
- Includes vacuum breaker and control stop



## Sustainability



## Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.



ADA CSA B651 OBC

ASSE 1037/ASME A112.1037/CSA B125.37

EPA WaterSense®

ADA

## Available Colors/Finishes

Color tiles intended for reference only.

CP Polished Chrome

ICC/ANSI A117.1

CSA B651

OBC

## Technical Information

All product dimensions are nominal.

Handle Handle Style/Type:

Lever



1-800-4 KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to

[www.kohler.co](http://www.kohler.co) m USA or [www.kohler.ca](http://www.kohler.ca) a Canada.

8-06-2026 16:10 - US- CA

## Pressure/Fixture Supply Requirements

|                           |                      |
|---------------------------|----------------------|
| Minimum Flowing Pressure: | 25 psi (172.4 kPa)   |
| Minimum Flow Rate:        | 3.5 gpm (13.2 l/min) |

---

## Material

- Durable brass construction
- 

## Recommended Products/Accessories

K-23723 Faucet cleaner

## Technology

- Nonhold open piston technology for accurate activation
- 

## Warranty

*See website for detailed warranty information.*

KOHLER® One-Year Limited Warranty



1-800-4 KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.


For the most current specification sheet, go to

[www.kohler.com](http://www.kohler.com) m USA or [www.kohler.ca](http://www.kohler.ca) a Canada.

8-06-2026 16:10 - US- CA

THE BOLD LOOK  
OF **KOHLER**®

\*10-3/4" (273 mm) minimum with a  
6" (152 mm) critical level above the fixture

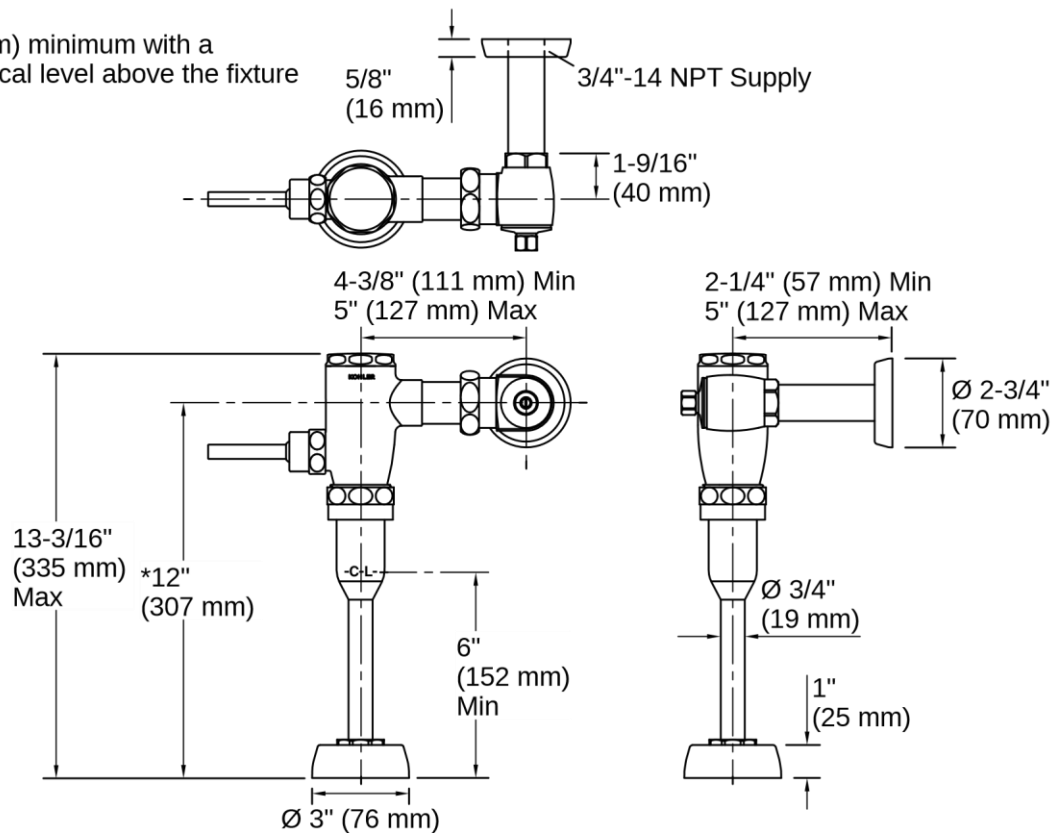

## Installation

- Intended for urinal installations with 3/4" (19 mm) top spud coupling connection

OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

## Installation Notes

Install this product according to the installation instructions.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance. ADA,



1-800-4 KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to

[www.kohler.co](http://www.kohler.co) m USA or [www.kohler.ca](http://www.kohler.ca) a Canada.

8-06-2026 16:10 - US- CA