

Features


- *ExoCrylic™*
- *Drop-in installation*
- *Pump with air switch and grounding-type plug-in cord*
- *Six individually adjustable ProFlex® hydro-massage jets*
- *In-line heater*
- *Molded lumbar support and armrests for comfort*
- *Custom pump locations*
- *Optional K-9696 whirlpool trim kit in additional finishes*
- *Optional K-1284 removable apron*
- *60" (1524 mm) x 36" (914 mm) x 18-1/8" (460 mm)*

Codes/Standards Applicable

Specified model meets or exceeds the following:

- *ASME A112.19.7/CSA B45.10*
- *CSA B45.5/IAPMO Z124*
- *UL 1795*

CUSTOM WHIRLPOOL BATH WITH HEATER K-1139-HN

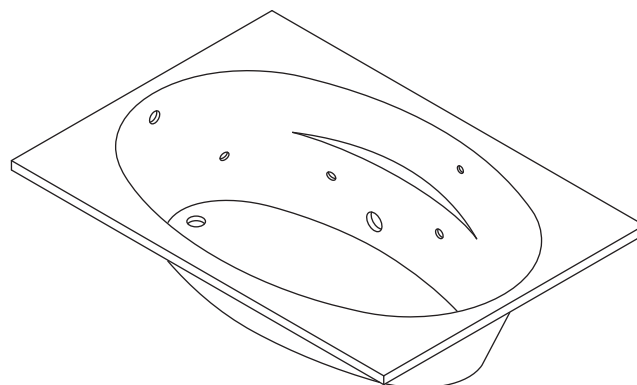

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1139-HN	Custom whirlpool bath with heater	☐ 0	☐ Other_____
Recommended Accessories			
K-11677	Swiftflo™ adjustable trip lever bath drain	☐ CP	☐ PB
Optional Accessories			
K-1284	Removable apron	☐ 0	☐ Other_____
K-9696	Jet trim kit (metal finishes)	☐ CP ☐ PB	☐ Other_____

Product Specification

The ExoCrylic whirlpool bath shall be 60" (1524 mm) in length, 36" (914 mm) in width, and 18-1/8" (460 mm) in height. Whirlpool shall be for drop-in installation. Whirlpool shall have six individually adjustable ProFlex hydro-massage jets, pump with air switch and grounding-type plug-in cord, and in-line heater. Whirlpool shall have custom pump locations and molded lumbar support and armrests for comfort. Whirlpool shall feature optional K-1284 removable apron, and K-9696 whirlpool trim kit in additional finishes. Whirlpool bath shall be Kohler Model K-1139-HN-_____.

PROFLEX® 6036

Technical Information

Fixture*:				
Bathing well:				
Basin area, bottom		46" (1168 mm) x 15" (381 mm)		
Basin area, top		55" (1397 mm) x 25" (635 mm)		
Weight		60 lbs (27.2 kg)		
To overflow:				
Water depth		14" (356 mm)		
Capacity		57 gal (215.8 L)		
* Approximate measurements for comparison only.				
Drop-in cutout		58-1/2" (1486 mm) x 34-1/2" (876 mm)		
Pump:		V	Hz	A
1-speed		120	60	7.5
Heater:	kW	V	Hz	A
	1.5	120	60	12.5

Required Electrical Service

Two dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control	120 V, 15 A, 60 Hz
Heater	120 V, 15 A, 60 Hz

Locate the outlets behind the whirlpool and within 24" (610 mm) of the pump and heater.


Installation Notes

Install this product according to the installation guide.



Floor support under whirlpool must provide for a minimum of 37 lbs/square foot (183 kg/square meter) loading.

The apron must be installed before the finished floor and wall materials are installed.

Pump must be relocated to custom position at the time of installation. Provide adequate clearance.

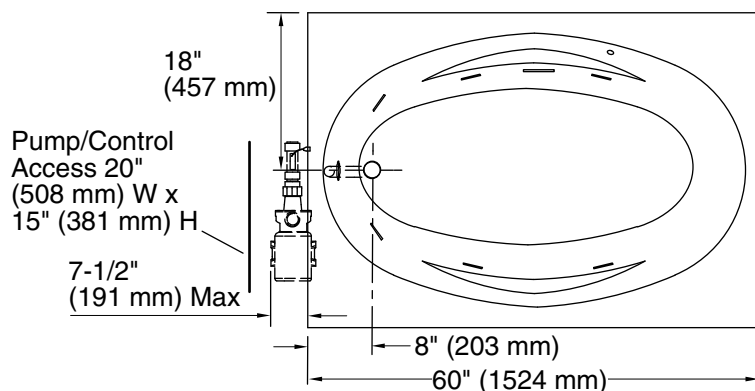

No change in measurements if connected with drain illustrated. (K-11677)

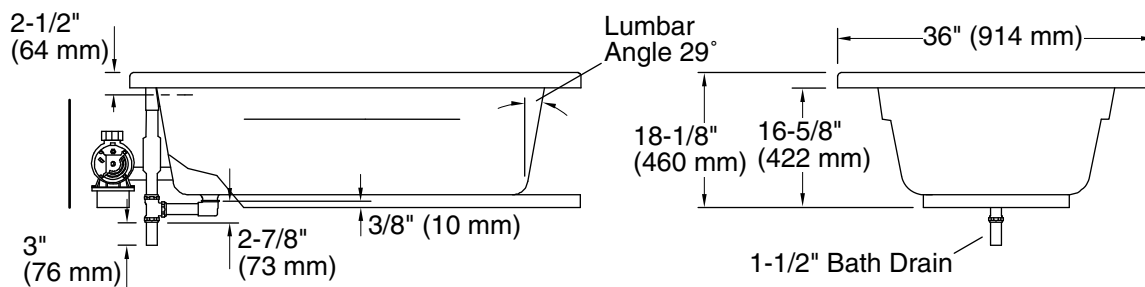

Product Diagram