



1. RELEASE TOP BOX

Remove screws with a phillips screwdriver.



2. REMOVE CHEST

Place cabinet on a level surface. Slowly remove chest from the cabinet.



3. LOCATE COMPONENTS

Tool chest components located in cabinet bottom drawer.




4. FIT SIDE PANEL

Fit side panel to the side of cabinet



5. SCREW IN SIDE PANEL

Use a phillips screwdriver to screw in panel screws.

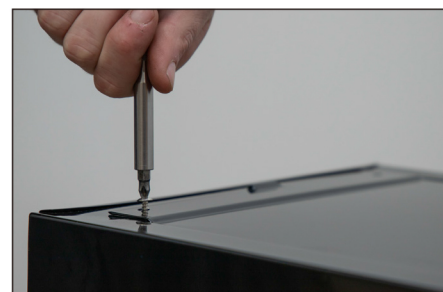

6. SIDE PANEL FITTED



7. ATTACH THE WHEELS

Push in wheel as shown below.




8. WHEEL SLOT



9. ATTACH SIDE HANDLE

Holding the handle, insert into the slots as shown below.

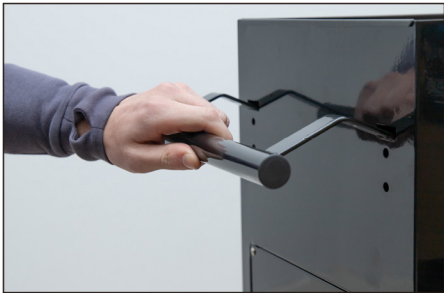

10. SIDE HANDLE IN PLACE



11. SECURE SIDE HANDLE

Using a phillips screwdriver, secure the handle by screwing in all 4 screws.



12. SIDE HANDLE FULLY FITTED.



13. THE UNIT COMES WITH 4 SIDE HOOKS



14. EACH HOOK CAN BE FITTED INDIVIDUALLY



15. MULTIPLE HOOK PLACEMENT SLOTS POSSIBLE



16. SECURE SIDE HANDLE

Using a phillips screwdriver, secure the handle by screwing in all 4 screws. Other Side as Same.

