


PRODUCT NAME: 1LT Pendant

Please consult your electrician for hanging fixture and wiring.

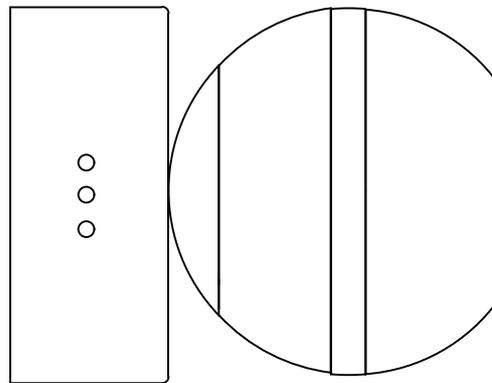

The fixture is designed to dim with a standard Triac forward phase dimmer. Dimming levels will vary by dimmer.

Below is a list of recommended dimmers:

Lutron MACL-153M

Lutron DVL-153P

Lutron SCL-153P

Leviton IPL06-10Z

Leviton 6674-POW

Due to inrush current wattage should not exceed 150 watts of product for a 600 watt dimmer.

WARNING: Wires need to be connected to driver found in canopy and should not be connected directly to power source or a short may occur.

Bulbs (Included):1*LED*6W


IMPORTANT: Turn off the power at the main fuse or circuit breaker box before starting installation



Bracket (A)




Mounting Screws(B)




Back plate(C)

Locate all hardware & components before discarding packaging

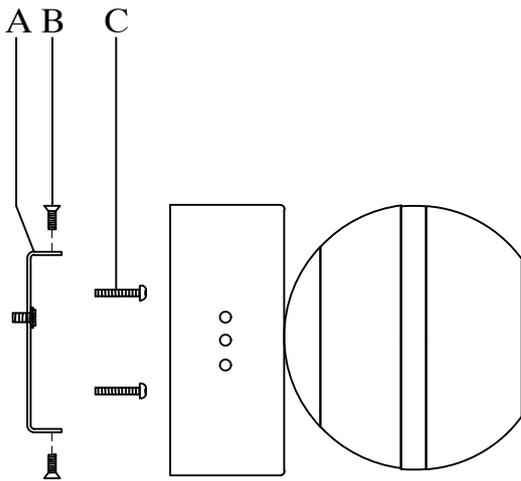


1.)

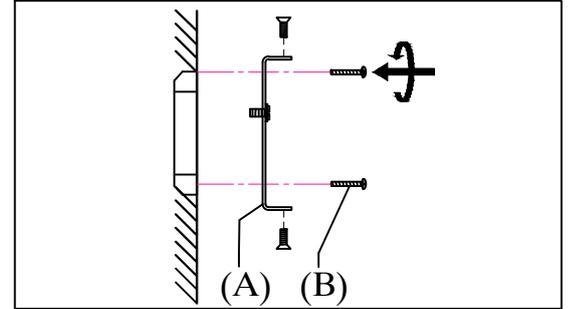


Step1 :Remove mounting bracket from fixture and install to electrical box.

2.)

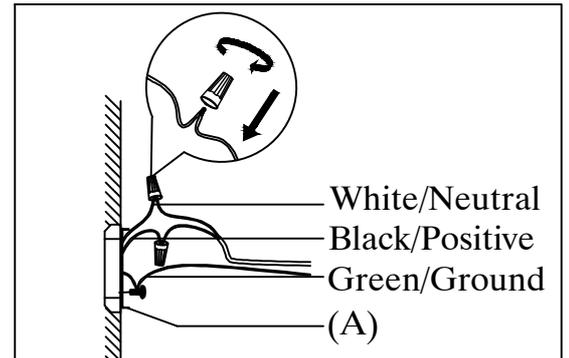

Step2 :Wire fixture to wires in outlet box. Green wire is for Ground.

3.)

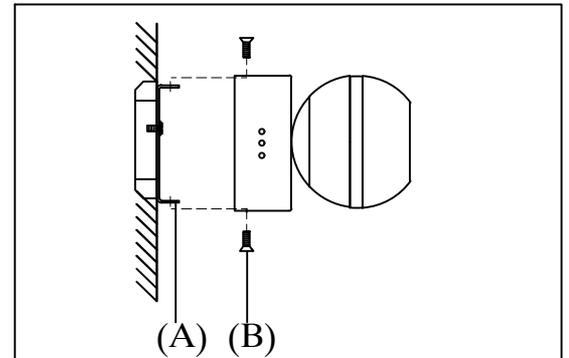

Step3 :Install fixture to bracket and tighten screws at the ends of the Back plate to secure.

Cleaning & Care:

Clean with soft cloth and a mild detergent.

Do not use abrasive cleaner.