



Wellworth® Classic | K-3531

Two-piece elongated toilet, 1.0 gpf

Features

- Elongated bowl offers added room and comfort
- Equipped with Sloan FLUSHMATE® – Sloan® Valve Company
- Polished Chrome trip lever
- 1.0 gpf (3.8 lpf)
- Left-hand trip lever



Sustainability



Available Colors/Finishes

Color tiles intended for reference only.

- | | |
|----|-------------|
| 0 | White |
| 96 | Biscuit |
| 7 | Black Black |



1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-11-2026 18:00 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

Accessibility standards may require controls to be located on the open side of the toilet.

Plumbing codes may require elongated toilets and elongated, open-front seats in public bathrooms.

This product should be used with a WaterSense labeled counterpart with the same rated flush volume to ensure the complete system meets the requirements of this specification for water efficiency and performance.



ASME A112.19.2/CSA B45.1

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

Recommended Products/Accessories

K-5588 Deodorizing elongated toilet seat

K-5420 Low-profile toilet bolt caps

K-4108 Elongated bidet toilet seat with remote control

Warranty

See website for detailed warranty information.

KOHLER® One-Year Limited Warranty

Technical Information

Installation Type:	Floor-mount
Rough-in:	Standard 12" (305mm)
Flush Type:	Pressure Lite
Flush Rate:	1.0 gpf (3.8 lpf)
Bowl Shape:	Elongated
Seat-Mounting Holes:	5-1/2" (140 mm)
Waste Outlet:	Floor
Trapway Size:	2-1/4" (57 mm)
Trapway Type:	Exposed
Water Surface Size:	11-1/2" x 9-1/2" (292 mm x 241 mm)
Rim to Water Surface:	5-5/8" (143 mm)

Included Combo Skus

- K-4303 Elongated toilet bowl
- K-4484 Toilet tank, 1.0 gpf




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-11-2026 18:00 - US-CA

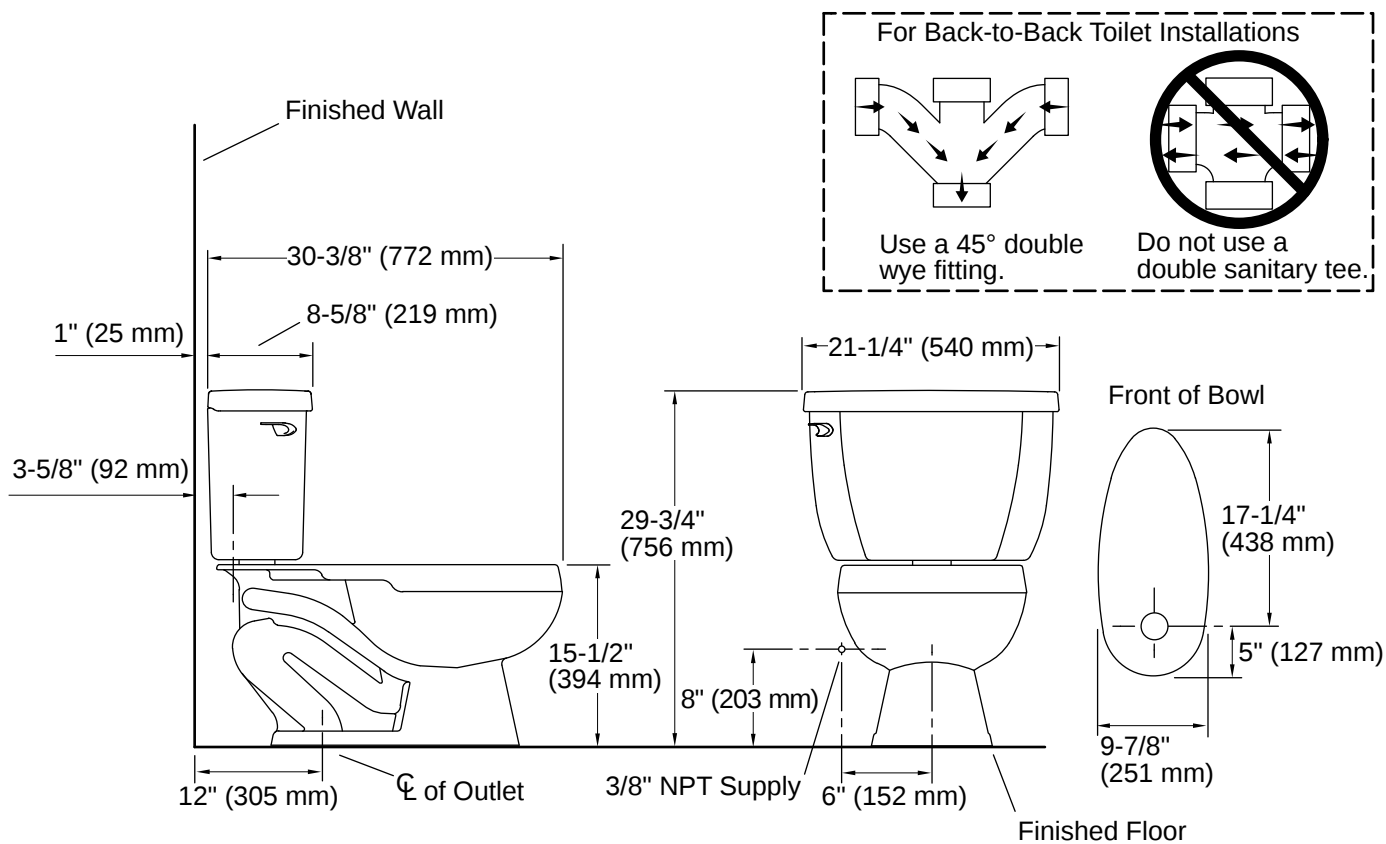

Installation

- Seat and supply line sold separately
- Standard 12" (305 mm) rough-in

Installation Notes

Install this product according to the installation instructions.

For back-to-back toilet installations: Use only a 45° double wye fitting.

Product dimensions are nominal and may vary per ASME A112.19.2 tolerances.



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-11-2026 18:00 - US-CA