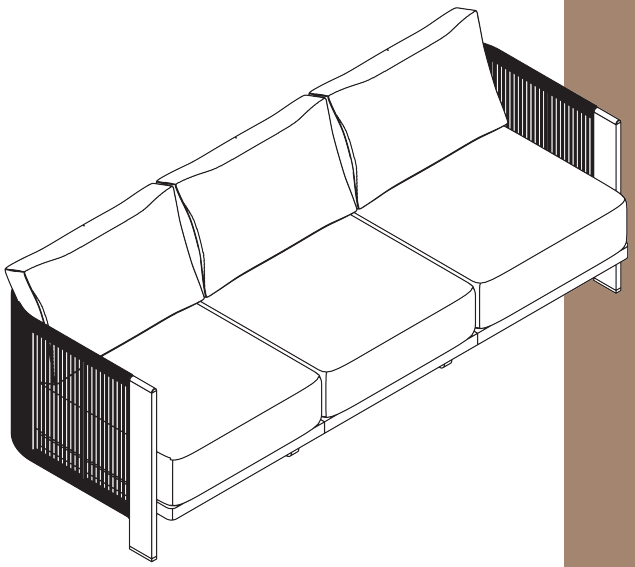
# 3-SEAT SOFA

Instruction Manual



- Excellent weather resistance
- Easy to clean and maintain

Instruction Manual

**ASSEMBLY INSTRUCTIONS:**

·Our clear, easy-to-follow, step-by-step instructions will guide you through the project from start to finish.

·Do not skip any steps. It is of utmost importance to assemble all of the parts according to the directions.

·Item identification: For ease of identification, all parts are labeled to correspond to the step number in which the part is used.

**IMPORTANT:**

·Read following instructions carefully before using the sofa.

·Be aware that some parts are heavy and have sharp edges.

·Do not overtighten screws (Insert all screws before tighten screws).

·Firmly secure all bolts, screws and nuts before use.

·Please do not exceed the weight limitations of this item.

·Reconfirm that all bolts, screws, and nuts are secure every 90 days.

**CARE &SAFETY**

·Always use on firm level ground.

·Keep all children and pets away from assembly area. Children and pets should be supervised while the product is being assembled.

·The assembled product should be located at least 6 feet (2m) from any obstruction such as fence, garage, house, overhanging branches, laundry lines or electrical wires.

·Do not use or store this item in the proximity of open flame or flammable/-combustible chemicals.

·In case of fire, do not attempt to extinguish any burning polypropylene with water.

·Be very careful when folding chair to avoid smashing your hands or fingers.

·Please contact Customer Service if you have any problems or discover any missing parts.

# Care & Maintenance



Do not clean furniture with harsh cleansers or polish, avoid using steel wool to clean the furniture.



To obtain the longest lifespan of your outdoor products, minimizing exposure to direct sunlight is recommended.



Children should not climb or jump on the furniture.



To obtain the longest lifespan of your outdoor products, avoid extended and lengthy exposure to rain and snow.Whenever possible cover the product and /or place under patio or awnings.



Stains may be removed with mild soap solution and damp cloth.



Keep away from sources of ignition.









Dust and pick-up spills using a clean,non-colored, lint-free cloth.






Do not use sharp objects on the product surface.

# ASSEMBLY PARTS

| | |
|---|---|
| A  | B  |
| Right Armrest: 1 pc | Left Armrest: 1 pc |
| C  | D  |
| Right Rear Leg Tube: 1pc | Left Rear Leg Tube: 1 pc |
| E  | F  |
| Back Panel: 2 pcs | Right Seat Panel: 1 pc |
| G  | H  |
| Mid Seat Panel: 1 pc | Left Seat Panel: 1 pc |
| I  | J  |
| Mid Leg: 2 pcs | Connector: 3 pcs |


# ASSEMBLY PARTS

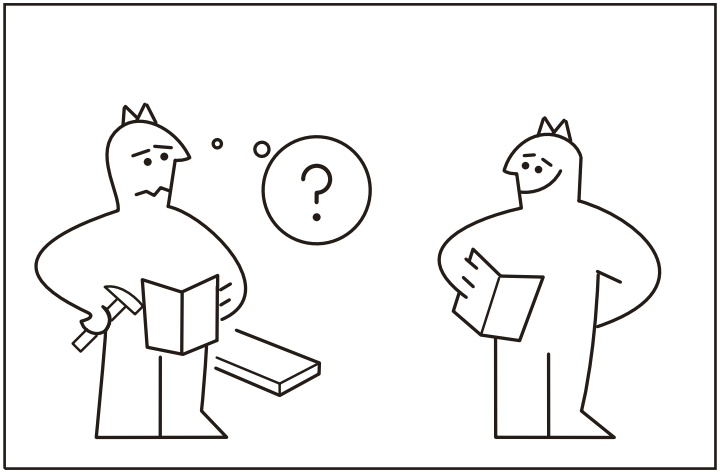
| K | L |
|---|---|
|  |  |
| Seat Cushion: 2 pcs | Mid Seat Cushion: 1 pc |

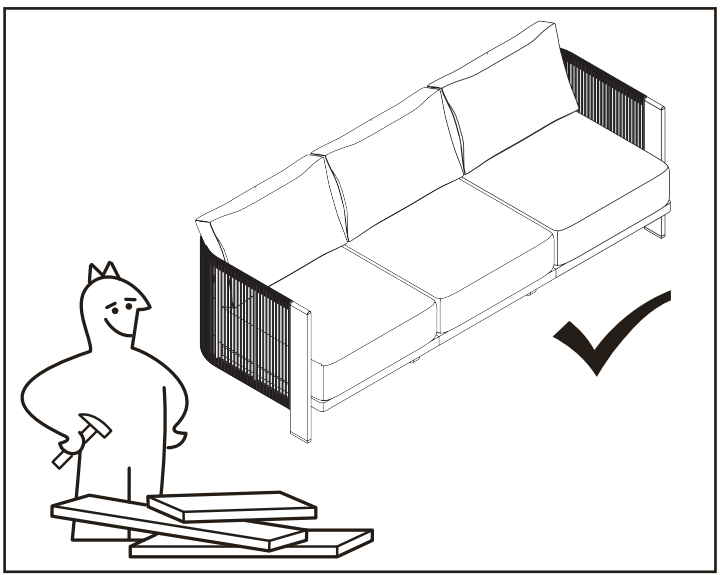
| M |
|---|
|  |
| Back Cushion: 3 pcs |

| ① | ② |
|---|---|
|  |  |
| Allen Wrench: 1 pc | M6*20 Screw: 10 pcs |

| ③ | ④ |
|---|---|
|  |  |
| M6*35 Screw: 16 pcs | M6*55 Screw: 4 pcs |

| ⑤ | ⑥ | ⑦ |
|---|---|---|
|  |  |  |
| Washer: 8 pcs | Nut: 4 pcs | Wrench: 1 pc |




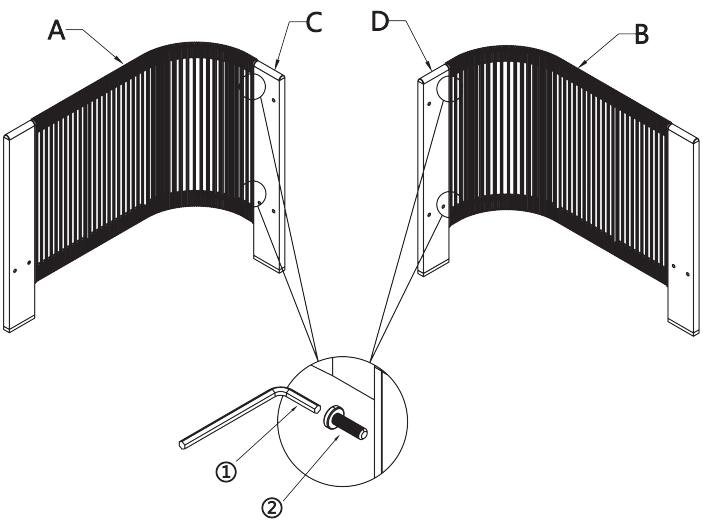



# Step 1

Connect the (C)Right rear leg tube to the (A)Right armrest, then insert the ②M6*20 screws into the side hole and tighten them by ① Allen wrench.


Connect the (D)Left rear leg tube to the (B)Left armrest, then insert the ②M6*20 screws into the side hole and tighten them by ①Allen wrench.




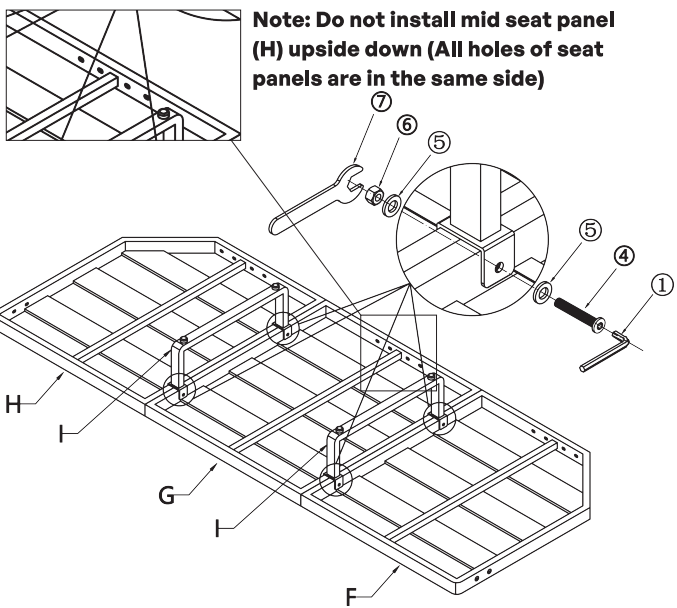



# Step 2

Place the (H)Left seat panel, (G)Mid seat panel and (F)Right seat panel in the same direction, then install the (I)Mid leg onto the seat panels and align the holes. Then put (⑤)Washers on both sides and insert the (④)M6*55 screw and cover the (⑥)Nut on the other side, then tighten them 1/2 tight with the (①)Allen wrench and (⑦) Wrench.




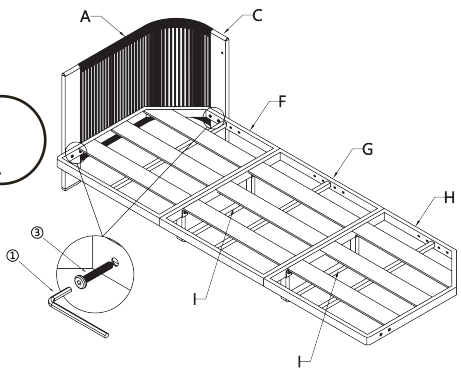



# Step 3


Connect the the right armrest section to (F)Right seat panel and insert the ③M6*35 screws into the holes of the right front leg tube and (C)Right rear leg tube, then tighten the screws.

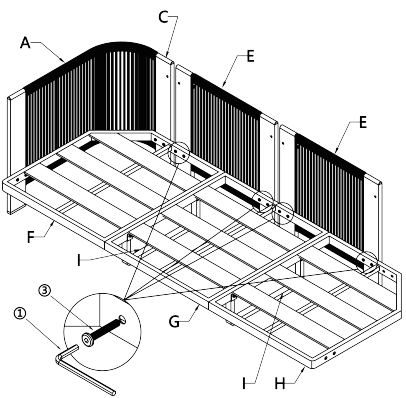



# Step 4


Connect (E)Back panels to the seat panels. Align the holes and insert the ③M6*35 screws,then tighten the screws.

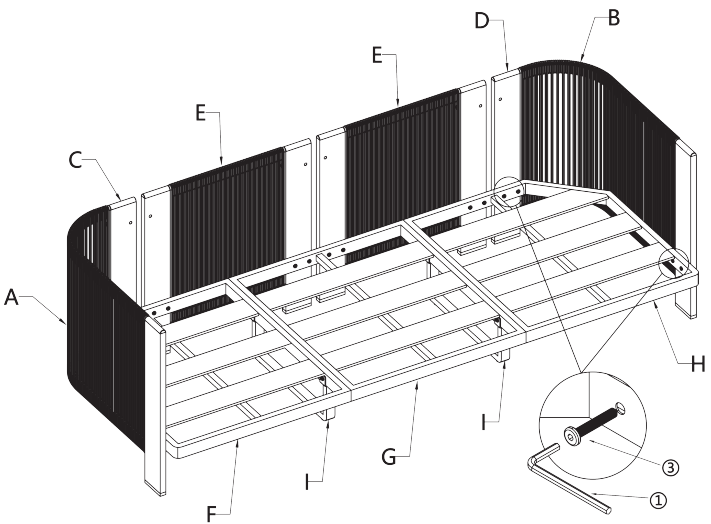


# Step 5


Connect the left armrest section to the (H)Left seat panel and insert the ③M6*35 screws into the holes of the left front leg tube and (D)Left rear leg tube, then tighten the screws.




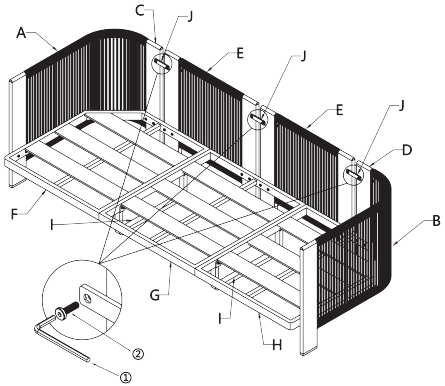



# Step 6

Contect the right and left armrests with the back panels by (J)Connectors. Align the holes, then insert ② M6*20 screws and tighten these screws.









# Step 7

Place these seat cushions and back cushions.




**PAY ATTENTION**
**DO NOT EXCEED THE MAXIMUM LOAD OF 800LBS.**




**DONE!**

*Due to transportation, the cushion may be slightly compressed and the surface fabric may have creases. It will take time to recover, but gently tapping it can speed up the rebound.

# WARRANTY

3-Seat Sofa

**3-year** basic Warranty Program

- Offers a 3-year basic warranty on the entire sofa from the date of purchase against defects in material and workmanship. During this period we will repair and replace, at our discretion, the defective component.

- This warranty does not apply to improperly installed, handled, abused, damaged by user error, nor to any unit which has been repaired or altered by unauthorized repair companies.

- Under no circumstances will the customer entitled warranty to consequential or incidental damages. This limited 3-year basic warranty will only grant customers certain legal rights; customers may have other rights according to different state laws.

# HOW TO CONTACT US

*Step 1:*
**Log in to your account.**

*Step 2:*
Go to **Your Orders**.
Select the item you purchased from us.

*Step 3:*
Select **Contact seller.**

