




Product Installation Instructions

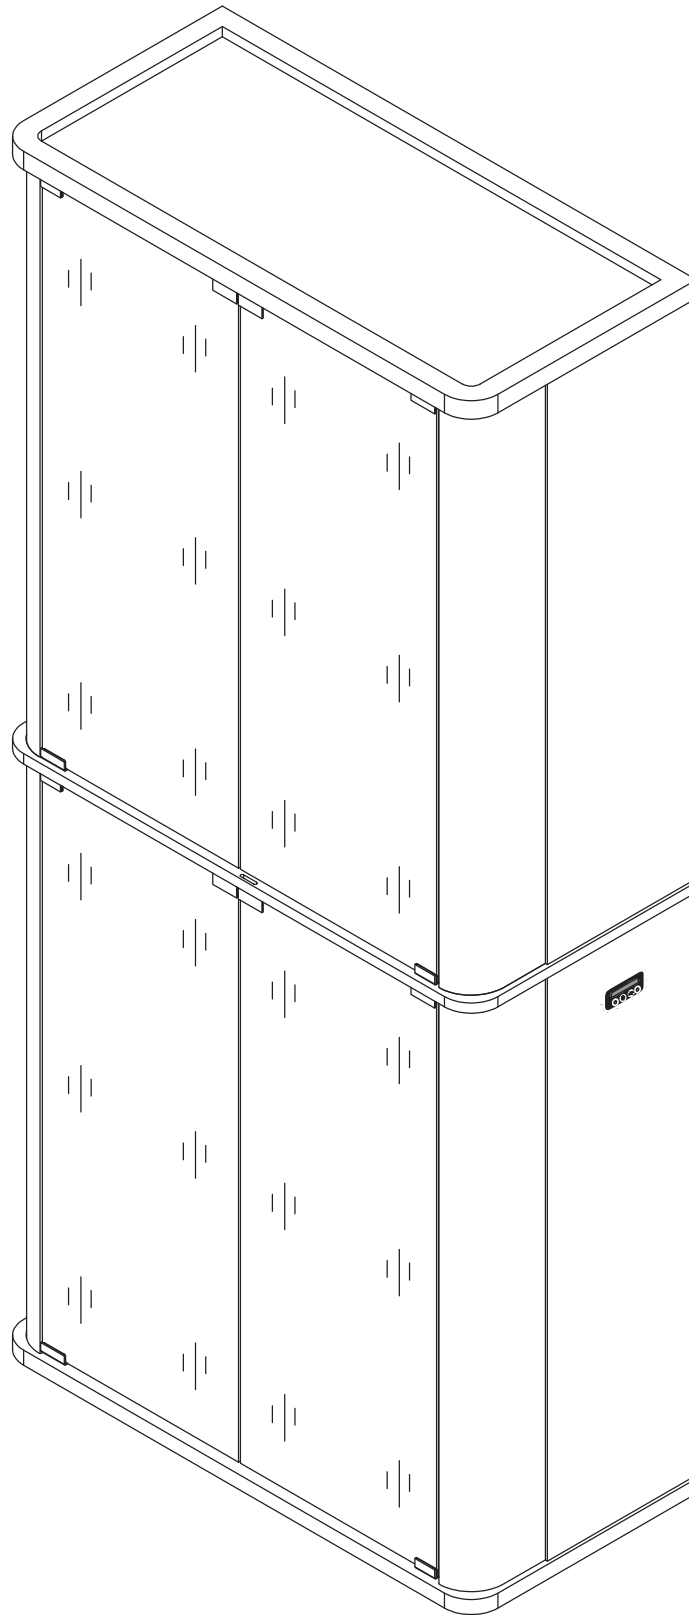


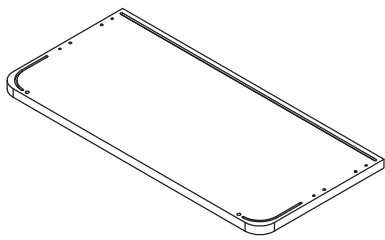


1x1

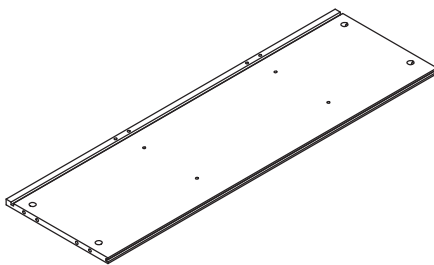


2x1

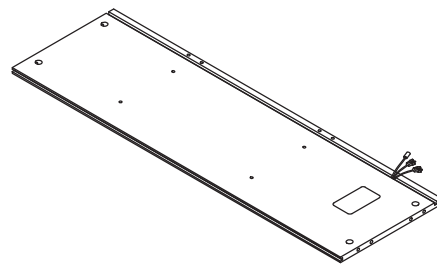


3x1



4x4




5x2




6x4




7x4

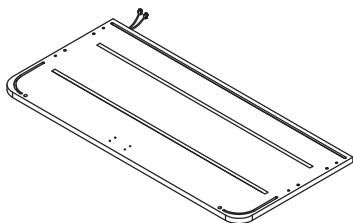


8x1




9x1

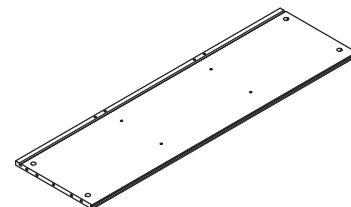


10x1

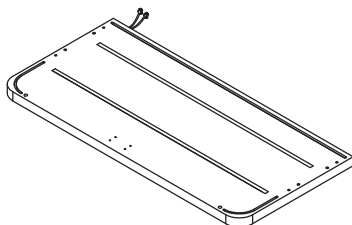

11x1



12x4











13x4




1

Accessories list


A		Two in one screw (6x28mm)	32pcs +3pcs
B		Two in one nut (10x12mm)	32pcs +3pcs
C		Wood chipping (6x30mm)	20pcs +4pcs
D		Non-slip pads (50x10)	6pcs
E		Rebound device & Screw (3x16mm)	8pcs +2pcs 2pcs
		Rubber ring	8pcs
		Iron sheet & Hinge	4pcs
F		Laminate support nail	8pcs
G		Glass clip	8pcs
H		Double door glass lock Key	1pcs +1pcs 1pcs
I		Fixing clip & screw (3x16mm)	20pcs +2pcs
J		Wire clamp	2pcs +2pcs
K	Anti Fall Hardware	 x2  x2  x2 (3. 5x14mm)  x2 (4x45mm)  x4	
L		Forked line	2pcs
N		module	1pcs
M		PVC	1pcs
		AC/DC Adapter (12V==3. 0A)	1pcs
 1pcs Double-head screwdriver, use as required 2			

Product structure decomposition

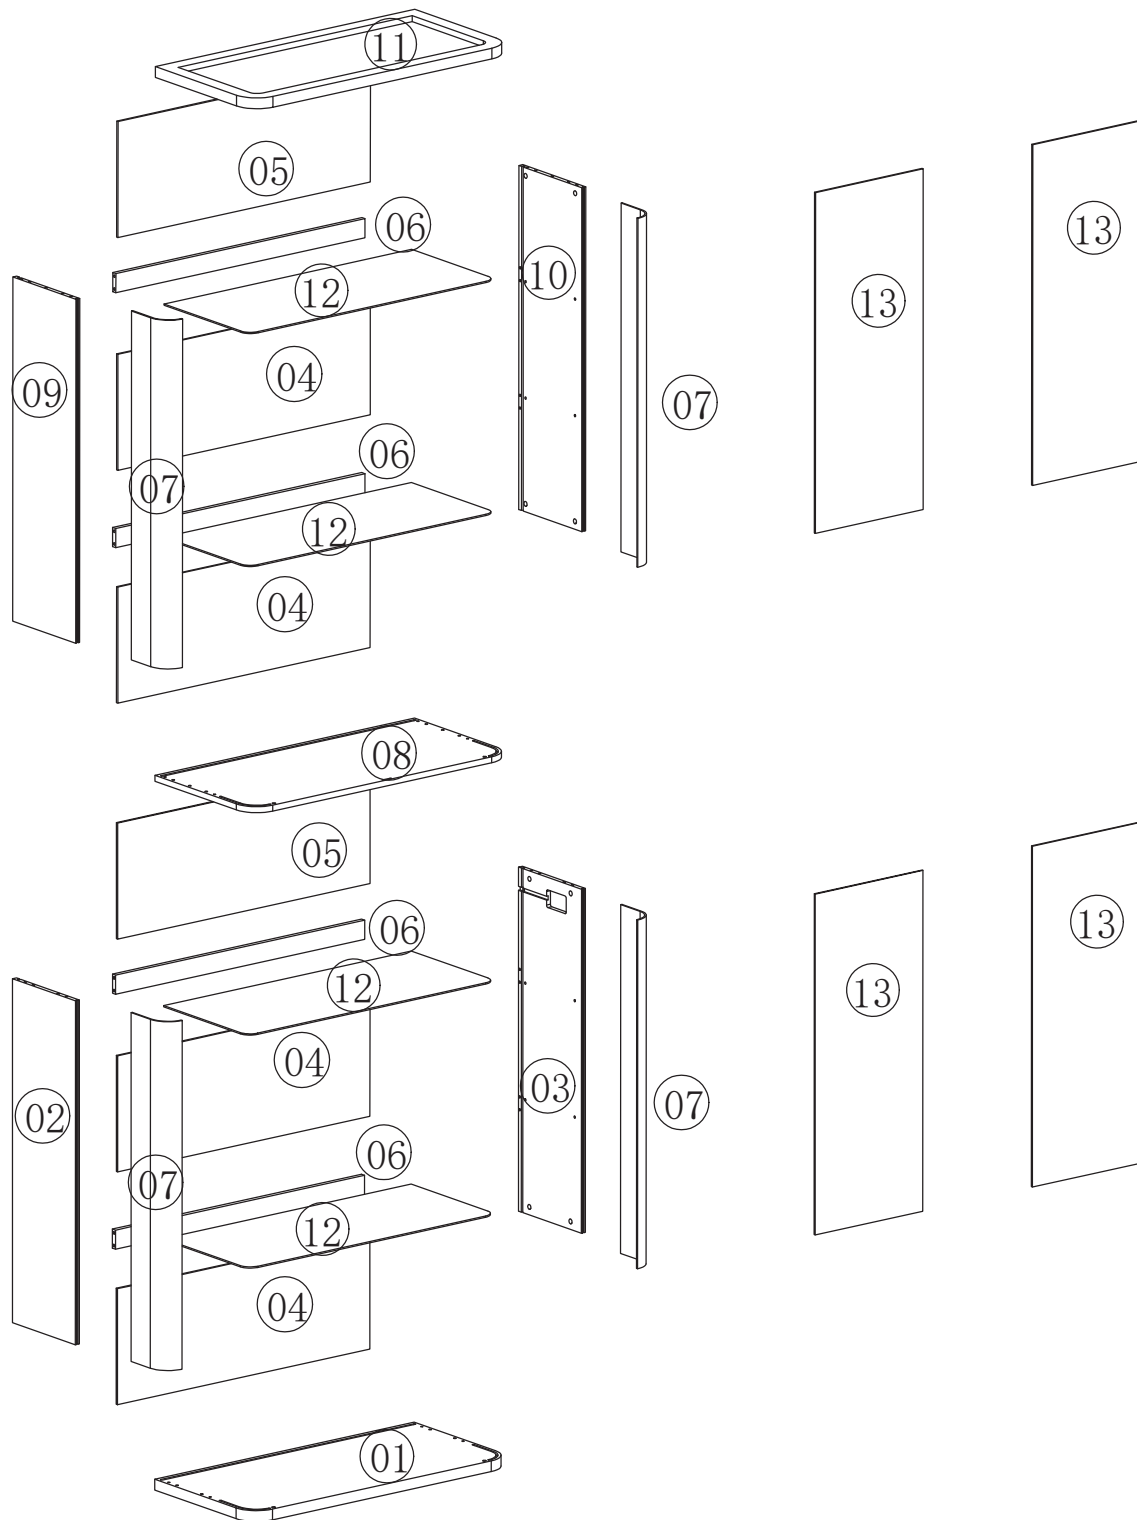


Use parts A and B



Step1

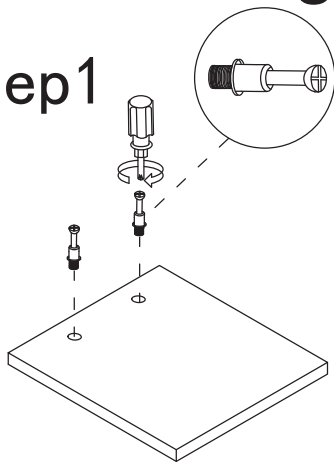

Step2

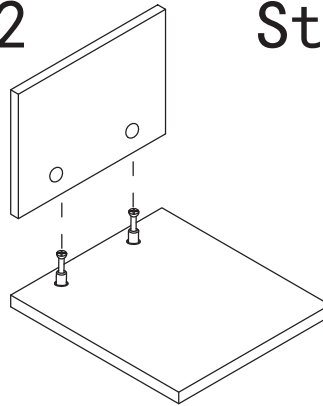


Step3

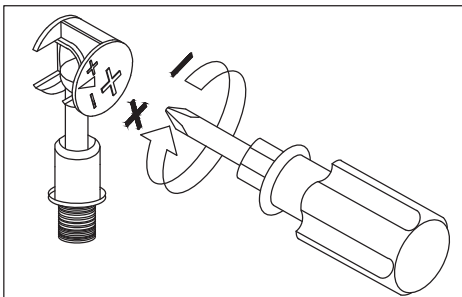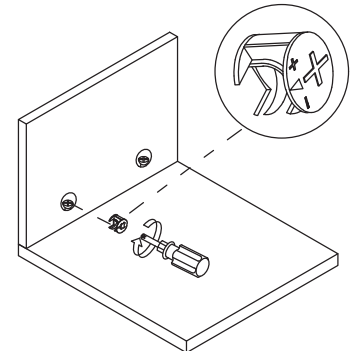


Use a screwdriver to lock in the direction of the "+" sign


Disassemble along the direction of "-" sign

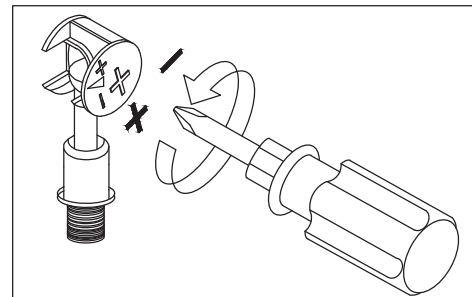

Step 1


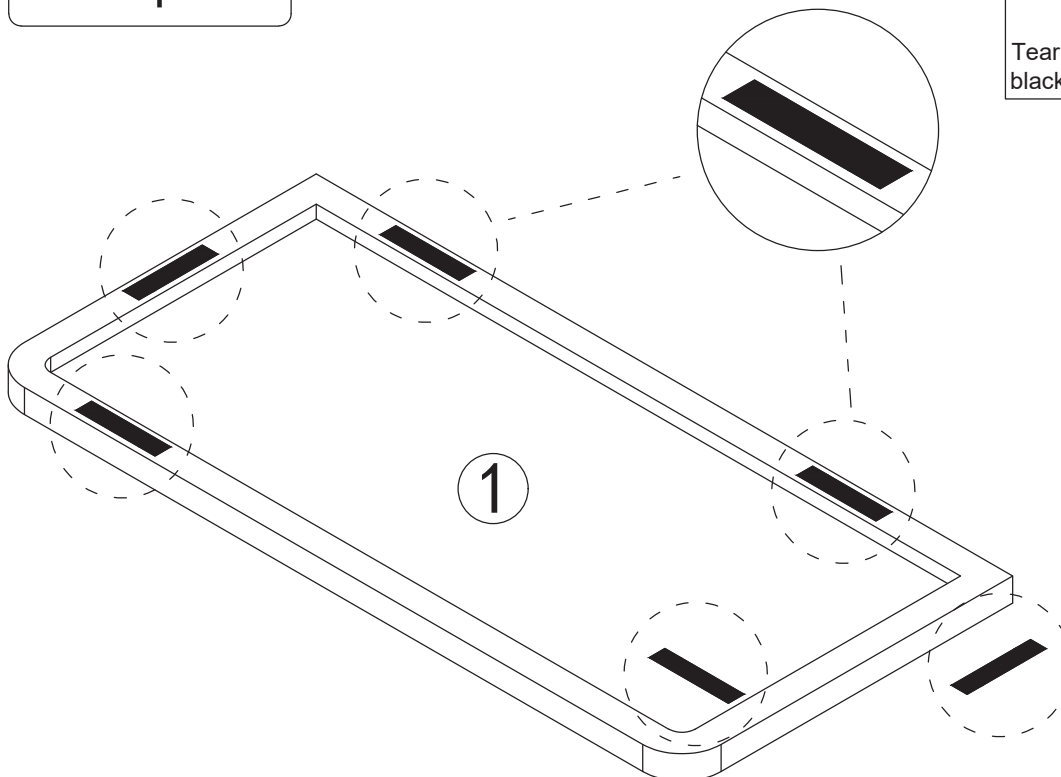


D



Tear off release paper and stick the black foot pad on the board


Step 2

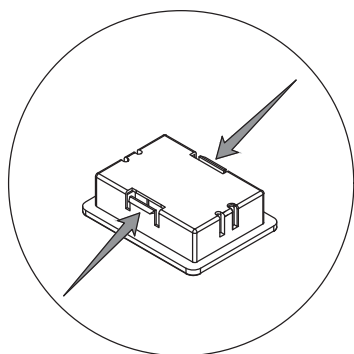

Note: Thread the wire through the hole first before installation.

Align the holes
Slap it down with your hand.


The two are pressed together on the rear protrusion of the box. The box will be detached from the board.

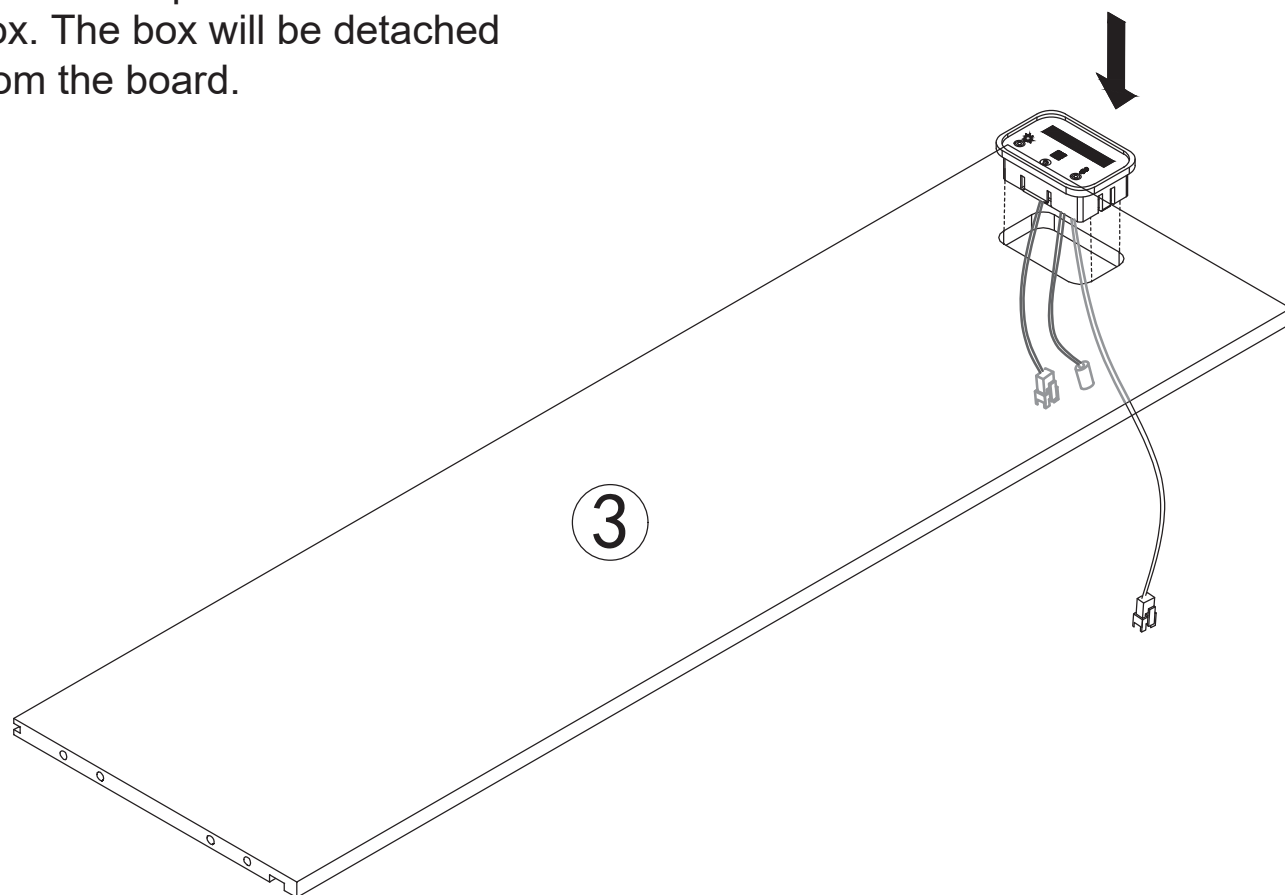




Step 3

Step 1 **Note: Align the direction of the wire with the slot.**



Step 2 **After placing the wire, seal the slot with PVC adhesive.**

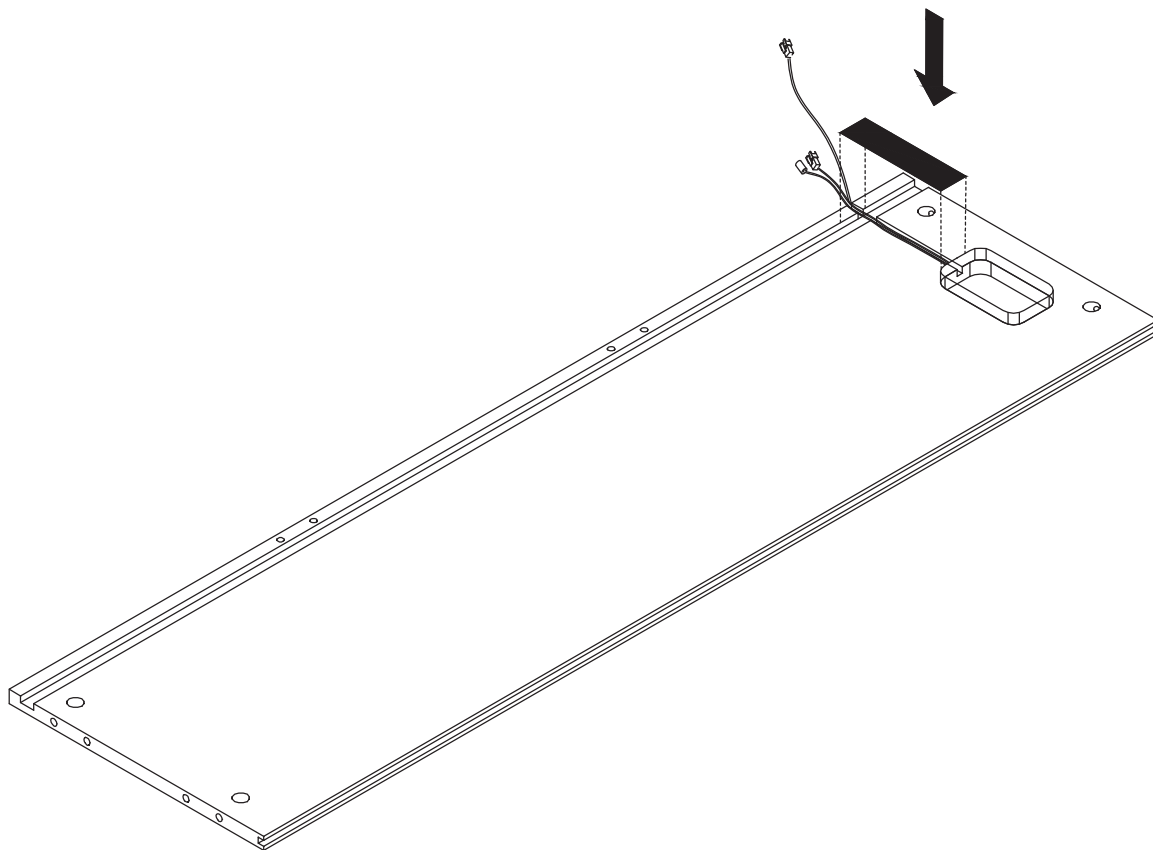

Step 4


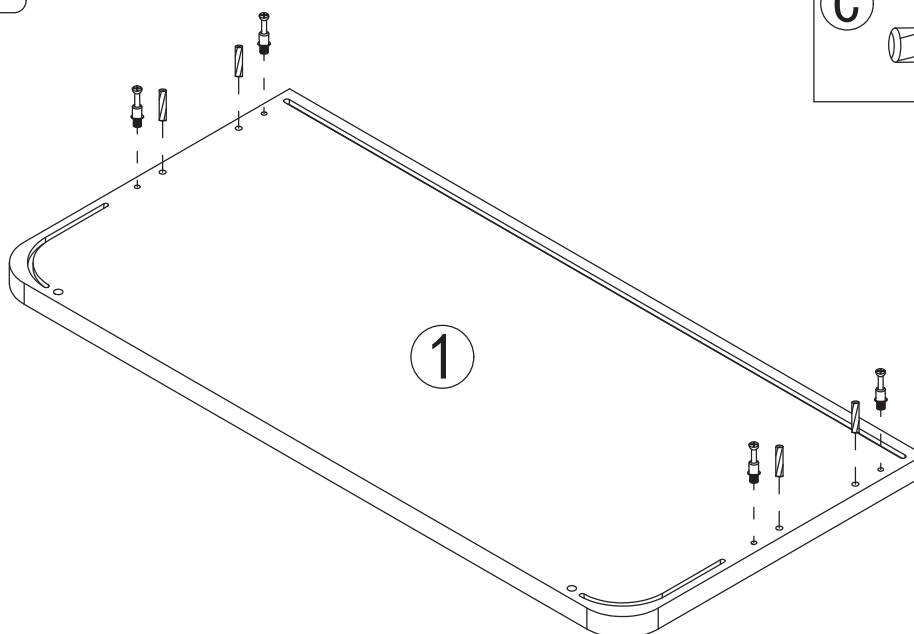


Step 5

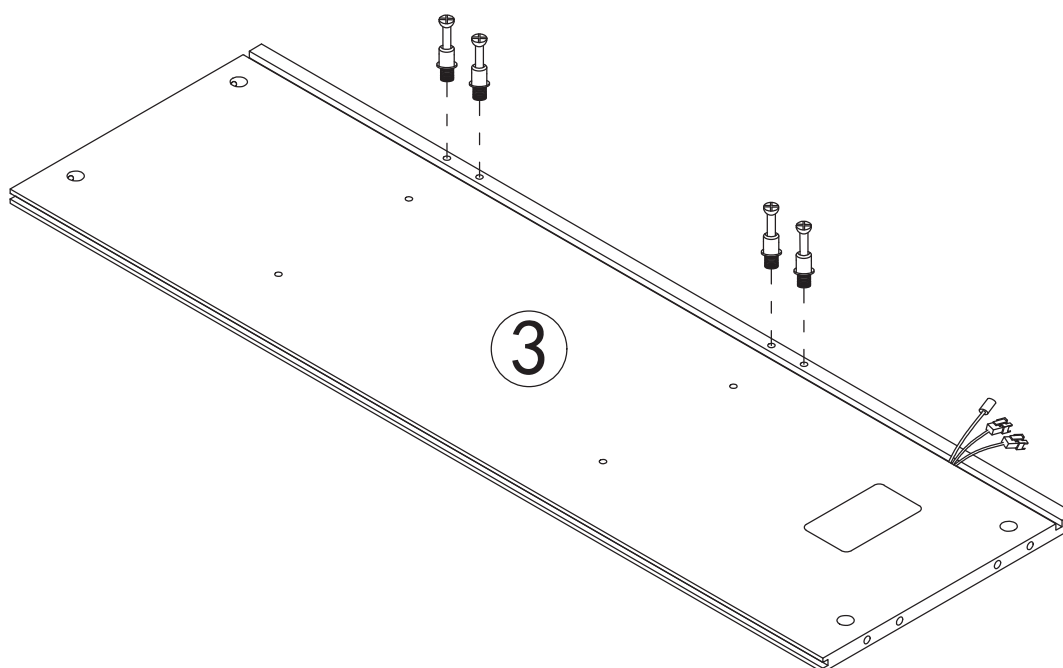


Step 6

A

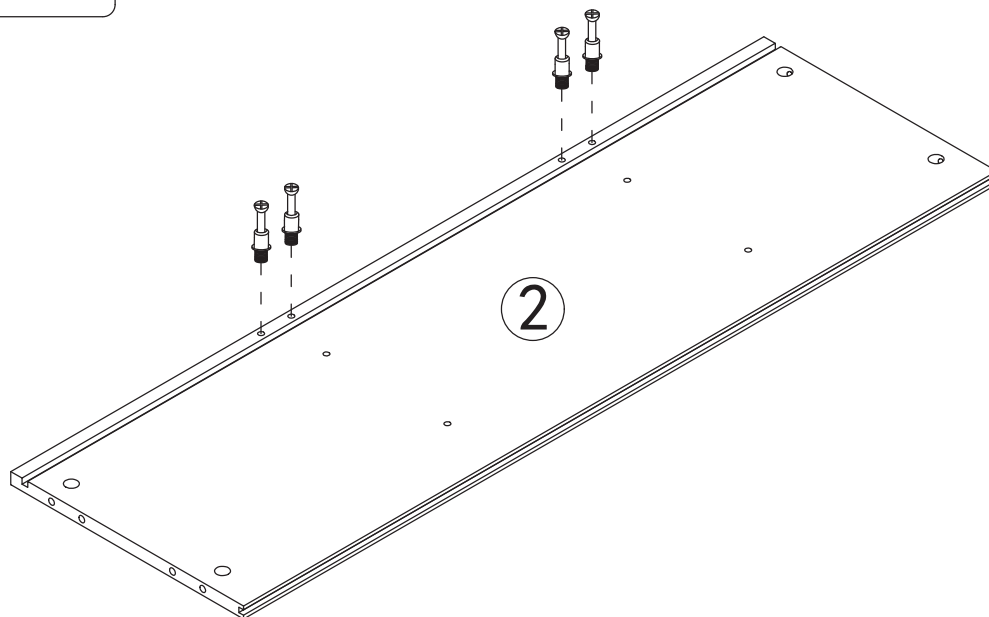

Step 7

B

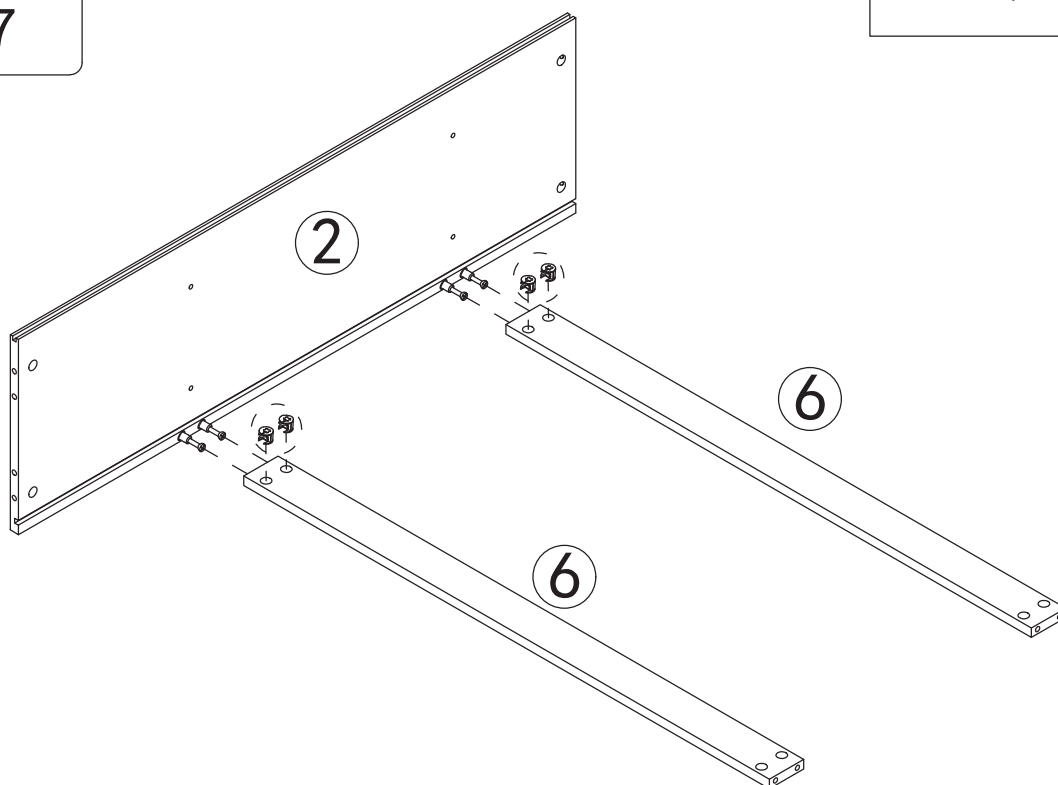


Step 8

(B)



x4

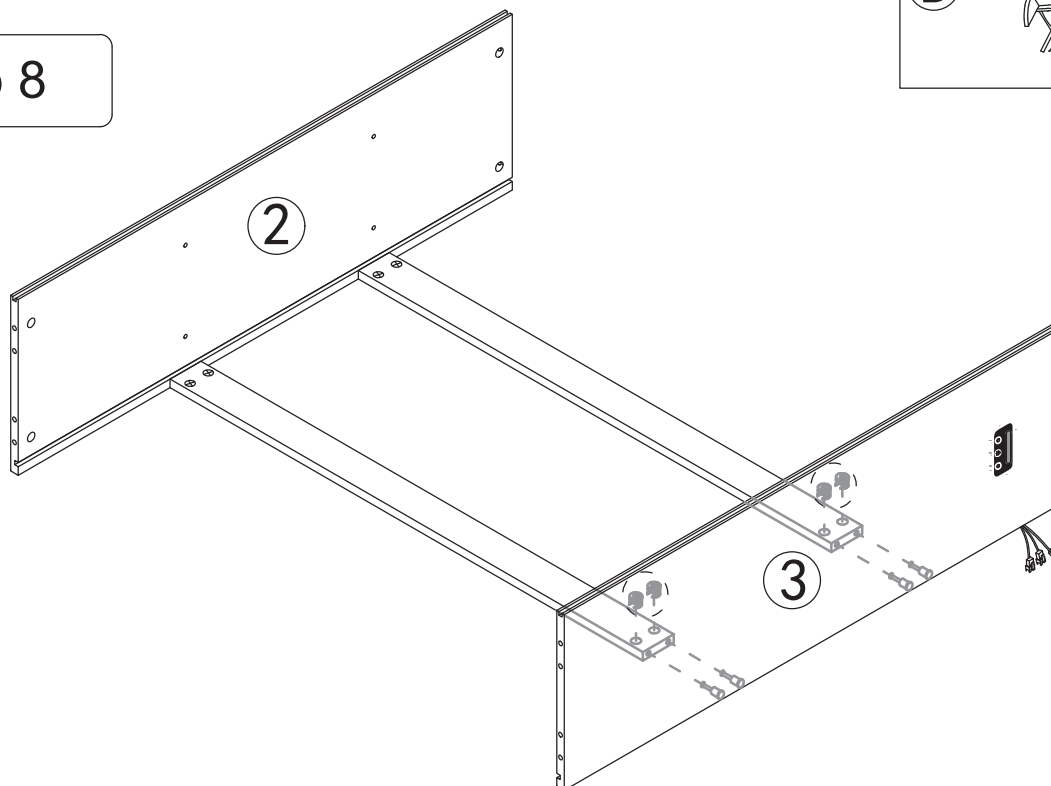


Step 9

(B)




x4

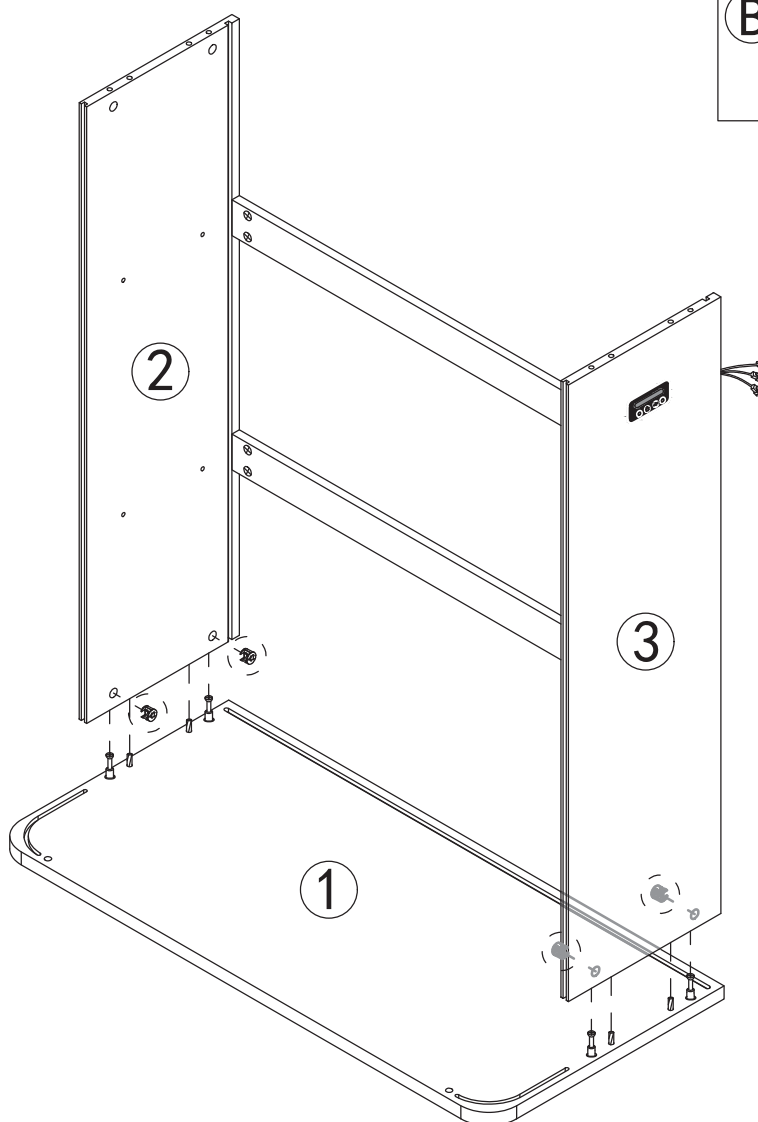




9

Step 10

C




x4

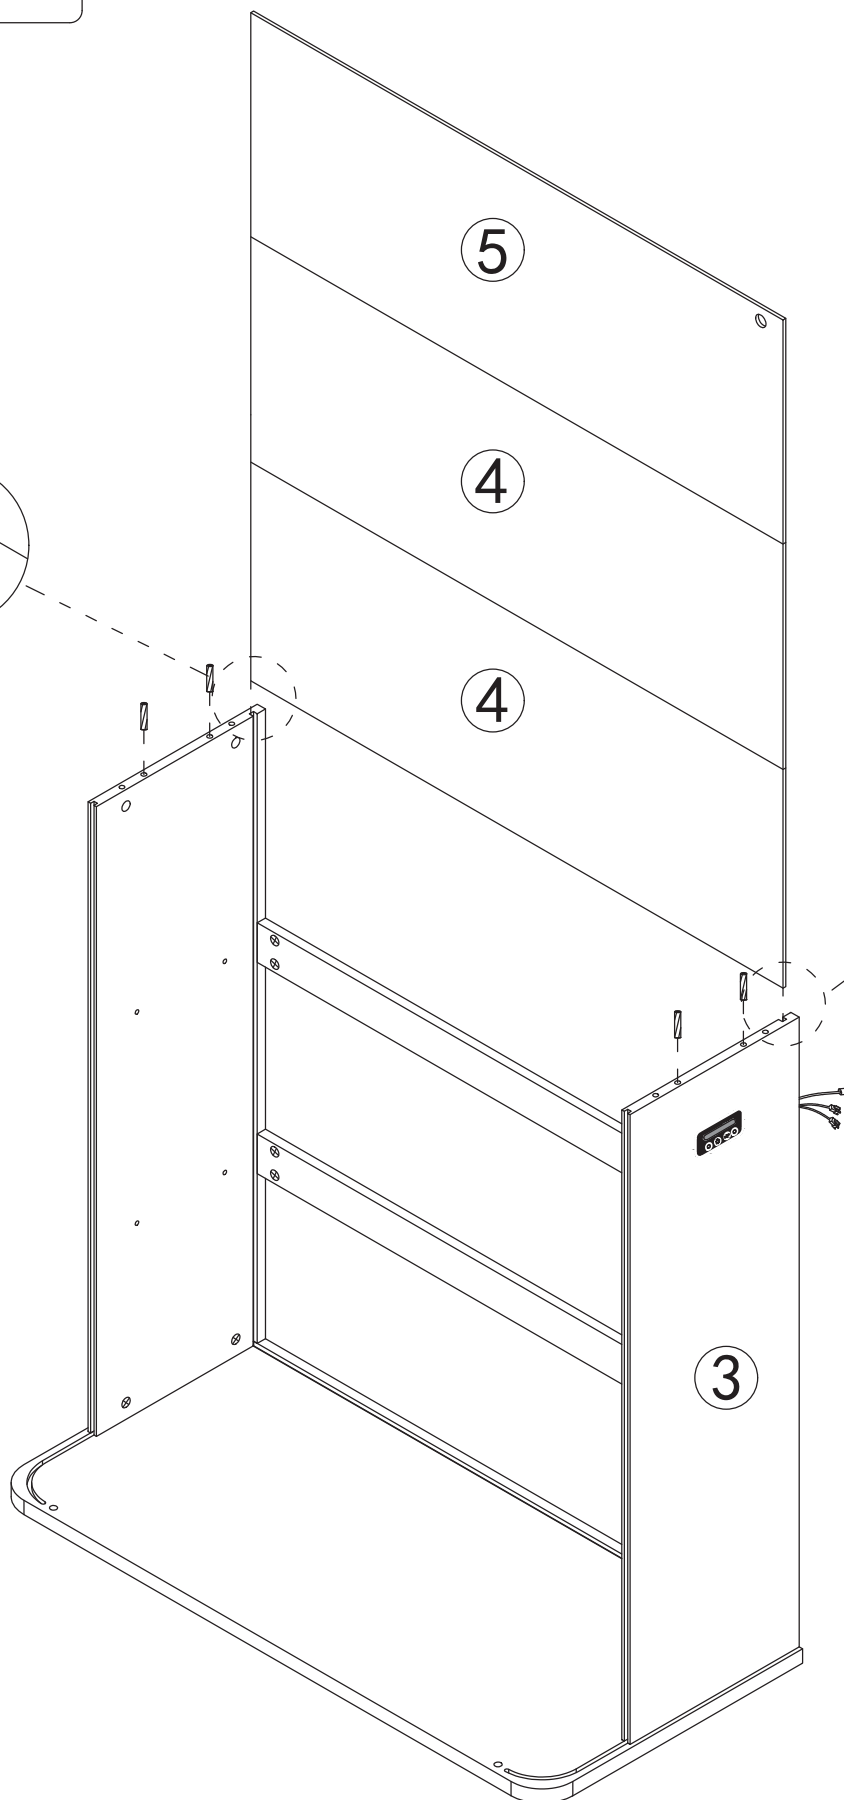


10

Step 11

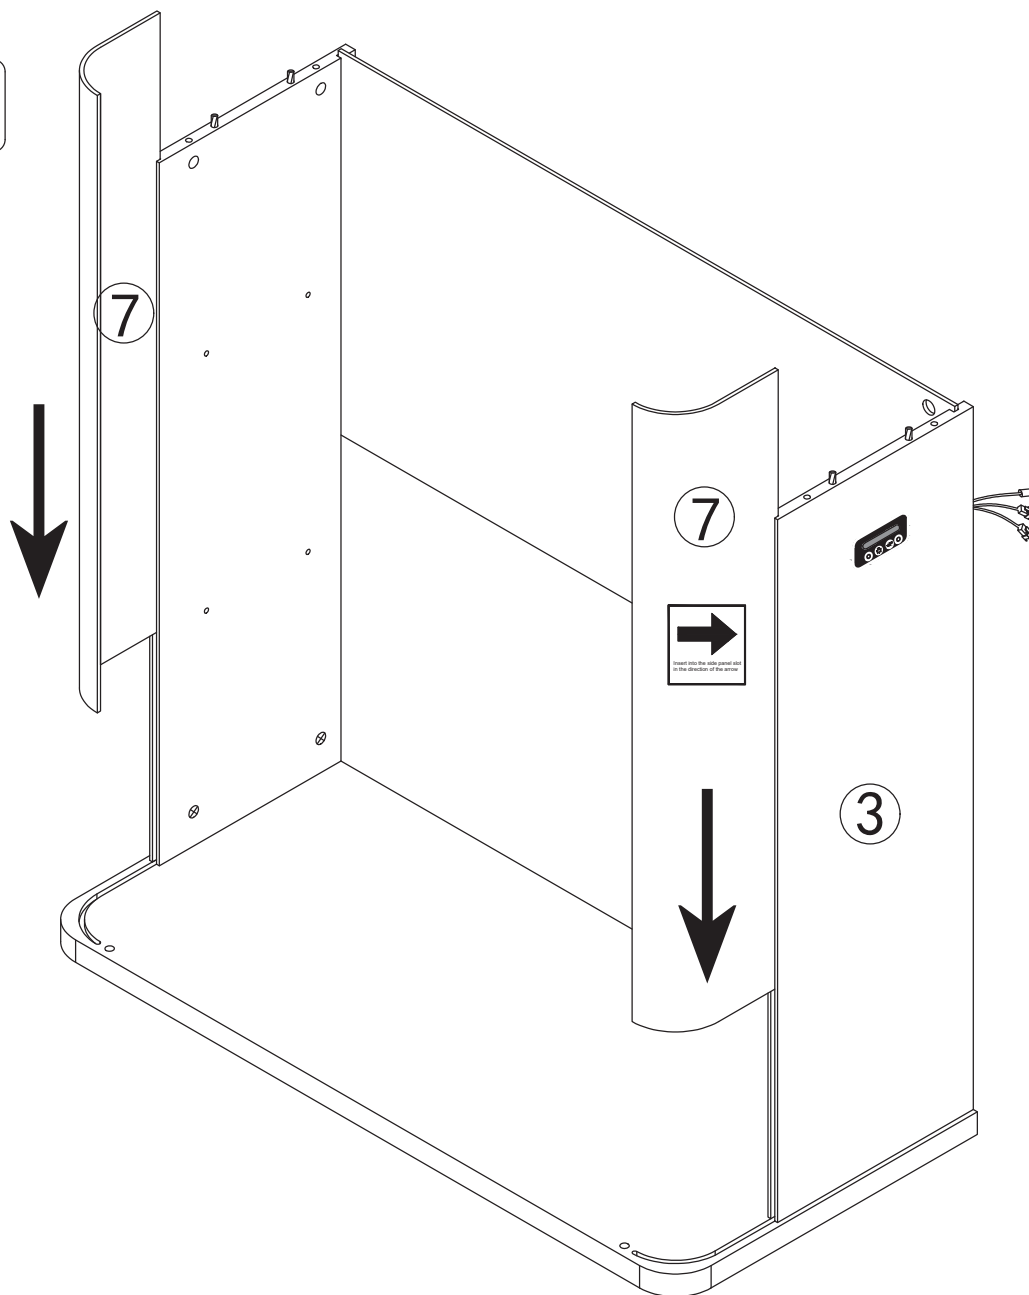

Step 12

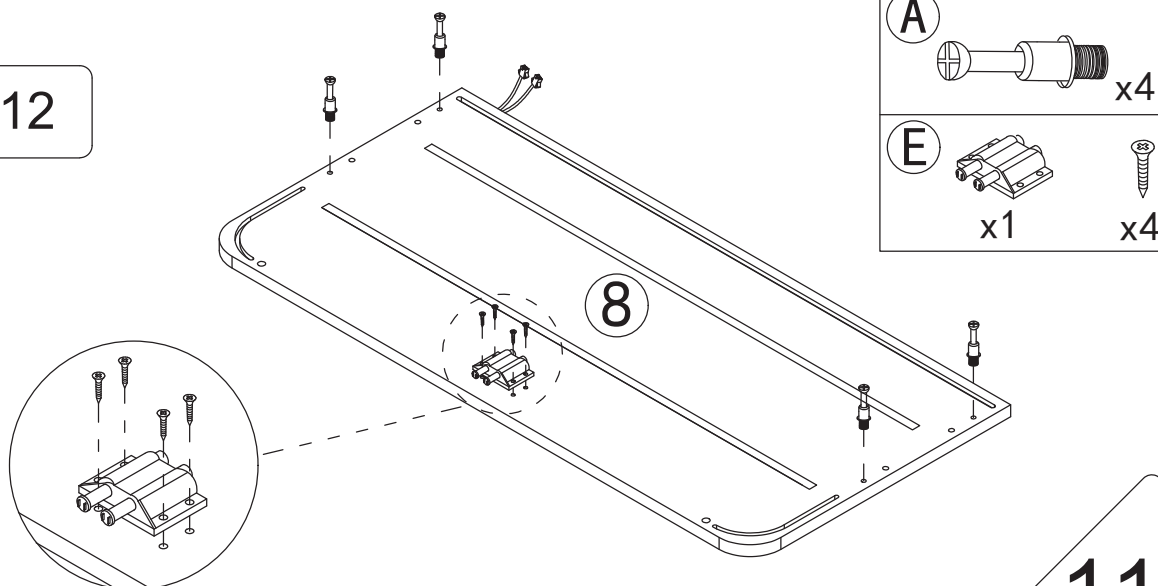


Step 13

B




x4

Note: thread the lamp wire through the hole in the back plate.


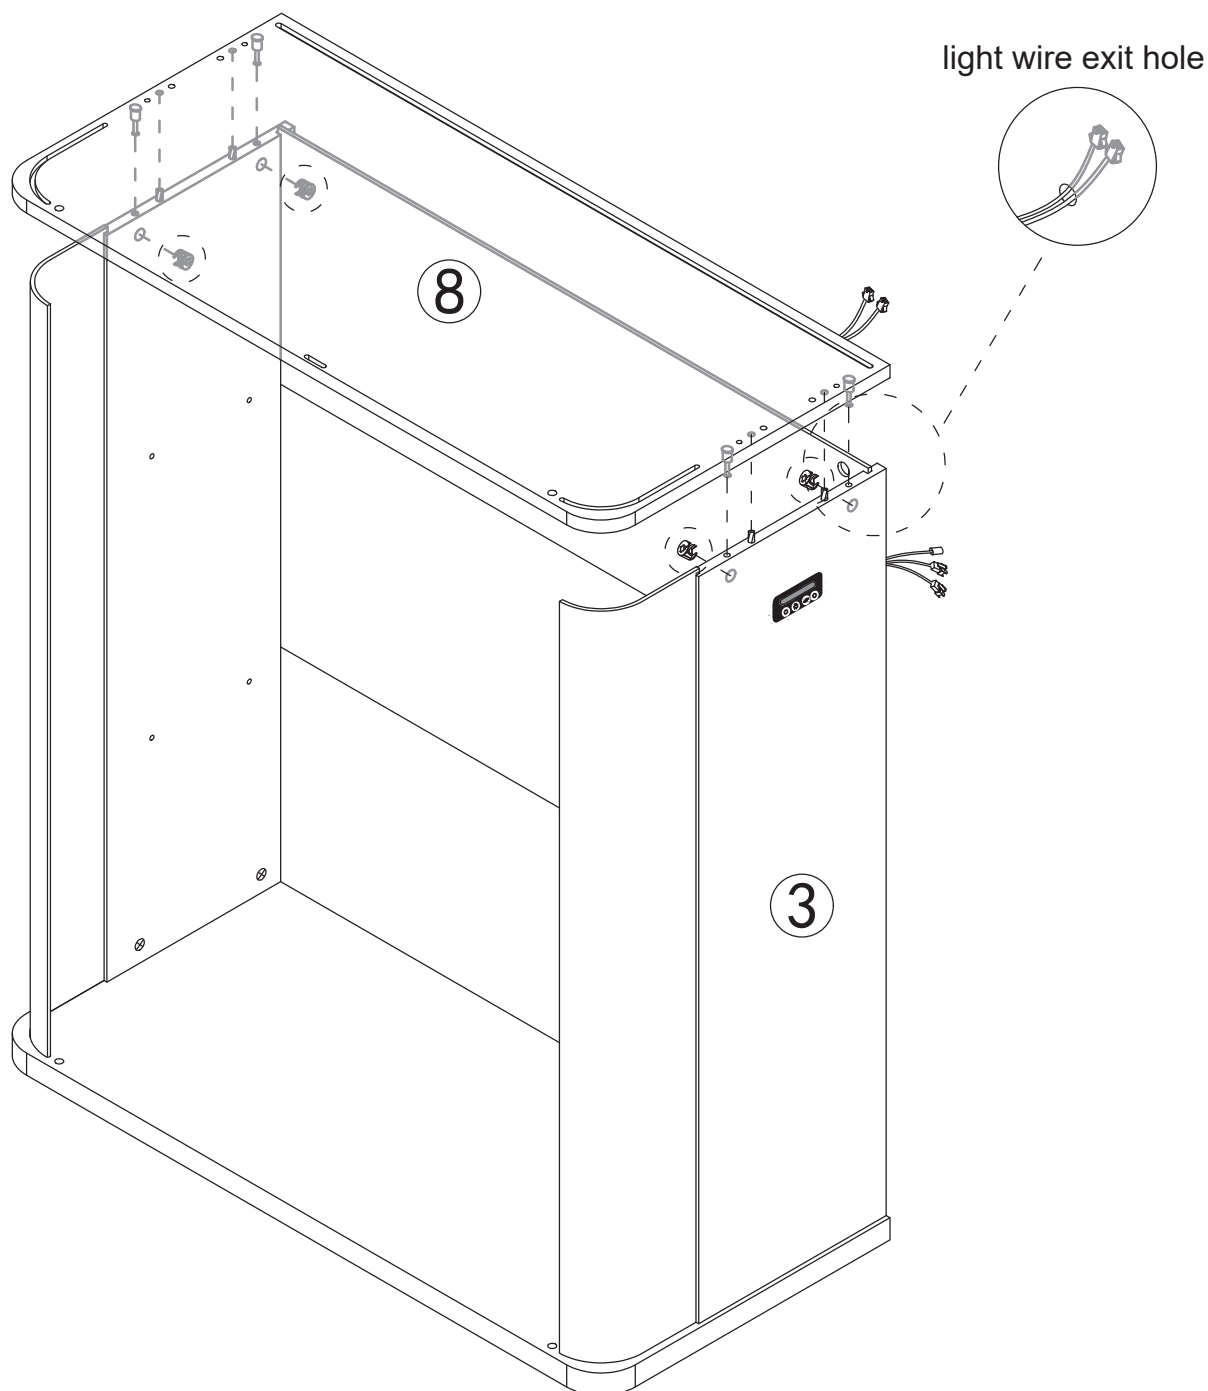


Step 14



A





C

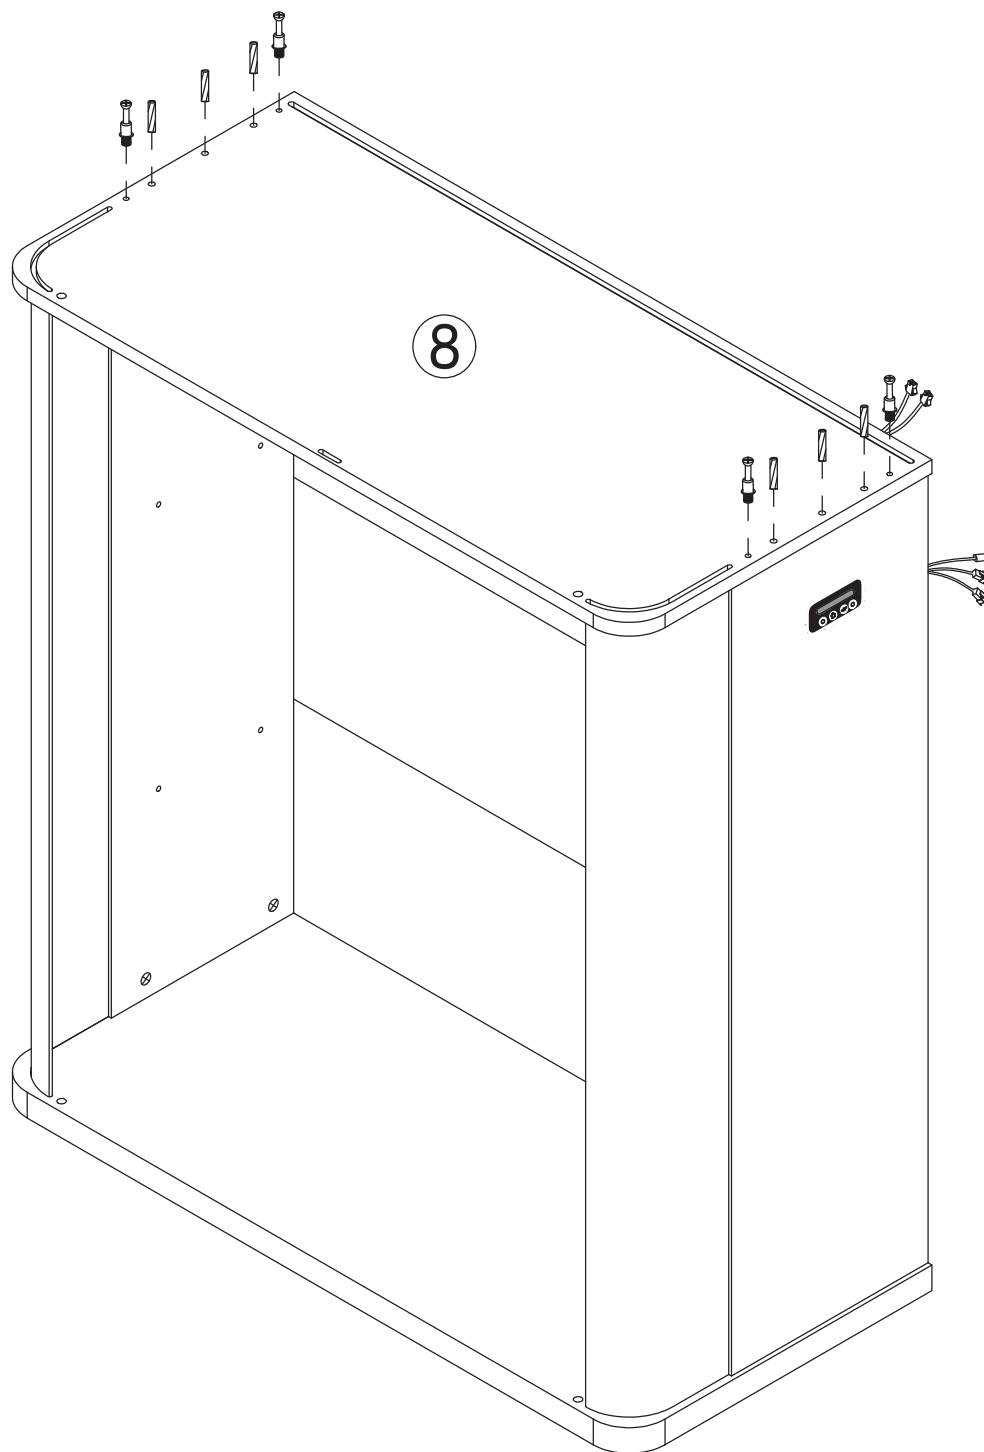

Step 15

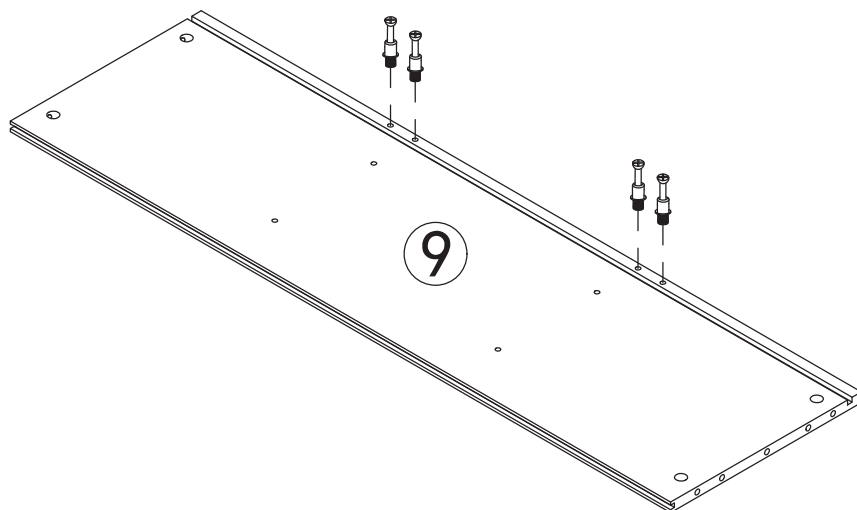

Step 16

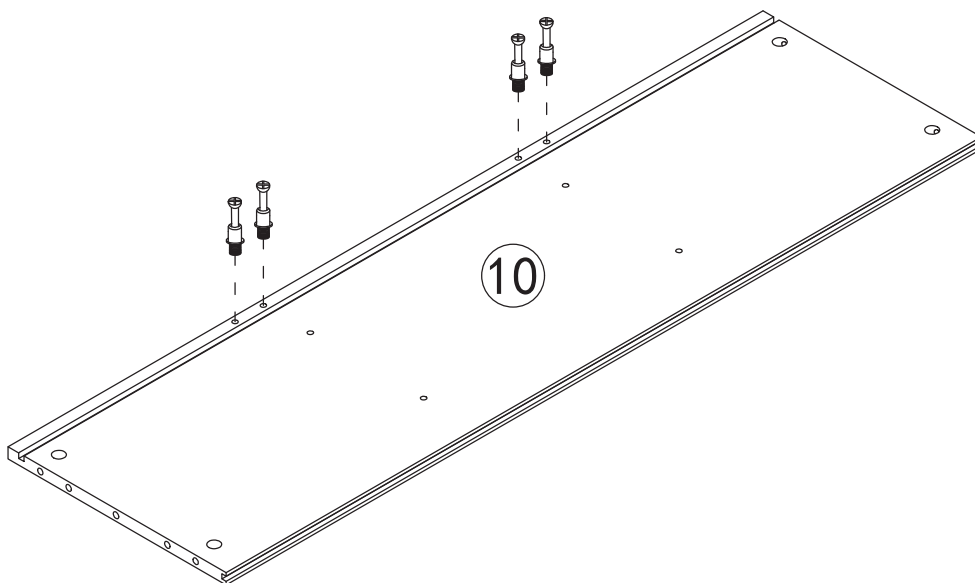


Step 17

B



x4

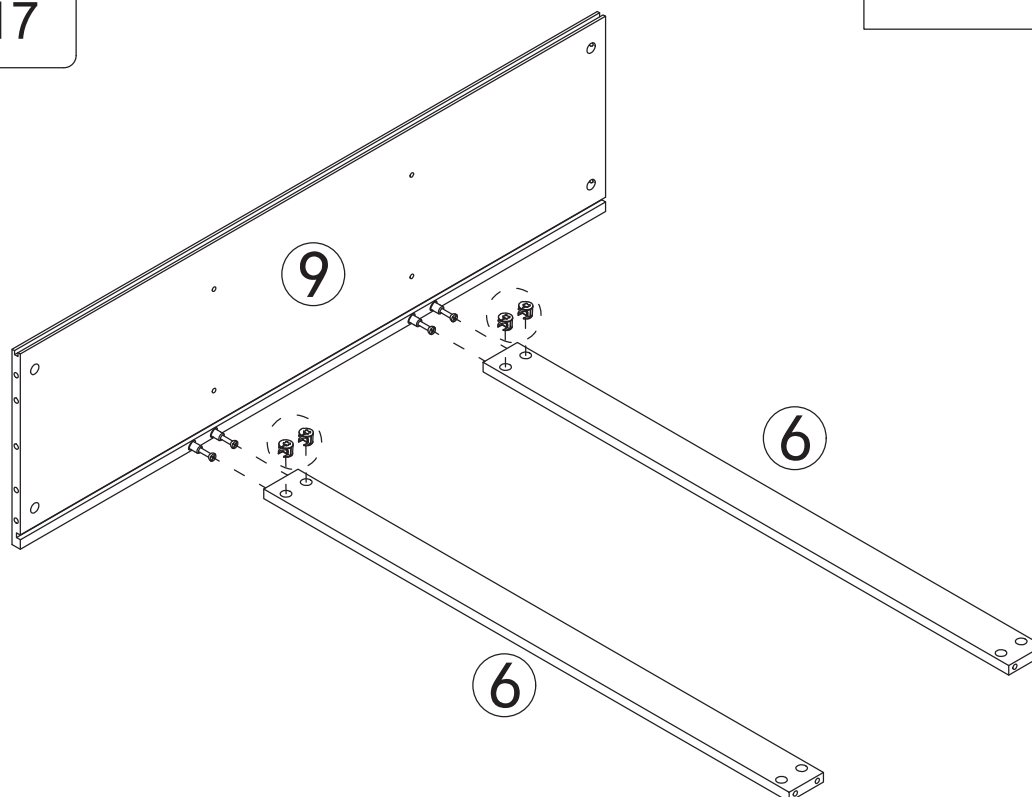


Step 18

B



x4

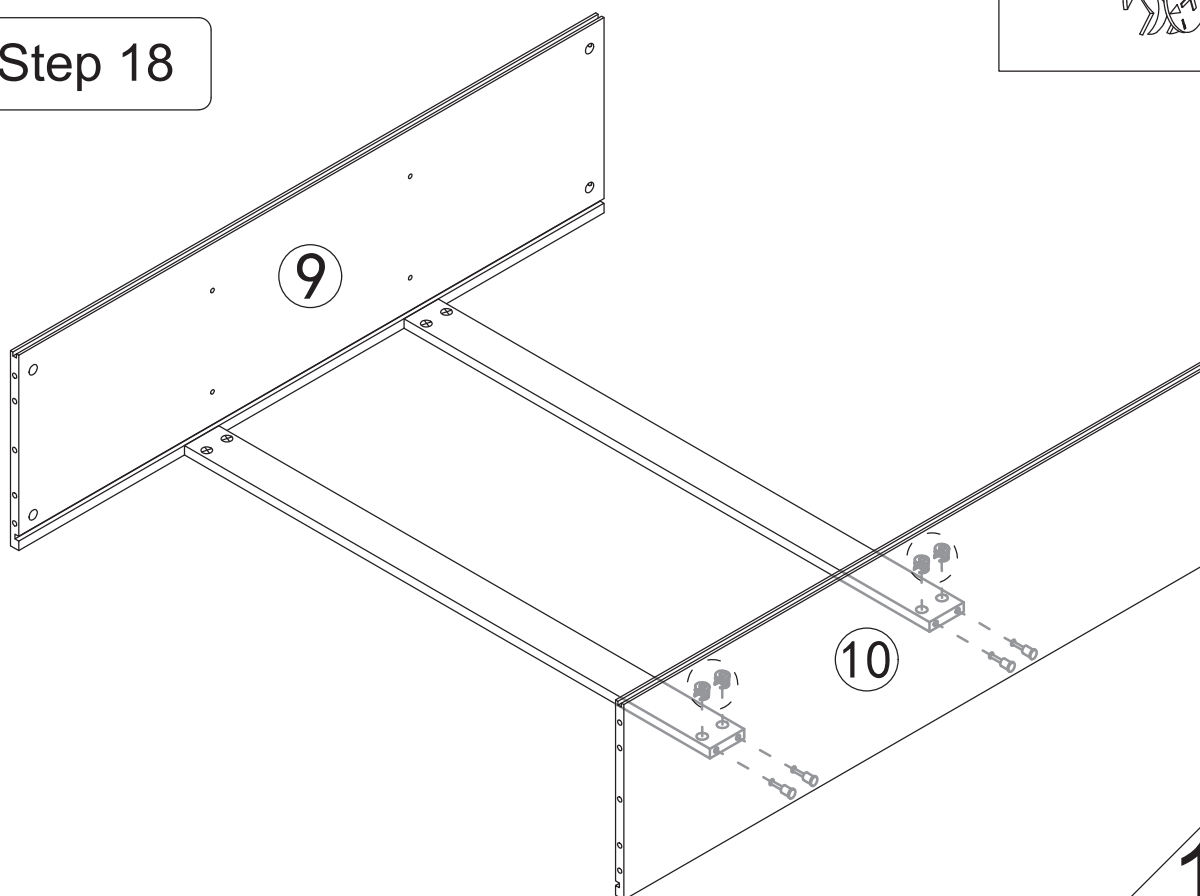


15

Step 19


B



x4

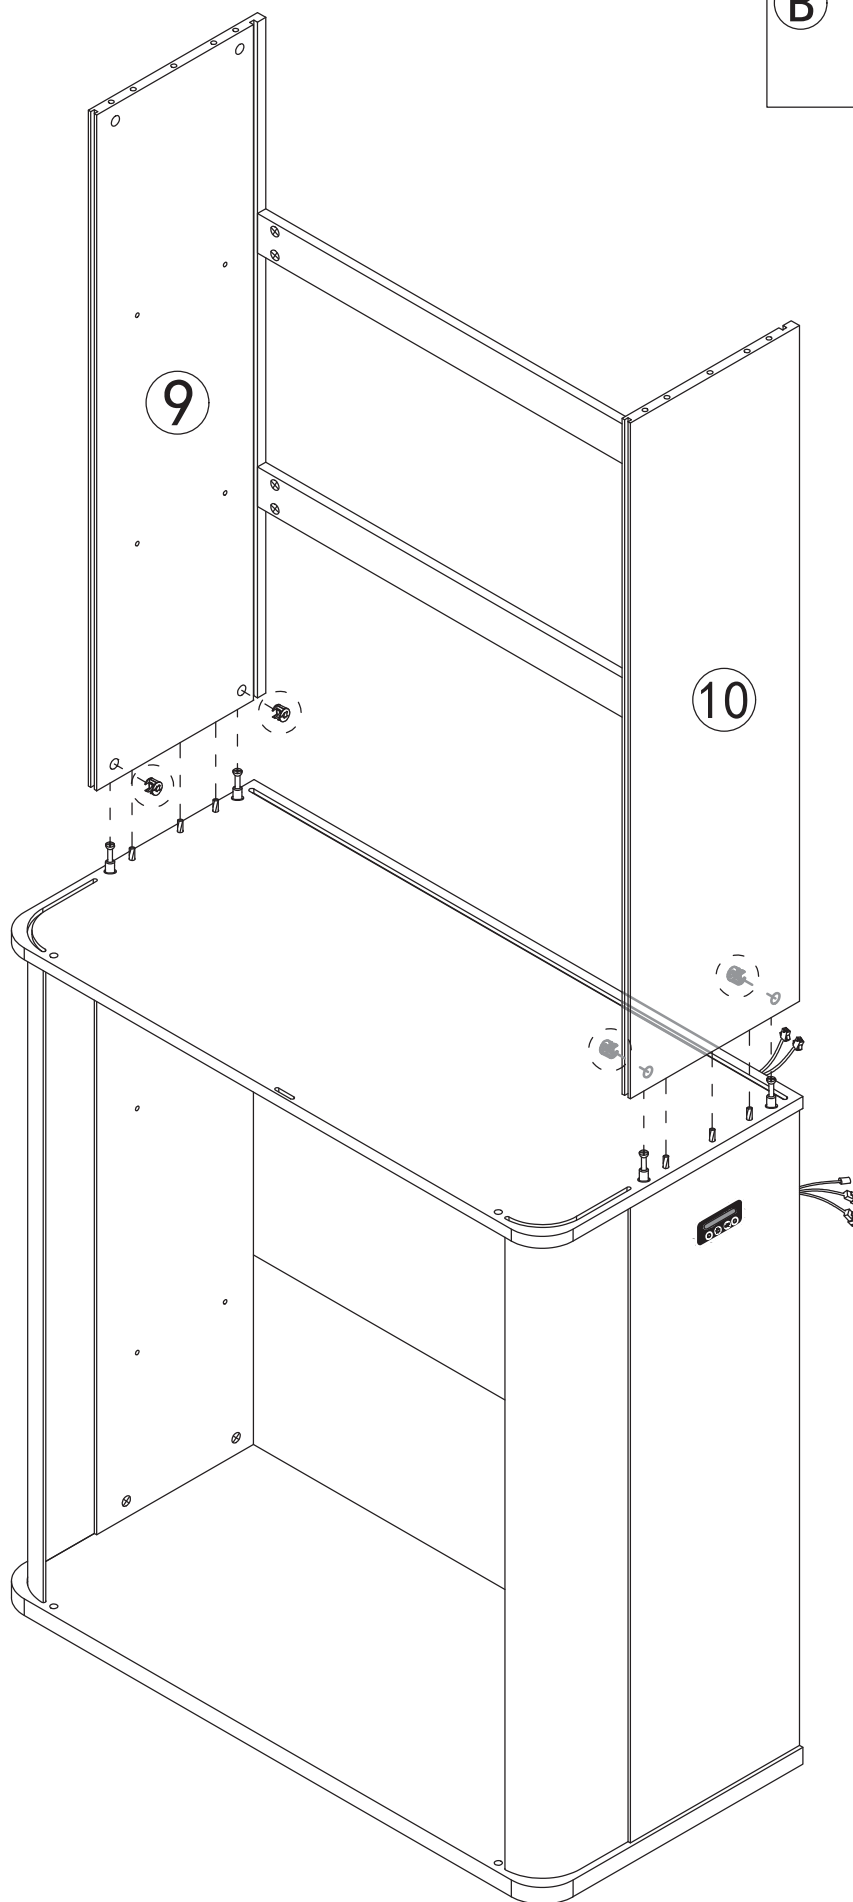

Step 20

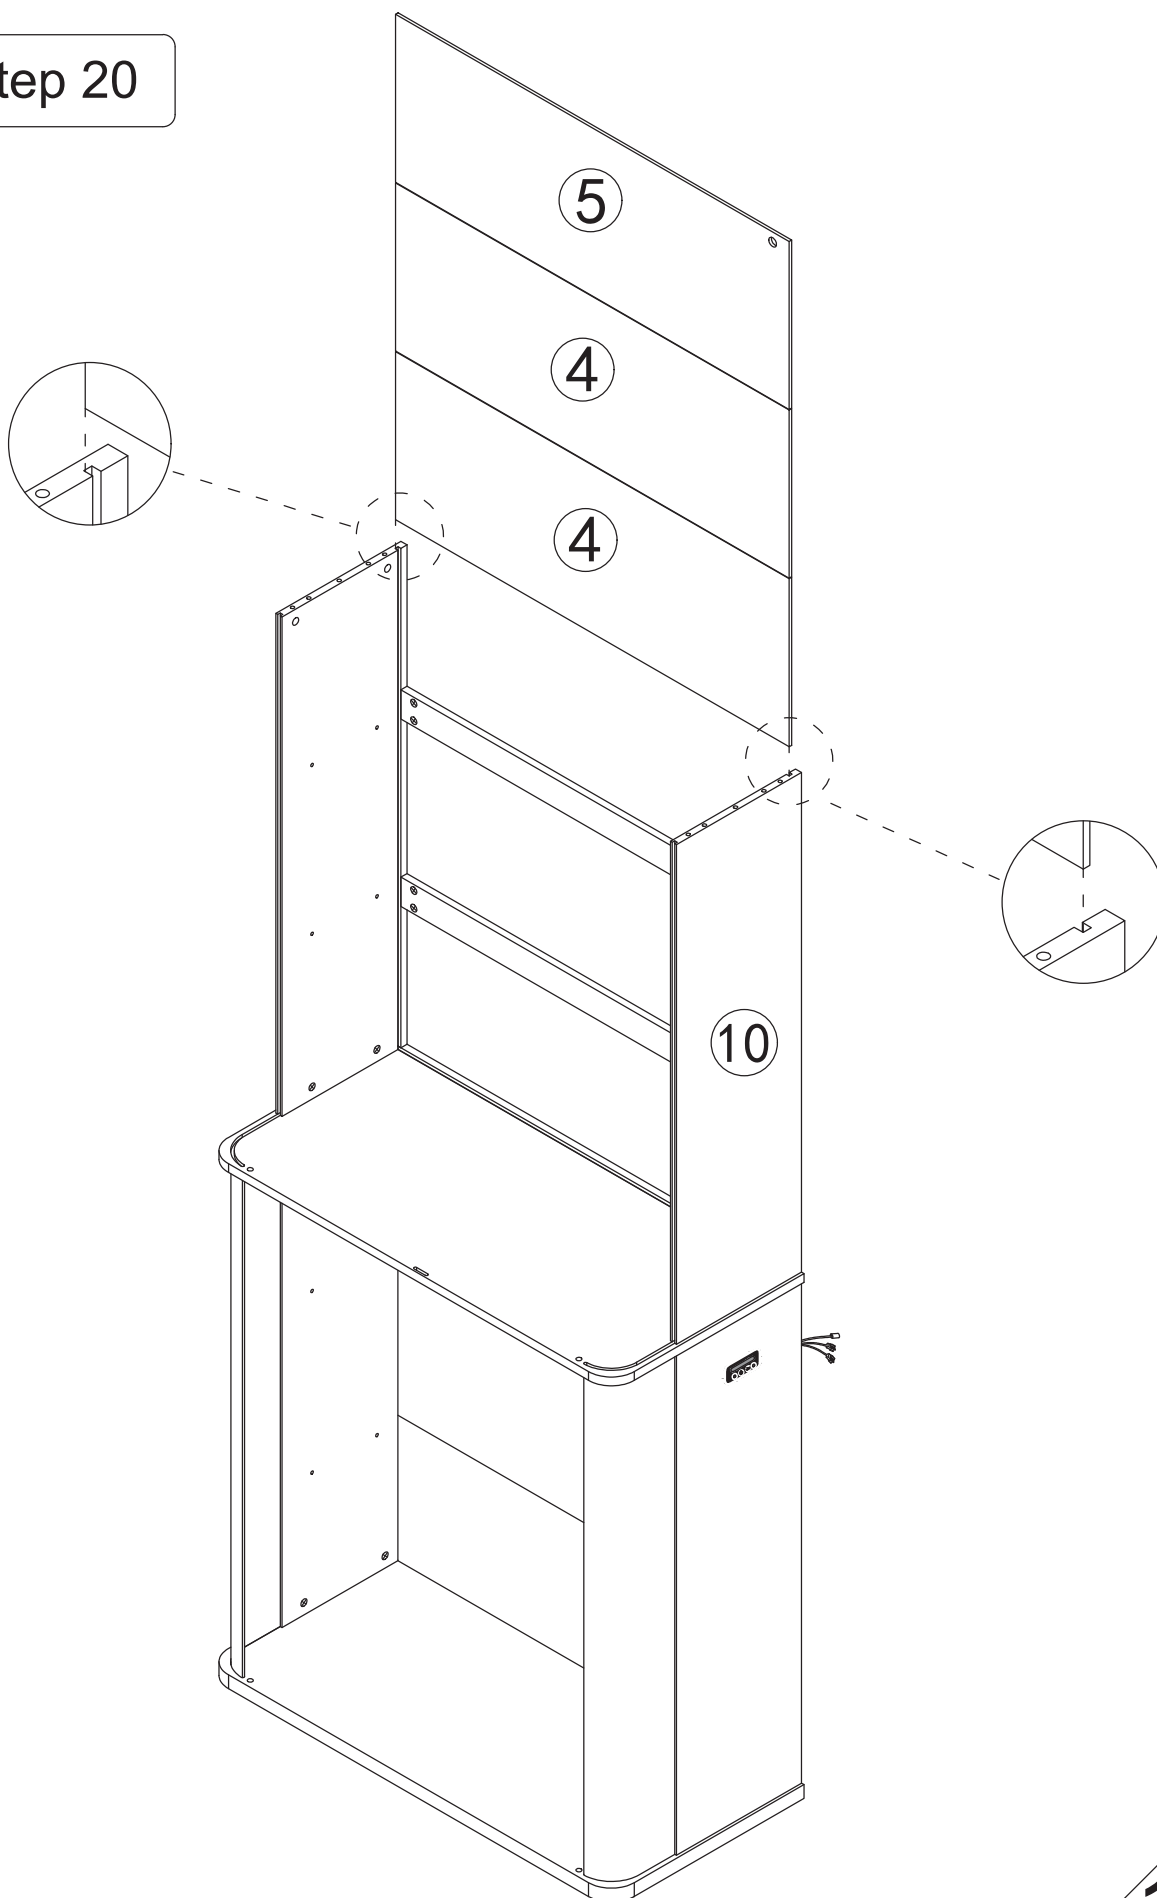


Step 21


C




x6

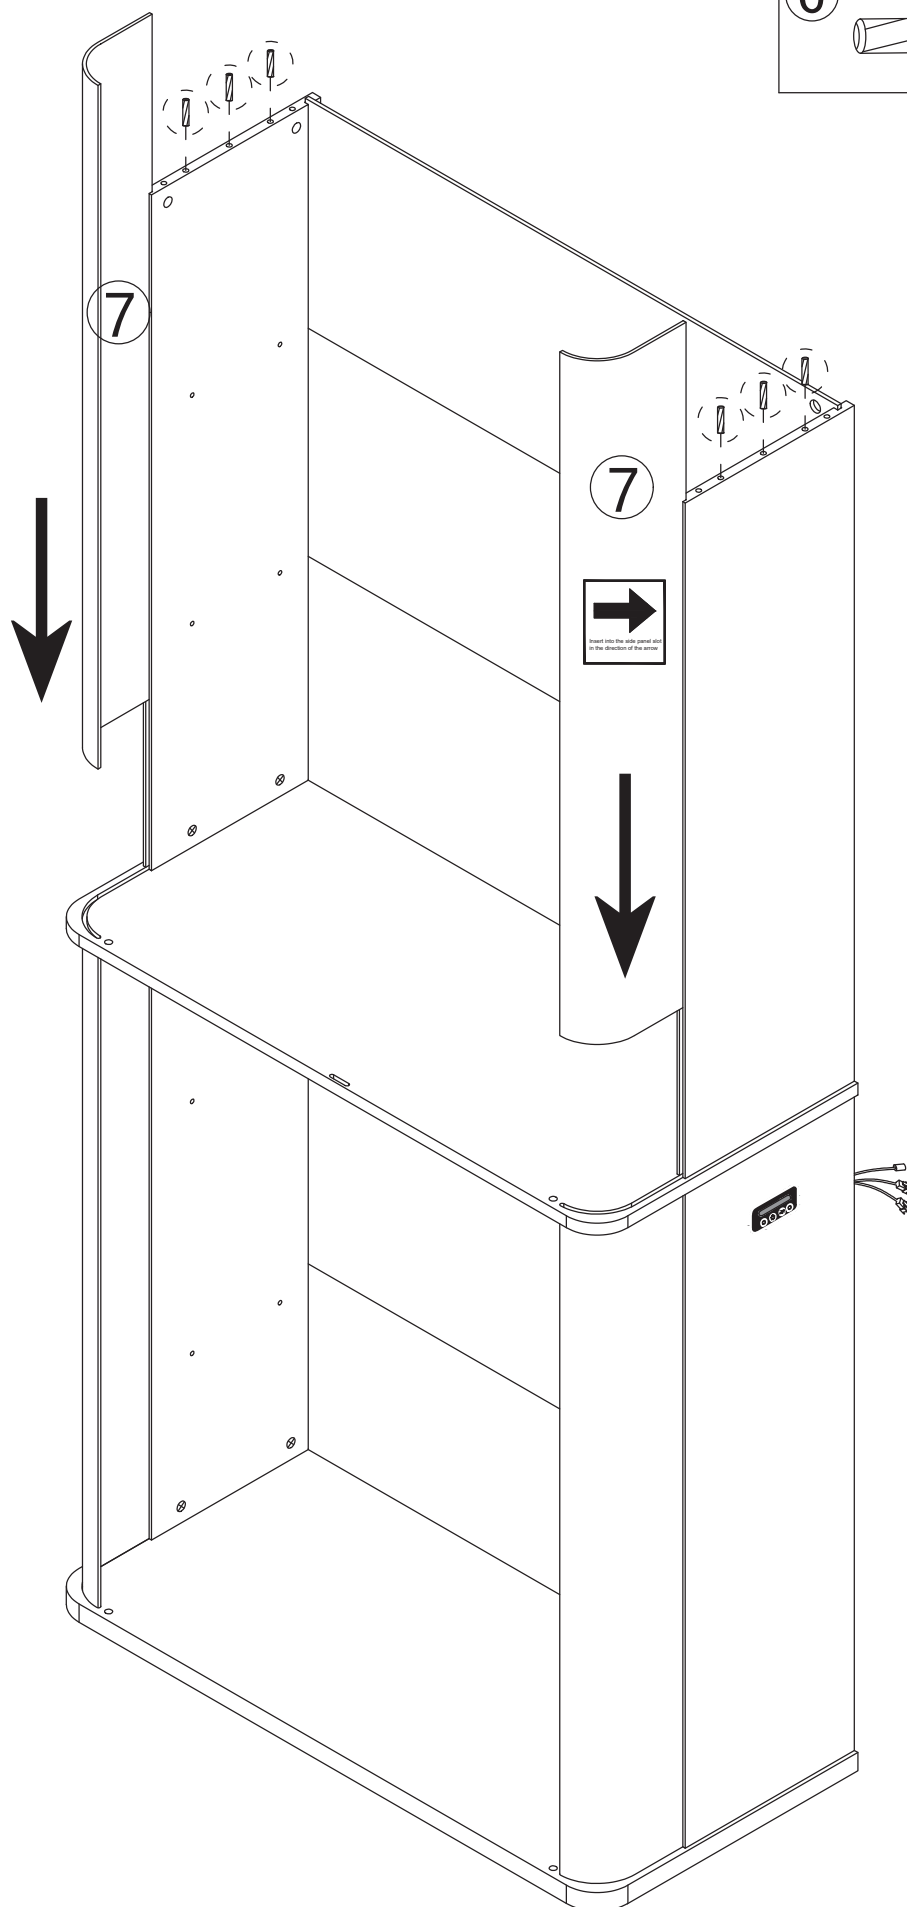

Step 22

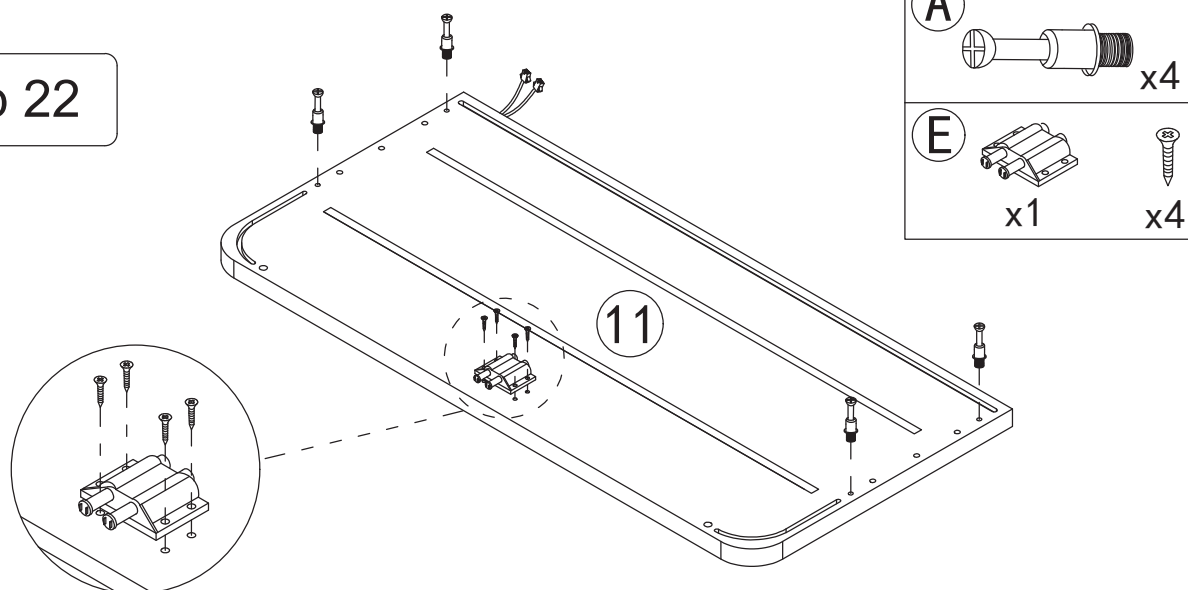

Step 23

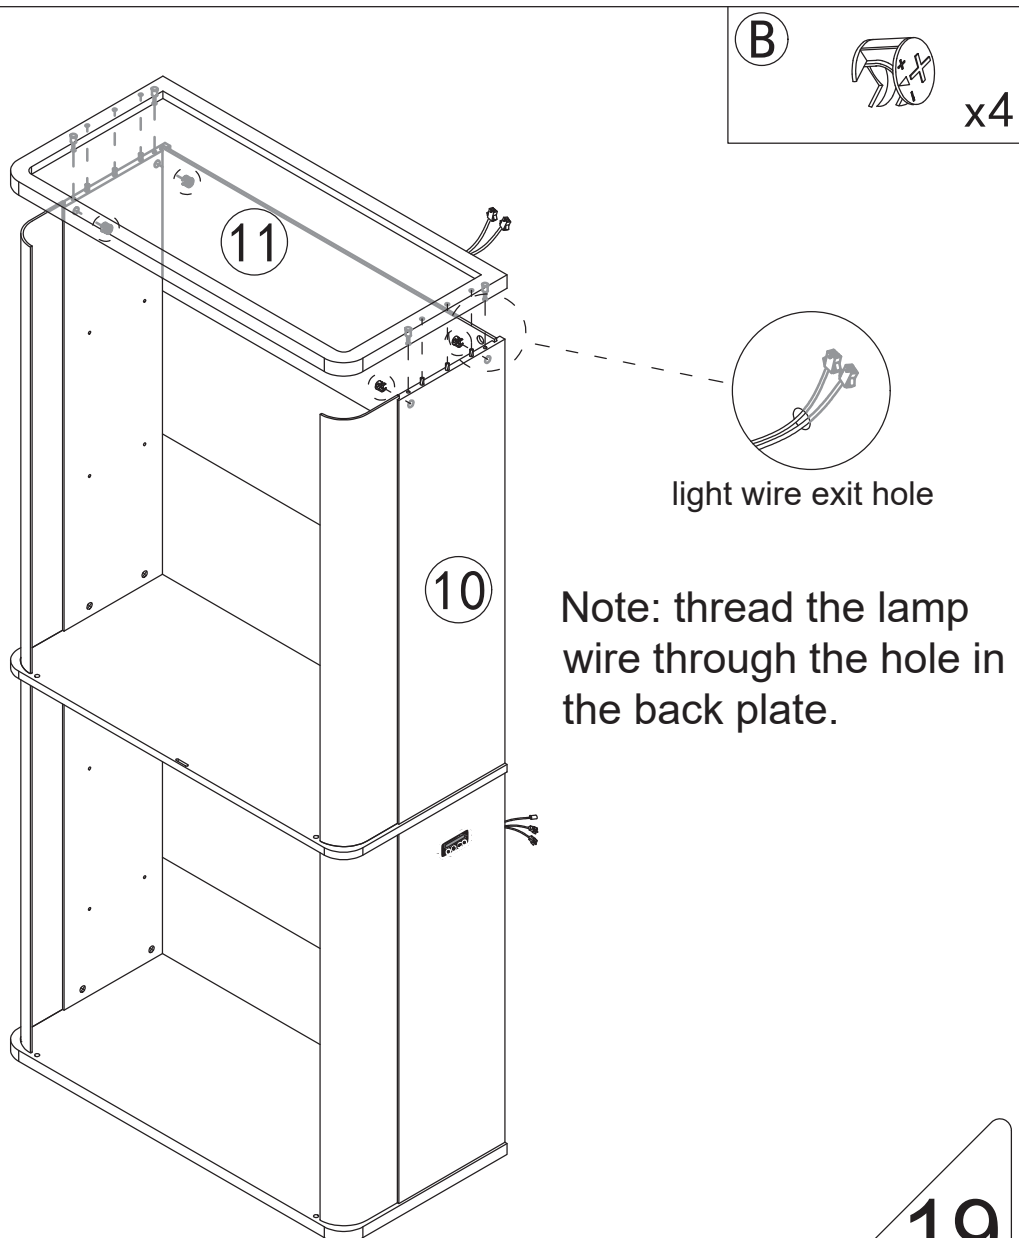


Step 24

F






x4


G



x4

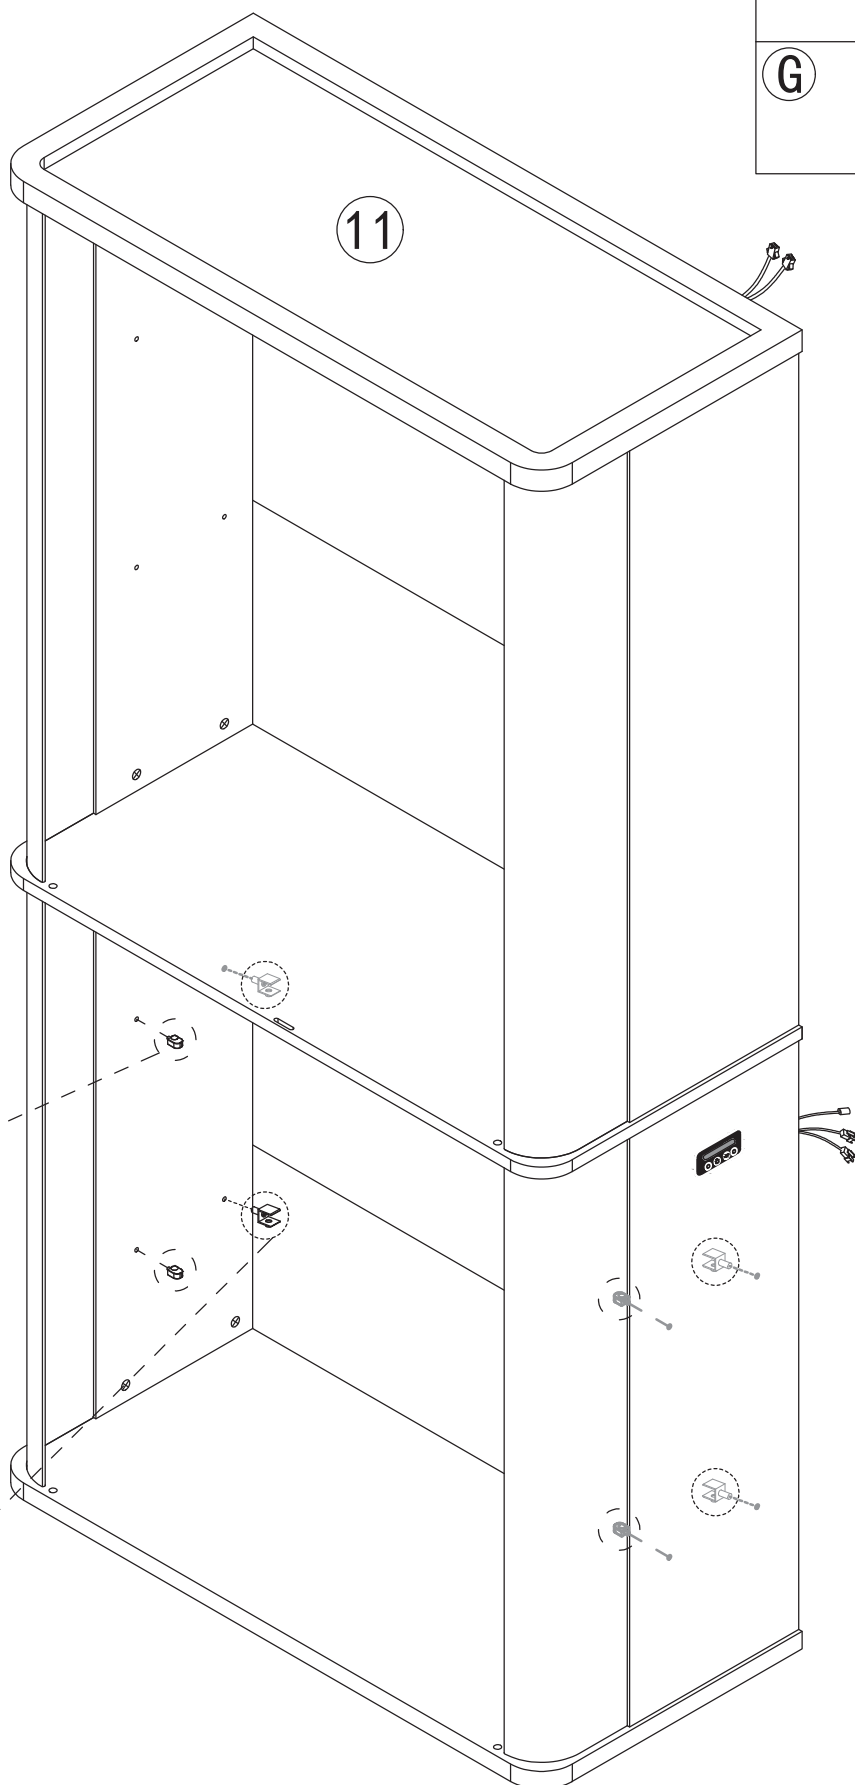


Step 25

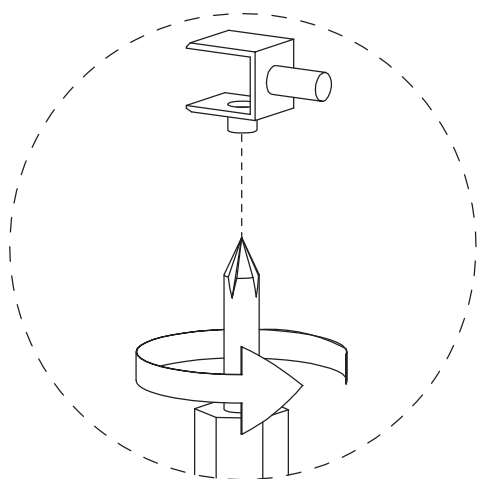

Tighten the screws after placing the shelf board.


Install the lower shelf first, then the upper one.

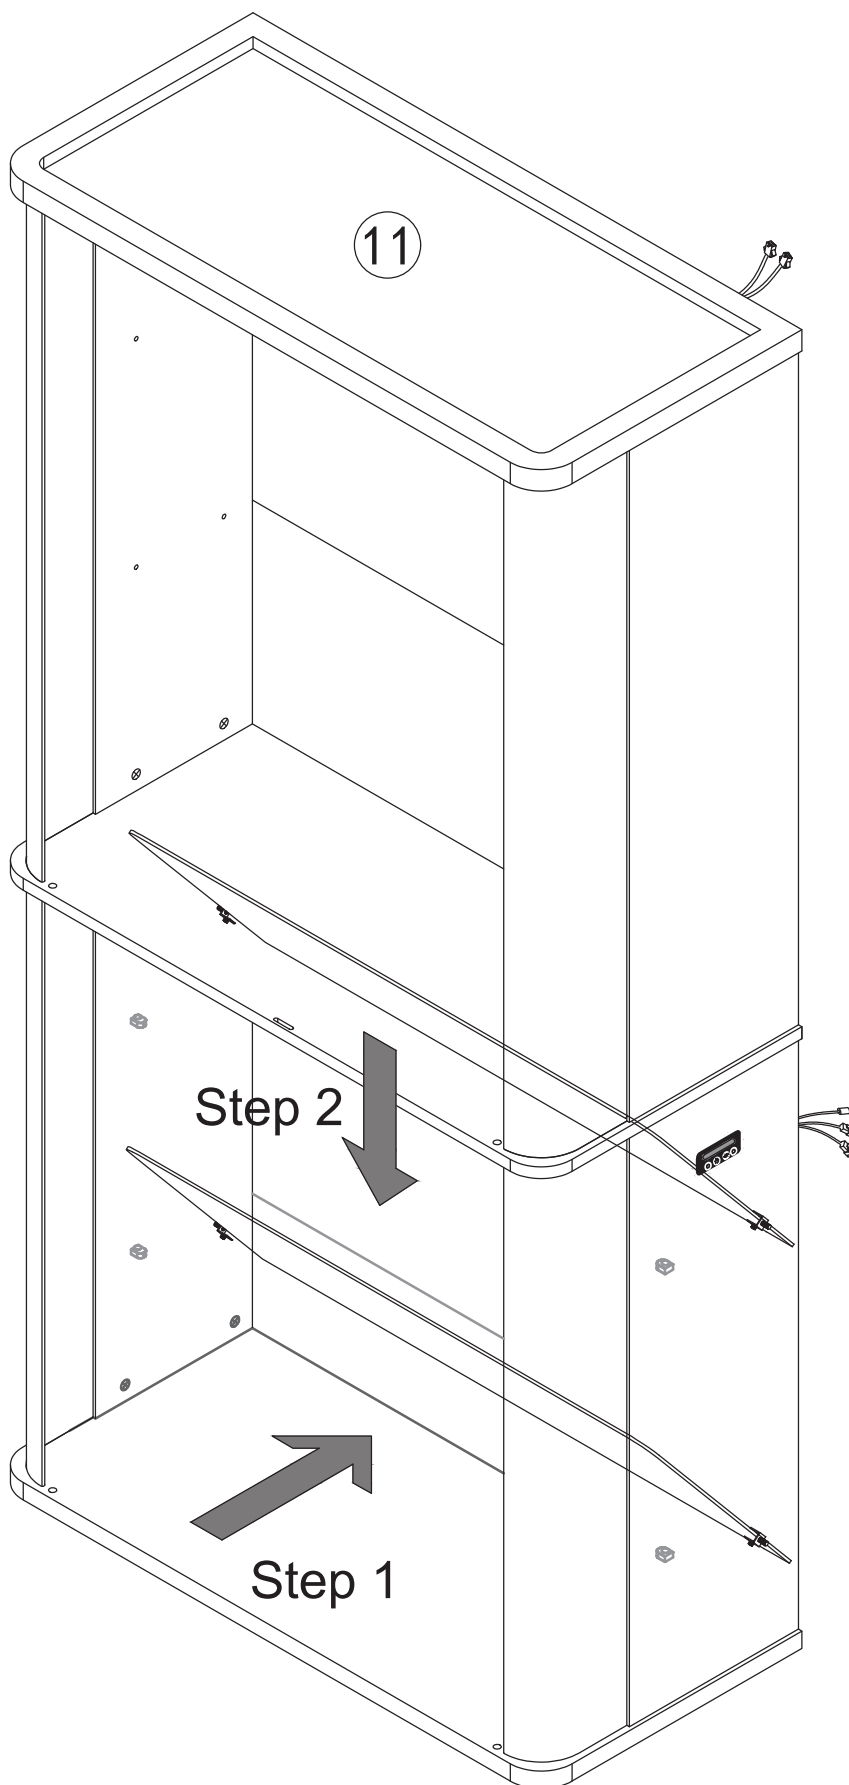


Note: It is better to put the glass in the cabinet at an angle.

Step 26



First, completely unscrew the screws on the parts



Then take out the black rubber pad from the inside of the part, and the white sponge remains unchanged inside the part.

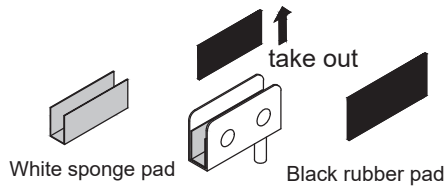



E

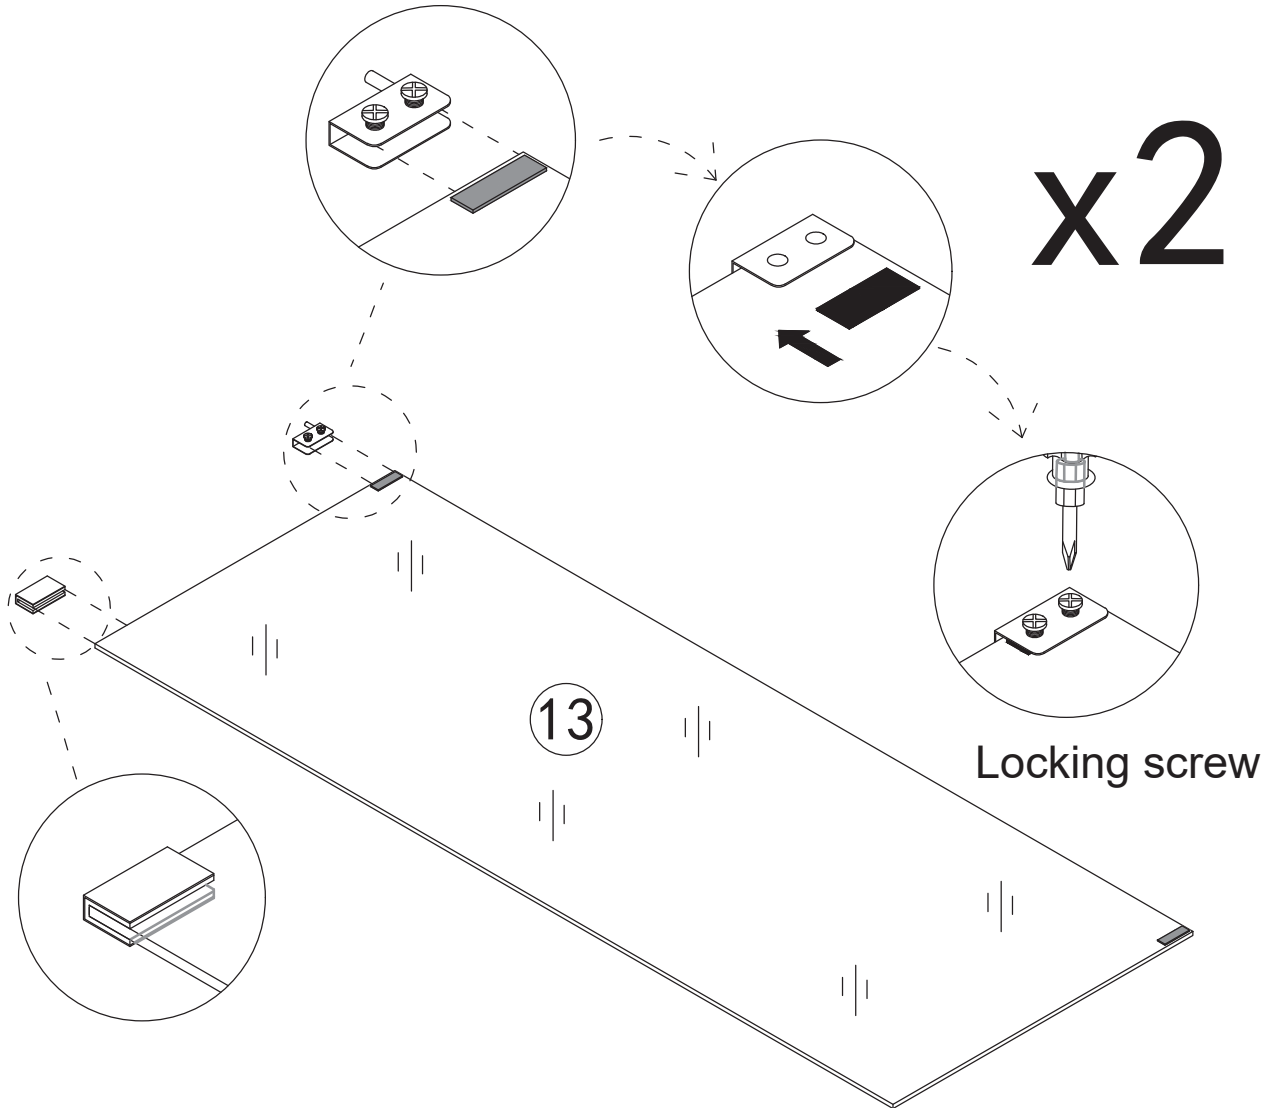

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed



Step 27

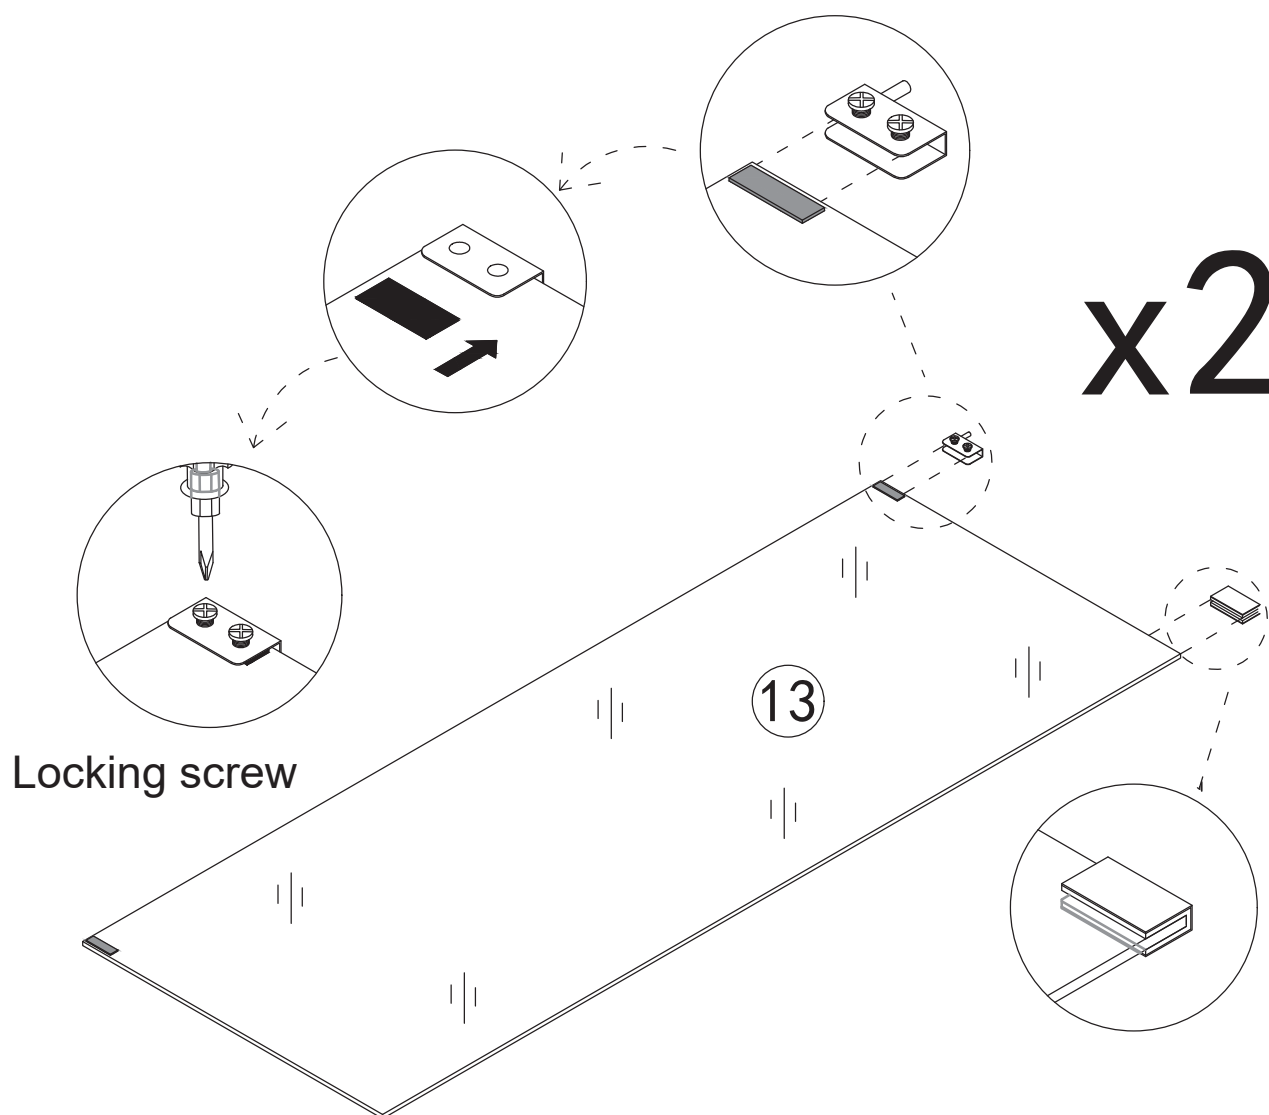

Pay attention to the direction of the door hinge, rotate the screws to compress the black gasket, and do not place it in the opposite direction

Place the black gasket on the side where the screws are installed

Step 28

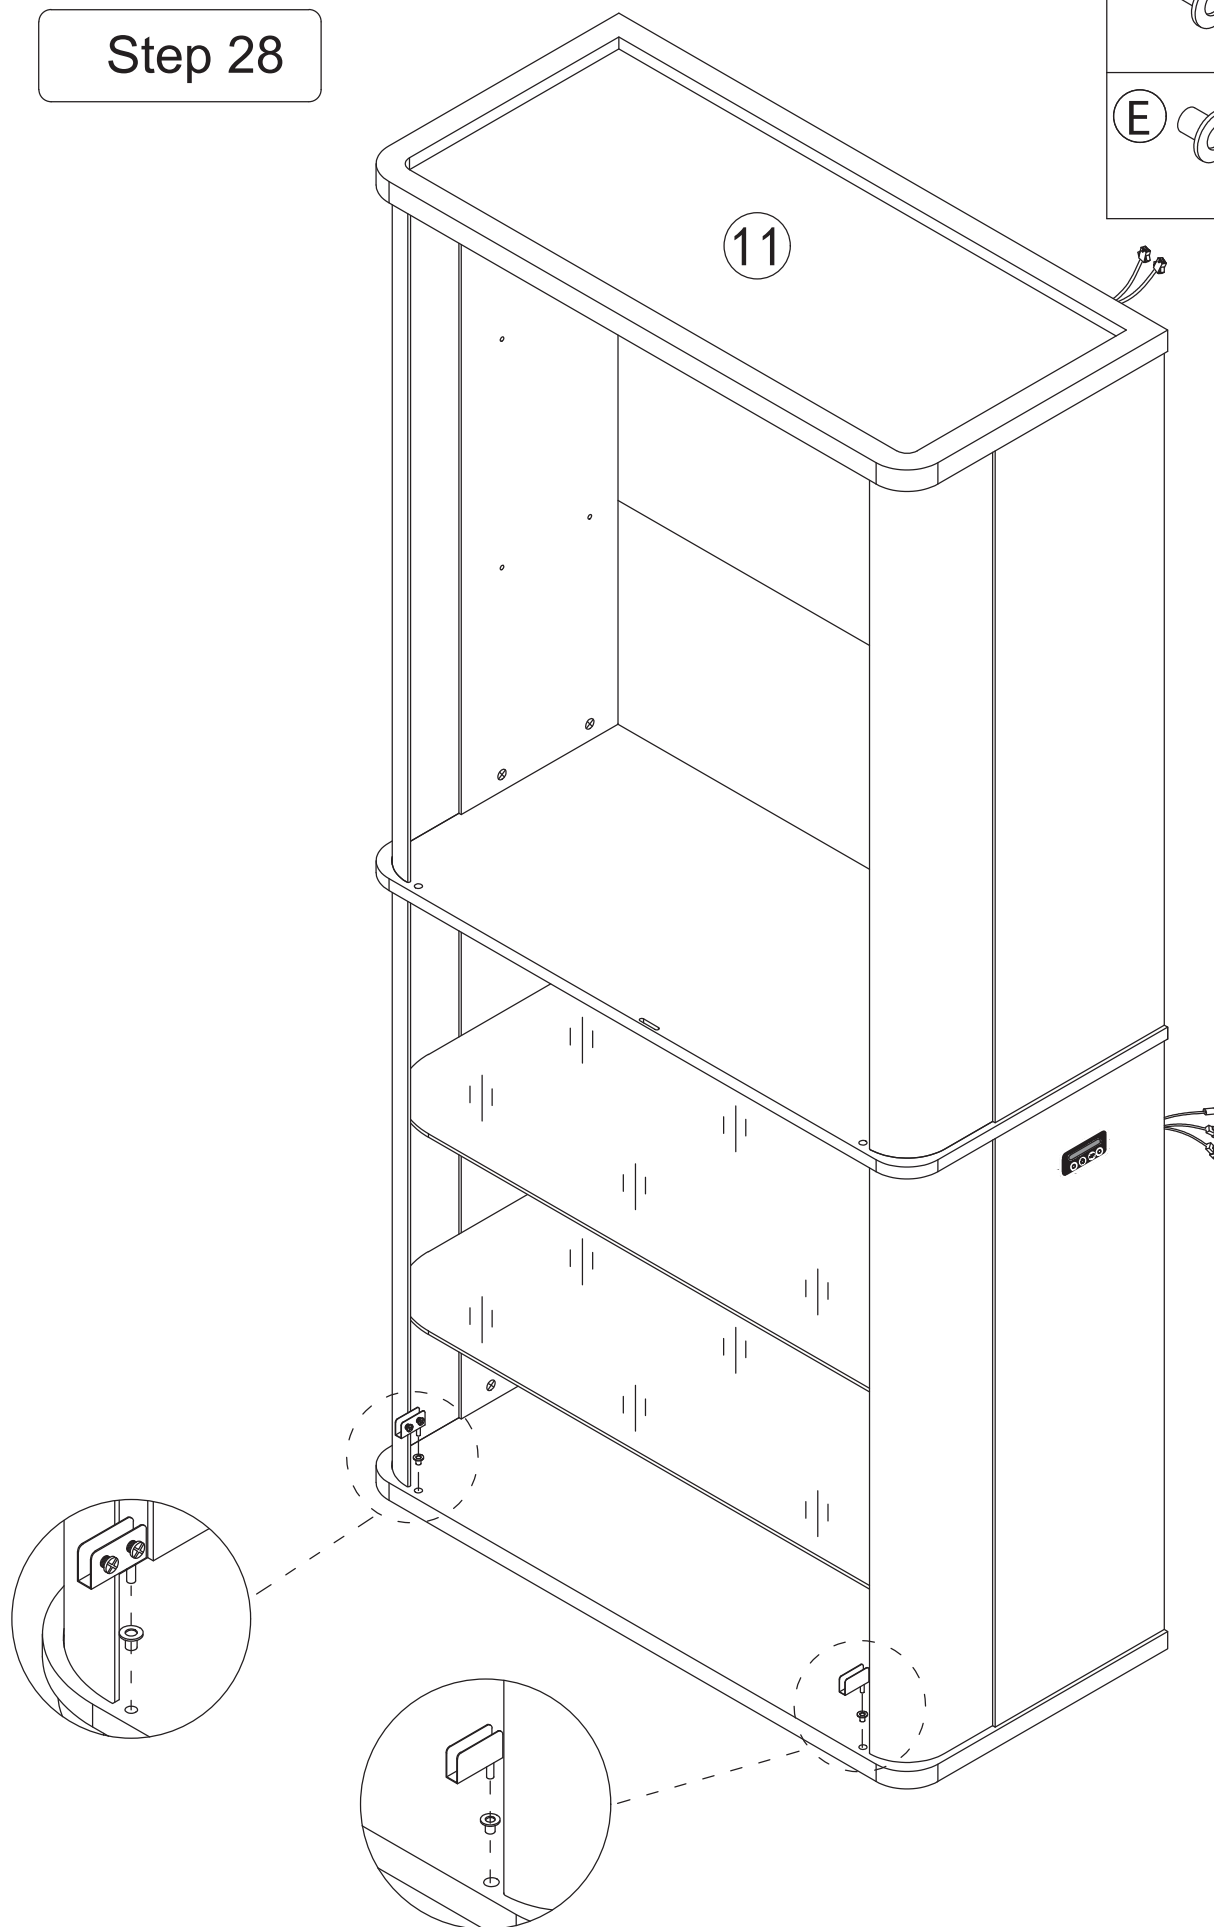

Step 29


Pay attention to the direction of the door hinge during installation

E




x2

When installing a glass door, it is recommended to have two people install it to avoid the glass door colliding or hitting oneself.




first




second

After installing the glass door, place the black gasket on the side where the screws are installed





third

Locking screw

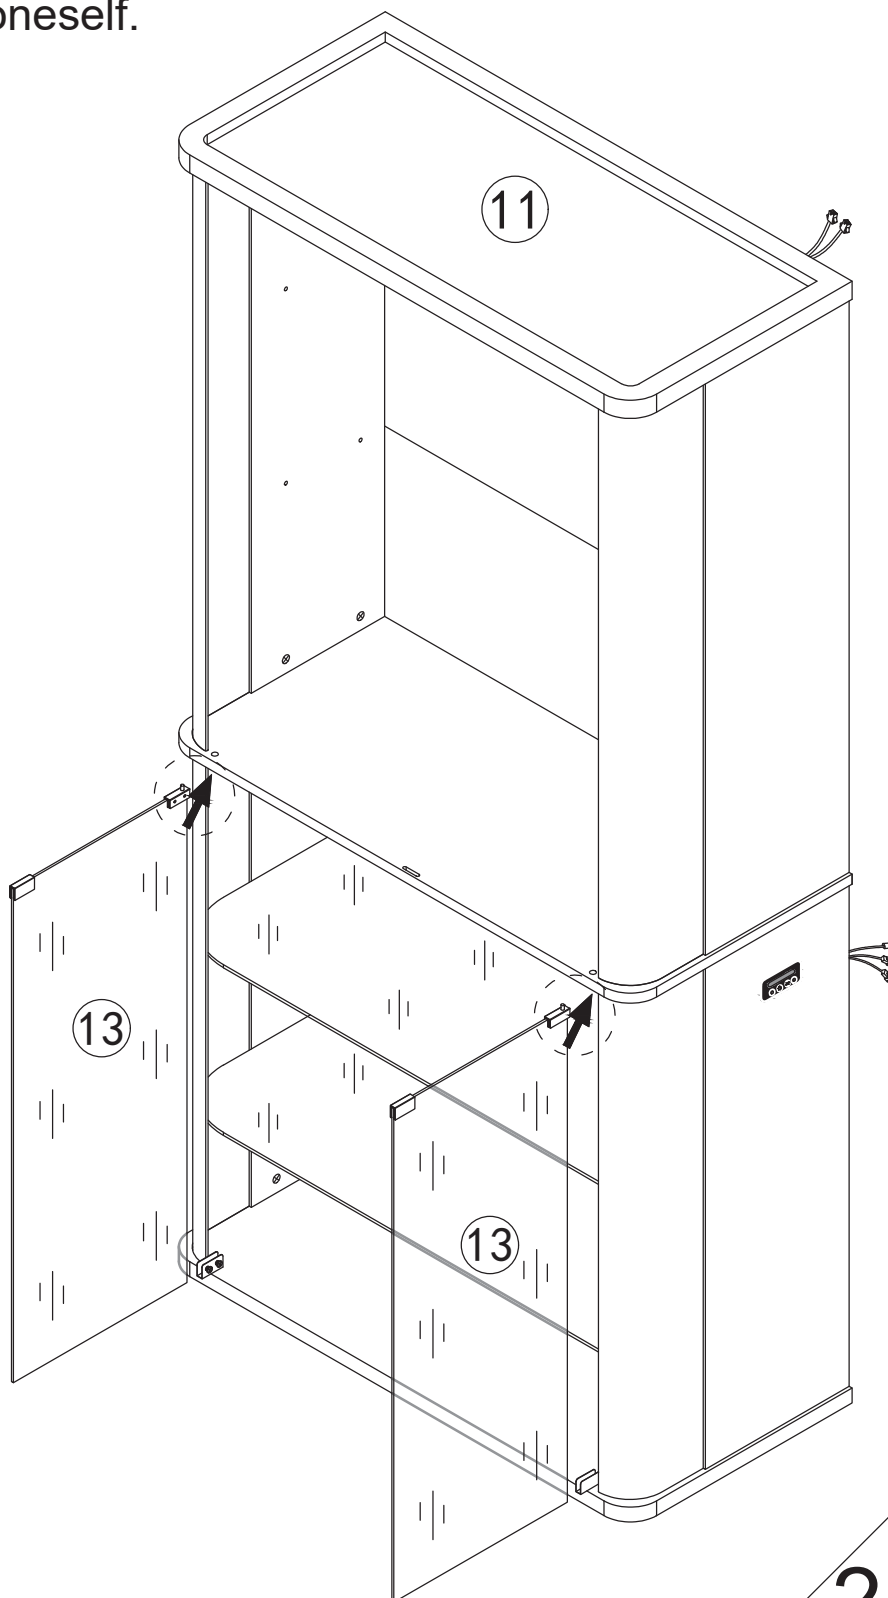


Step 30

F		x4
G		x4

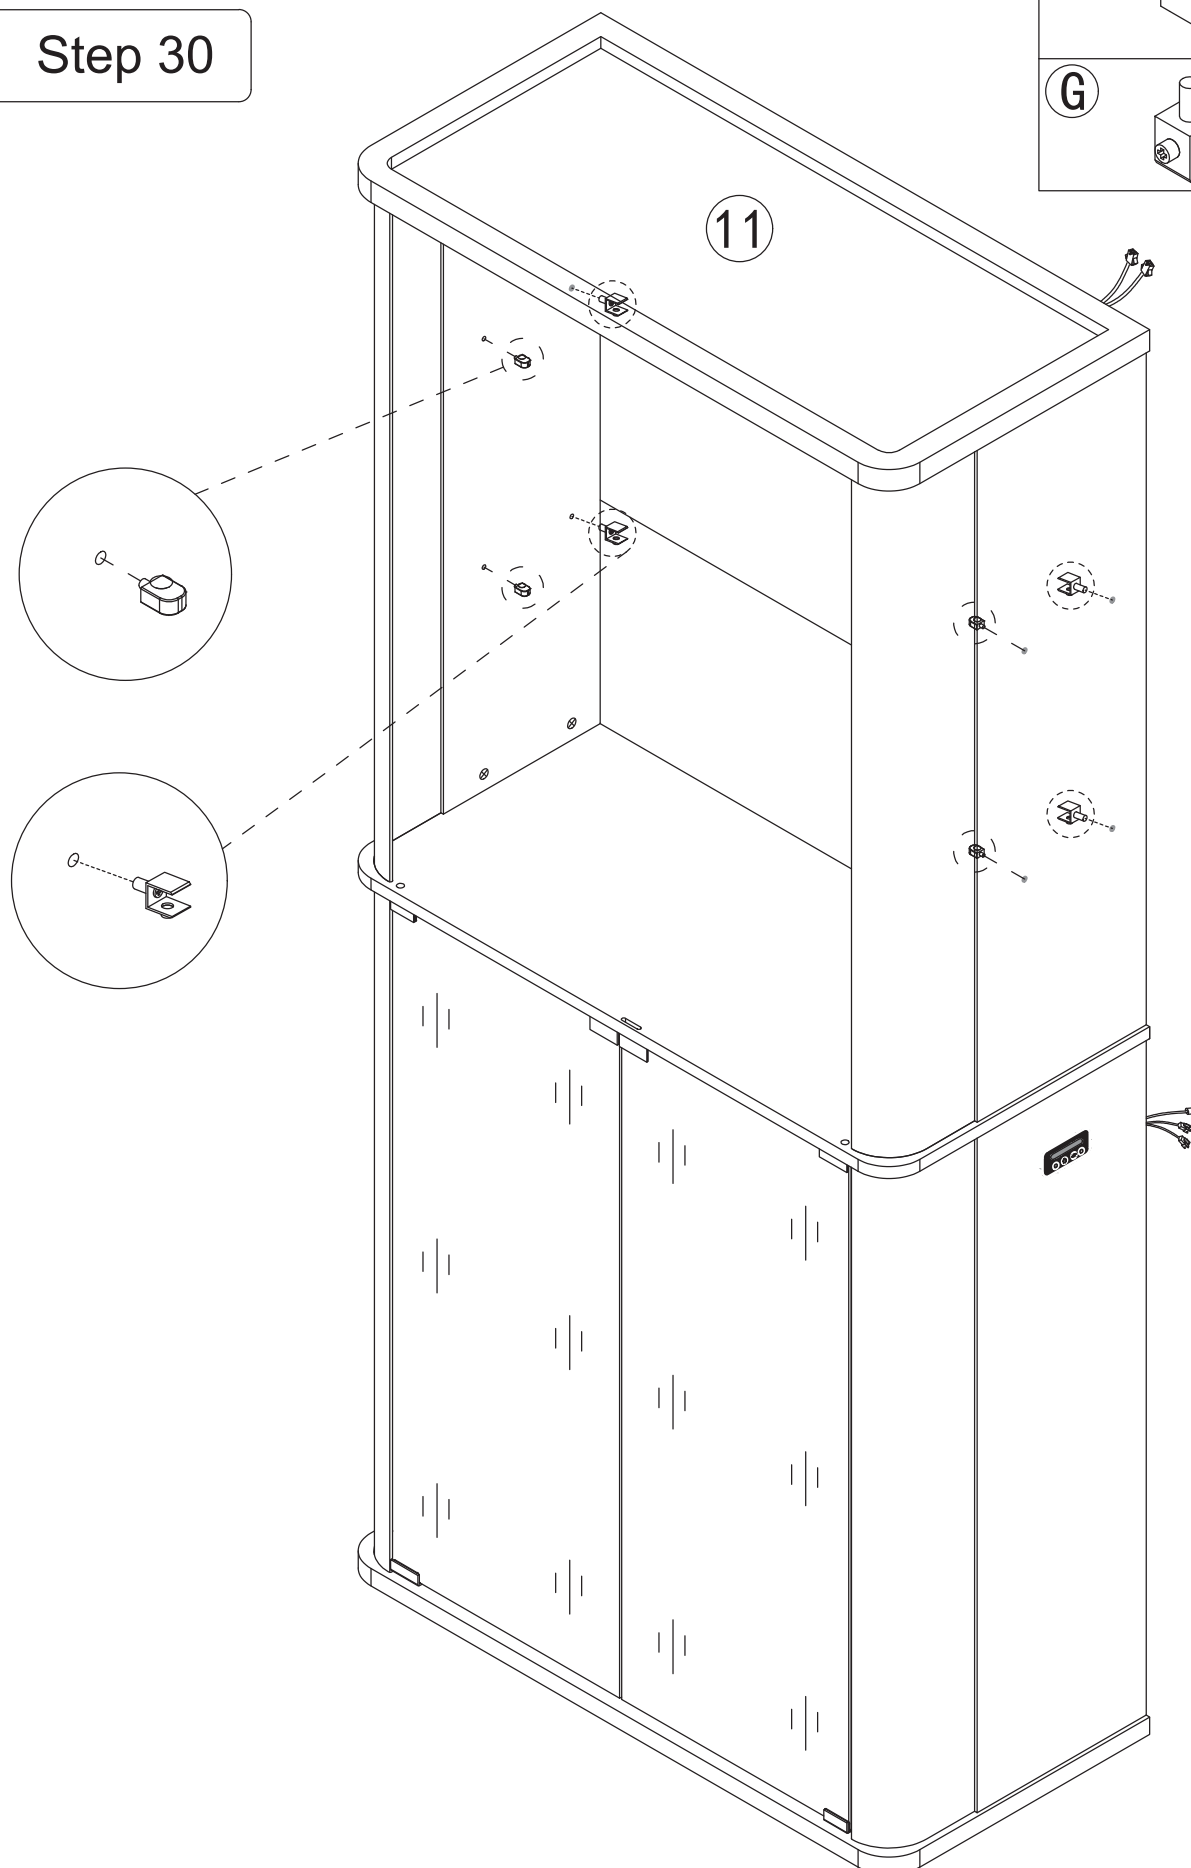


Step 31

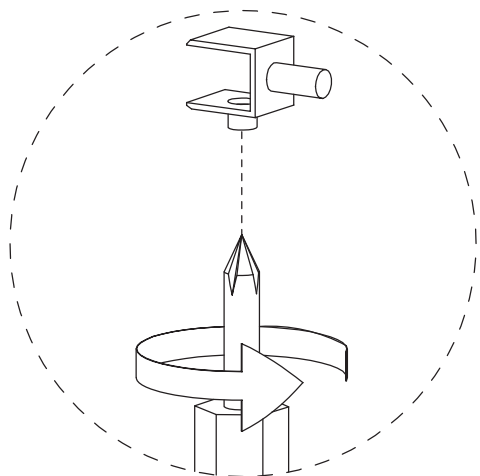




Tighten the screws after placing the shelf board.

Install the lower shelf first, then the upper one.

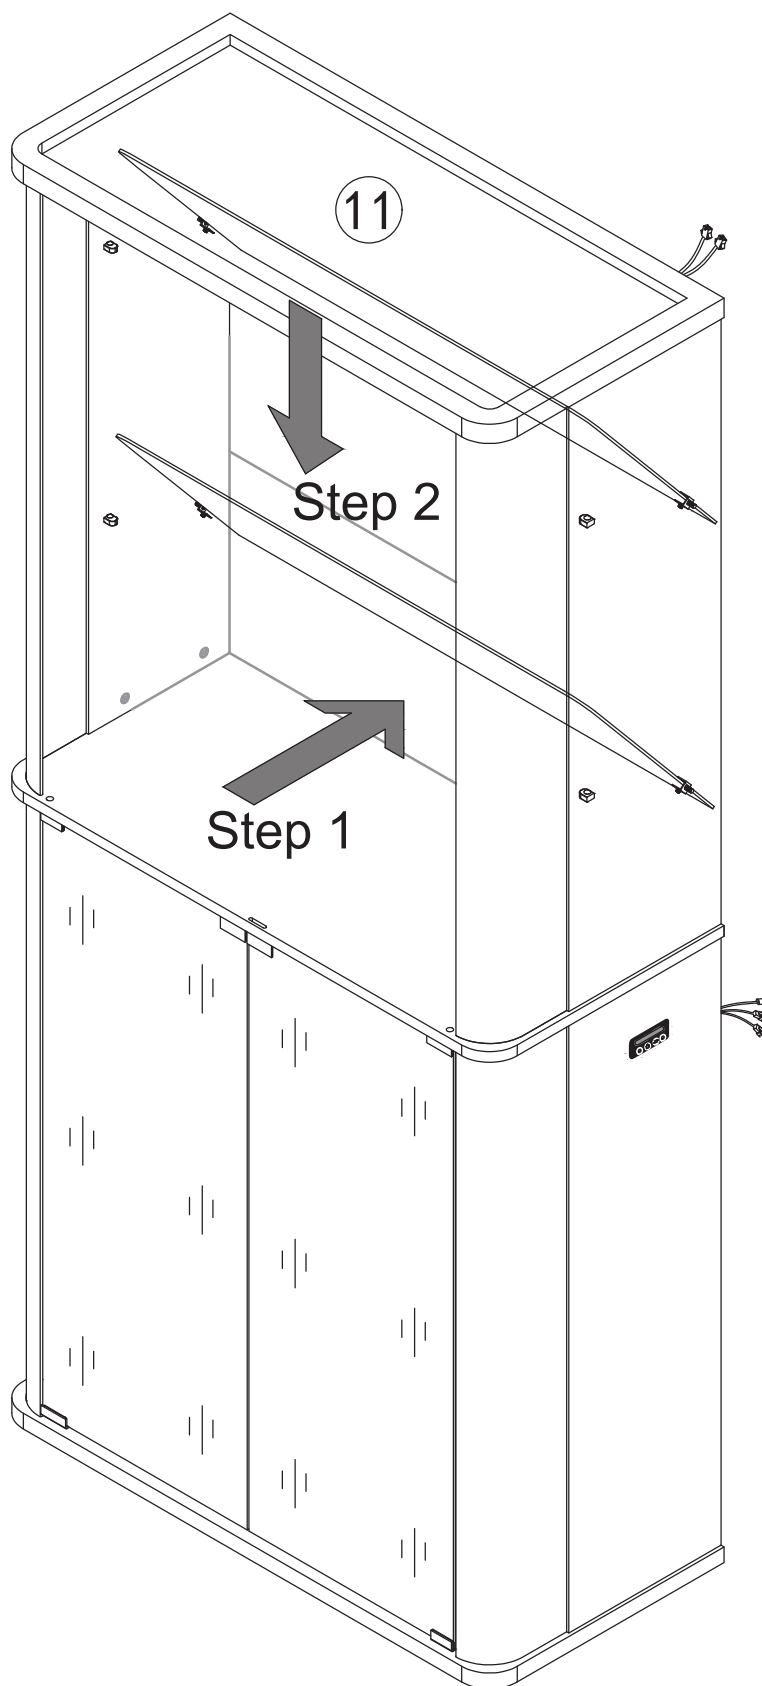

Note: It is better to put the glass in the cabinet at an angle.

Step 32

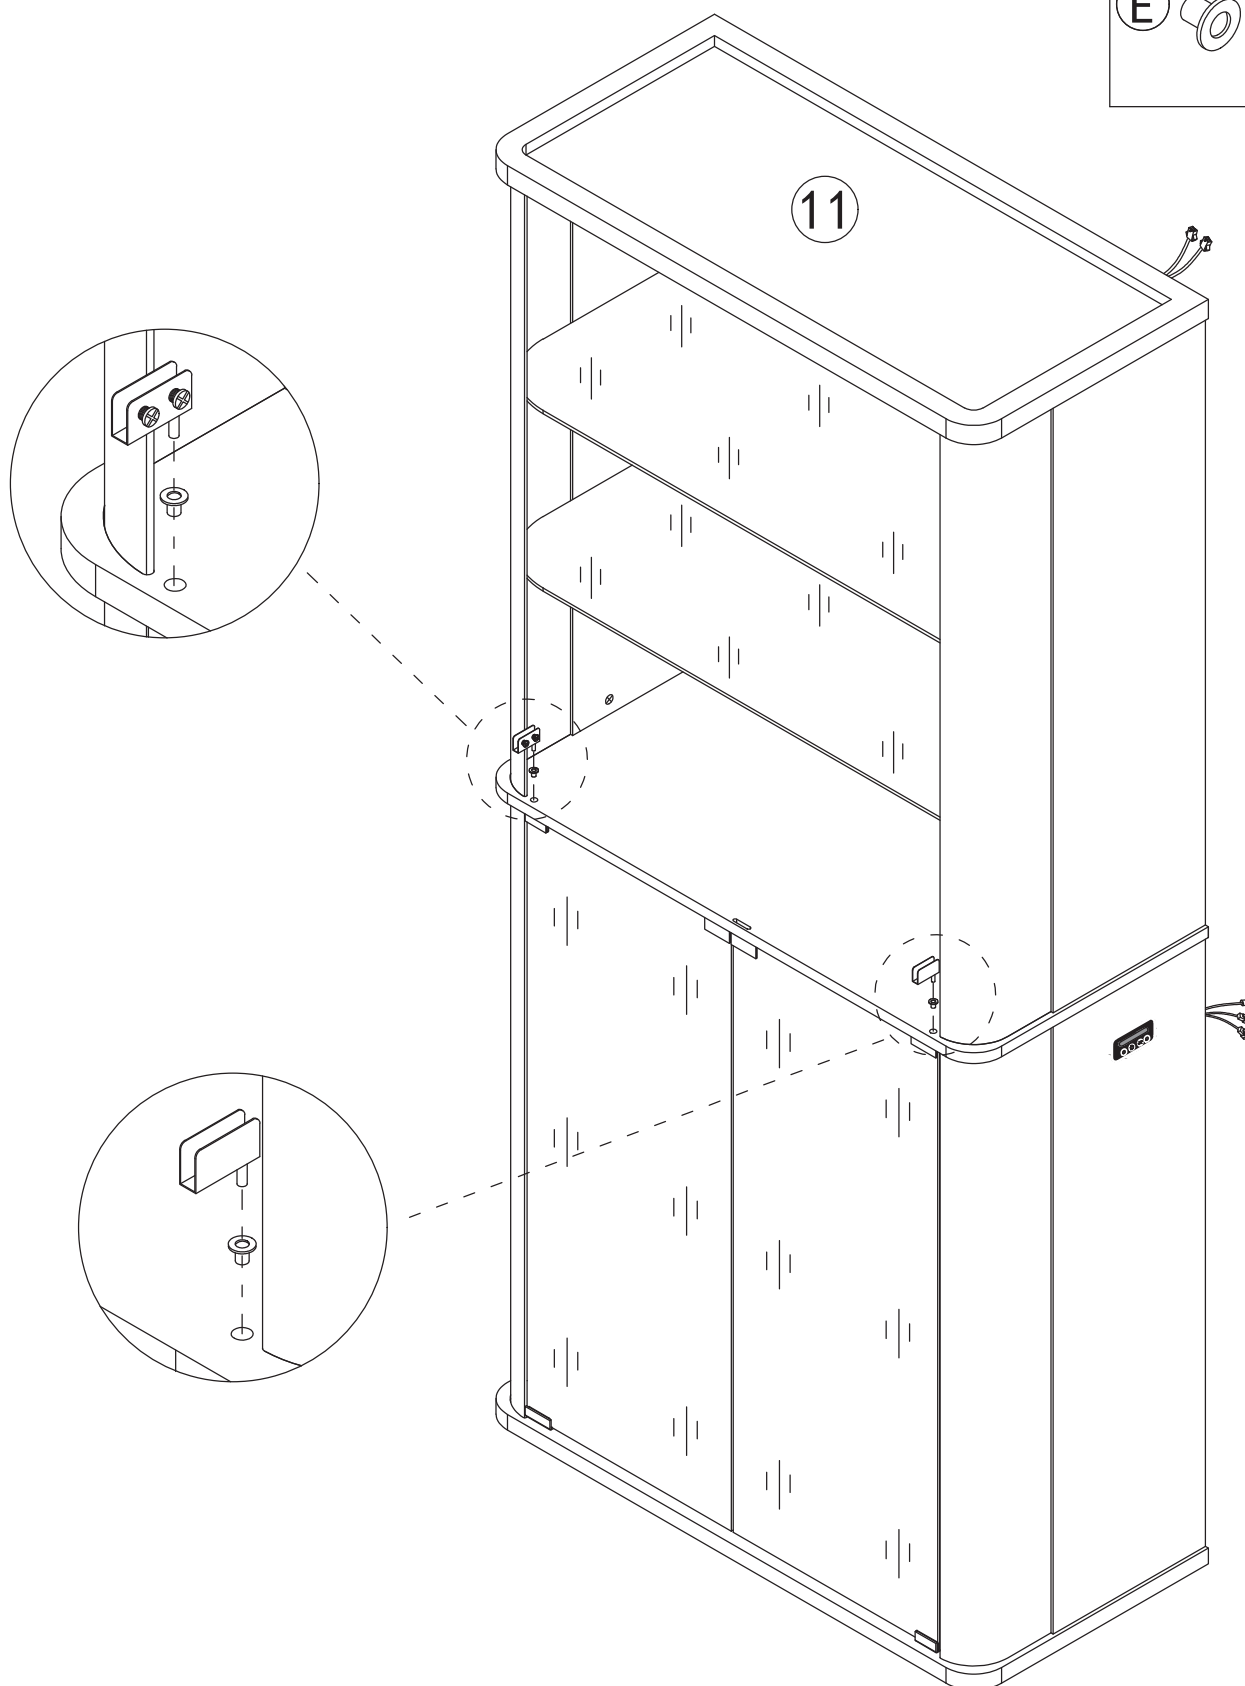


Step 33


E




x2

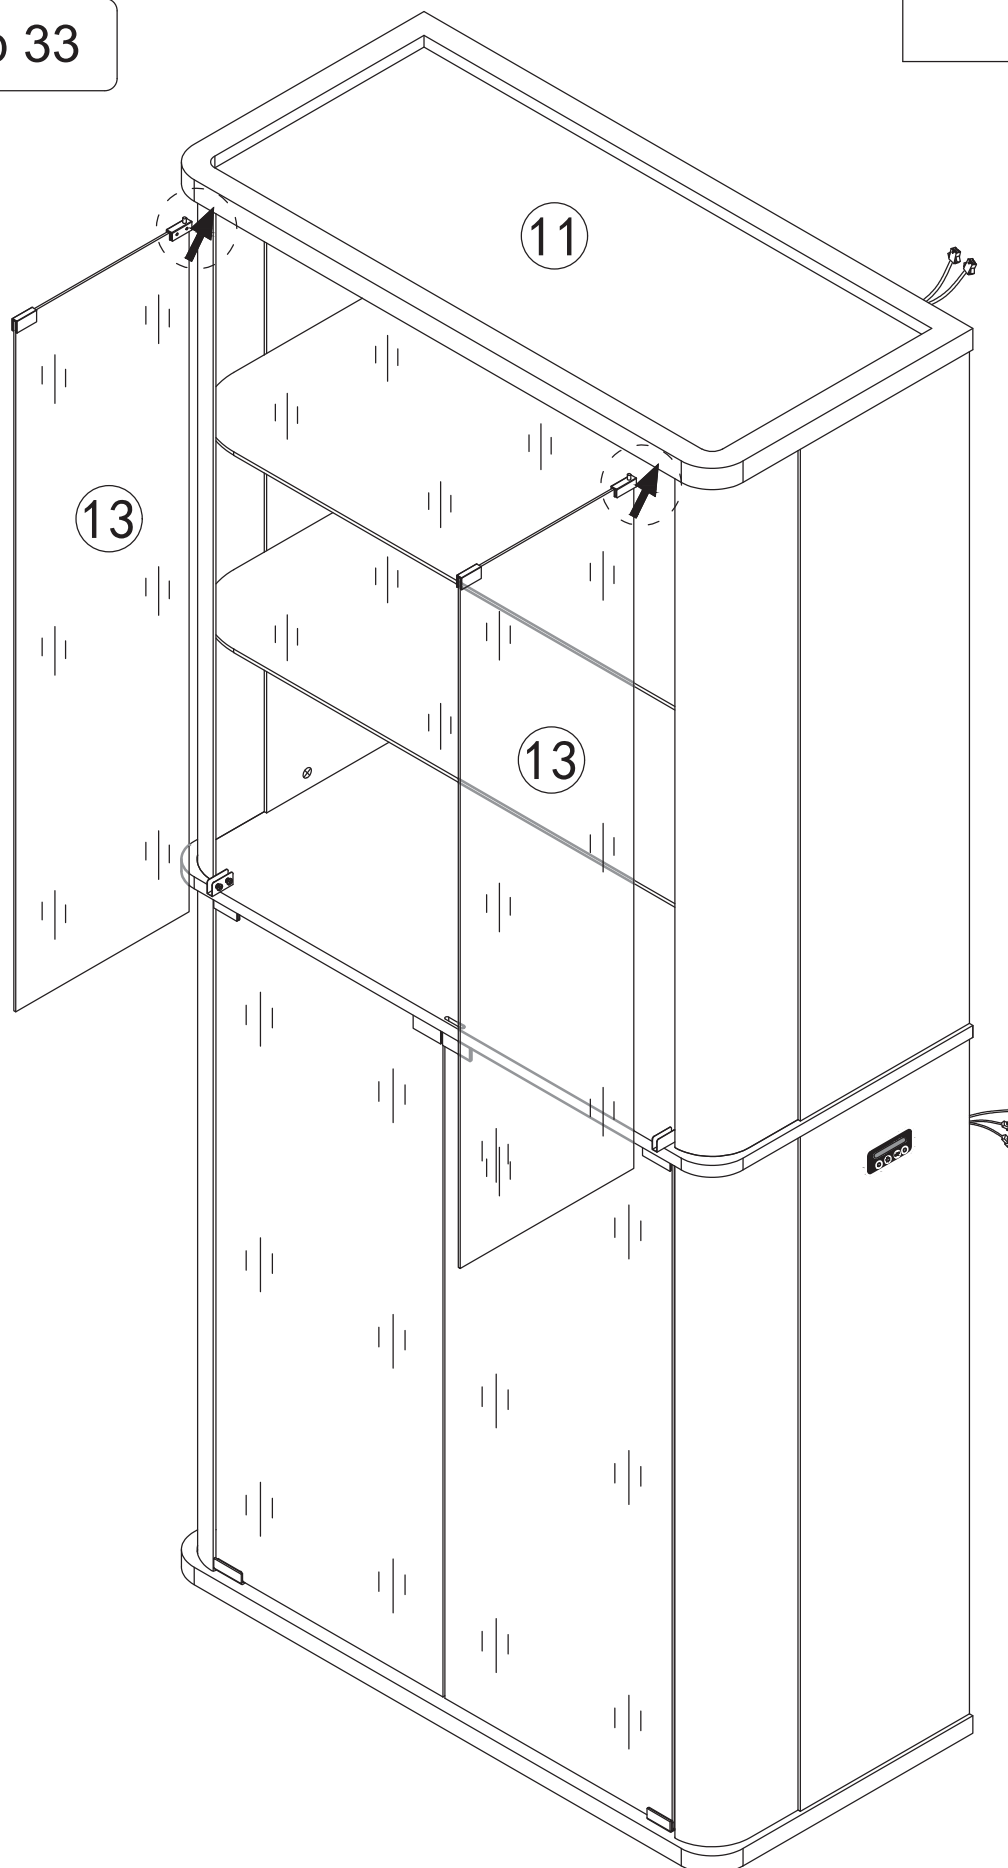

Turn clockwise to lock the door.

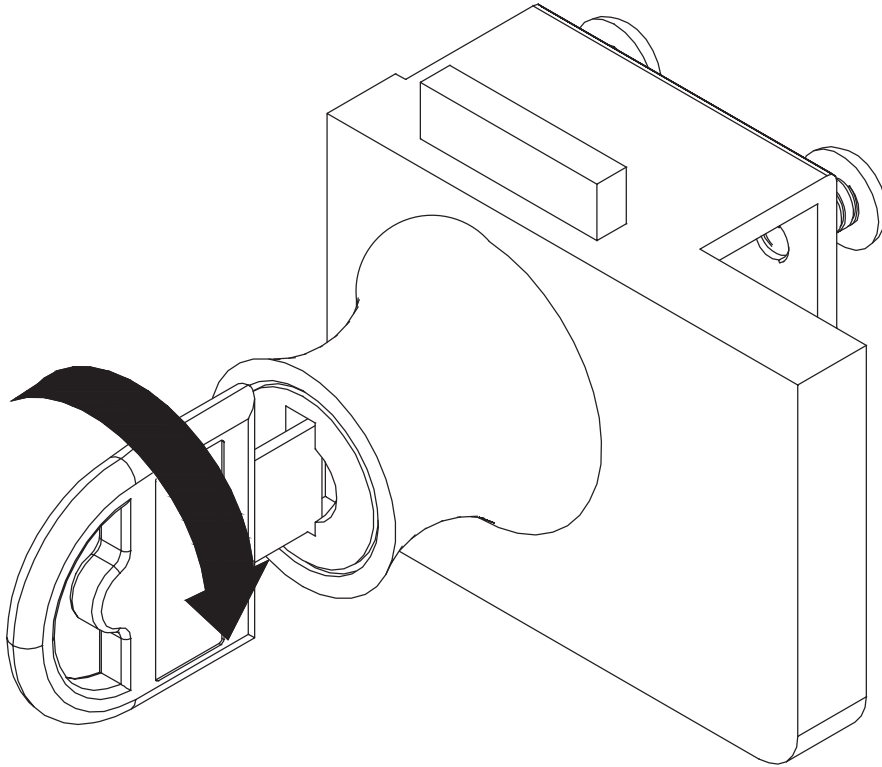


Turn counterclockwise to unlock the door.

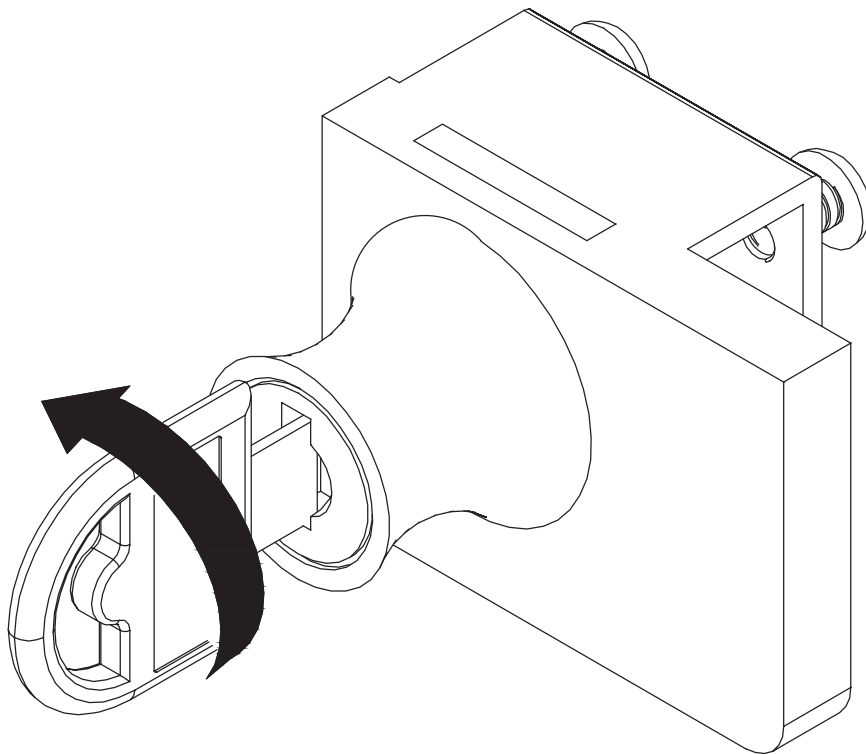


Step 34


H




x1

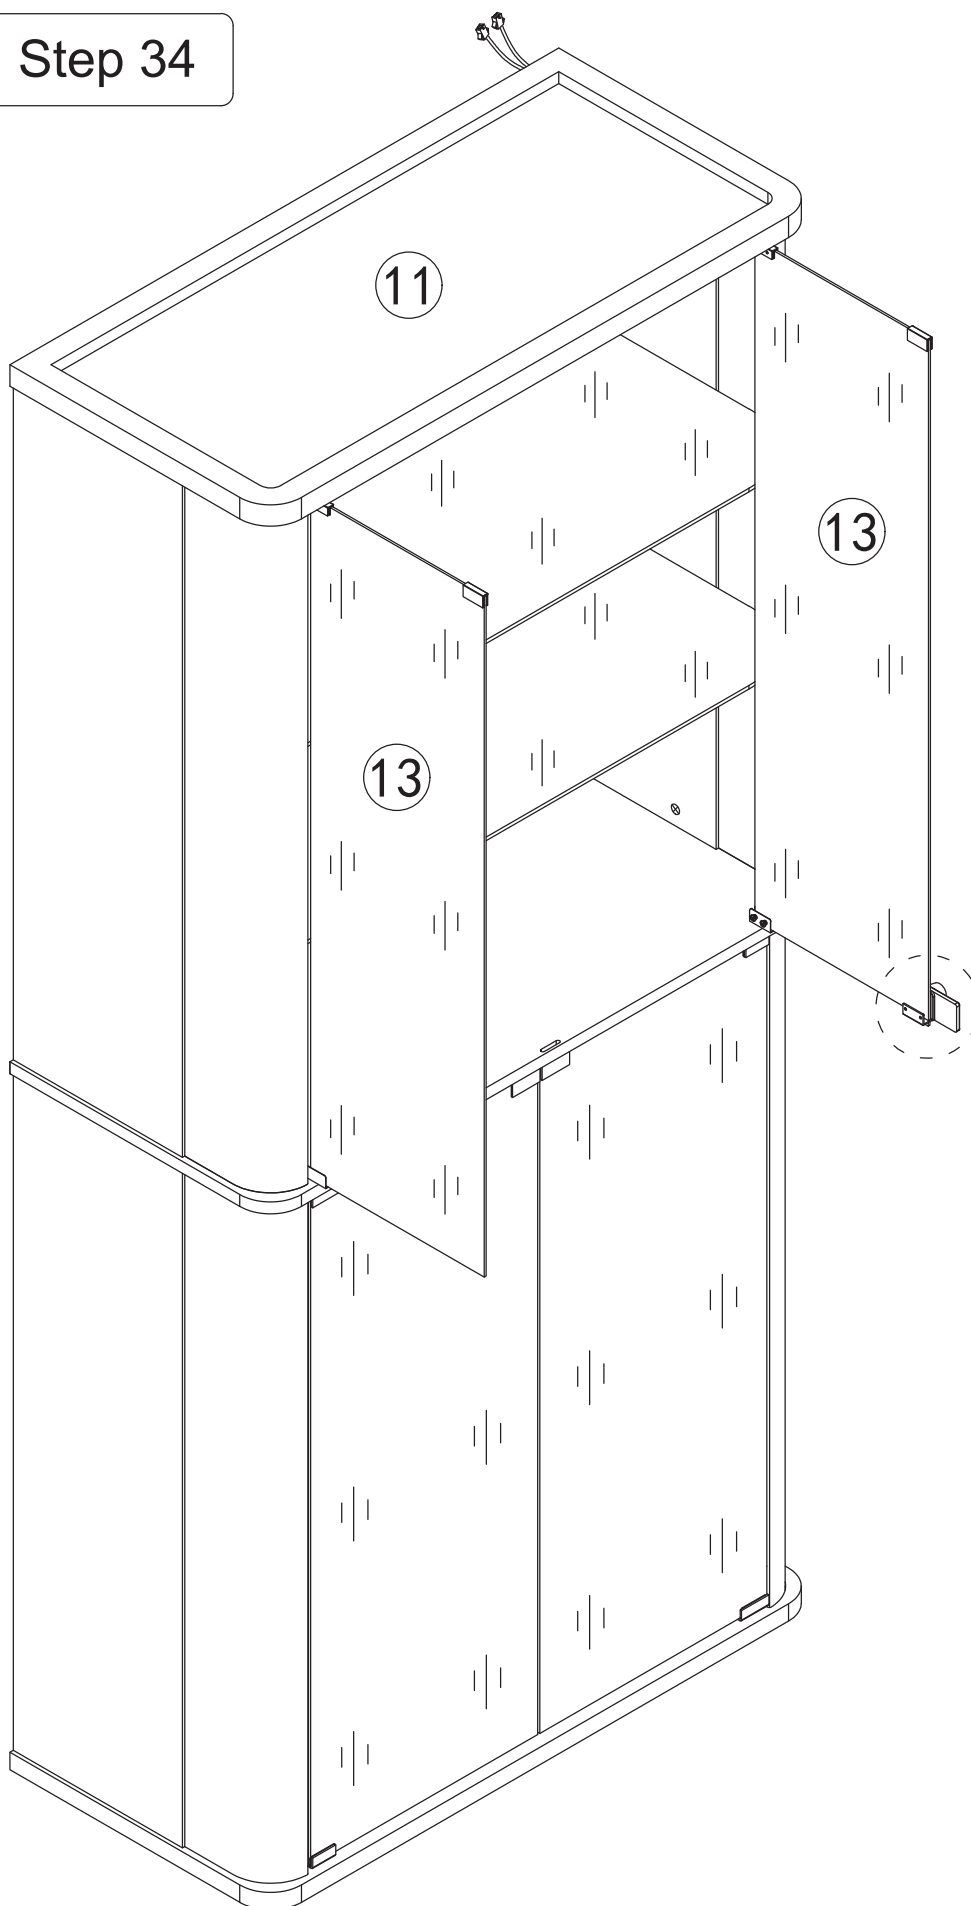

first




second




Step 35


The rebound device automatically
opens and closes by pressing

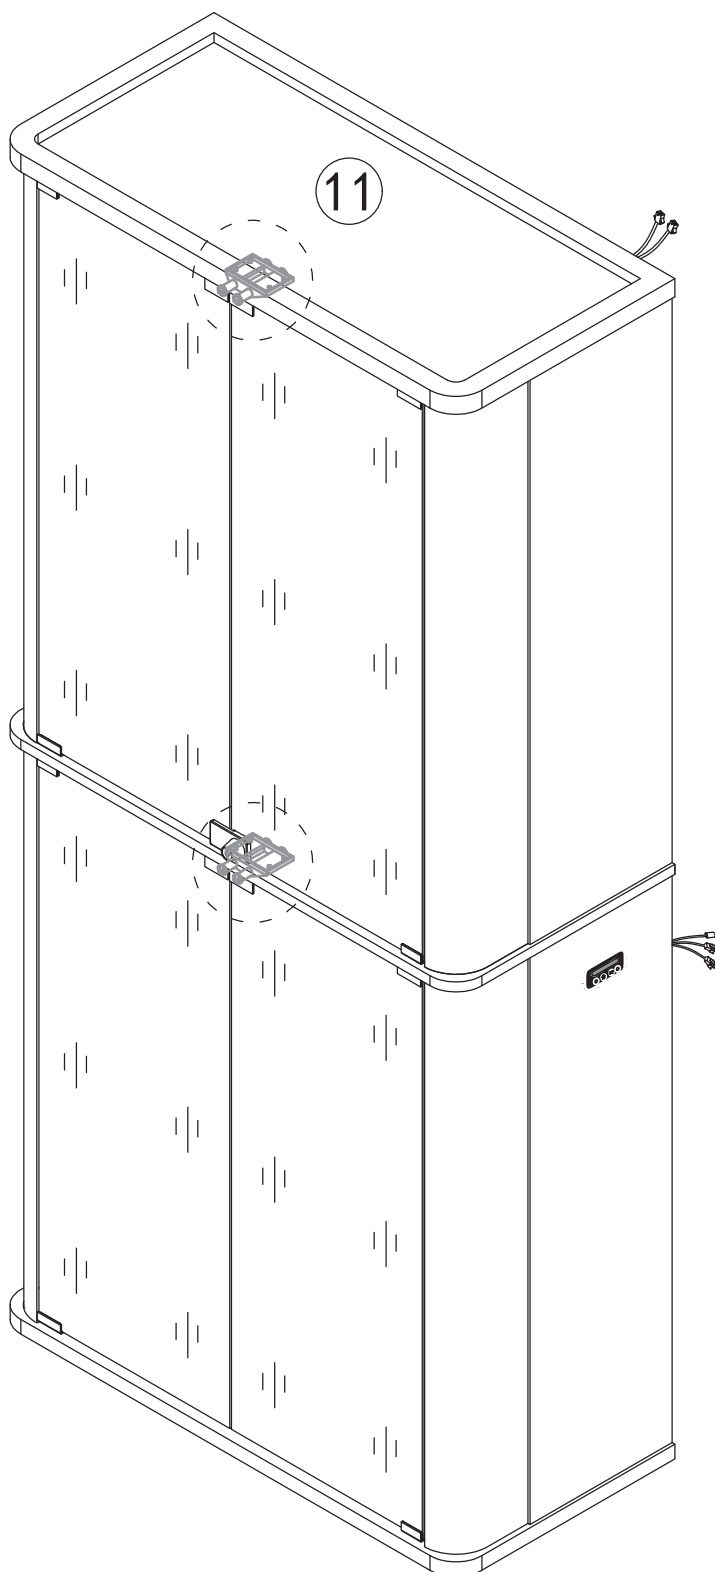

Open the glass door



Close the glass door

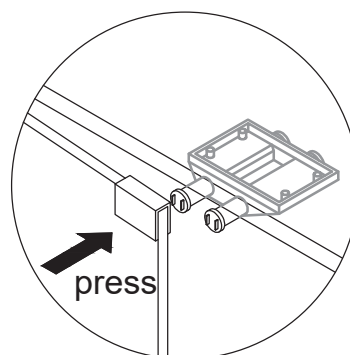



Step 36

1




x20

11

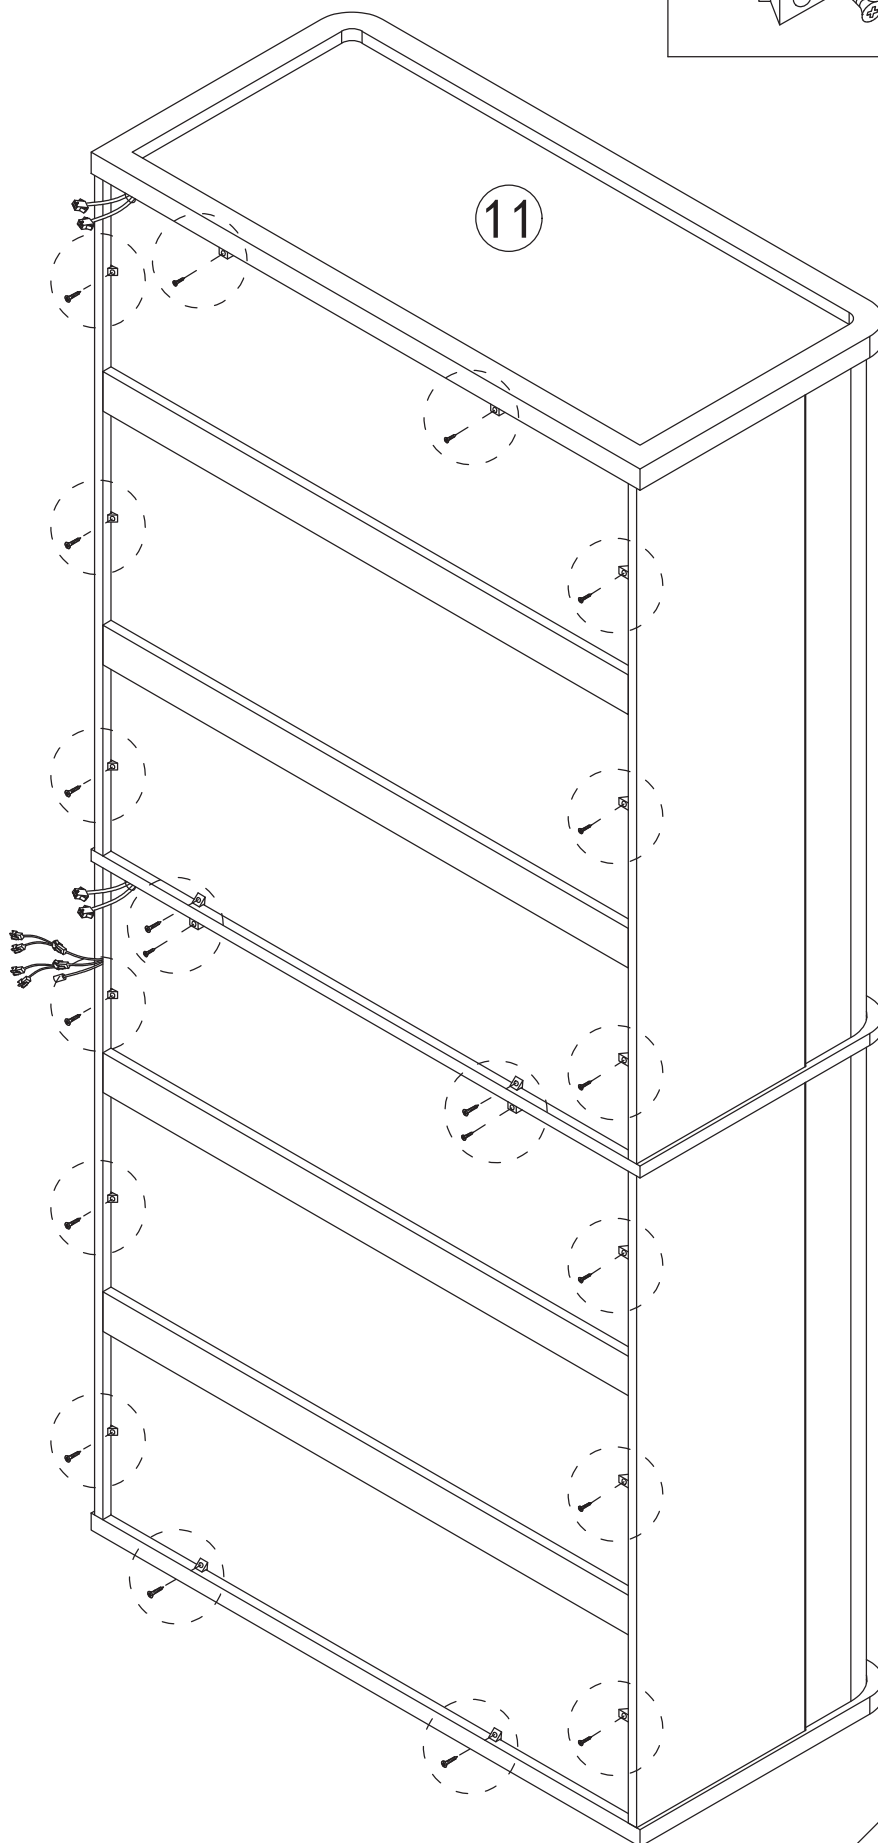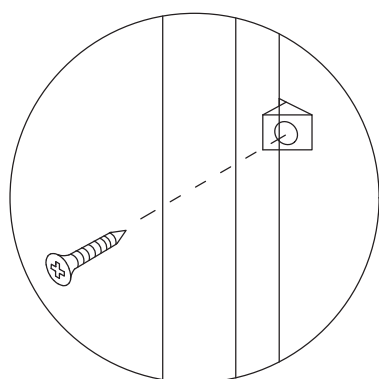


Step 37

L x2

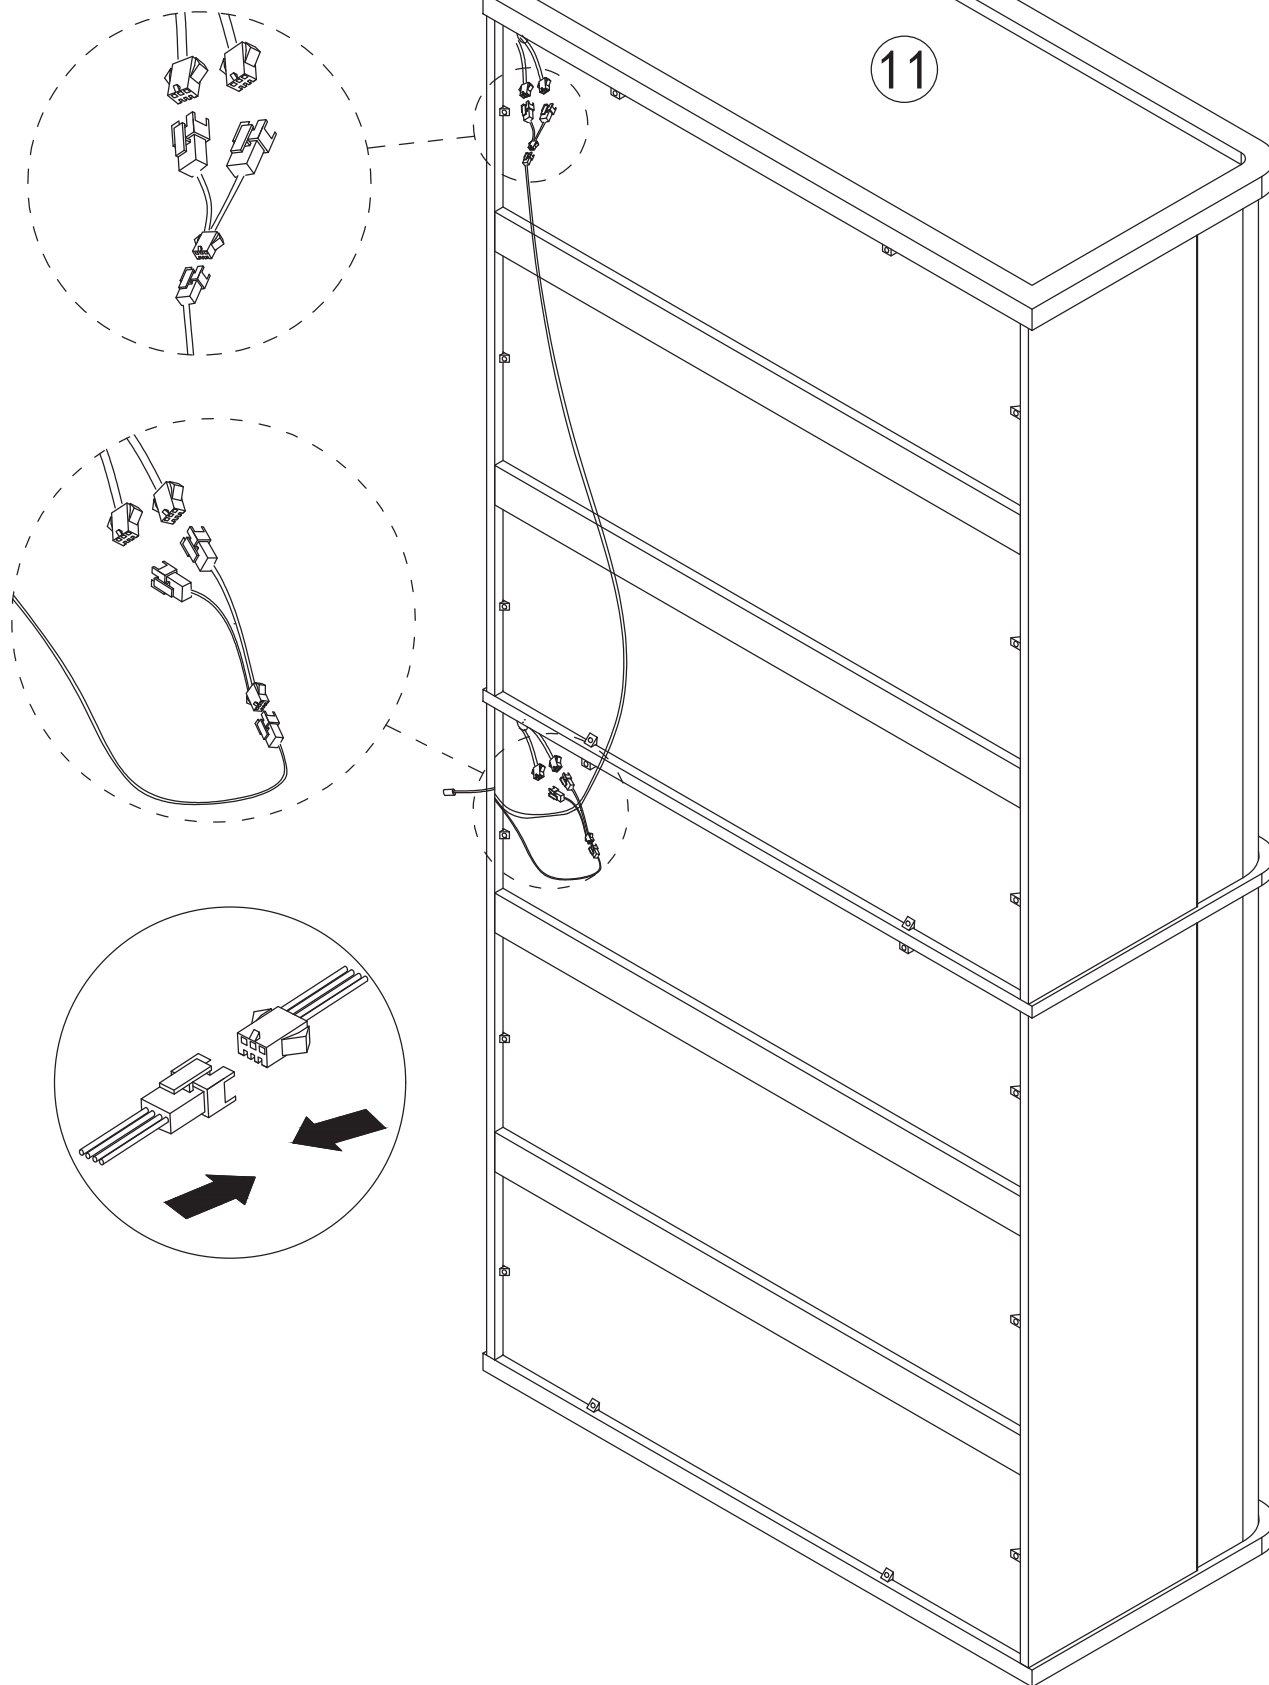

Step 38


J




x2

11

Step 39




x1

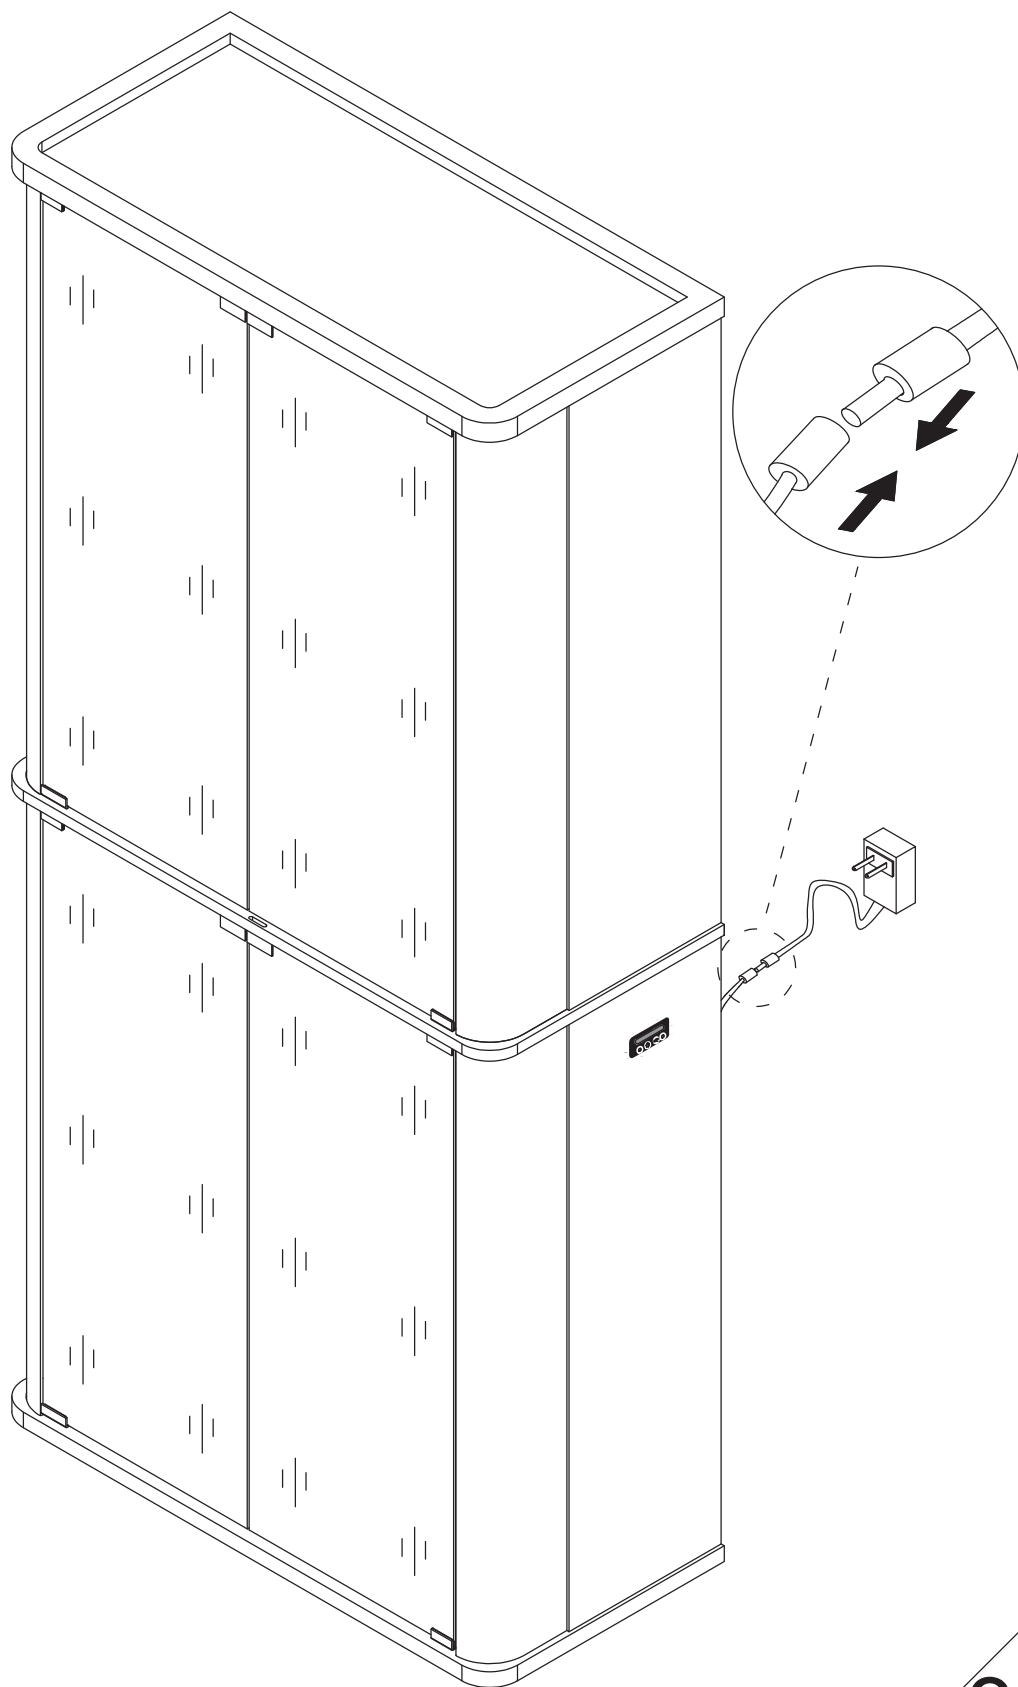

Step 40

Install as required

K



x2




x2






x2

3.5x14mm




Install the anti fall hardware on the cabinet as shown in the picture first

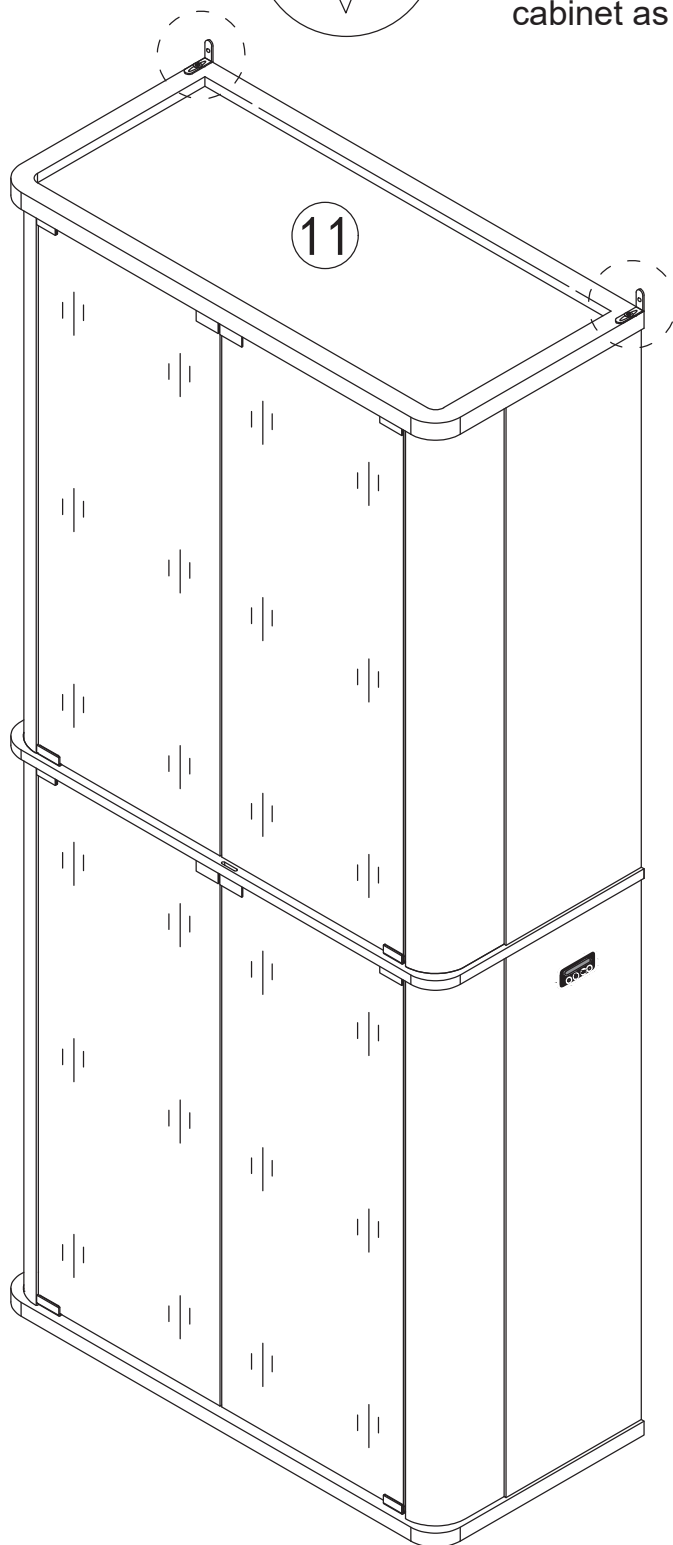


Then mark the wall with a pen through the holes in the anti-fall hardware

Step 41



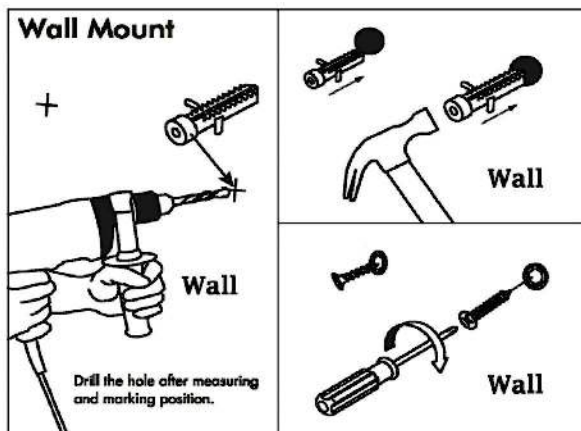


K

 x2

 x2  x2

Drill the hole with an electric drill and punch in the colloidal particles

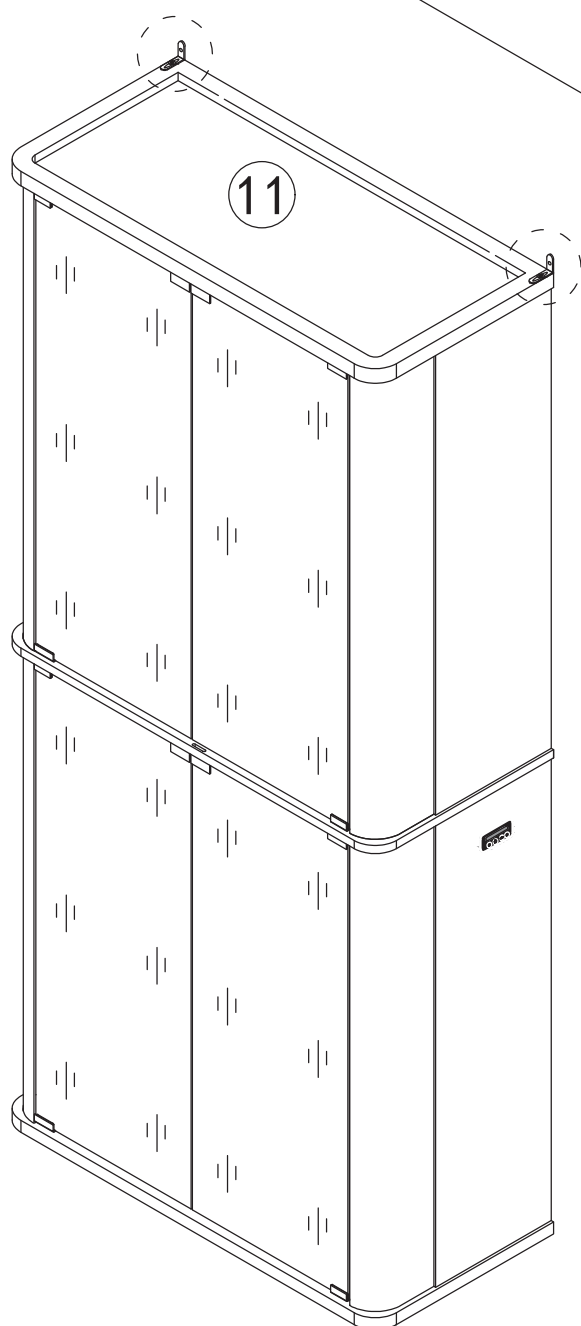

4x45mm

Fix the dressing table to the wall



User's Guide

Thank you for purchasing this product.

To use this product, please plug it into a 12V DC power supply.

Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. With 4 touch buttons, it can turn ON/OFF the light and turn ON/OFF the induction function, change light colors, and adjust the light luminance.

The lights can be controlled through both the touch buttons and a dedicated app.

Operation



This touch button is used to turn the light on/off, adjust brightness, and switch the color of the lights.

- i. Single Click: Turn the light on/off.
- ii. Quick Double-Click: Switch between 7 static RGB colors.
- iii. Long Press (2+ seconds): Adjust the light luminance.



This touch button is used to turn on/off the induction function.

A. touch this button once to turn on the induction function (indicator light on).

After the person leaves or remains stationary for more than 30 seconds, the light strip goes out; people and objects within a range of 1 meters move will light up the light strip.

B. Long press this button for 0.5 seconds to turn off the human body induction function (the indicator light goes out).

At this point, Keep the light strip as it was before turning off and no longer be affected by human and object activities. By default, induction function is enabled when powered on.



This touch button is the Dynamic Phantom Color Mode, which includes 5 magical lighting effects.

Simply tap to cycle through the options. (Attention: This mode cannot adjust the brightness)



This area controls the color switching function.

You can tap or slide to any color bar position to change the color.

Color Palette



Induction Button


Master Switch Button

Phantom Color Mode Button



ATTENTION PLEASE


1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
2. If bubbles appear on the panel, remove the protective film.
3. If you have any questions when installing, please feel free to contact us. Thank you.

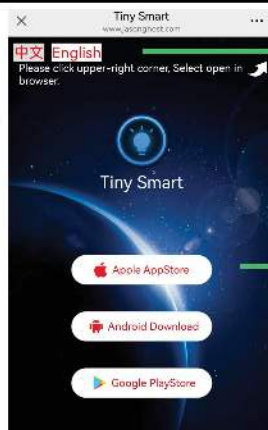


Select English Language



Select the corresponding device to download.
Note: If the download fails, please turn off the "Enhanced Protection" in the Pure Mode settings of the device.

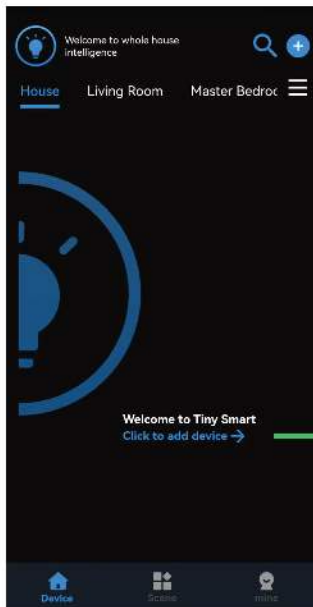


1

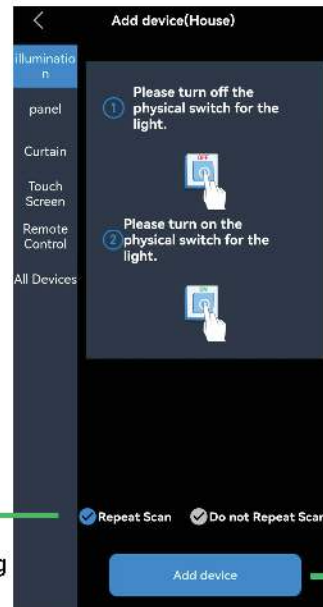

2

It turns blue after clicking

3

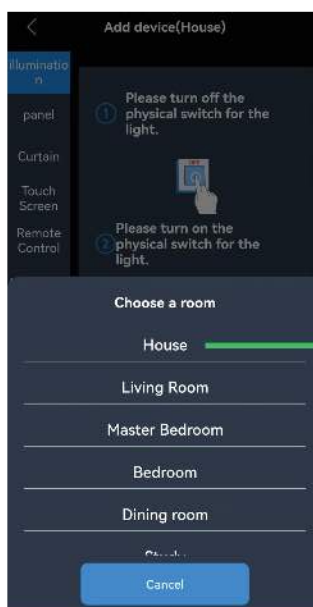

4




5 Unplug the smart box




6

7 Plug in the smart box power plug.

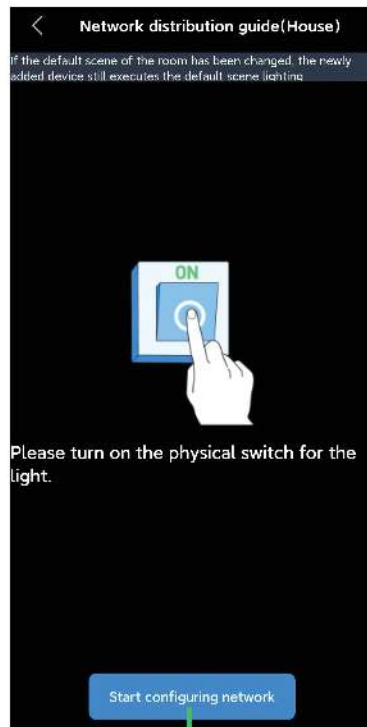

8

The appearance of this program icon indicates that the matching is complete

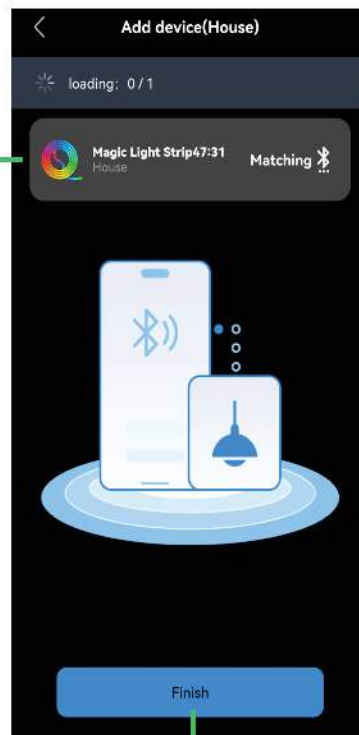

9



10



Now you can freely adjust the lighting according to your preferences