

E521L2030; E521L2040

5" NON-IC Pull Down LED Engine




PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

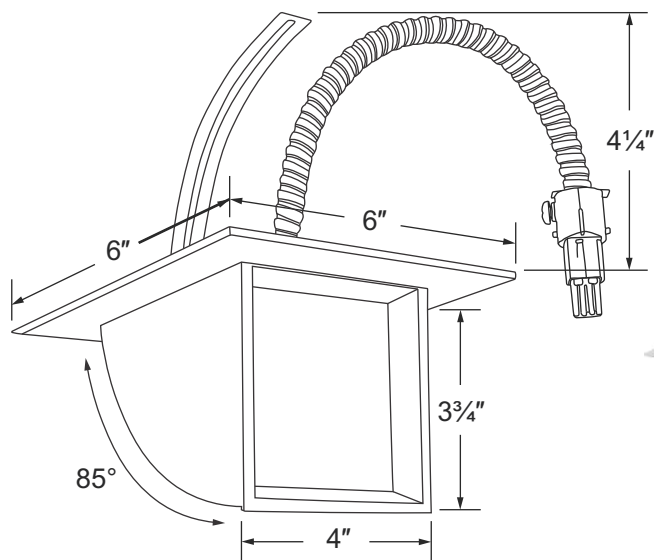

PRODUCT SPECIFICATIONS

- Suitable for installation into a 5" square recessed fixtures with 2-wire connector (EL5SQLFU20A)
- Adjustable 85° tilt, 356° rotation
- Meets restricted airflow requirements per ASTM E-283
- CA Title 24 compliant.
- Meets ENERGY STAR requirements.

Lamp: LED Array, CRI 90+

E521L1130: 26W, 3000K, 2000 lm

E521L1140: 26W, 4000K, 2000 lm

Life-span: 50,000 hours

Labels: UL listed for Wet Location

Finishes: White

Warranty: 5 years limited

CATALOG NUMBER

Example: E521L2030W
E521L2040W