
INSTURCTION MANUAL

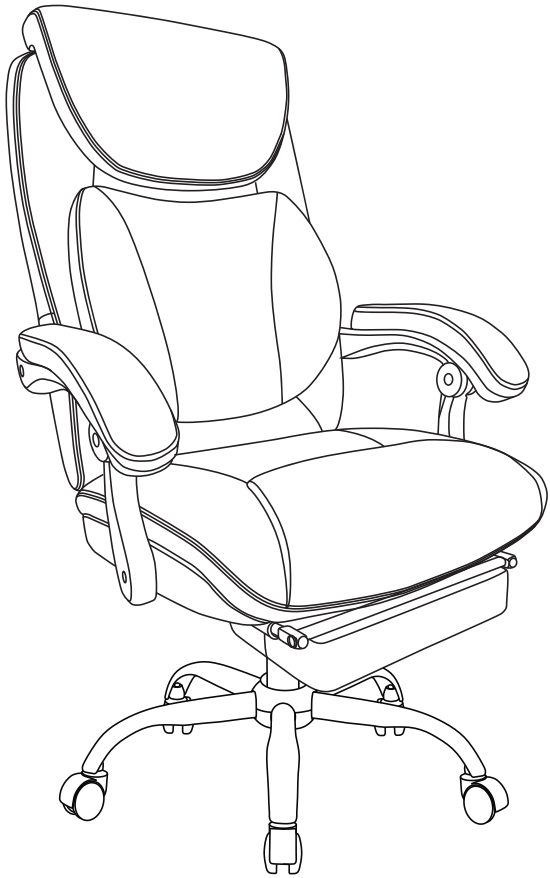

LG-BYOC300

ASSEMBLY GUIDE

Before enjoy the comfort chair, you have to put it together.This Assembly Guide will take you through the basic assembly process. To make sure your assembly goes smoothly, please follow the assembly instructions, **and especially the important safety information.**


Also, while it is possible to assemble the chair on your own, **having a second person to help you makes it even easier.**

Before you begin, please check if there are any missing parts from the package. Should there be any issues, please don't hesitate to drop us an email and we'll help you out ASAP.

If you run into any difficulty during the assembly, remember to check out the Assembly Video to see if you've missed anything. If you're unable to resolve your problems, drop us an email as well and our support team will assist you.


PACKAGE LIST

Ⓐ



Casters
Quantity: 5

Ⓑ




Star Base
Quantity: 1

Ⓒ




Gas Lift
Quantity: 1

Ⓓ



Arms
Quantity: 2

Ⓔ



Seat Plate
Quantity: 1

Ⓕ



Back Cushion
Quantity: 1

Ⓖ



Seat Cushion
Quantity: 1

Ⓗ



Footrest
Quantity: 1


Ⓘ



Steel Plate
Quantity: 1

① 


Spacer Bolts M6*20mm
Quantity: 8

② 

Bolts M8*35mm
Quantity: 4

③ 

Spacer Bolts M8*20 mm
Quantity: 3

④ 

Bolts M6*30mm
Quantity: 4

⑤ 

Plastic Caps
Quantity: 4


⑥ 

T-Wrench
Quantity: 1


ASSEMBLY INSTRUCTION

If possible, using drill bit with your electric drill to install our chair will make assembly more convenient.


STEP 1 : Turn the Star Base upside down, then press the Casters into the holes at the end of each base leg.

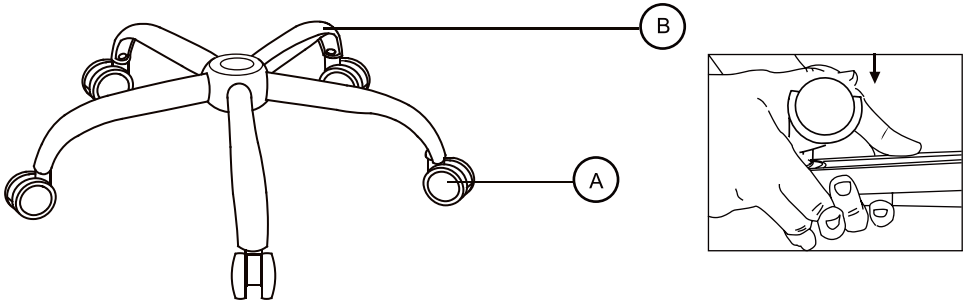


STEP 2 : Turn the Star Base upright and insert the Lift into the center hole of the Star Base, the Lift Cover should be placed over the Lift.

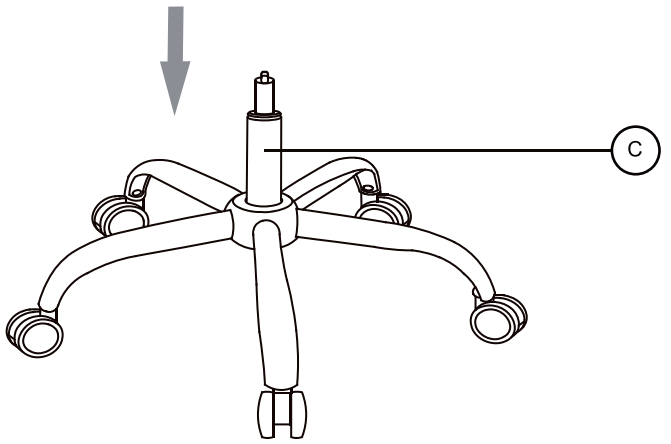


STEP 3 : Align the seat plate to the bottom of the seat cushion, make sure that the front of the seat plate is facing the front of the seat cushion. Attach the seat plate to the seat cushion using four M6X20m bolts, tighten all the bolts with the T-wrench.

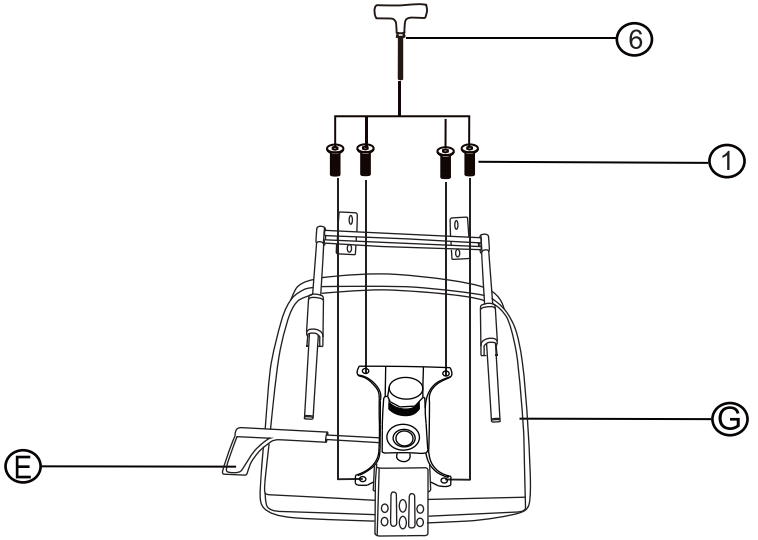


STEP 4 : Align two control handles of the seat plate over the pre-drilled holes underneath the seat cushion with four M6x20m Bolts, tighten all the bolts with the T-wrench. the bolts with the T-wrench.

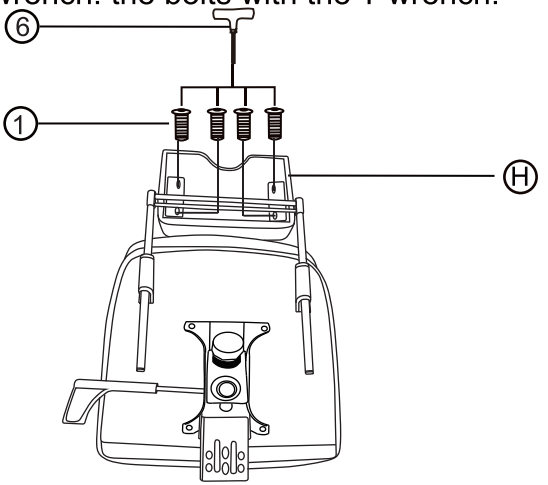


STEP 5 : Attach Seat Cushion and Back Cushion, align the Steel Plate over the pre-drilled holes underneath the back cushion with four M6x30mm Bolts, tighten all the bolts with the wrench.

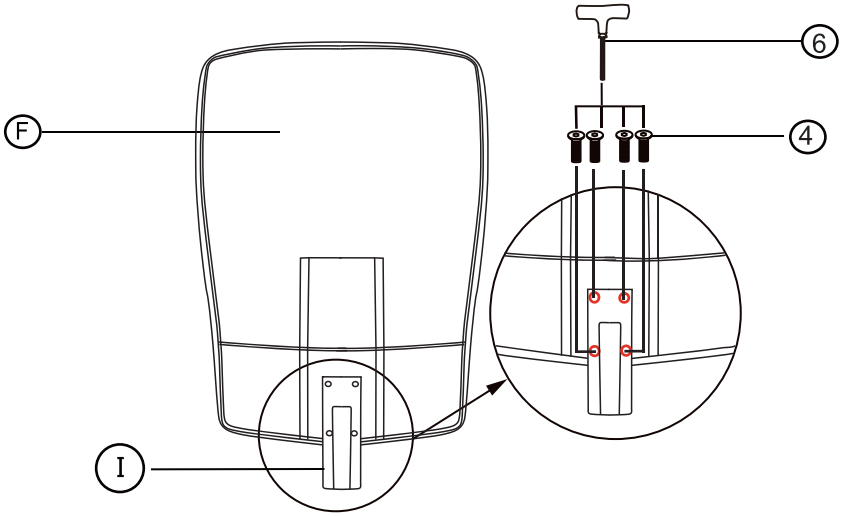

STEP 6 : Then insert one end of the back cushion steel plate under the bottom plate of the seat with three M8x20 Bolts, tighten all the bolts with the wrench.

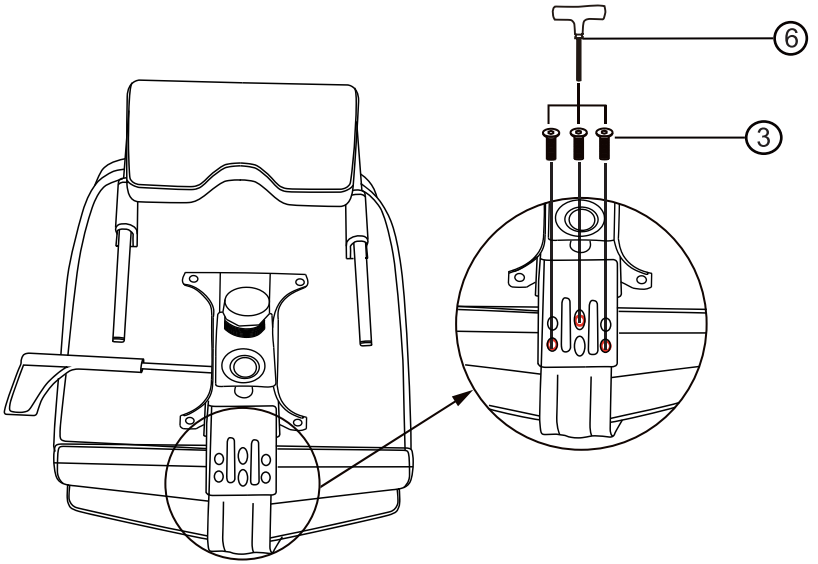


STEP 7 : Turn the seat cushion upright and align the center hole of the seat plate over the lift, then push the seat cushion down onto the lift firmly until the connection is secure.

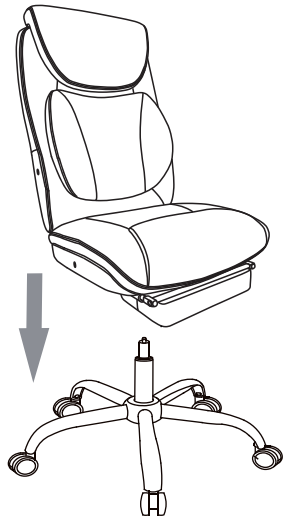


STEP 8 : Attach the arms to the seat cushion with four M8X35mm bolts, using the Wrench.


Note: Arm rests are labeled with an “L”(left) or “R”(right) to show which sides they should be placed on.

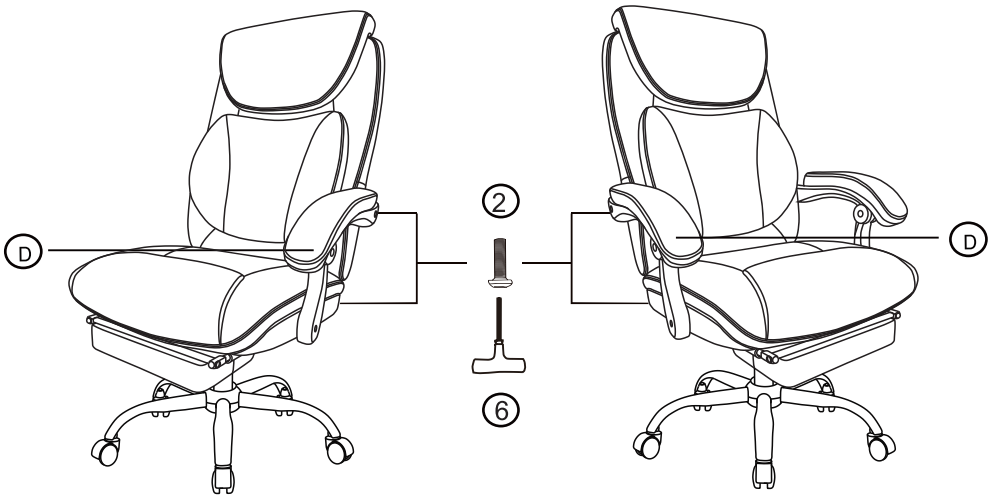

STEP 9 : Press the plastic caps into the adjuster holes to cover the bolts.

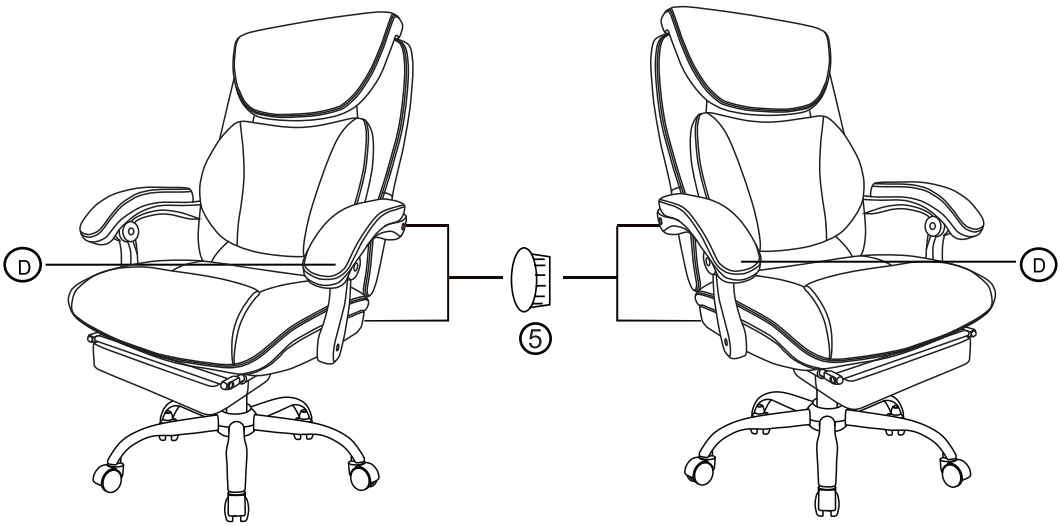


Congratulations!You've assembled your chair.

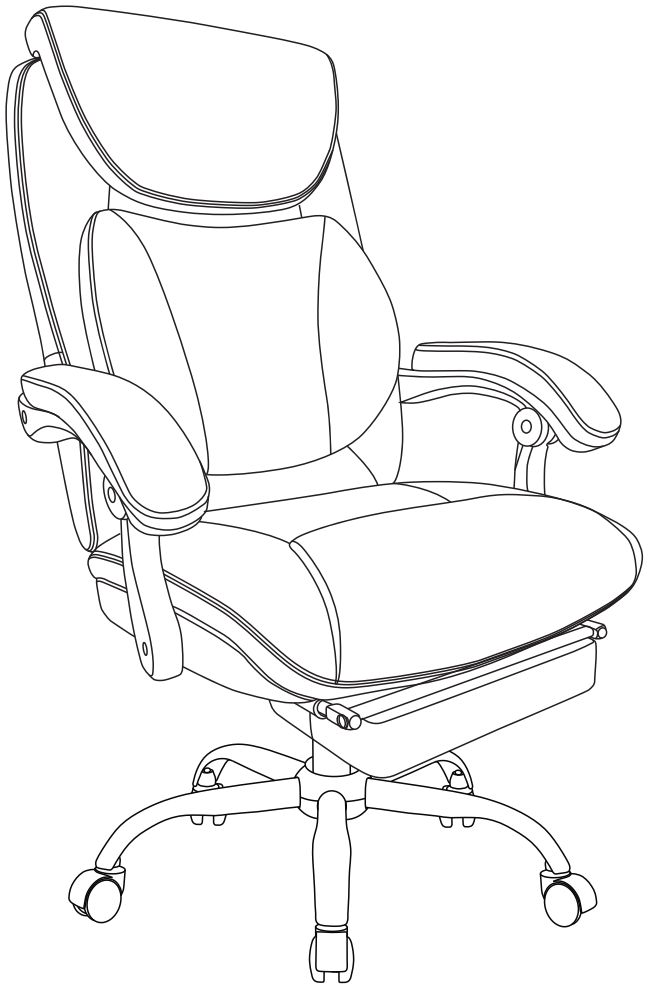

INSTRUCTIONS FOR USE

1.Seat Height:Paddle-shaped lever on the right side

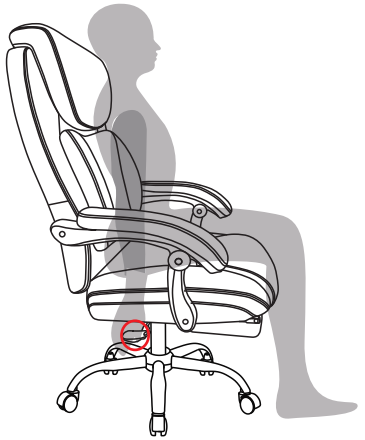

To raise:


While taking your weight off chair, lift lever up.

To lower:

While seated, lift lever up.

* *At the proper height, your feet should rest flat on the floor.*

2.Tilt Tension: Long stem under the seat cushion with knob

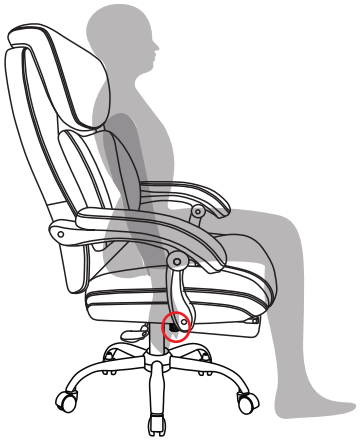

To increase tension:
While seated, turn knob forward (toward + sign).

To decrease tension:
While seated, turn knob backward (toward - sign).

INSTRUCTIONS FOR USE

3.Adjustable Back Angle



4.Lifting headrest and dynamic suspension lumbar pillow



SAFETY AND MAINTENANCE

- Do not stand on the chair, Do Not use the chair as stepladder.
- Use this product for seating one person at a time.
- Do not use the chair unless all bolts and screws are firmly secured.
- Avoid contact with sharp objects to prevent puncturing the fabric.
- Every 6 months, check all bolts and screws to ensure they are tight.
- To clean, spot clean only using a damp towel and mild cleaner, first test on a small,, obscure area of fabric.
- Chair weight limit not to exceed 350 lbs.

SAFETY INFORMATION



Sit in the center of the chair,with your back to the backrest



Do not sit at the front edge of the chair



Do not stand on the chair



Do not use the chair with more than one person



Do not push the chair around when a person is sitting in it



Do not push down on the backrest when a person is reclined



Do not place all your weight on the backrest only