

- LG49-YP1C Finish(C)
- LG49-YP1K Finish(K)
- LG49-YP1U Finish(U)
- LG49-YP1Y Finish(Y)

- Two-Handle
- 3-Hole Installation
- Pforever Seal

Specifications

Features

- 1.2 GPM Flow Rate
- MatchMakers® Accessories Available
- Complete Collection with Coordinating Roman Tub and Tub & Shower Options
- Solid Cast Brass Body and Spout
- Metal Lever Handles
- Includes Metal Supply Nuts
- 8"-15" Variable Installation
- 3-Hole Installation
- Metal Pop-Up
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- Cal Green Compliant
- EPA WaterSense Certification 1.2 gpm, 4.5 L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

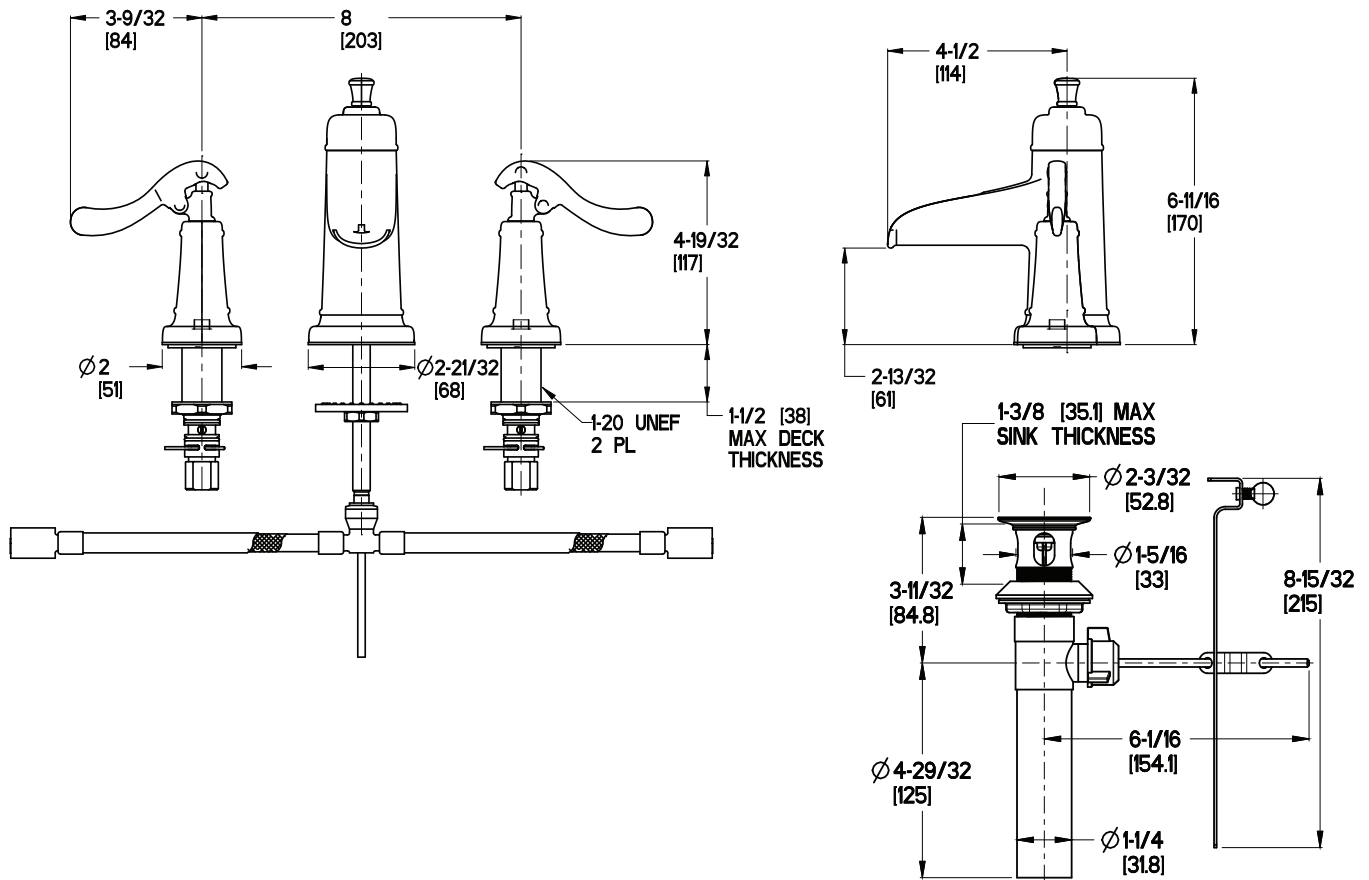

$\varnothing 1$ Min to $\varnothing 1\frac{1}{2}$ Max. Deck Hole Openings

Metal Pop-Up