

ASSEMBLING & INSTALLATION INSTRUCTIONS

The drawing shown may not exactly match the product enclosed. However, the installation instructions do apply to this product

- ◆ **WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.**
- ◆ **ATTENTION! COUPER LE COURANT AU FUSIBLE OU UN DISJONCTEUR.**

ASSEMBLING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker box. Remove old fixture and all hardware from Junction Box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to lose any small parts necessary for installation.
3. Thread the two mounting screws about 1/4" into the pre-drilled holes in the mounting plate spaced the same distance apart as the holes in the canopy.
4. Attach the mounting plate to the Junction Box with the two Junction Box Screws as shown. The side of the mounting plate marked "GND" must face out. **The junction box is not included.**
5. By measuring, determine correct cord length of needed for proper hanging height, then lock it securely with small screw. **NOTE: SLIDE WIRE CLIP TO THE PROPER POSITION, THEN YOU MAY PROPERLY CUT THE CORD TO DESIRED LENGTH. CONNECT THE ELECTRICAL WIRES AS SHOWN IN FIG.2.**
6. While holding the lamp body(A) towards the ceiling, connect the electrical wires as Shown in **Fig.2**, making sure that all wire nuts are secured. You may have to wrap the connections with electrical tape. If your junction box has a ground wire (green or bare copper), connect the fixture ground wire to it. Otherwise connect fixture's ground wire directly to the mounting plate with the green screw provided. **This lamp body provided two copper ground wires, one copper ground wire connects cord's ground wire, other one copper ground wire connects junction box ground wire or mounting plate's green screw.** After wires are connected, tuck them carefully inside the Junction Box.
7. Raise the lamp body(A) onto the junction box, aligning the mounting screws on mounting plate with mounting hole in canopy and lock it securely with the round nut(B). Raise the lamp holder(C) into the top ring of the shade(D), lock it securely with the check ring(E) until tight.
NOTE: THE SHADE(C) OF THE PRODUCT MAY VARY.
8. Install the light bulbs(not included) in accordance with the fixture specifications. **NOTE: DO NOT EXCEED THE SPECIFIED WATTAGE!**

Your installation is now complete. Return power to the junction box and test the fixture.

FIG.1

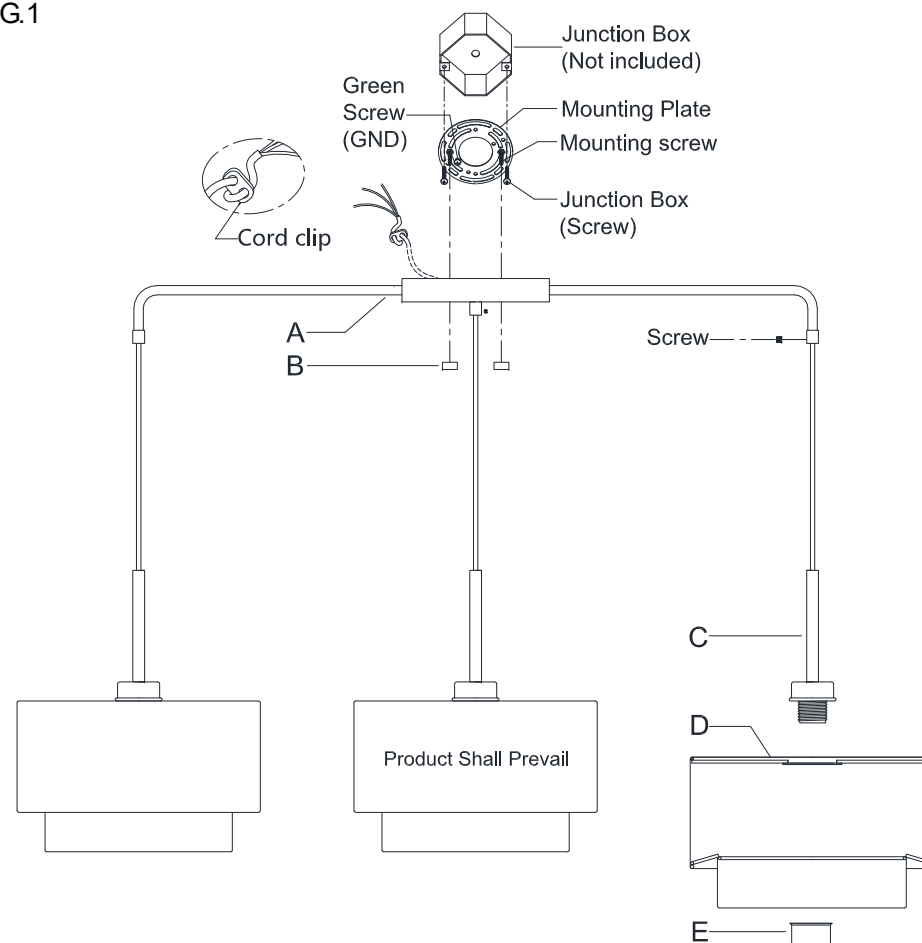


FIG.2

