




5	hanging ring 1PCS	6	metal ring 1PCS	7	chain 1PCS	1PCS	3PCS
4	cover 1PCS					1PCS	3PCS
3	metal box 1PCS					5PCS	3PCS
1	metal profile 1PCS screw 1PCS lock nut 1PCS teeth lock washer 1PCS	1	lock nut 4PCS teeth lock washer 4PCS metal profile 4PCS screw 4PCS	8	bracket 1PCS		
2	light fixture 1PCS			9	canopy 1PCS		
				10	ring 1PCS		

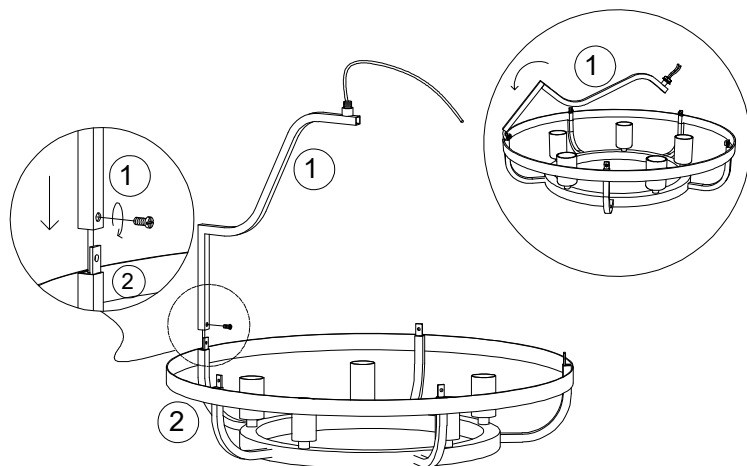


1.Put the metal profile ① into the light fixture ②, rotate to fasten it with screw.

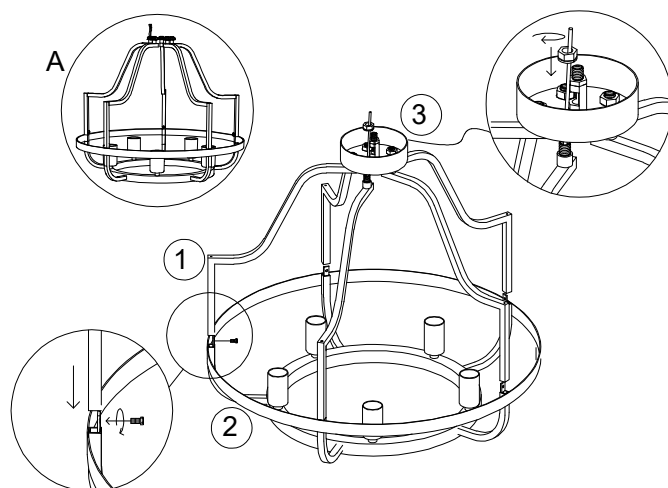

2.Install the other profiles① to the fixture ② with screw.
3.Install the profiles① to the box ③ with lock nut and teeth lock washer.

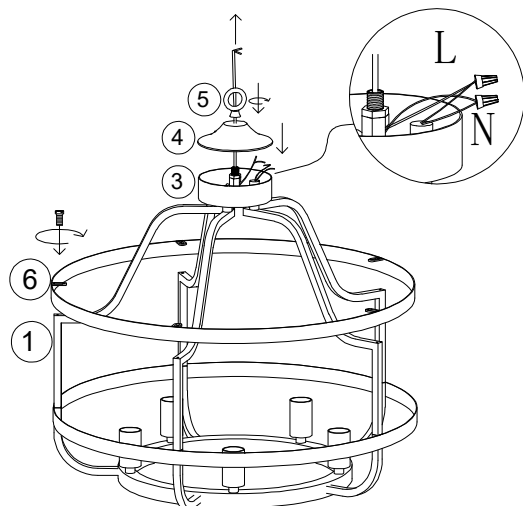

4.Connect all the wires by parallel with cap connectors (all live line-L use one connector, and neutral Line-N use another connector).
5.Close the cover ④ to the box ③ with hanging ring ⑤.
6.Install the ring ⑥ to the fixture with screw.

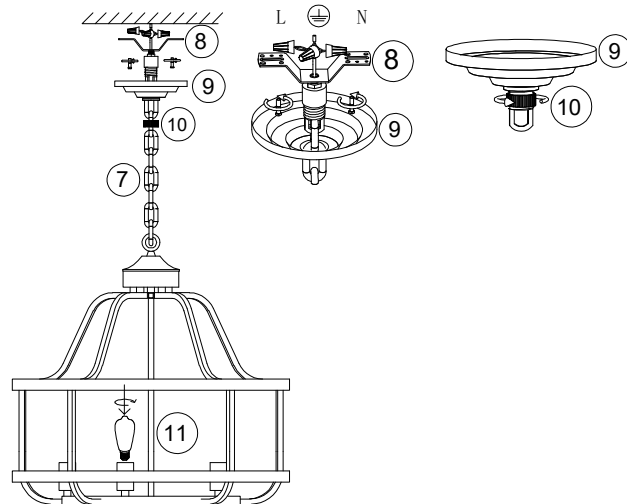

7.Hang the chain ⑦to the fixture, let the wire go through the chain ⑦.
8.Install the bracket ⑧ to the ceiling junction box with screw.
9.Let the wire and chain ⑦go through the ring ⑩, canopy ⑨ and bracket ⑧, hang the chain ⑦ to the bracket ⑩.Connect the wire to the home line with cap connector.
10.Rotate the ring to install the canopy to the bracket.
11.Install the bulb ⑪.(bulb is not included in the package)

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !
Only a professional electrician should install this kind of product !