

①	① light fixture 1pcs	④	④ hanging ring	⑩	lock nut & teeth ⑫ lock washer	⑬	⑬ cap nut 20pcs	⑰	⑰ chain 1pcs	X 1PCS
②	② hanging tube 1pcs	⑤	⑤ cover	⑪	⑪ screw 10pcs	⑭	⑭ plastic washer 20pcs			X 1PCS
③	③ metal plate 10pcs	⑥	⑥ connected metal plate	⑫	⑩ metal profile 5pcs	⑮	⑮ screw 20pcs			X 3PCS
		⑦	⑦ connected metal plate			⑯	⑯ glass piece 5pcs	⑱	⑱ canopy 1pcs	X 3PCS
		⑧	⑧ cover					⑲	■ ⑲ cap nut 2pcs	X 3PCS
		⑨	⑨ end cap							X 3PCS



1.Rotate to install the tube ② to the fixture ①.




2.Install the metal plate ③ to the profile ⑩ with screw ⑪.(make the plate horizontal before fasten the screw)




3.Loosen the ring ④ to remove out the ring ④ and cover ⑤ from plate ⑥.




4.Loosen the end cap ⑨ to remove out the end cap ⑨ and cover ⑧ from plate ⑦.





please install all profils to the upper plate ⑥ first, after finishing install them to the down plate ⑦.


5.Install the profiles ⑩ to the round plate ⑥ and round plate ⑦ up and down with lock nut and teeth lock washer ⑫.(don't tighten the screws until all screws are ready in the holes of plate, rotate to fasten the screws at last)

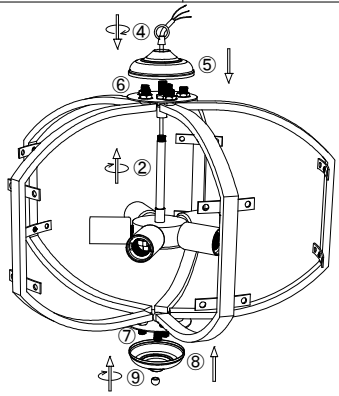


6.Let the wire of the fixture go through the plate ⑥, rotate to install the fixture and frame together.

7.Let the wire of the fixture go through the cover ⑤ and ring ④, rotate ring ④ to close the cover ⑤ to the fixture,close the cover ⑧ to the plate ⑦ with end cap ⑨.


should be carefully when install the glass piece to avoid damage or scratching !!!

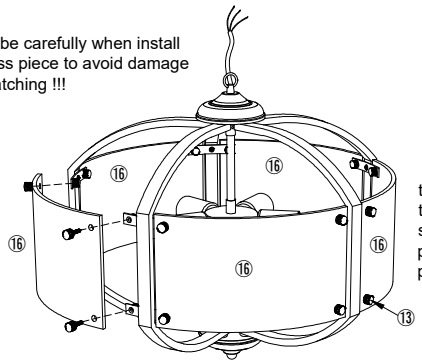





there will be thickness tolerances for glass piece, so don't need to use the plastic washer if the glass piece too thick.

8.Install the glass pieces ⑯ to the profile ⑩ with screw ⑮ and plastic washer ⑭ and cap nut ⑬, don't tighten the cap nut ⑬ until all screws ⑮ are in the holes of glass pieces, rotate to fasten the screw ⑮ to the cap nut ⑬ at last.（should be carefully when install the glass piece to avoid damage or scratching !!!）

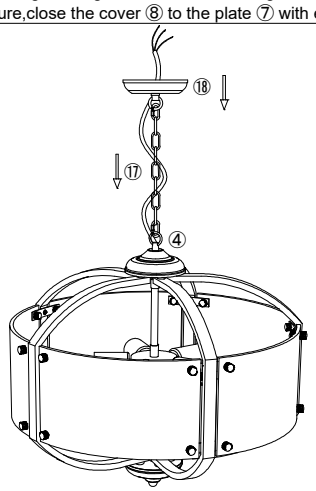

9.Hang the fixture to the canopy ⑱ with chain ⑰, let the wire go through the chain ⑰ and canopy ⑱.



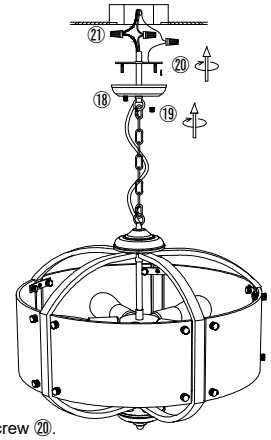

10.Install the bracket to the ceiling junction box with screw ⑳.

11.Connect the wire to the home line with cap connector ㉑.

12.Install the fixture to the bracket with cap nut ⑲.

13.Install the bulb ㉒.

Please read carefully before installation!!!

Note : Please make sure that the electricity is powered off during installation !

Only a professional electrician should install this kind of product !