




97170 Product Installation Instructions

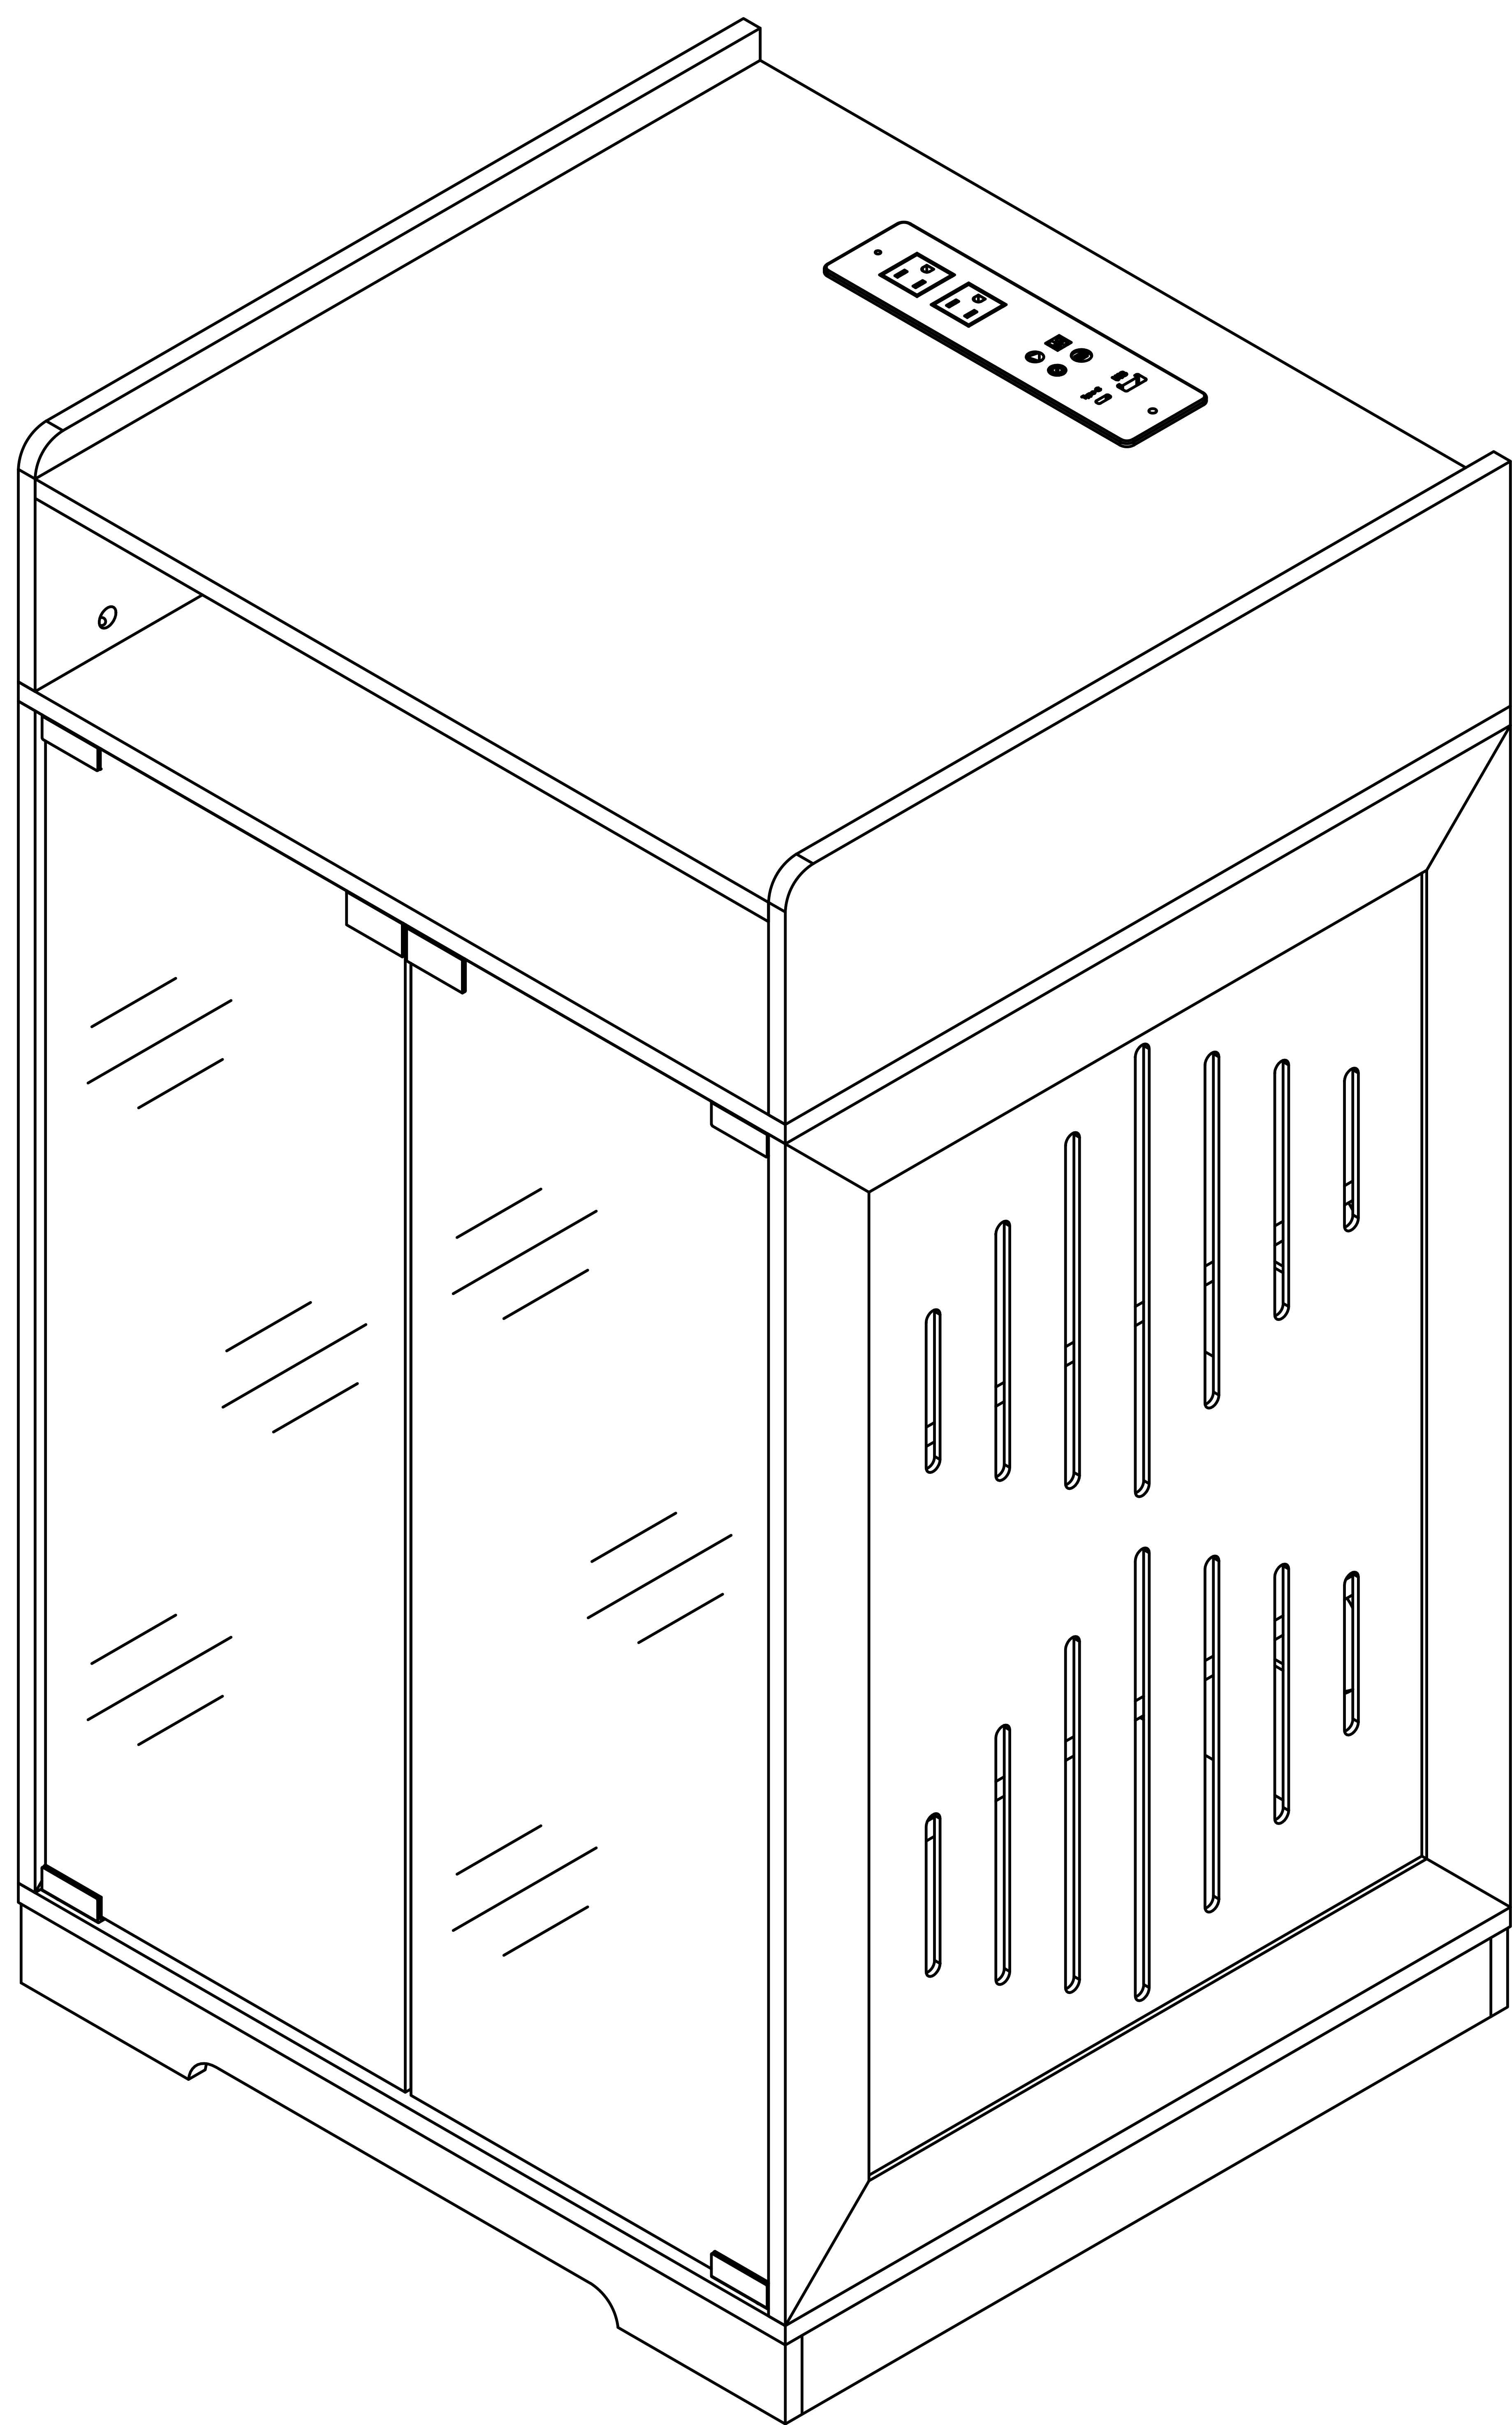


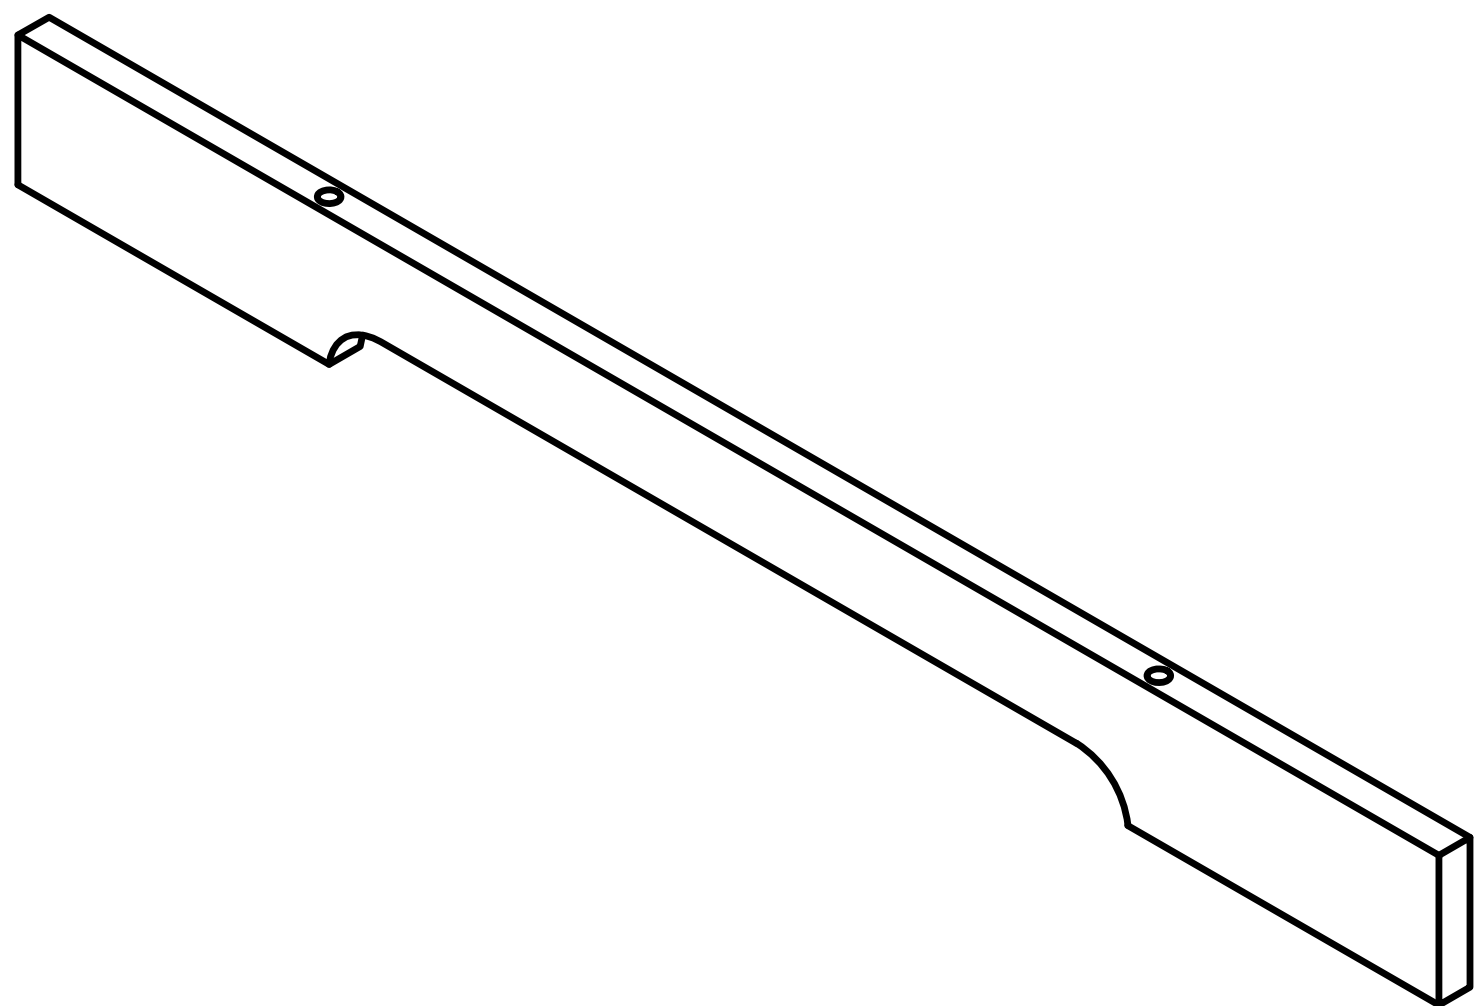


Ax1

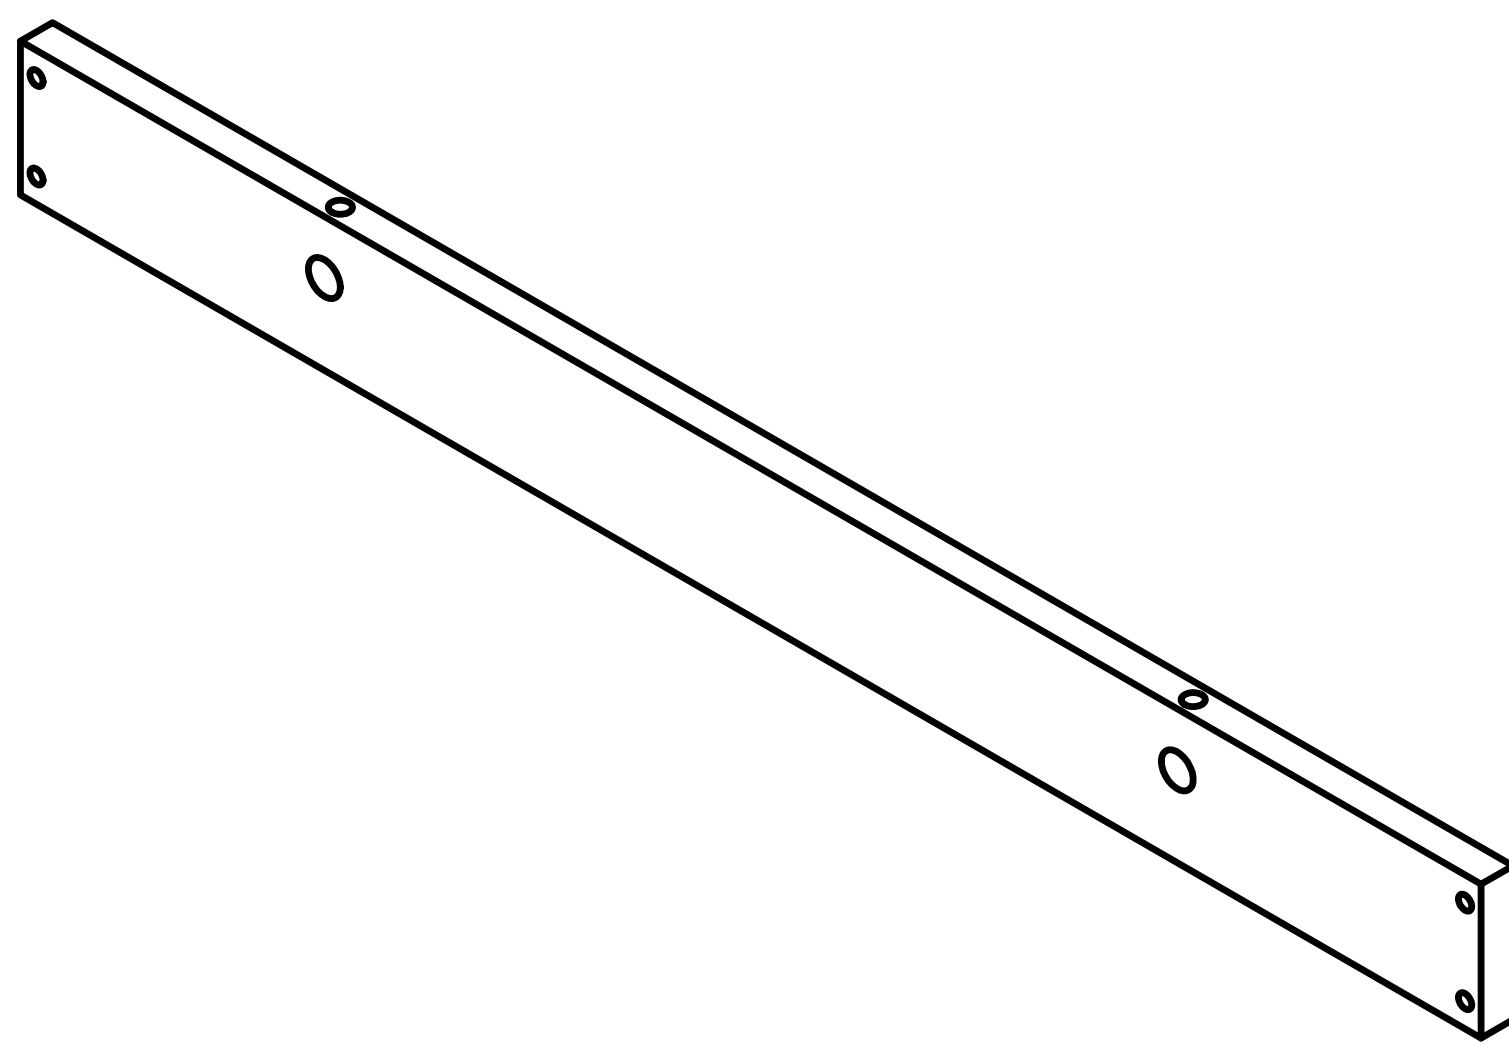


Bx1

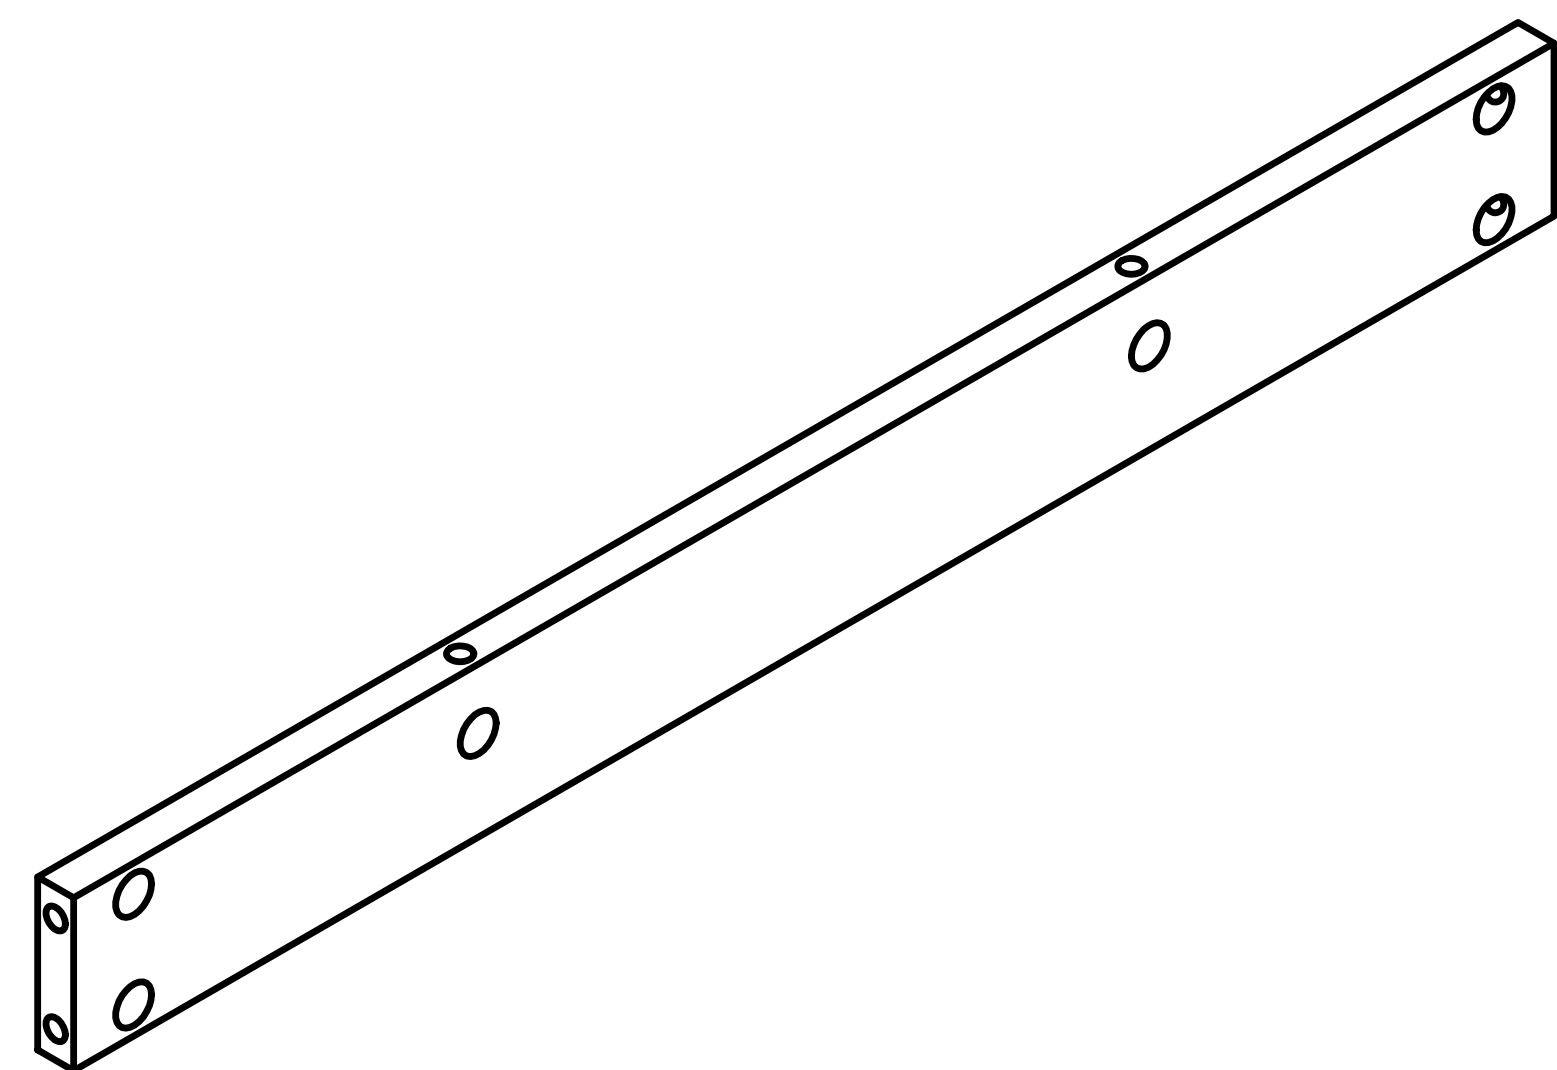


Cx2

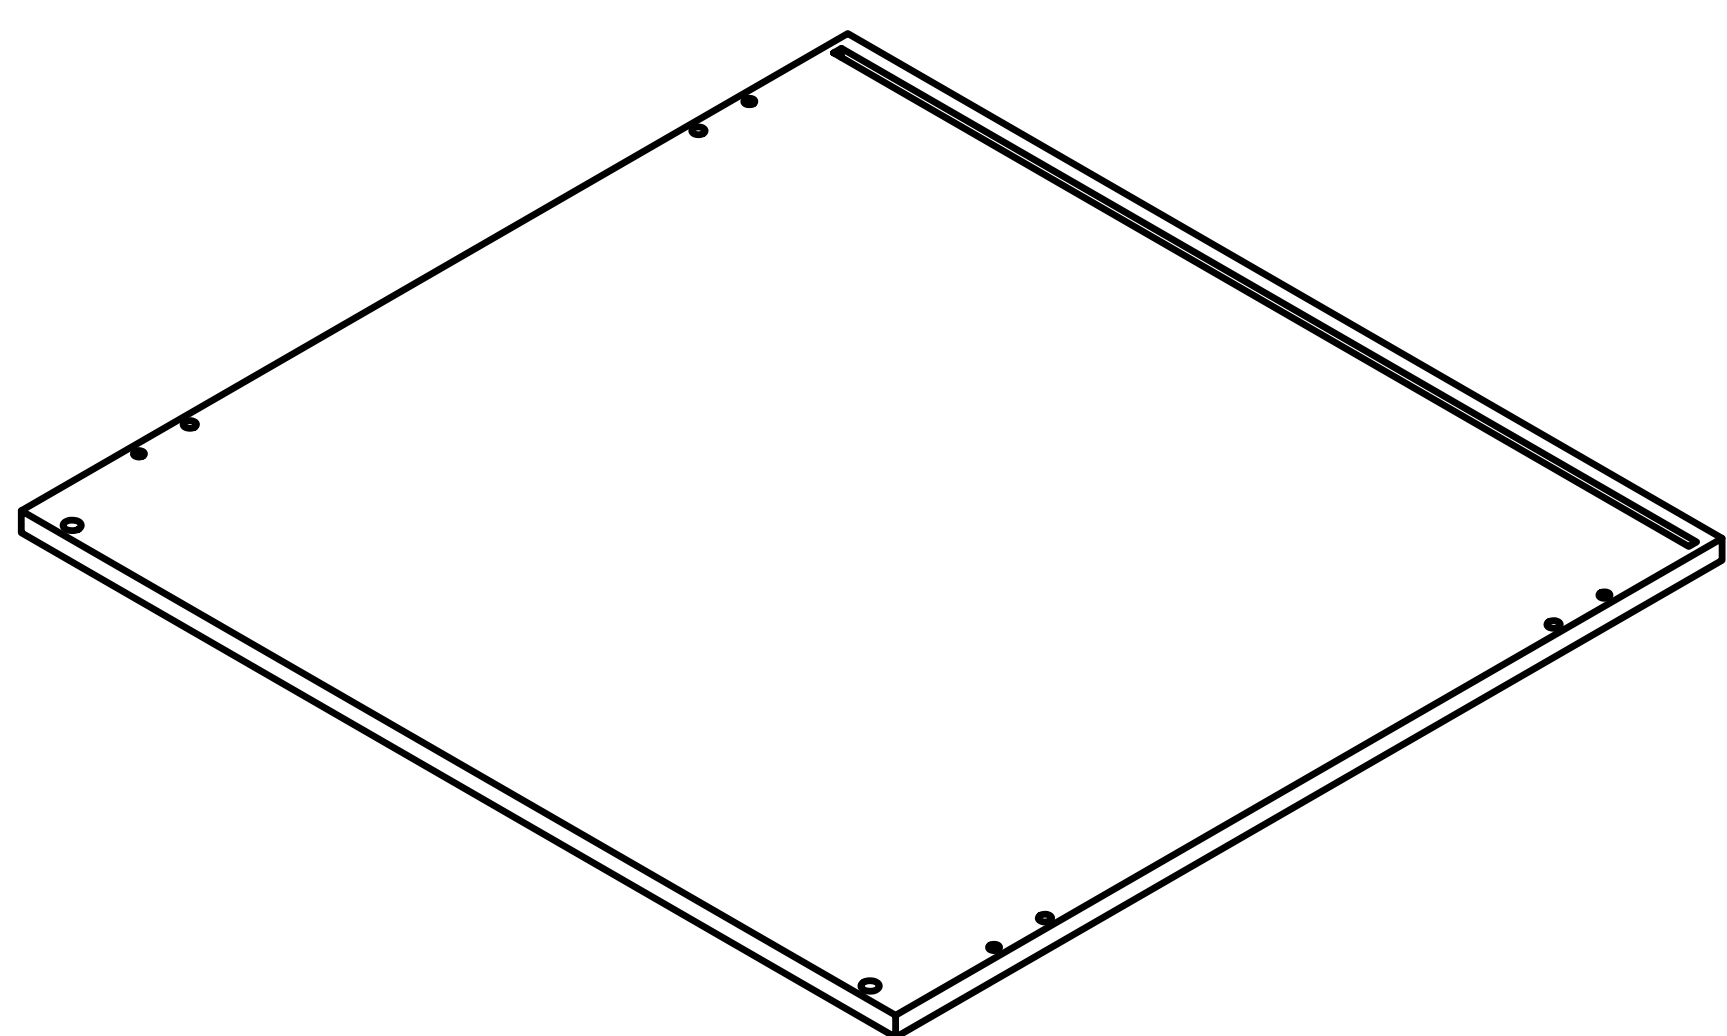


Dx1

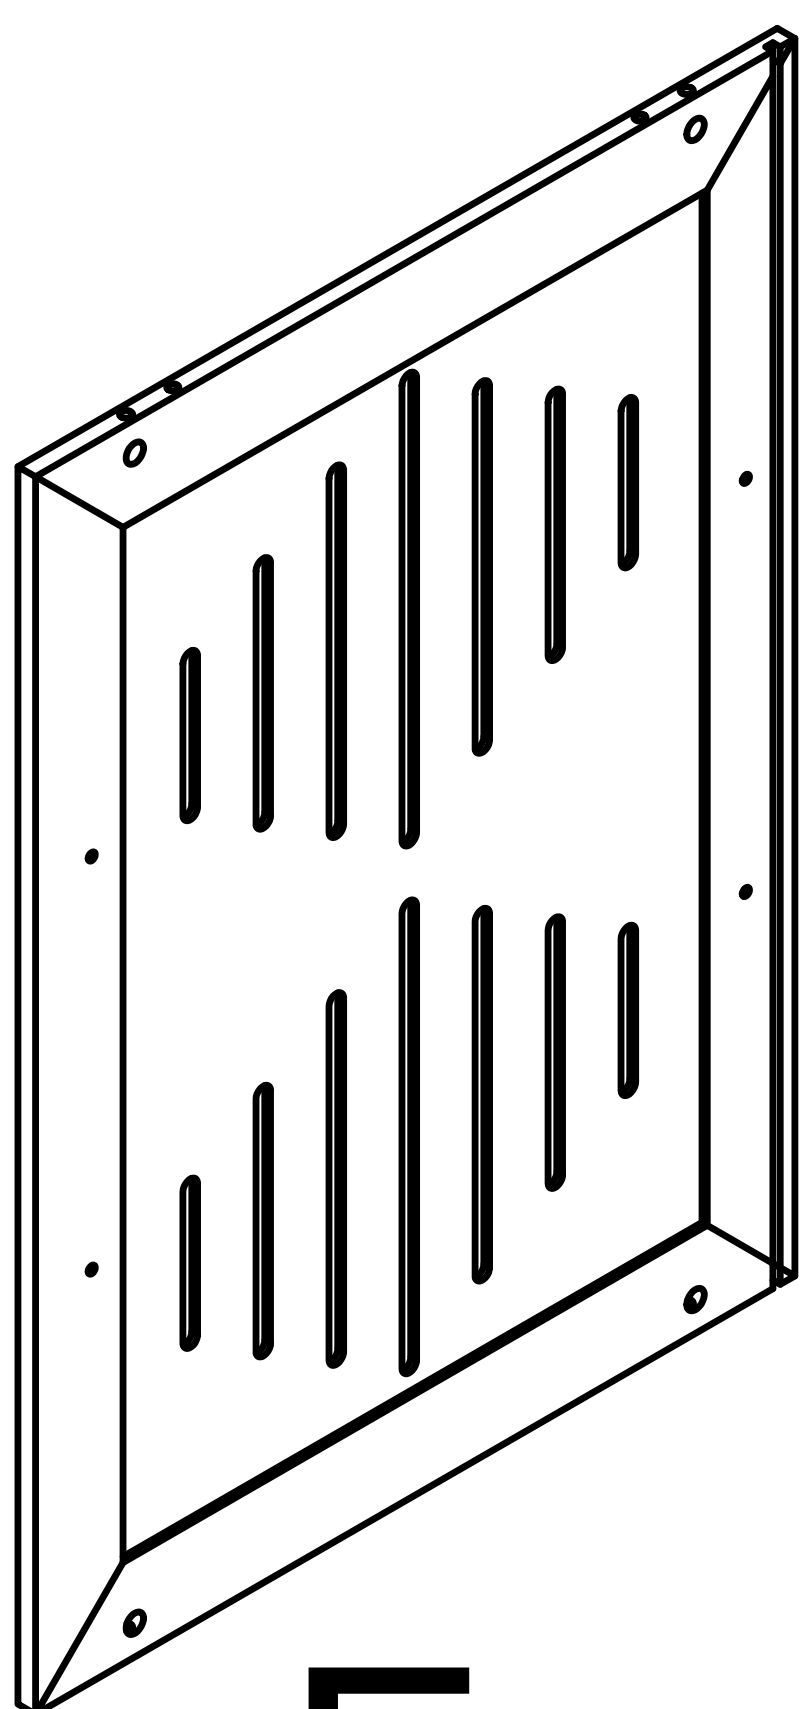


Ex2

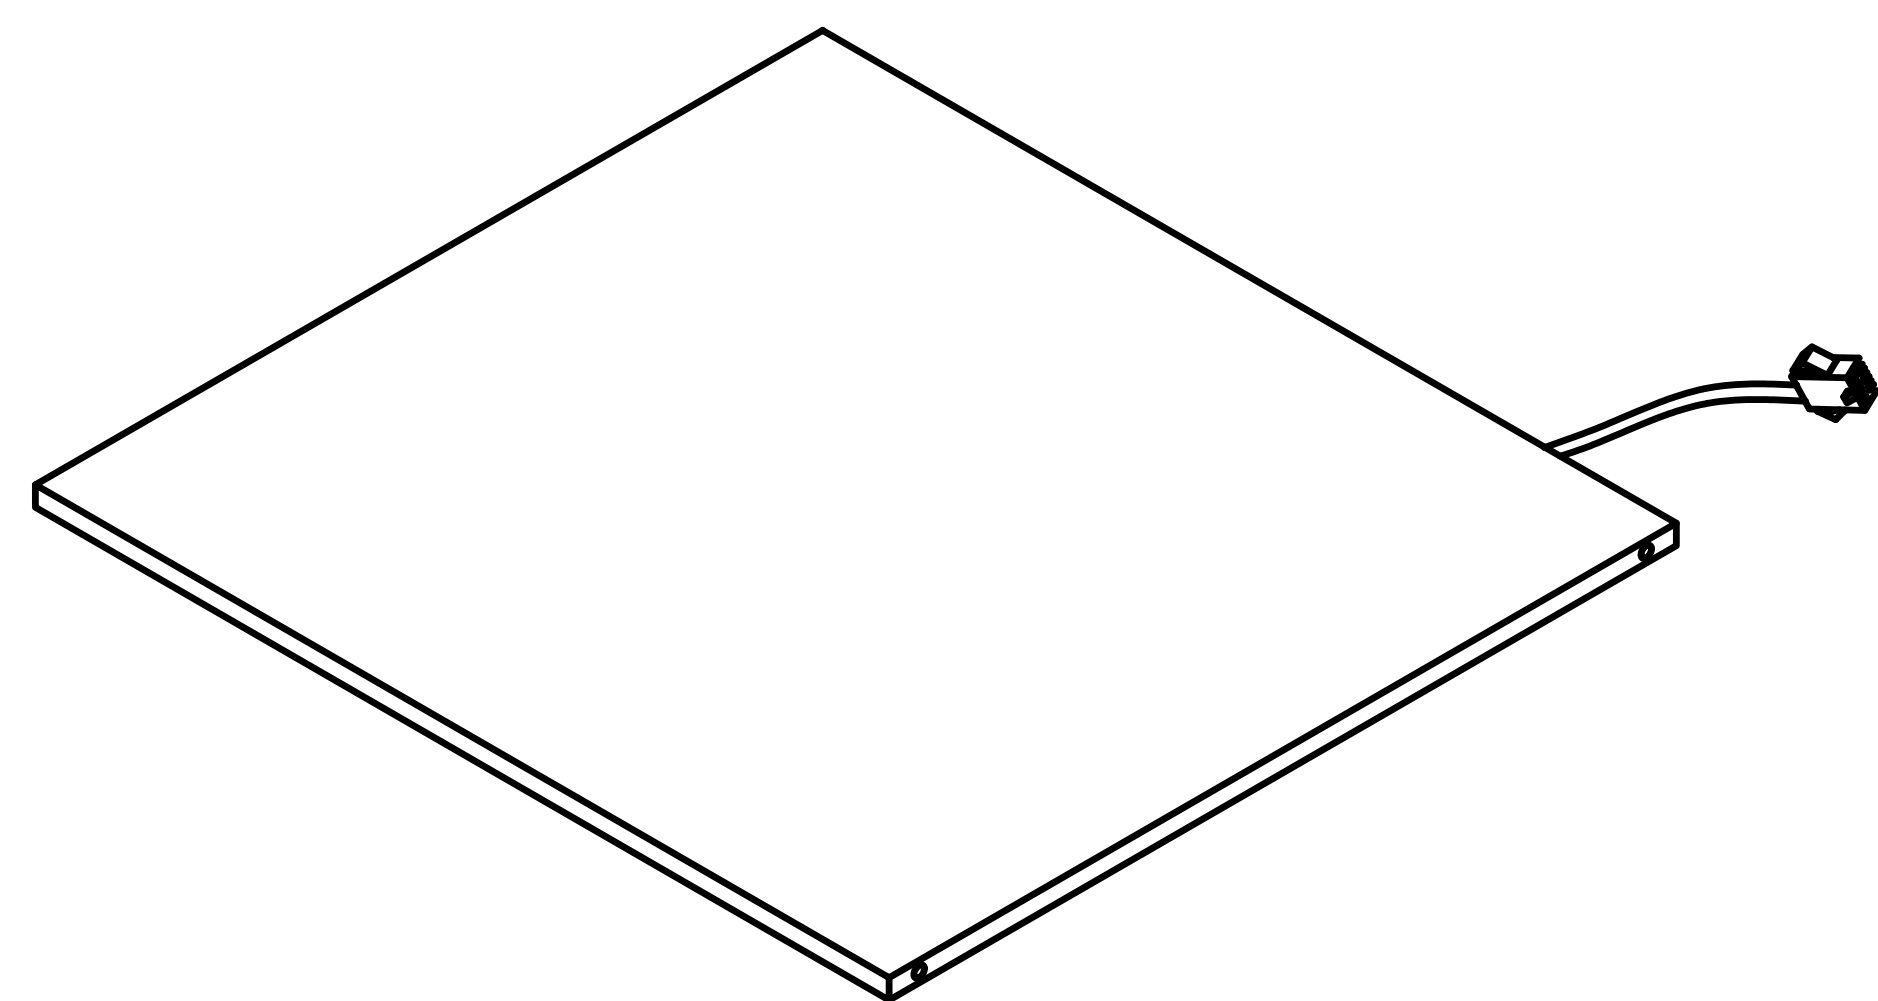


Fx2

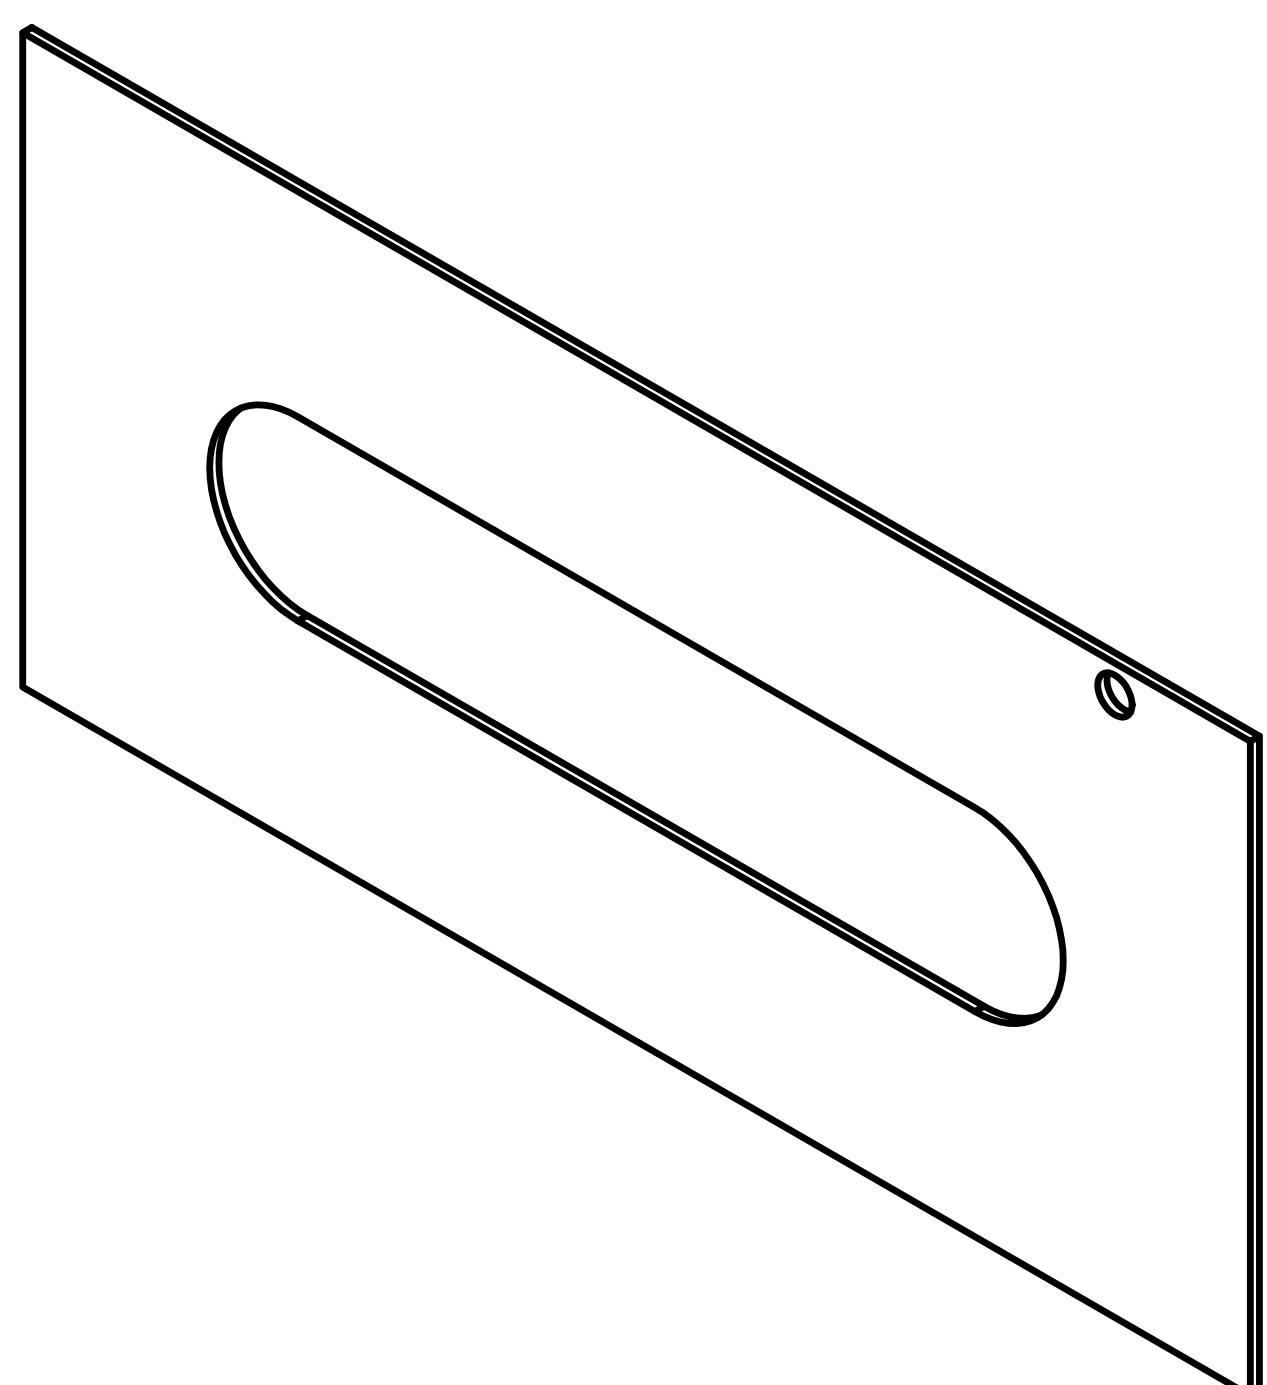


Gx2

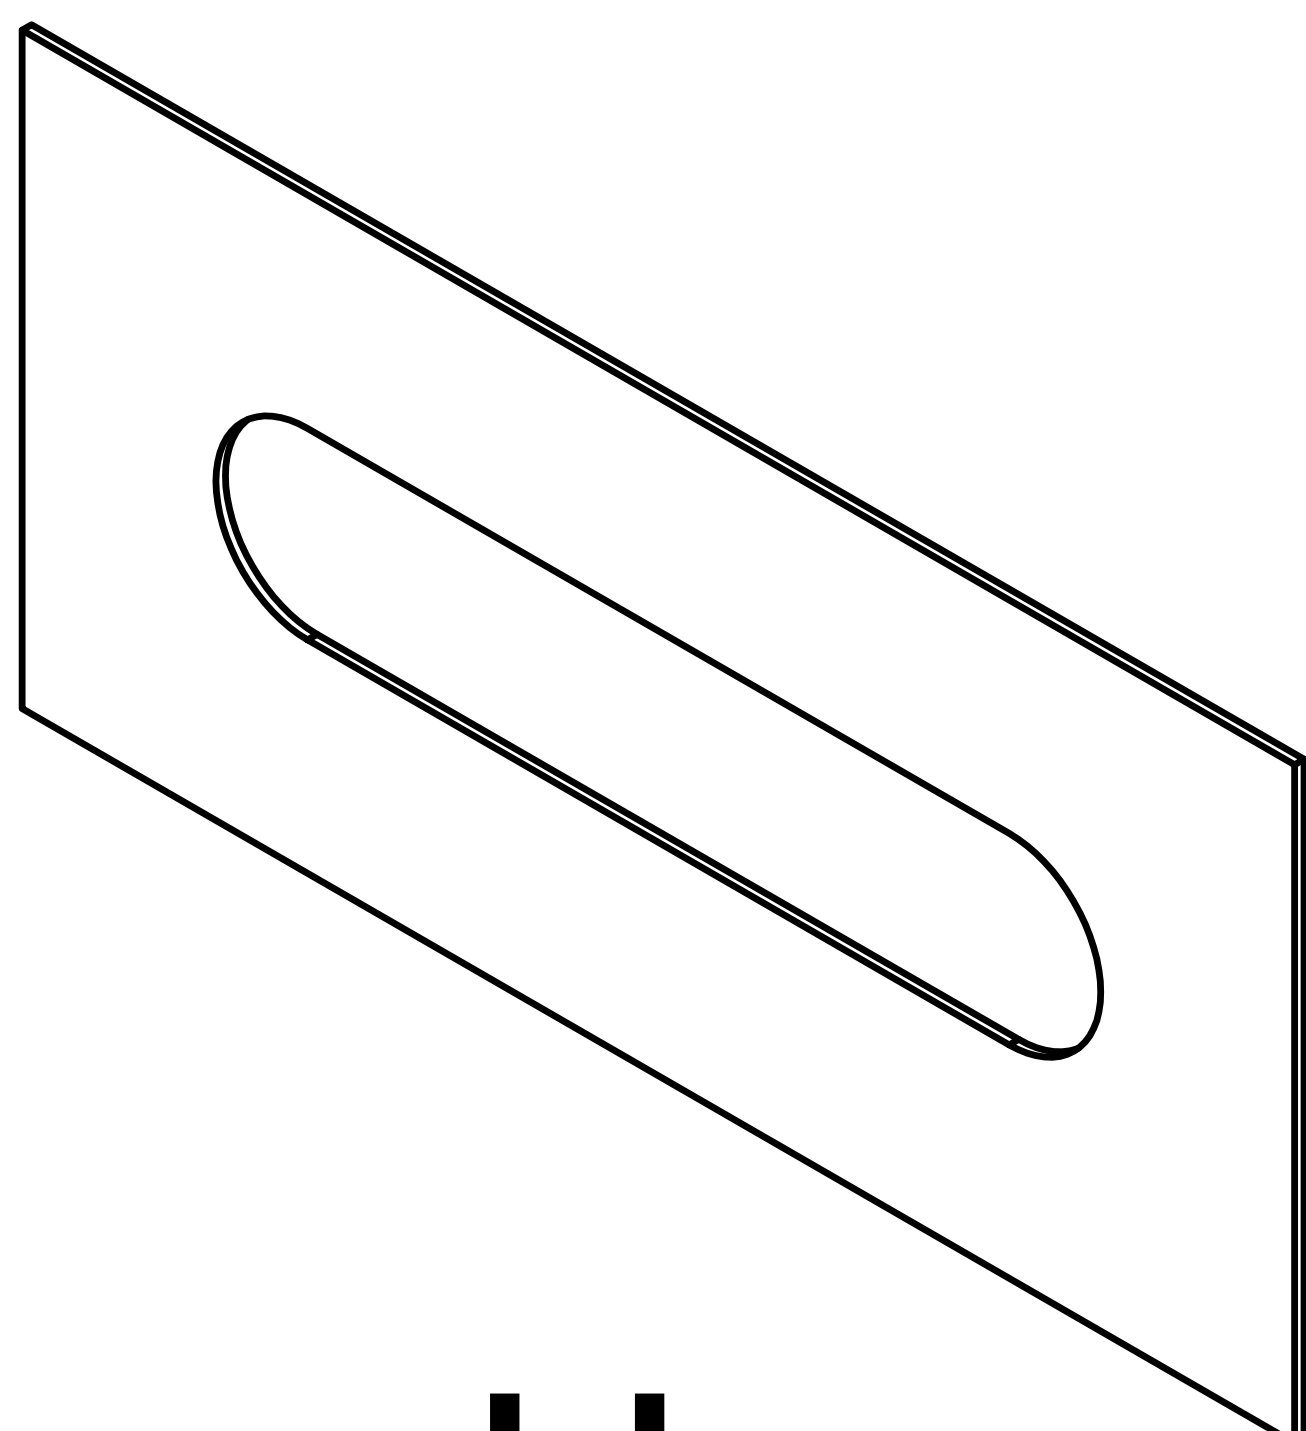


Hx1

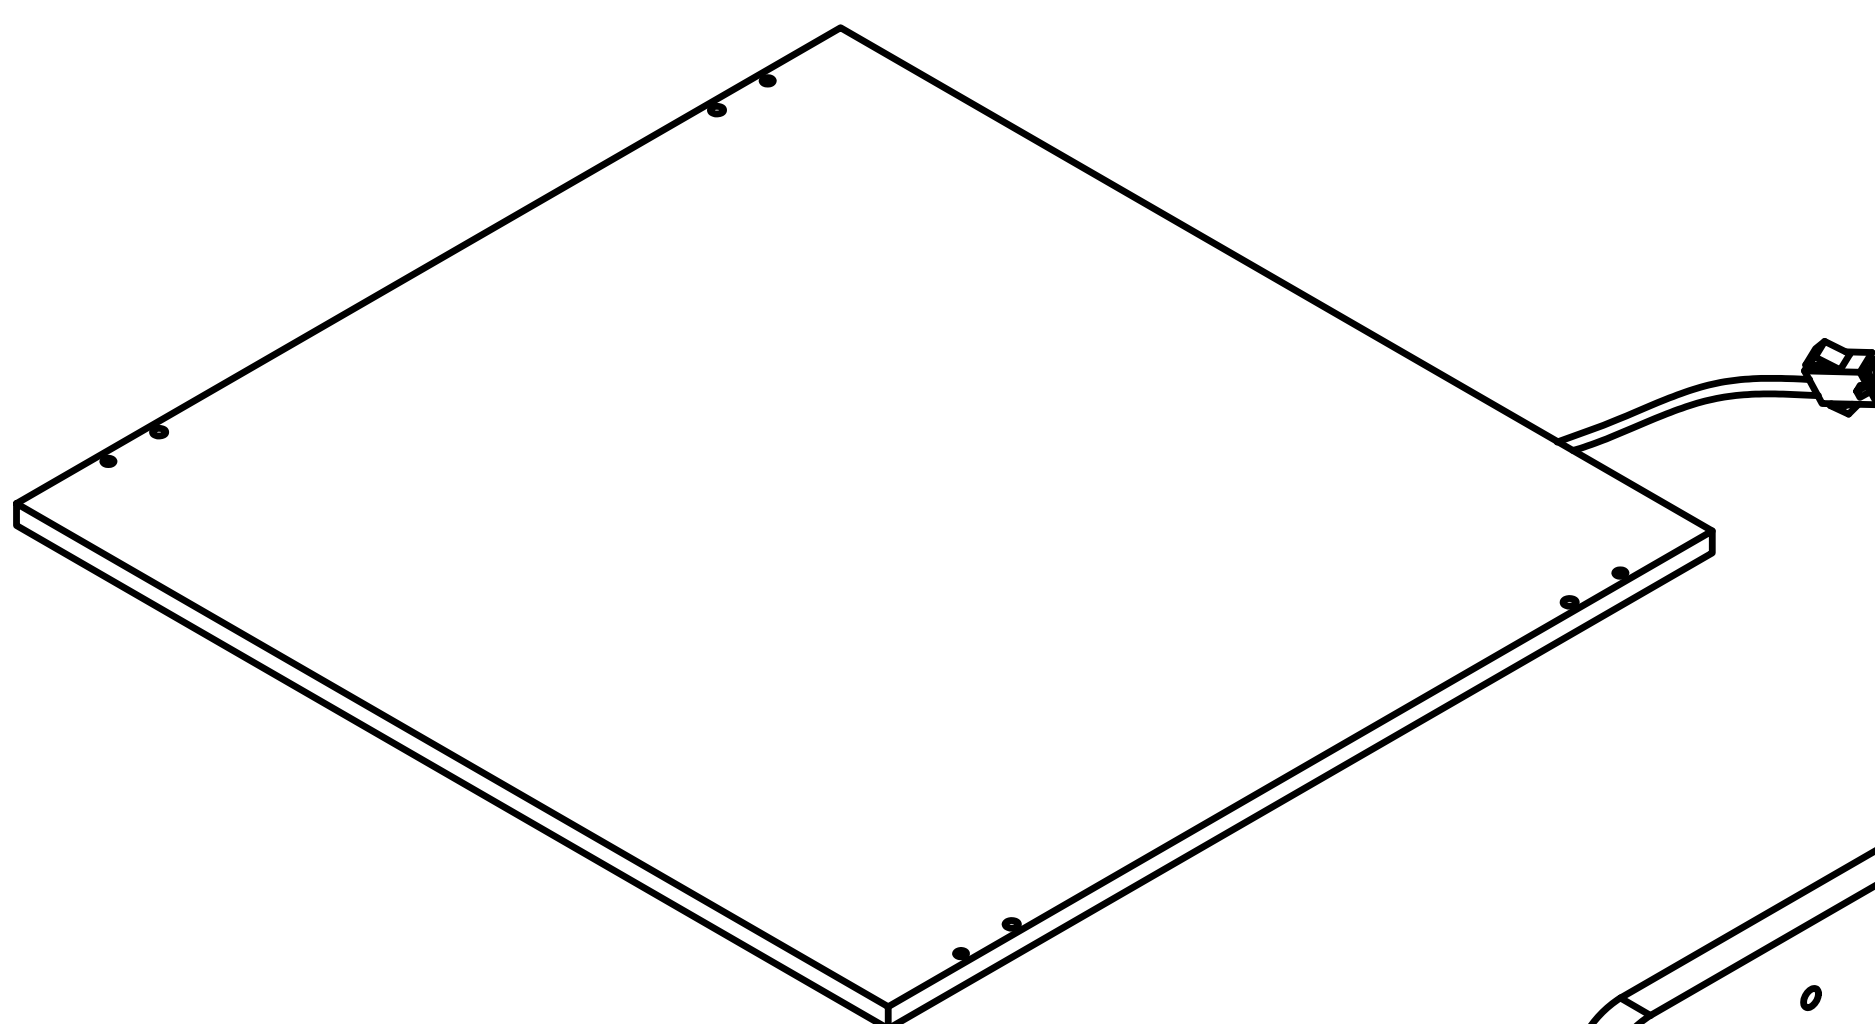


Ix1

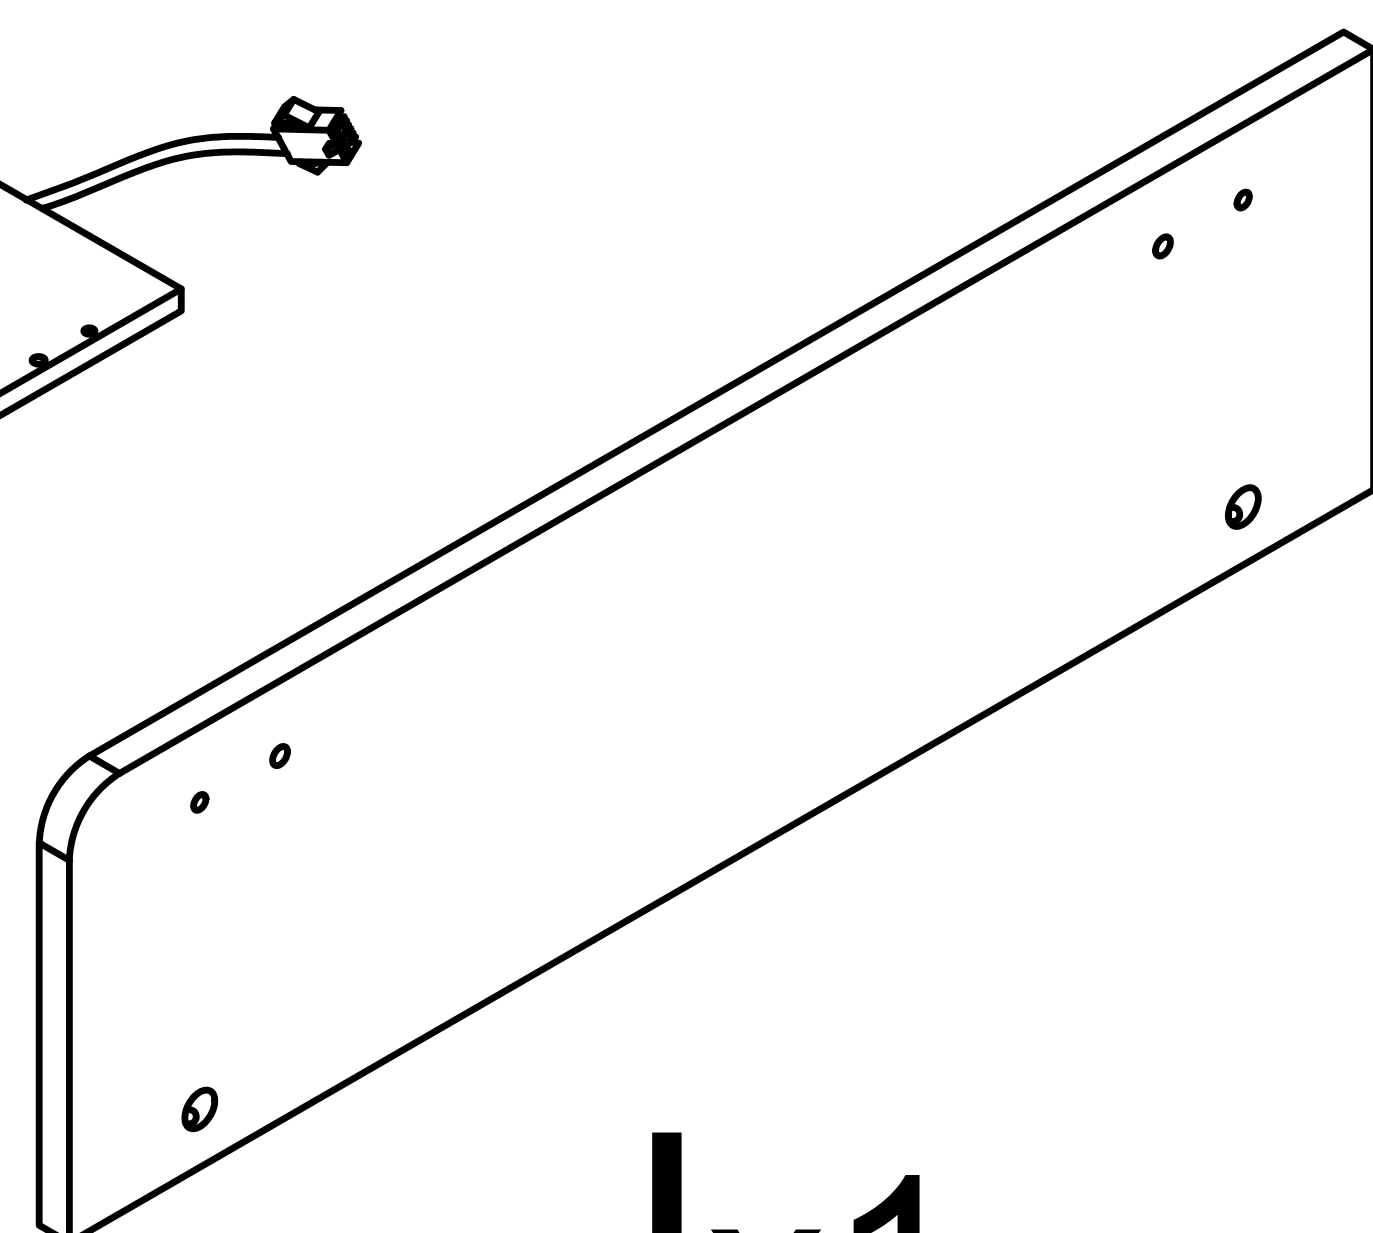


Jx1

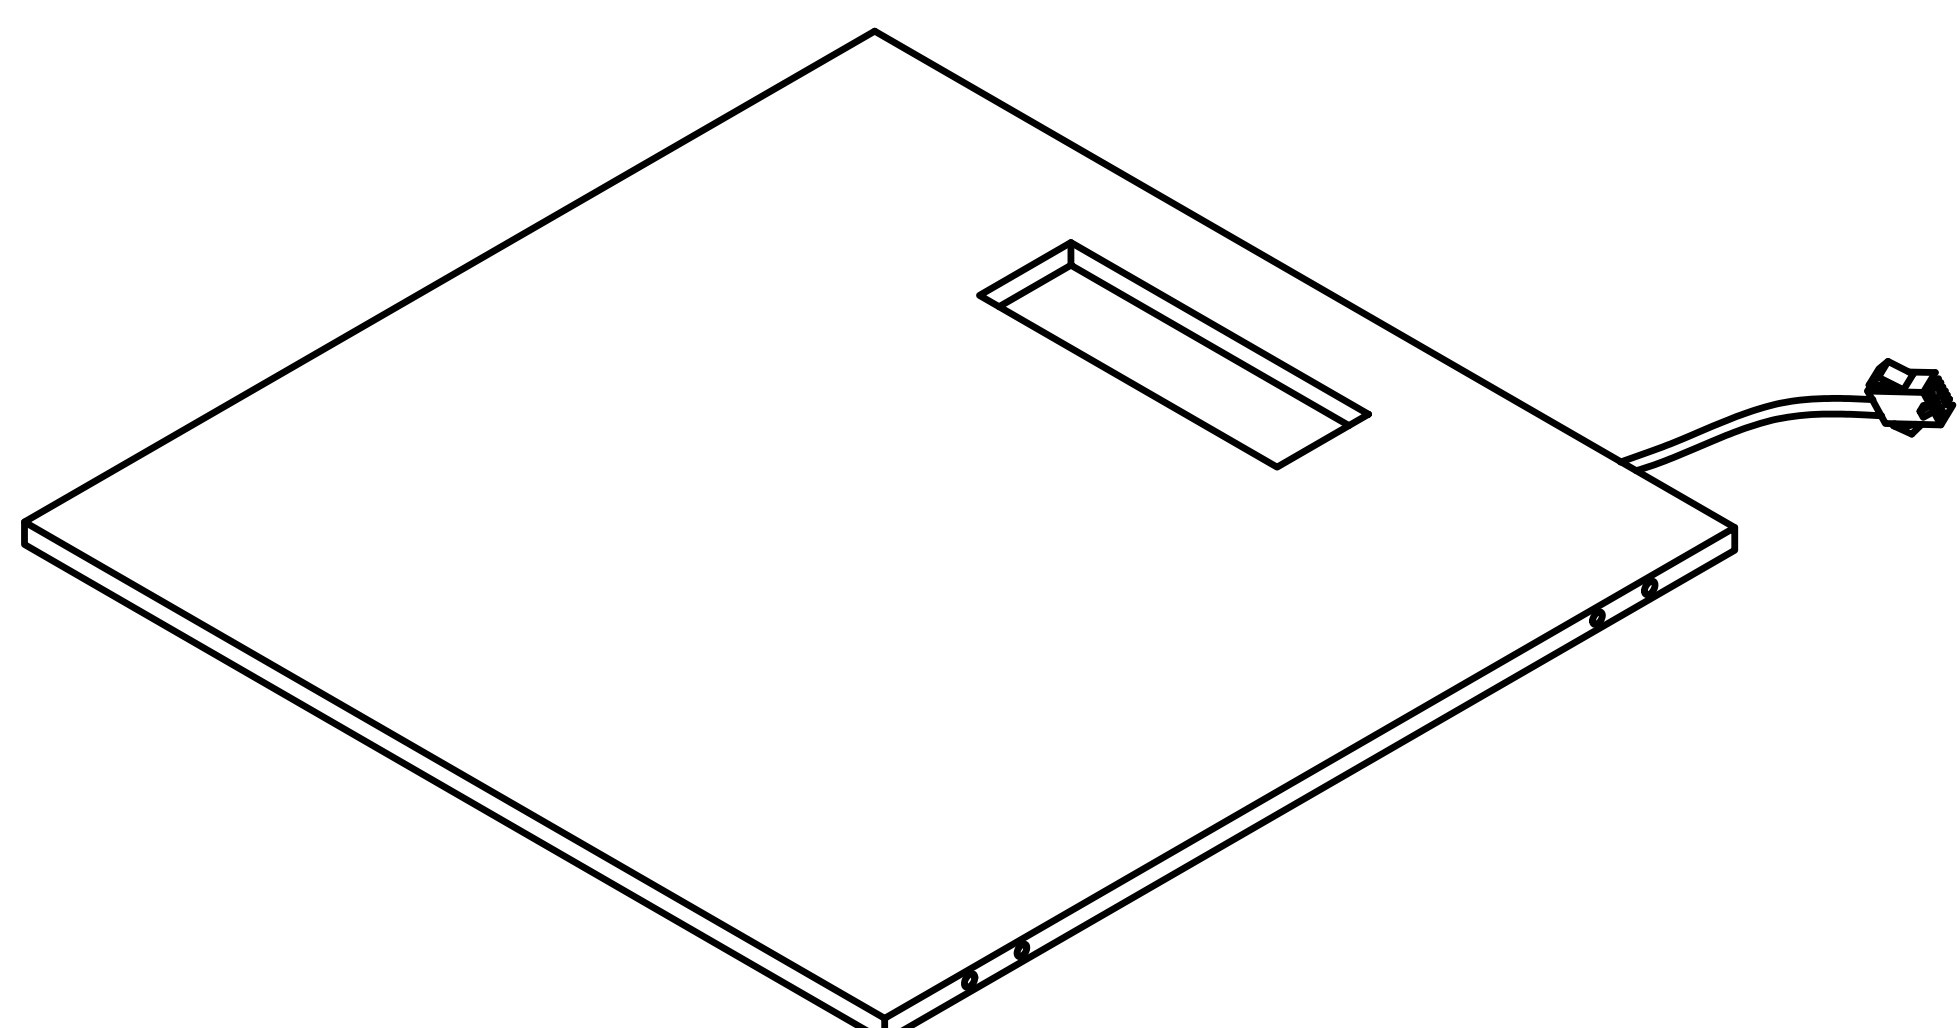


Kx1

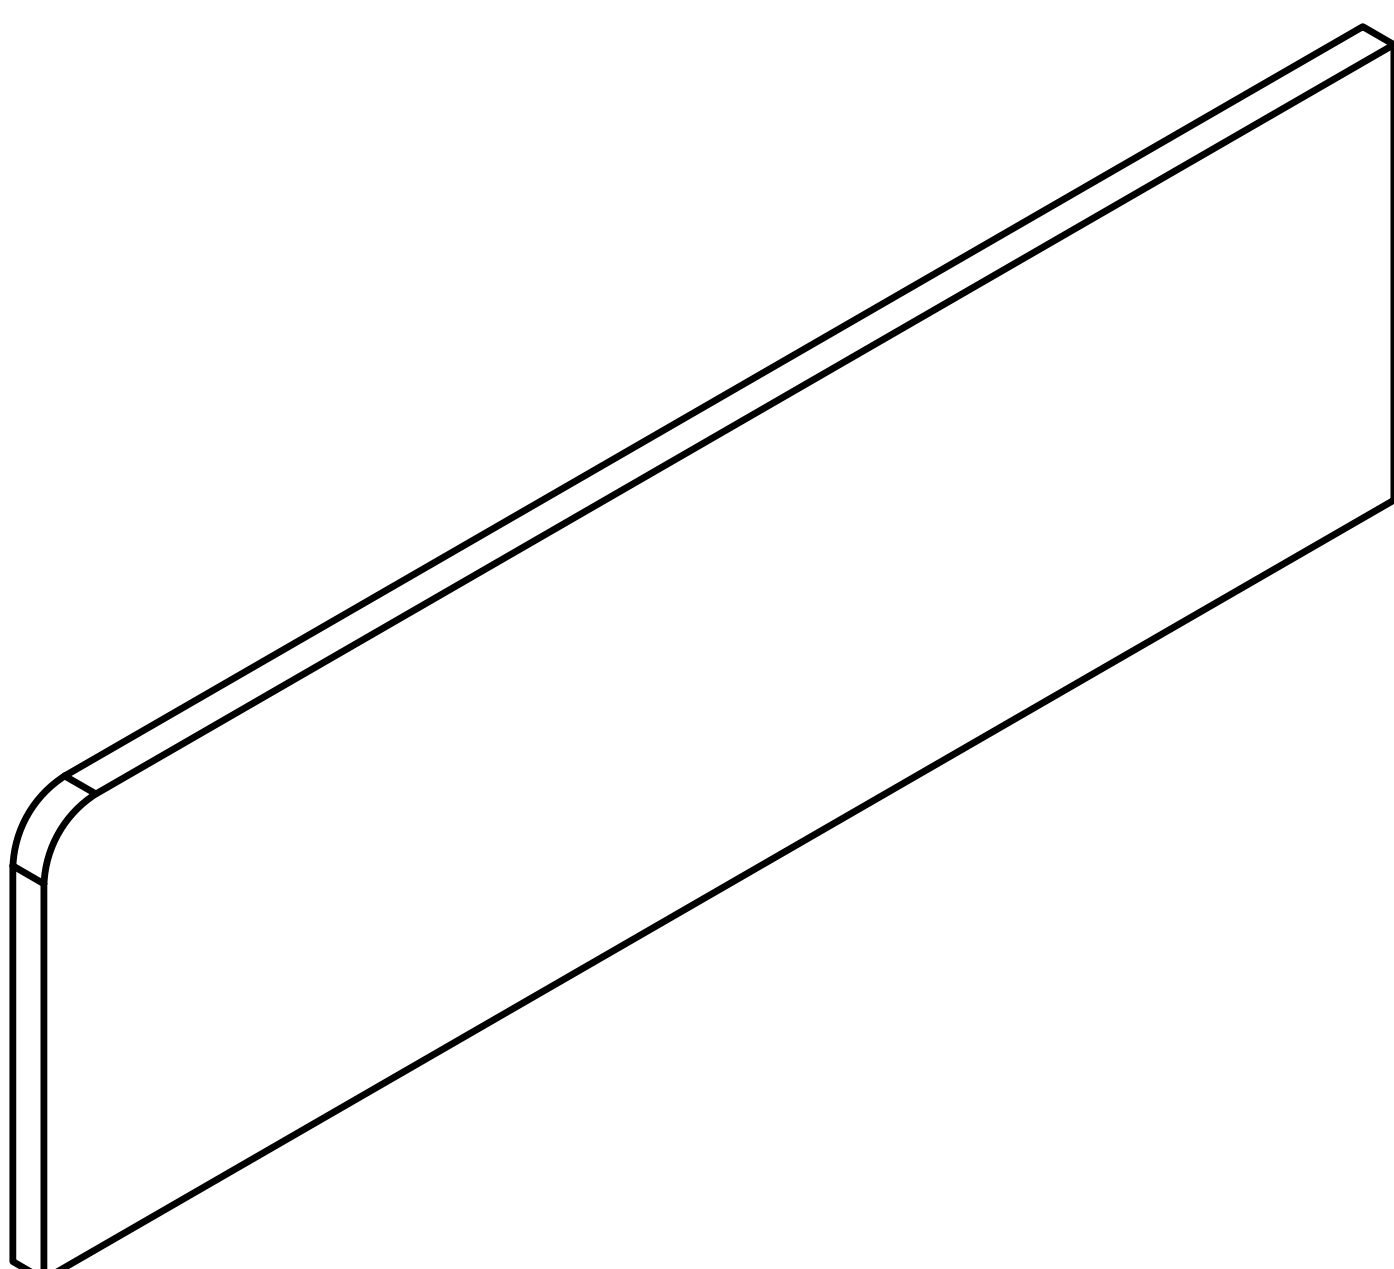















Lx1

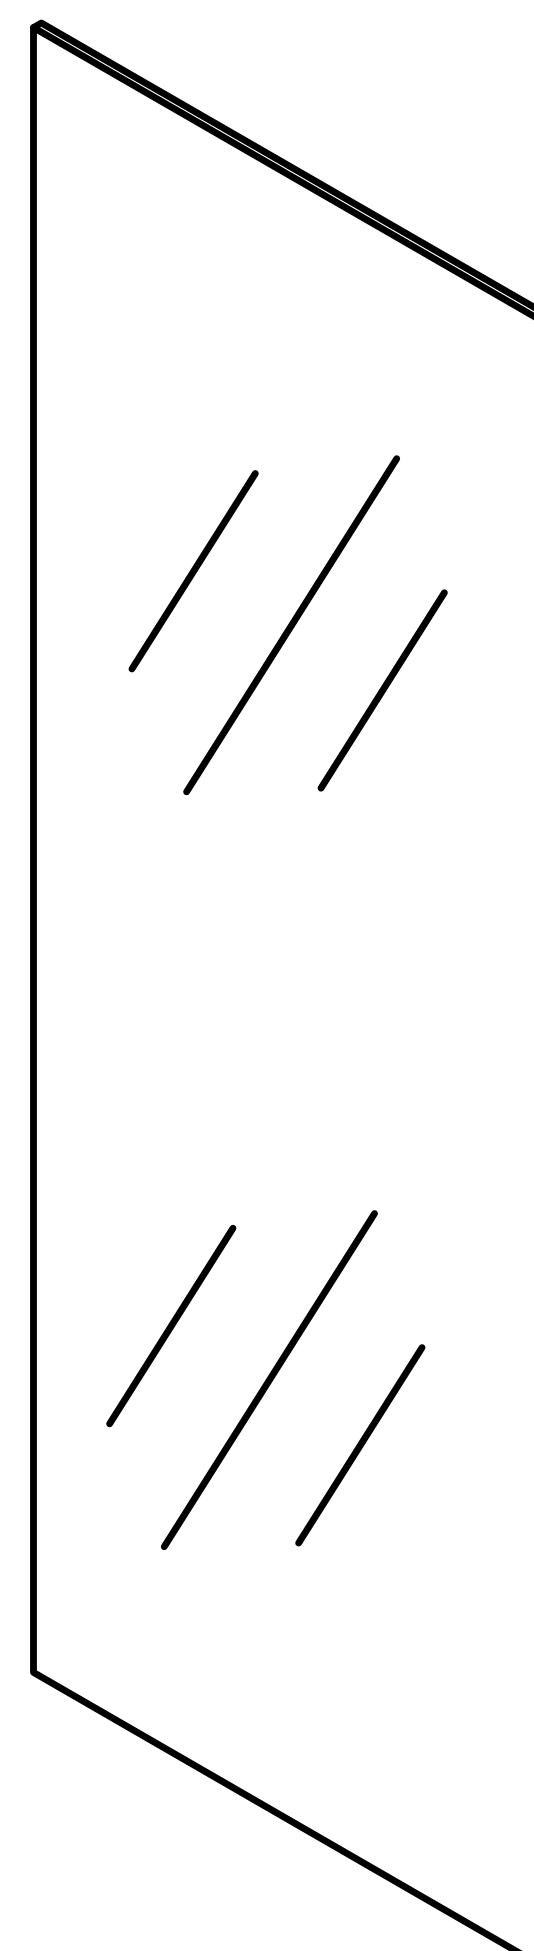


Mx2

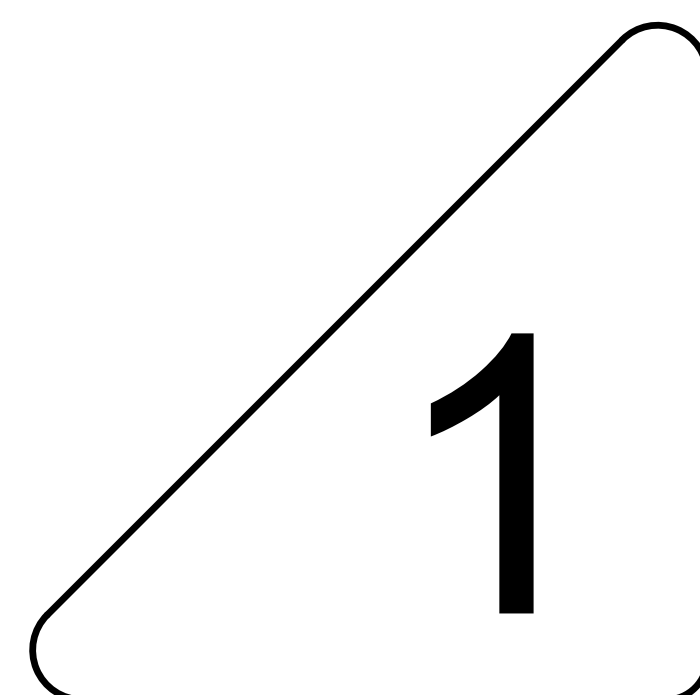

1

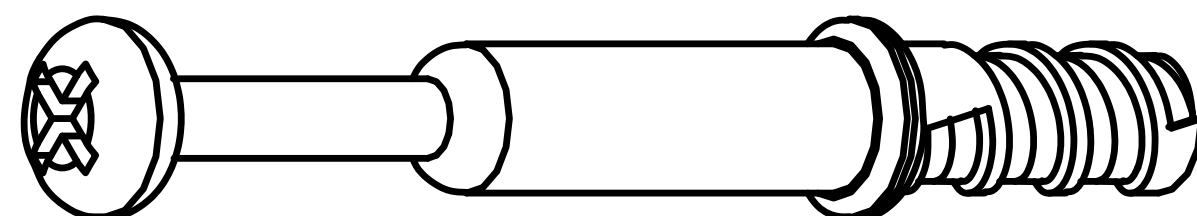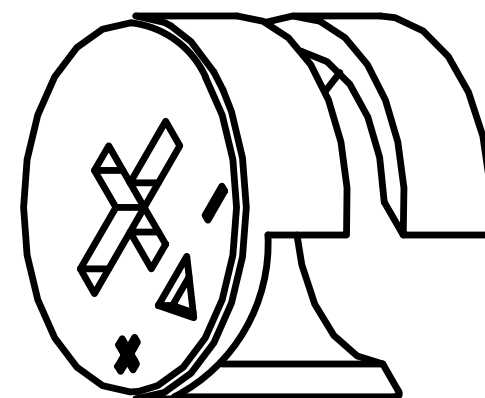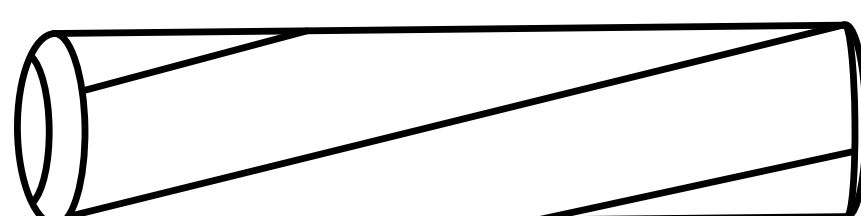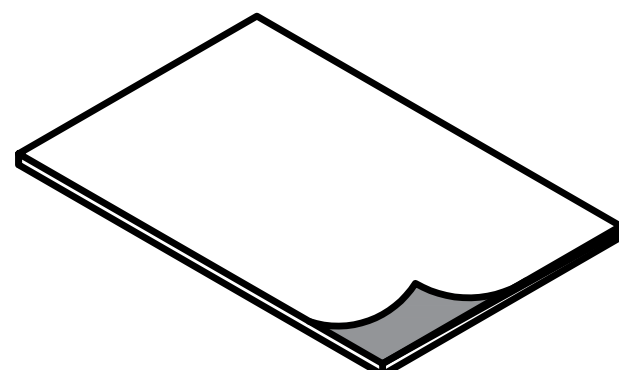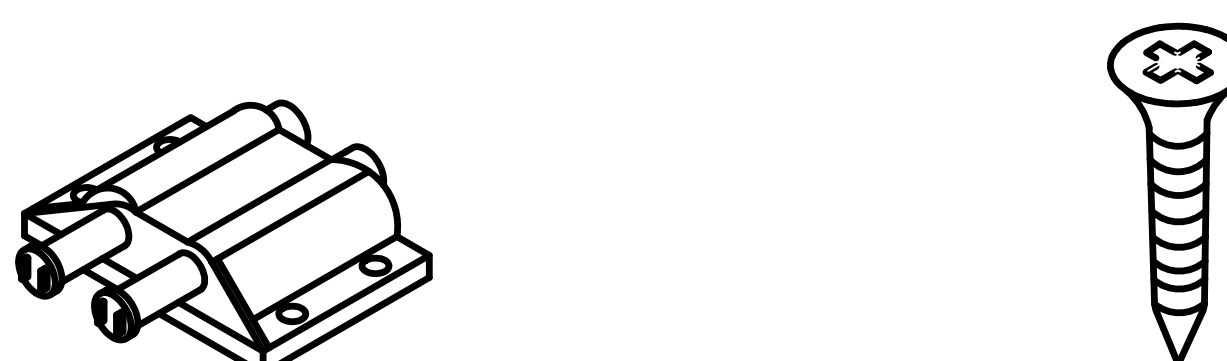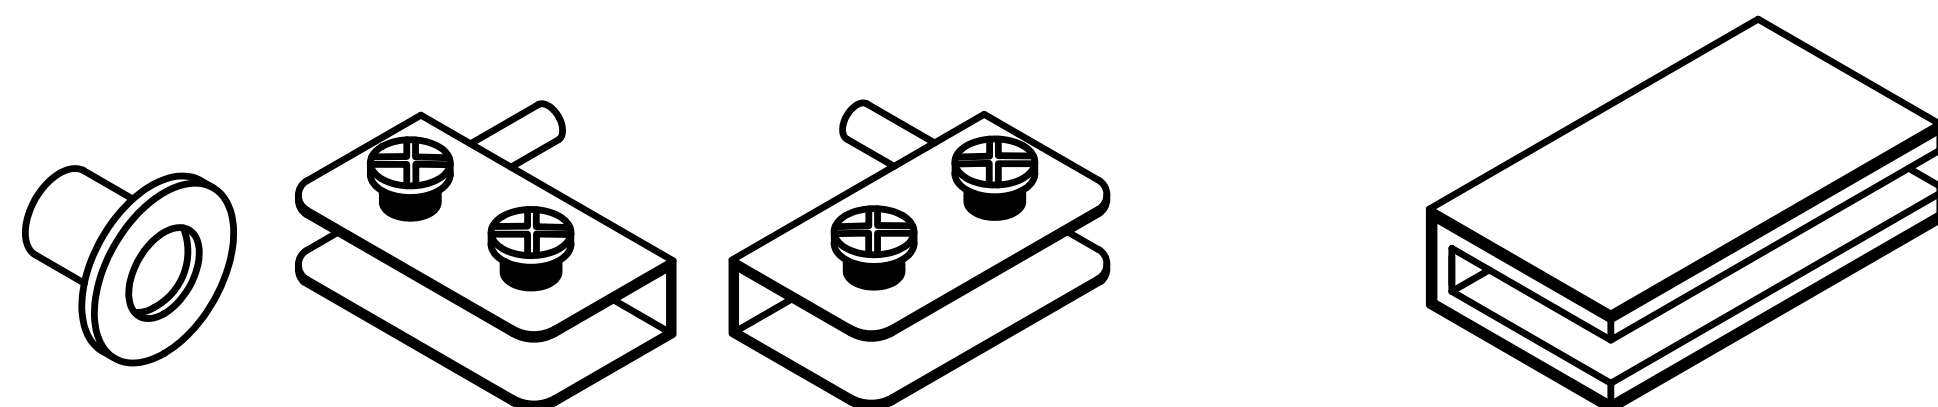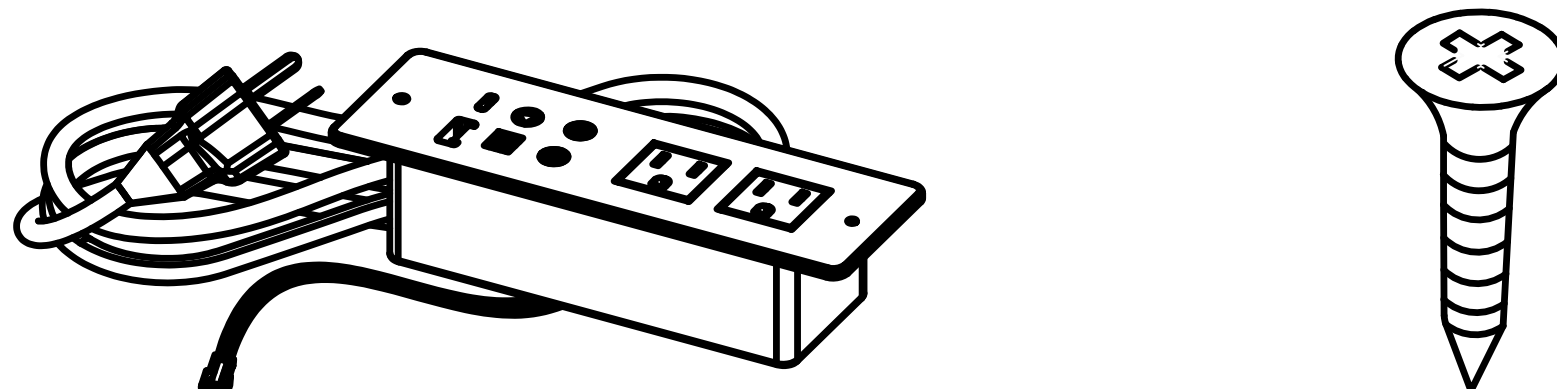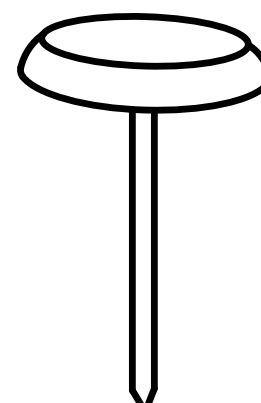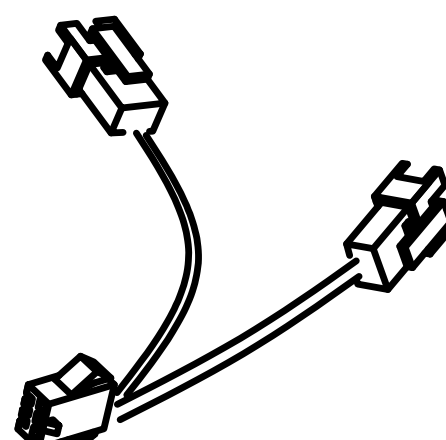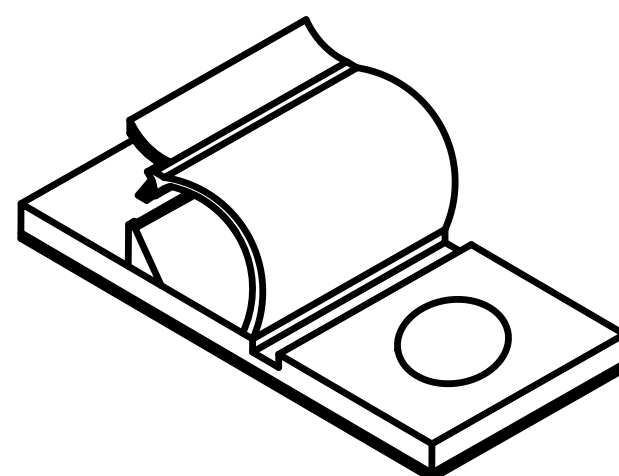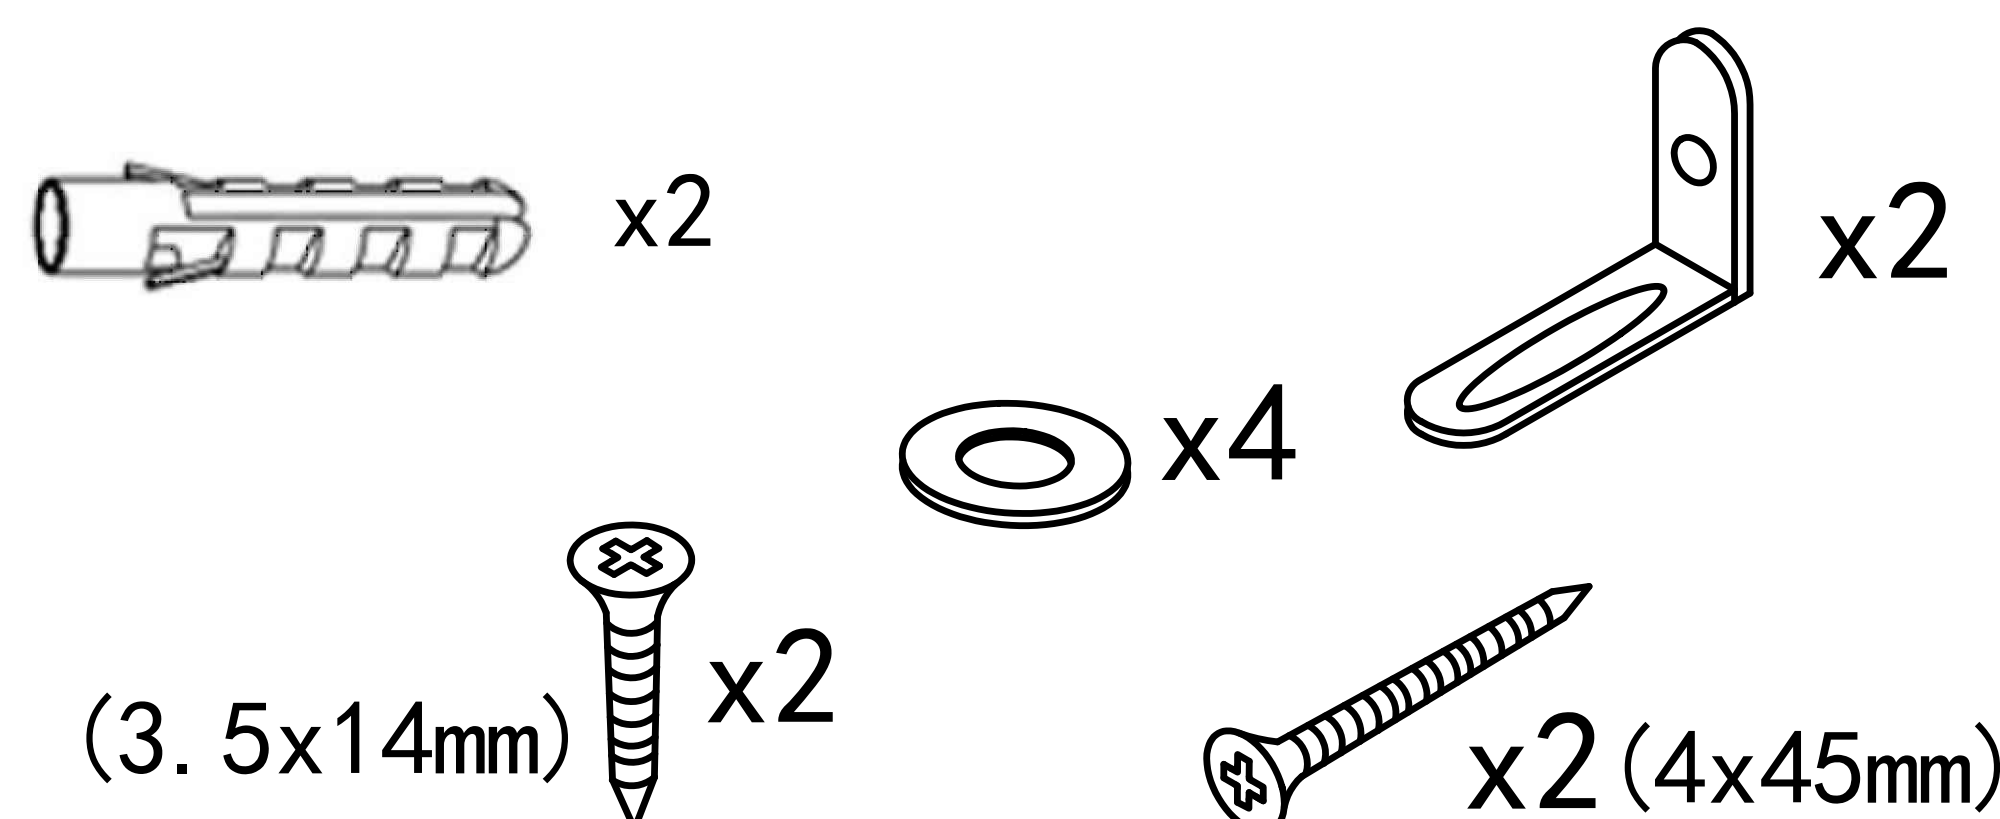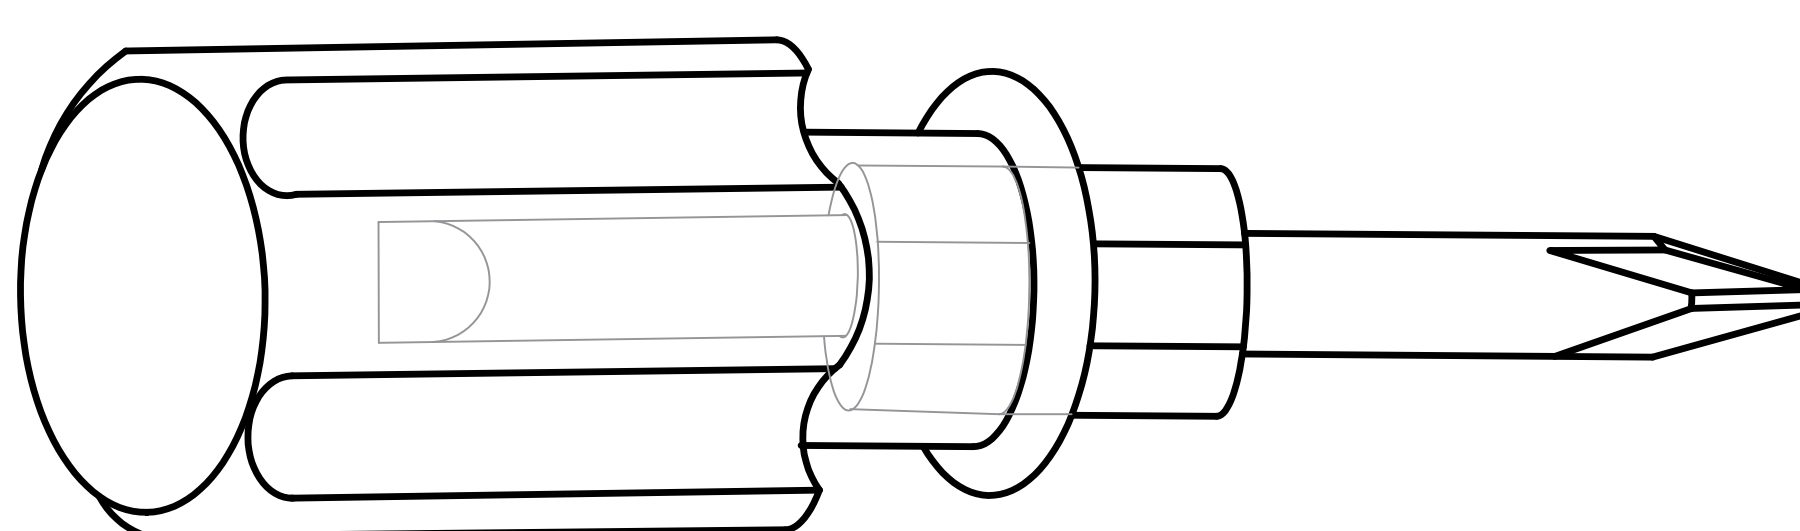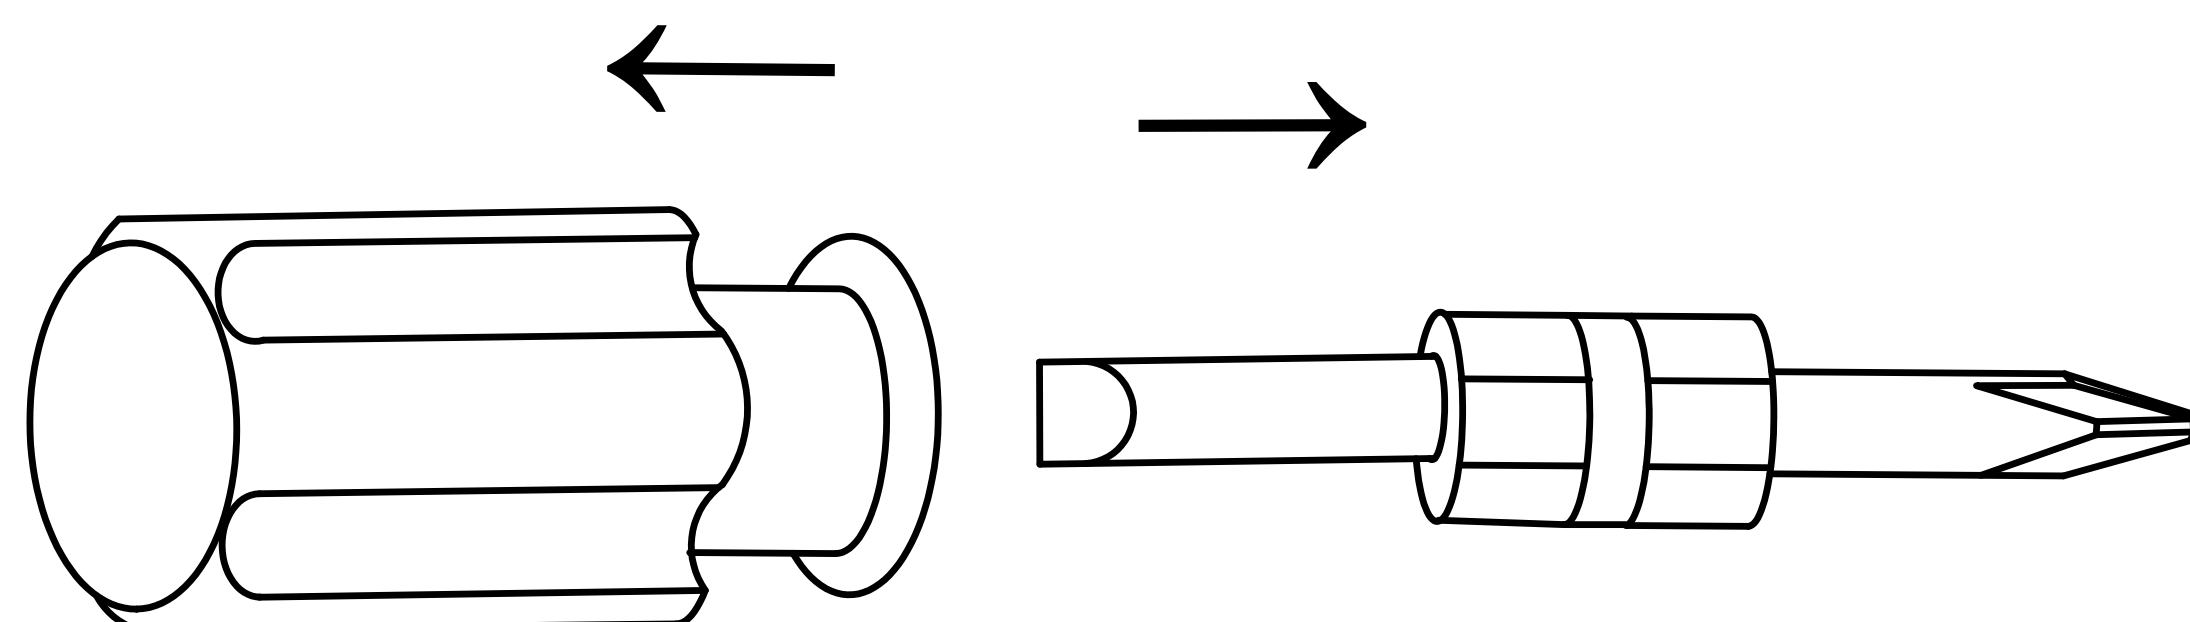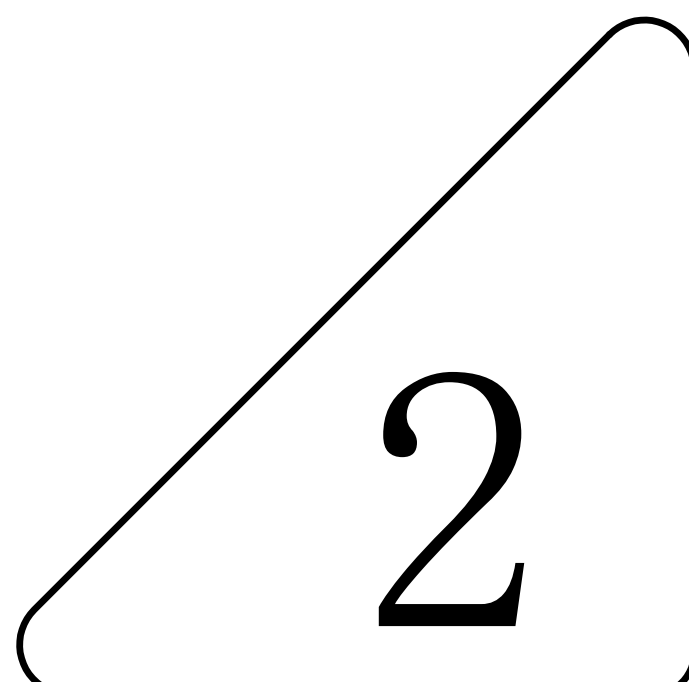
Accessories list				
①		Two In One Screw (6x28mm)	40pcs +7pcs	
②		Two In One Nut (10x12mm)	40pcs +7pcs	
③		Wood Chipping (6x30mm)	16pcs +2pcs	
④		Non-slip pads (50x10mm)	4pcs +2pcs	
⑤		Rebound device & Screw (3x16mm)	4pcs +1pcs 1pcs	
		Iron sheet&Hinge	4 p c s	2 p c s
⑥		Socket & Screw (3x10mm)	2pcs +1pcs 1pcs	
⑦		Fixing clip & screw (3x16mm)	10pcs +2pcs	
⑧		Foot nail	4pcs +1pcs	
⑨		Double end connecting line	2pcs	
⑩		Wire clamp	3pcs +1pcs	
⑪		Anti Fall Hardware	1pcs	
 1pcs  Double-head screwdriver, use as required 				

Product structure decomposition

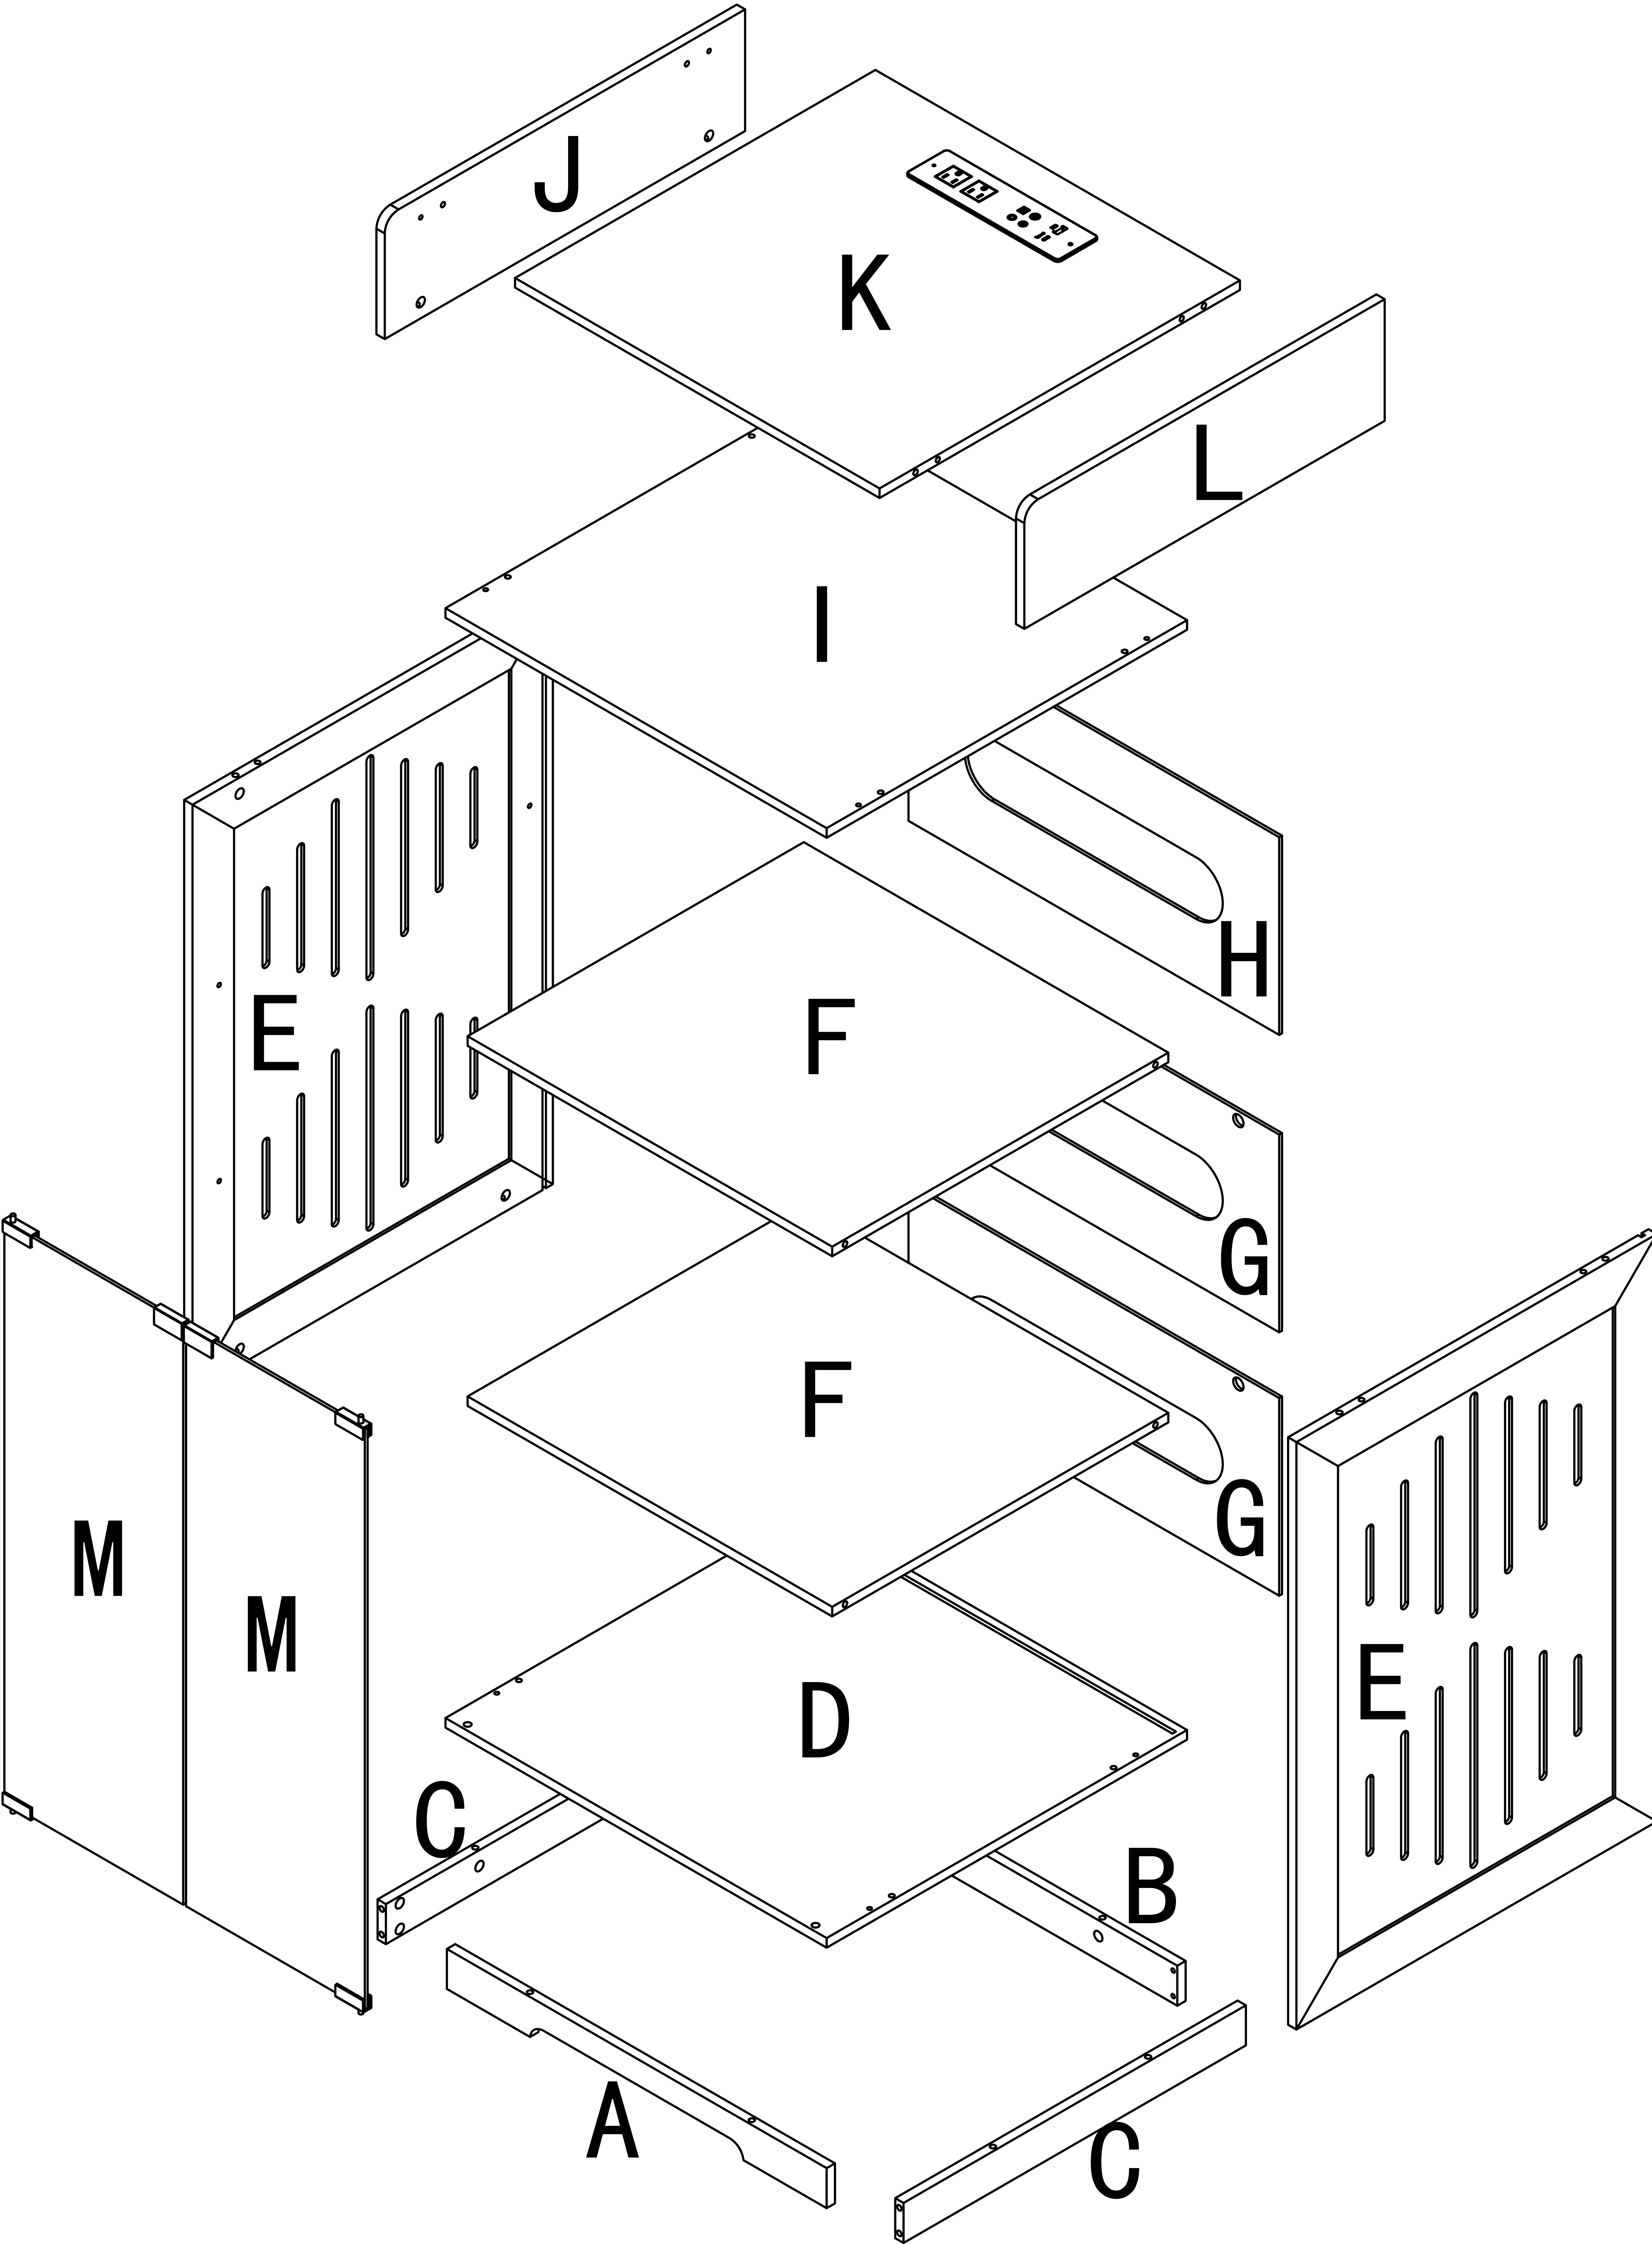


Use parts ① and ②




Step1

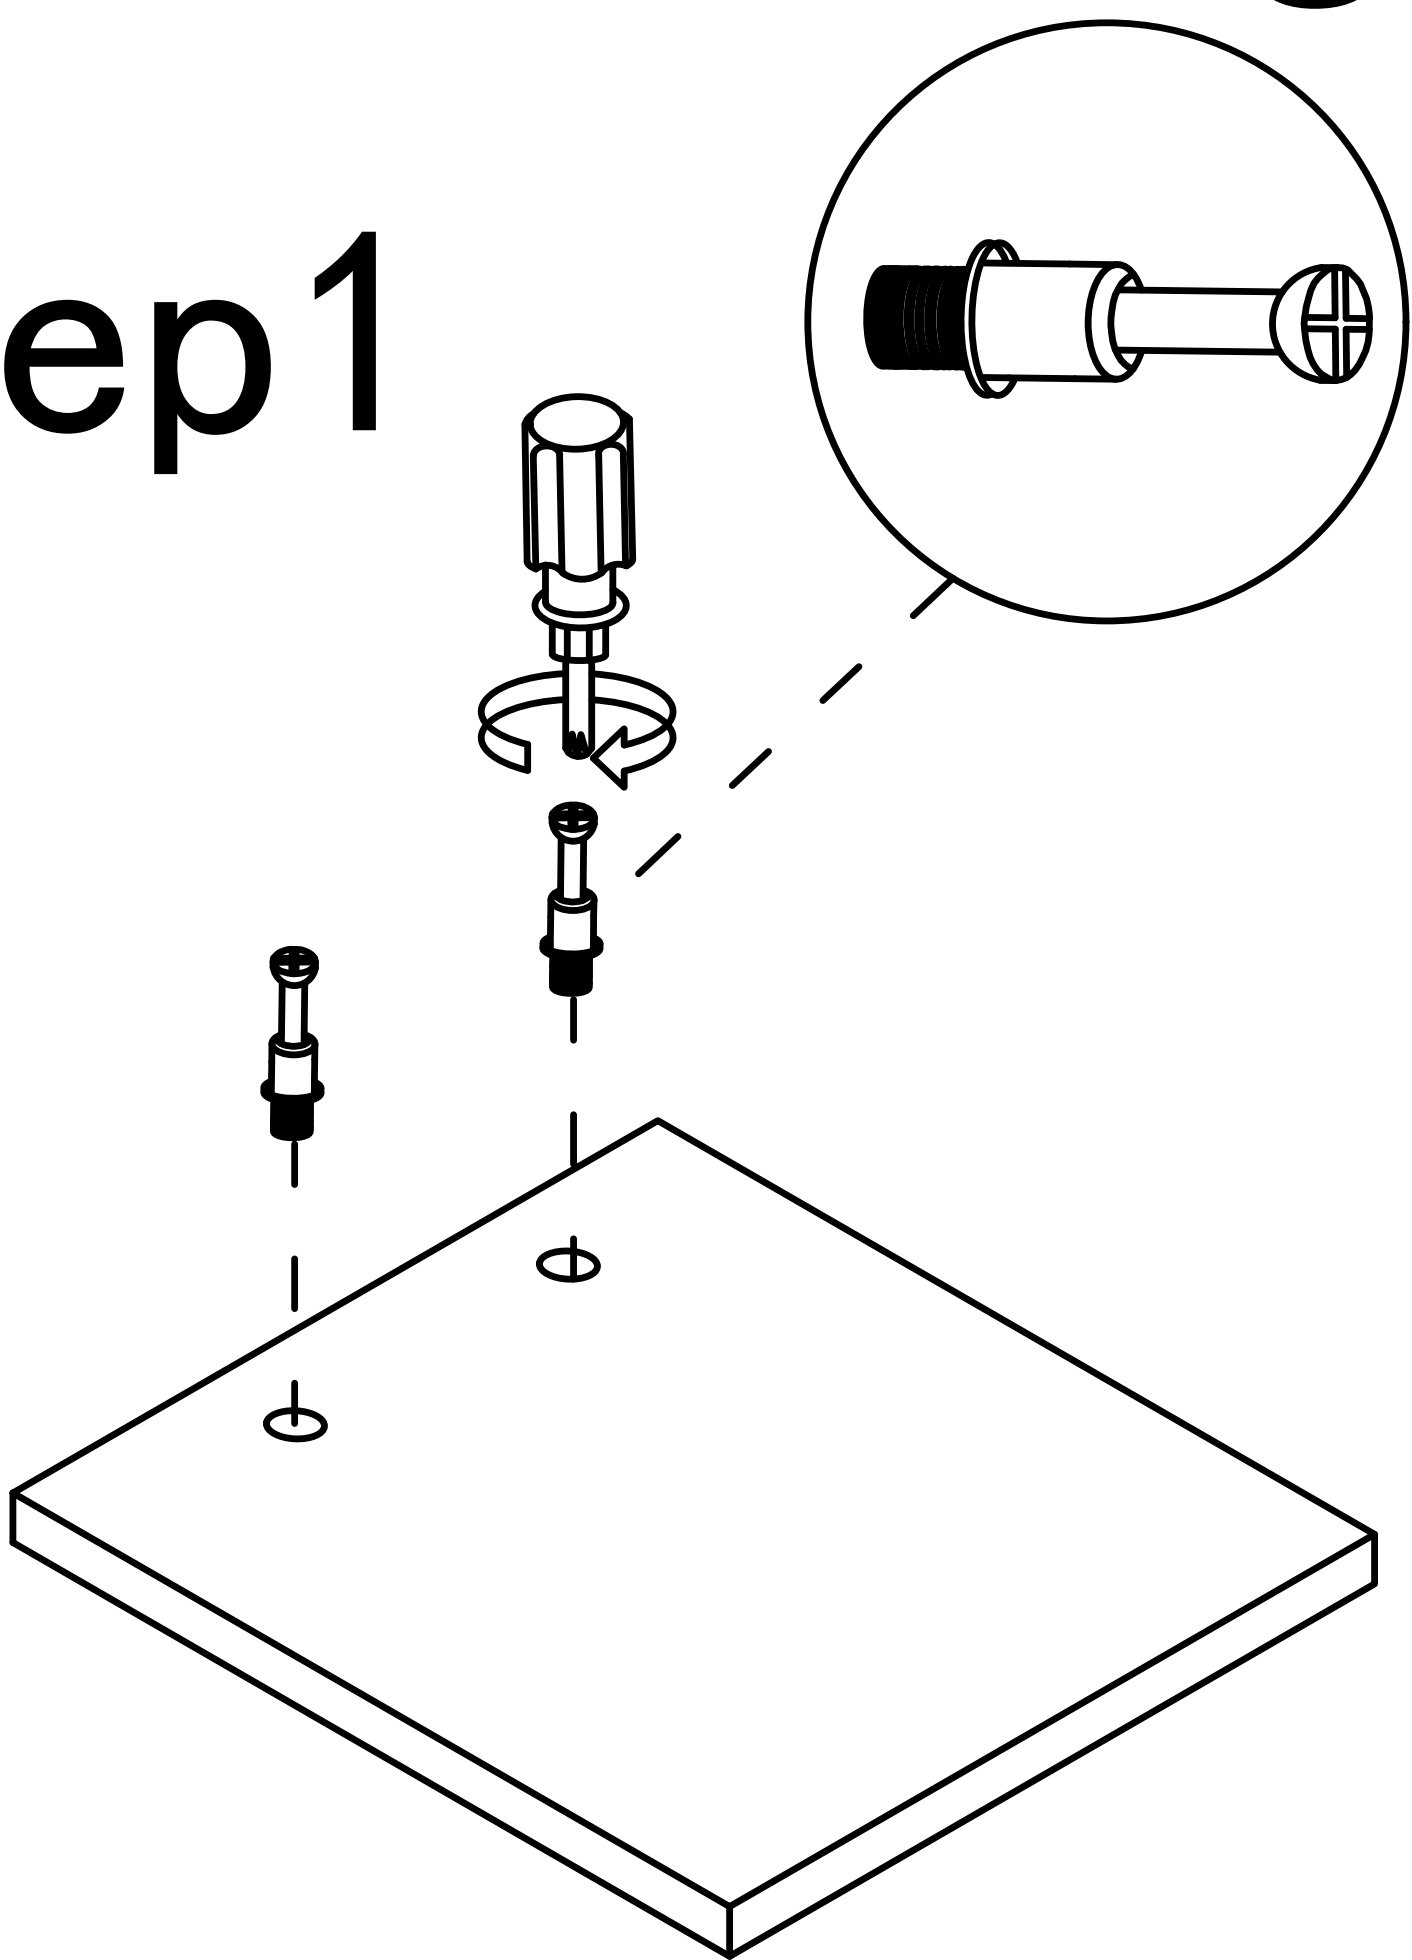

Step2

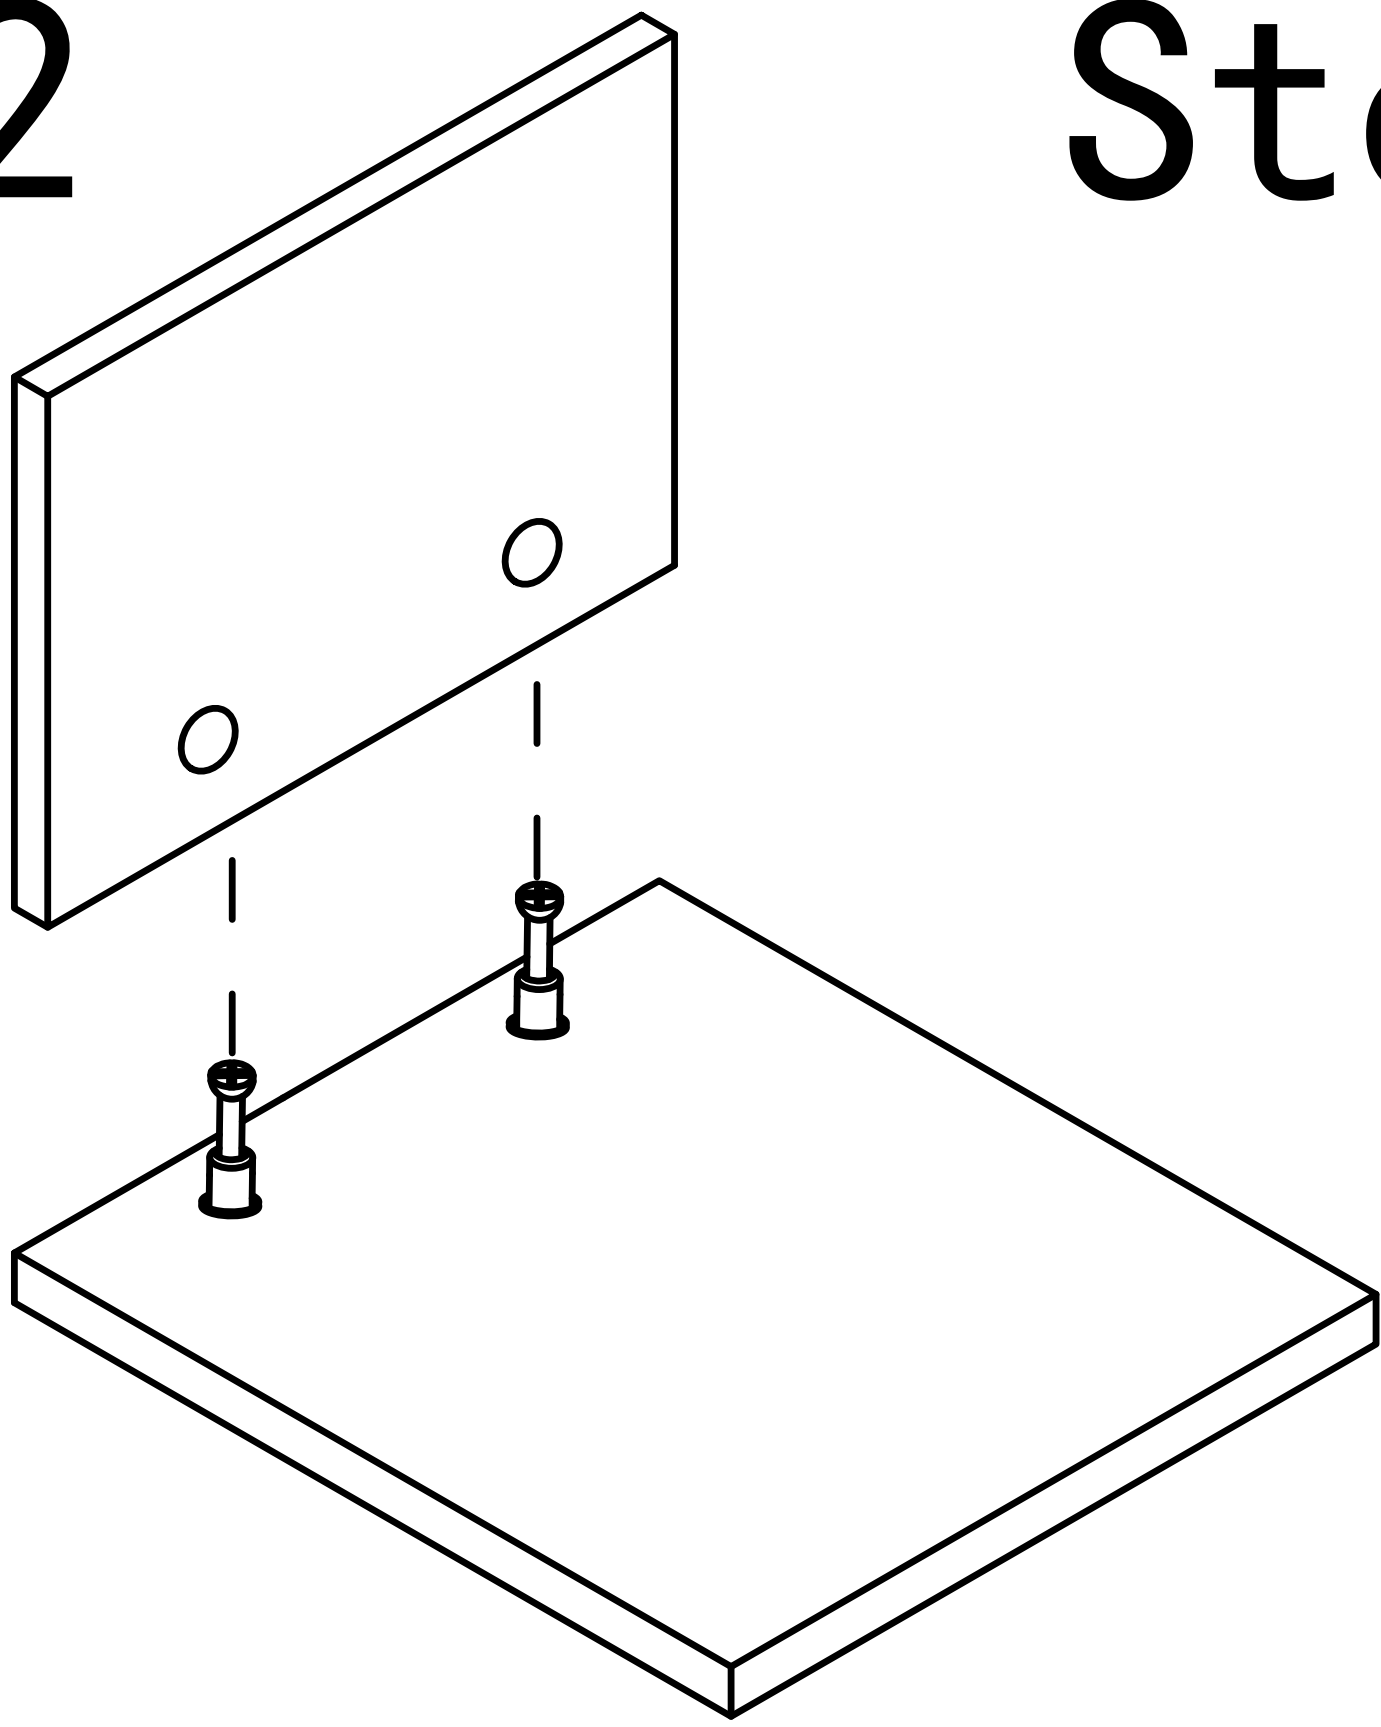



Step3

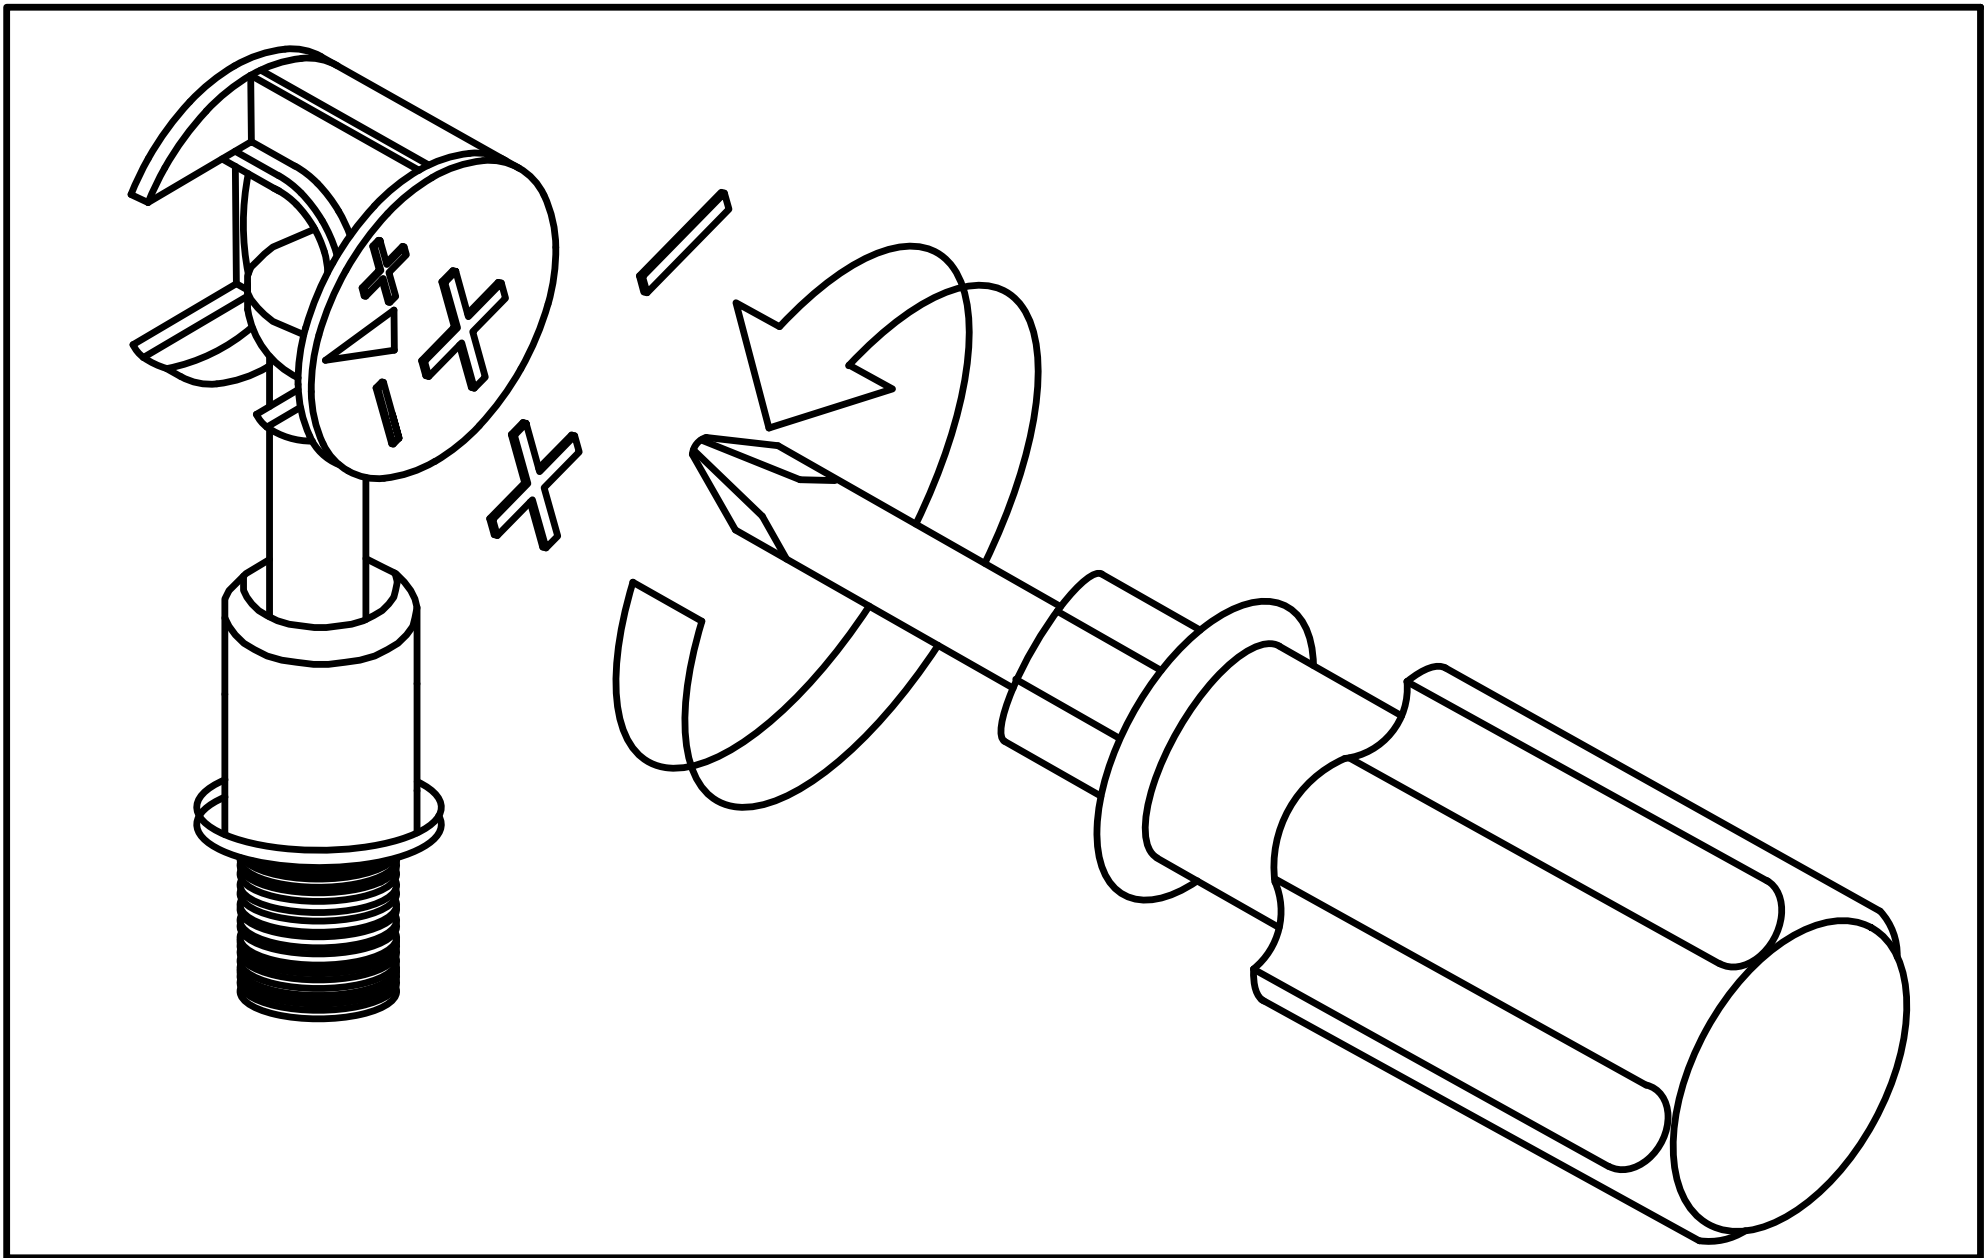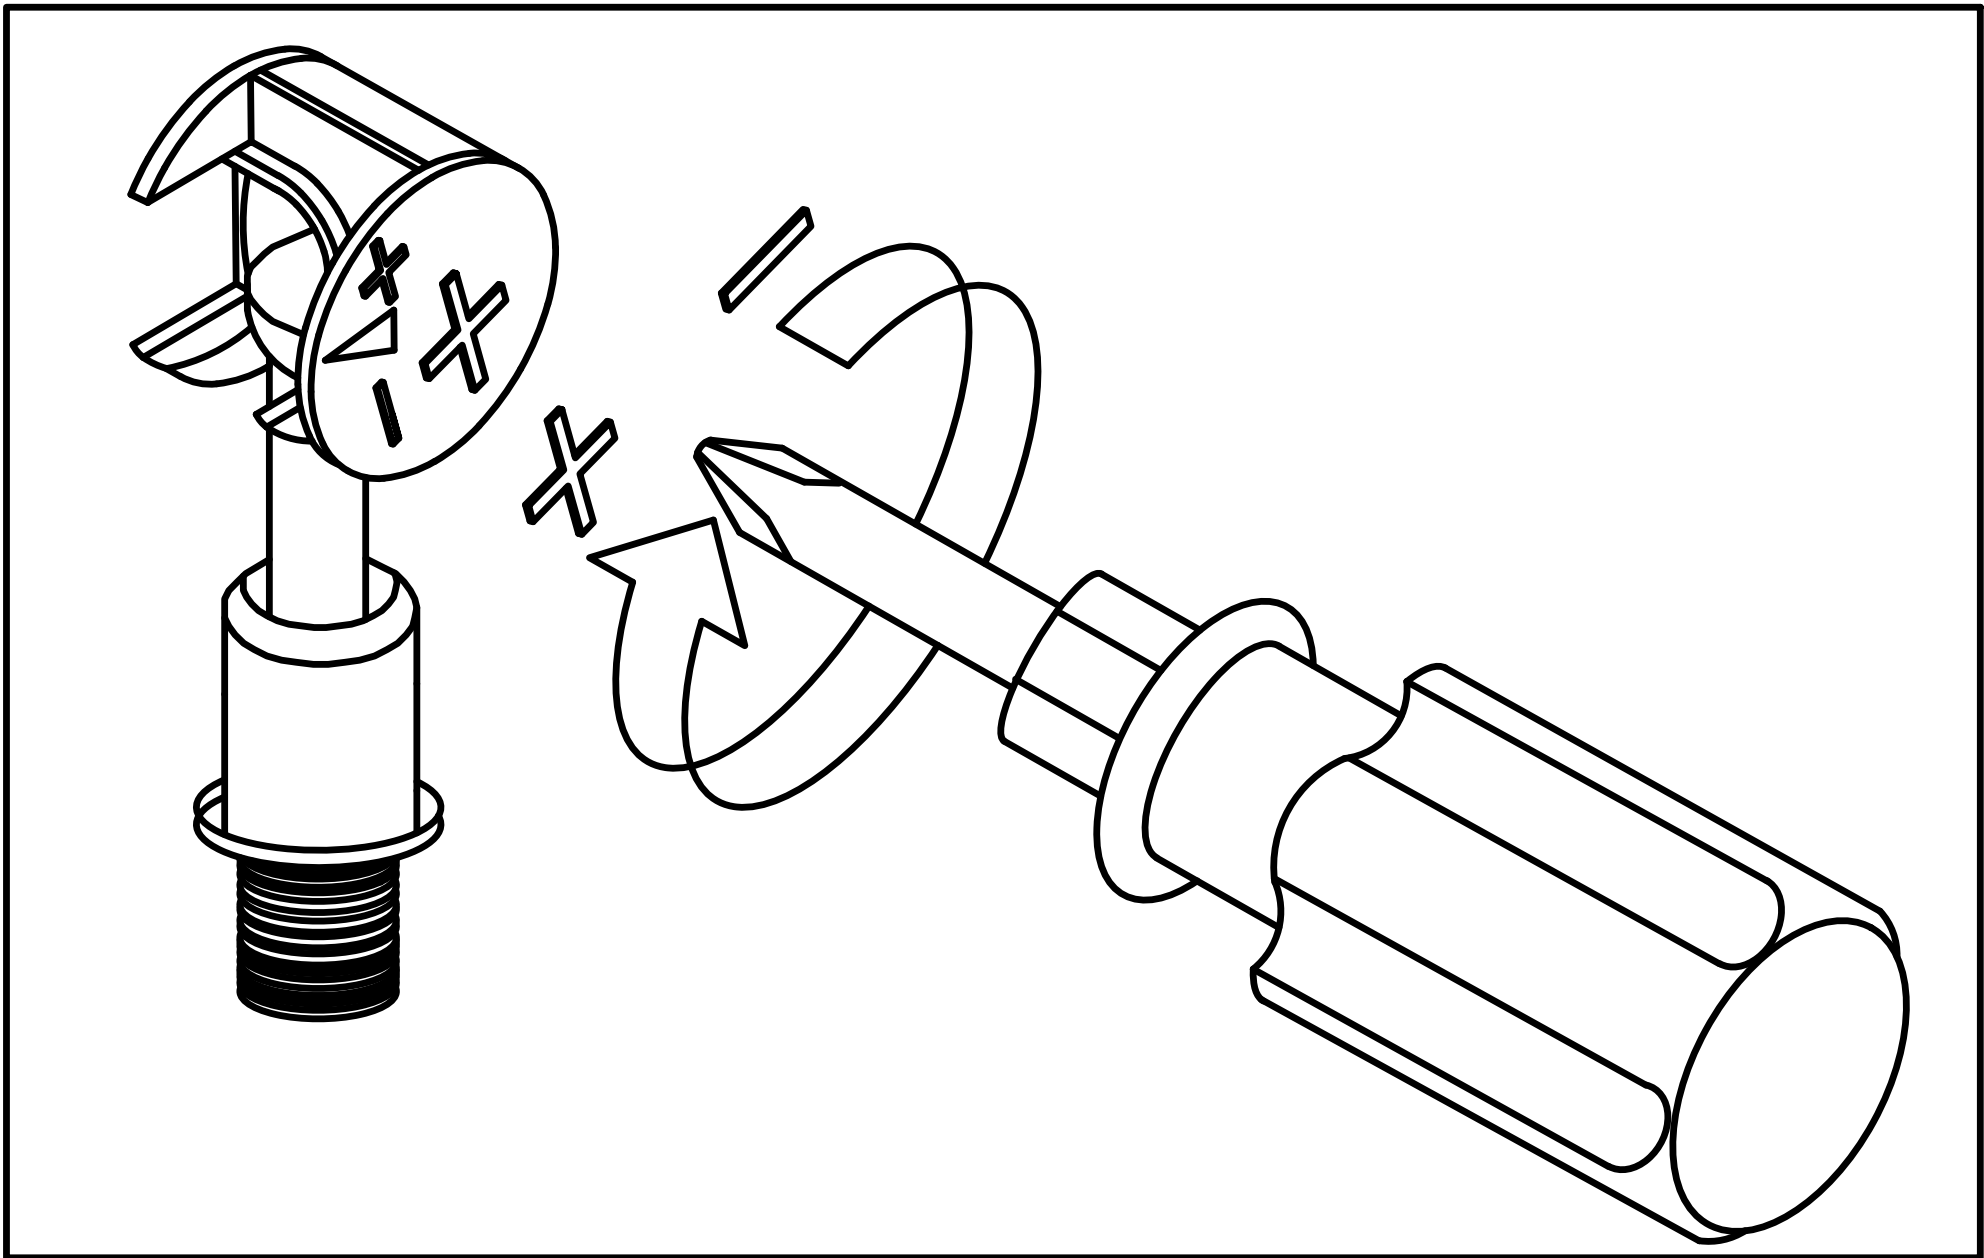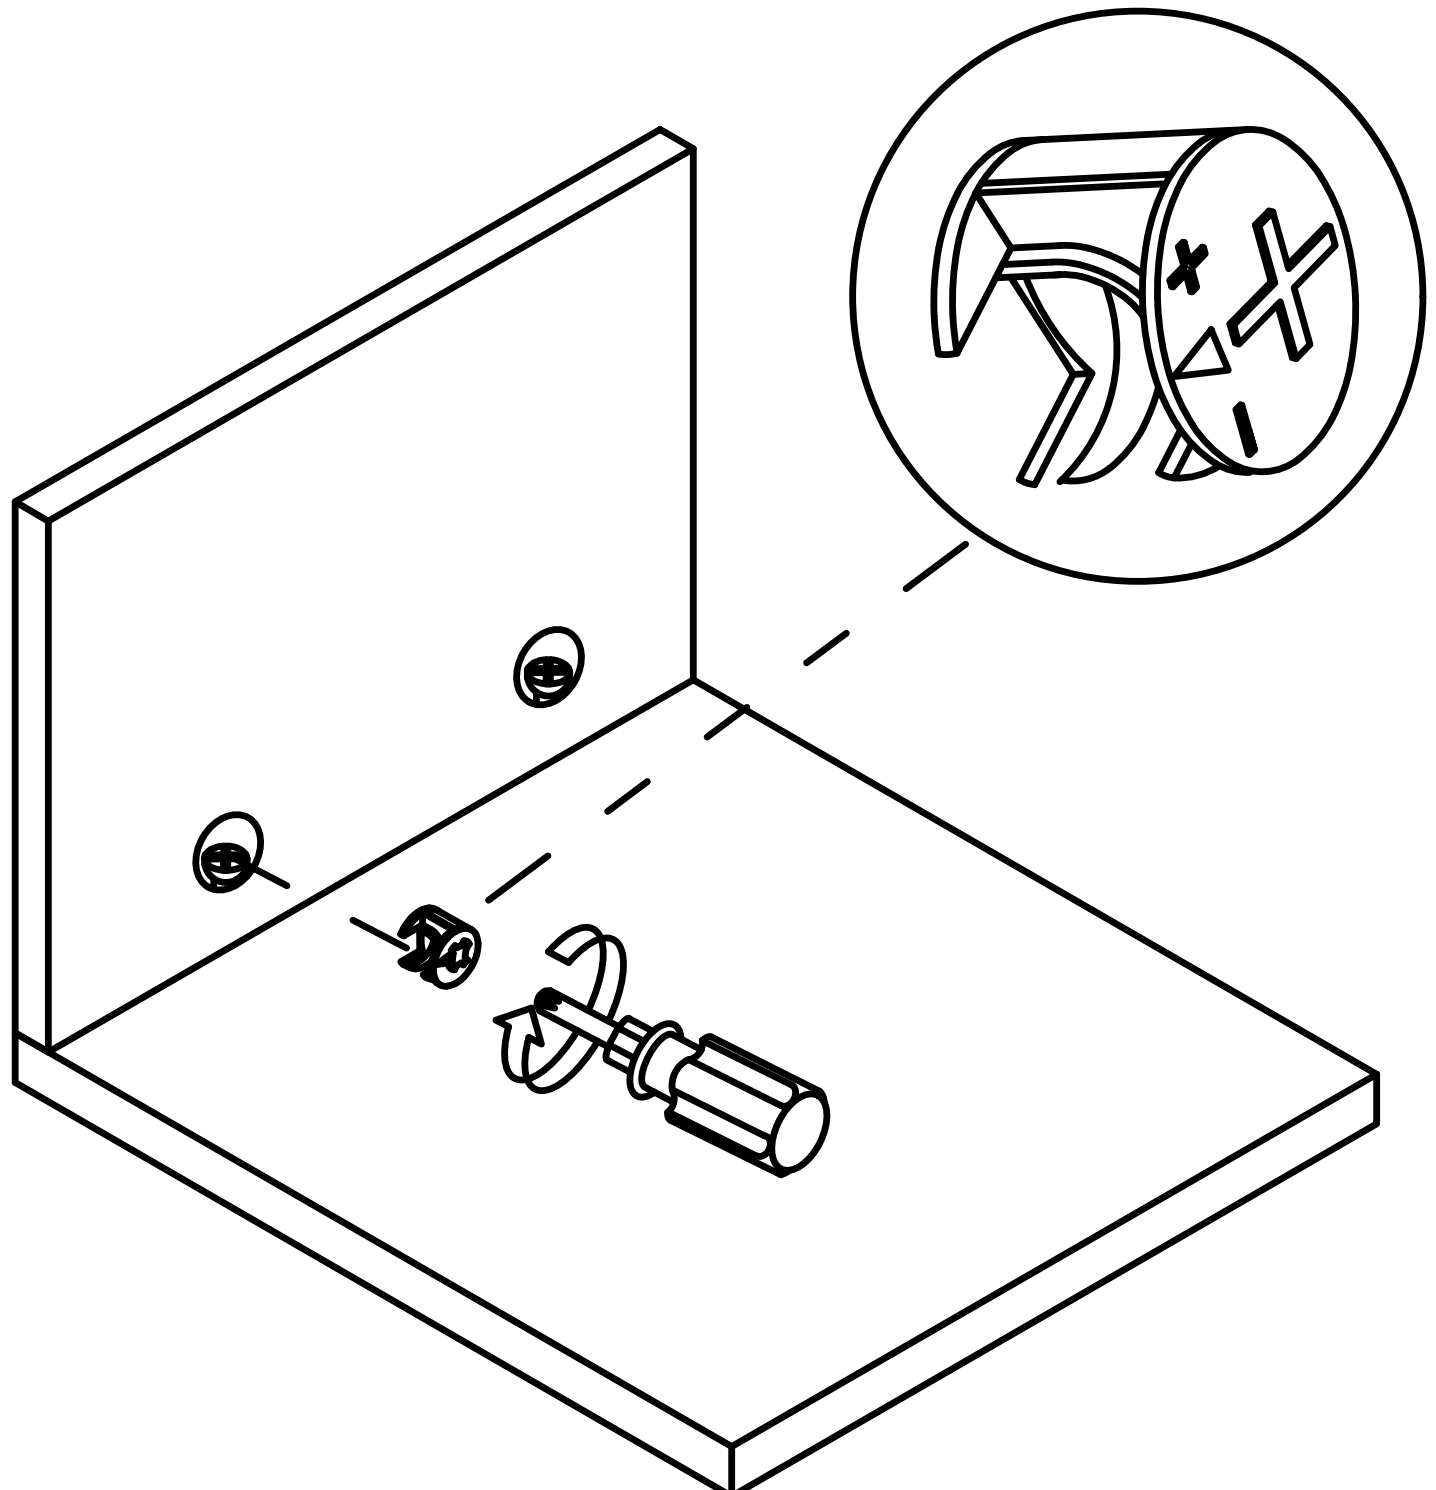

Use a screwdriver to lock in the direction of the "+" sign


Disassemble along the direction of "-" sign

Step 1

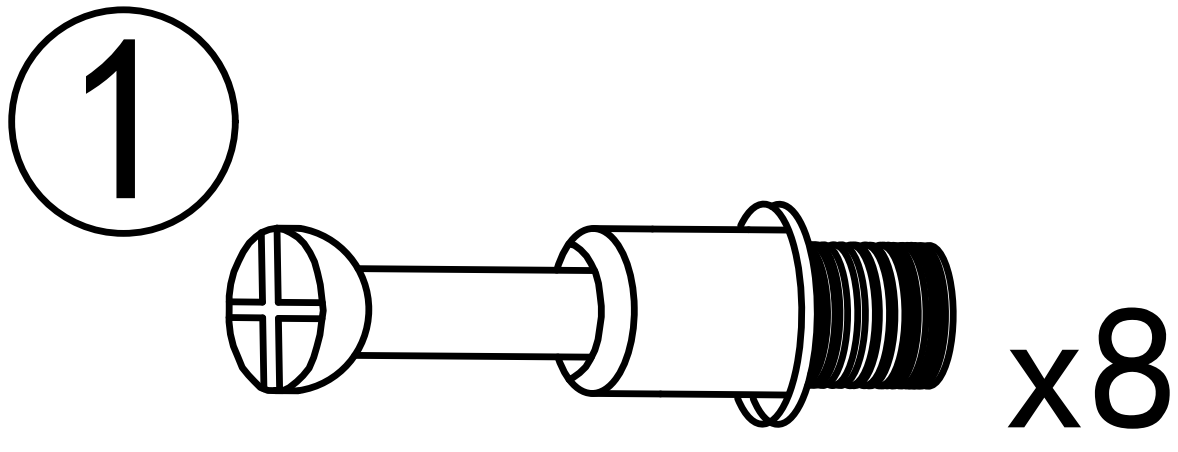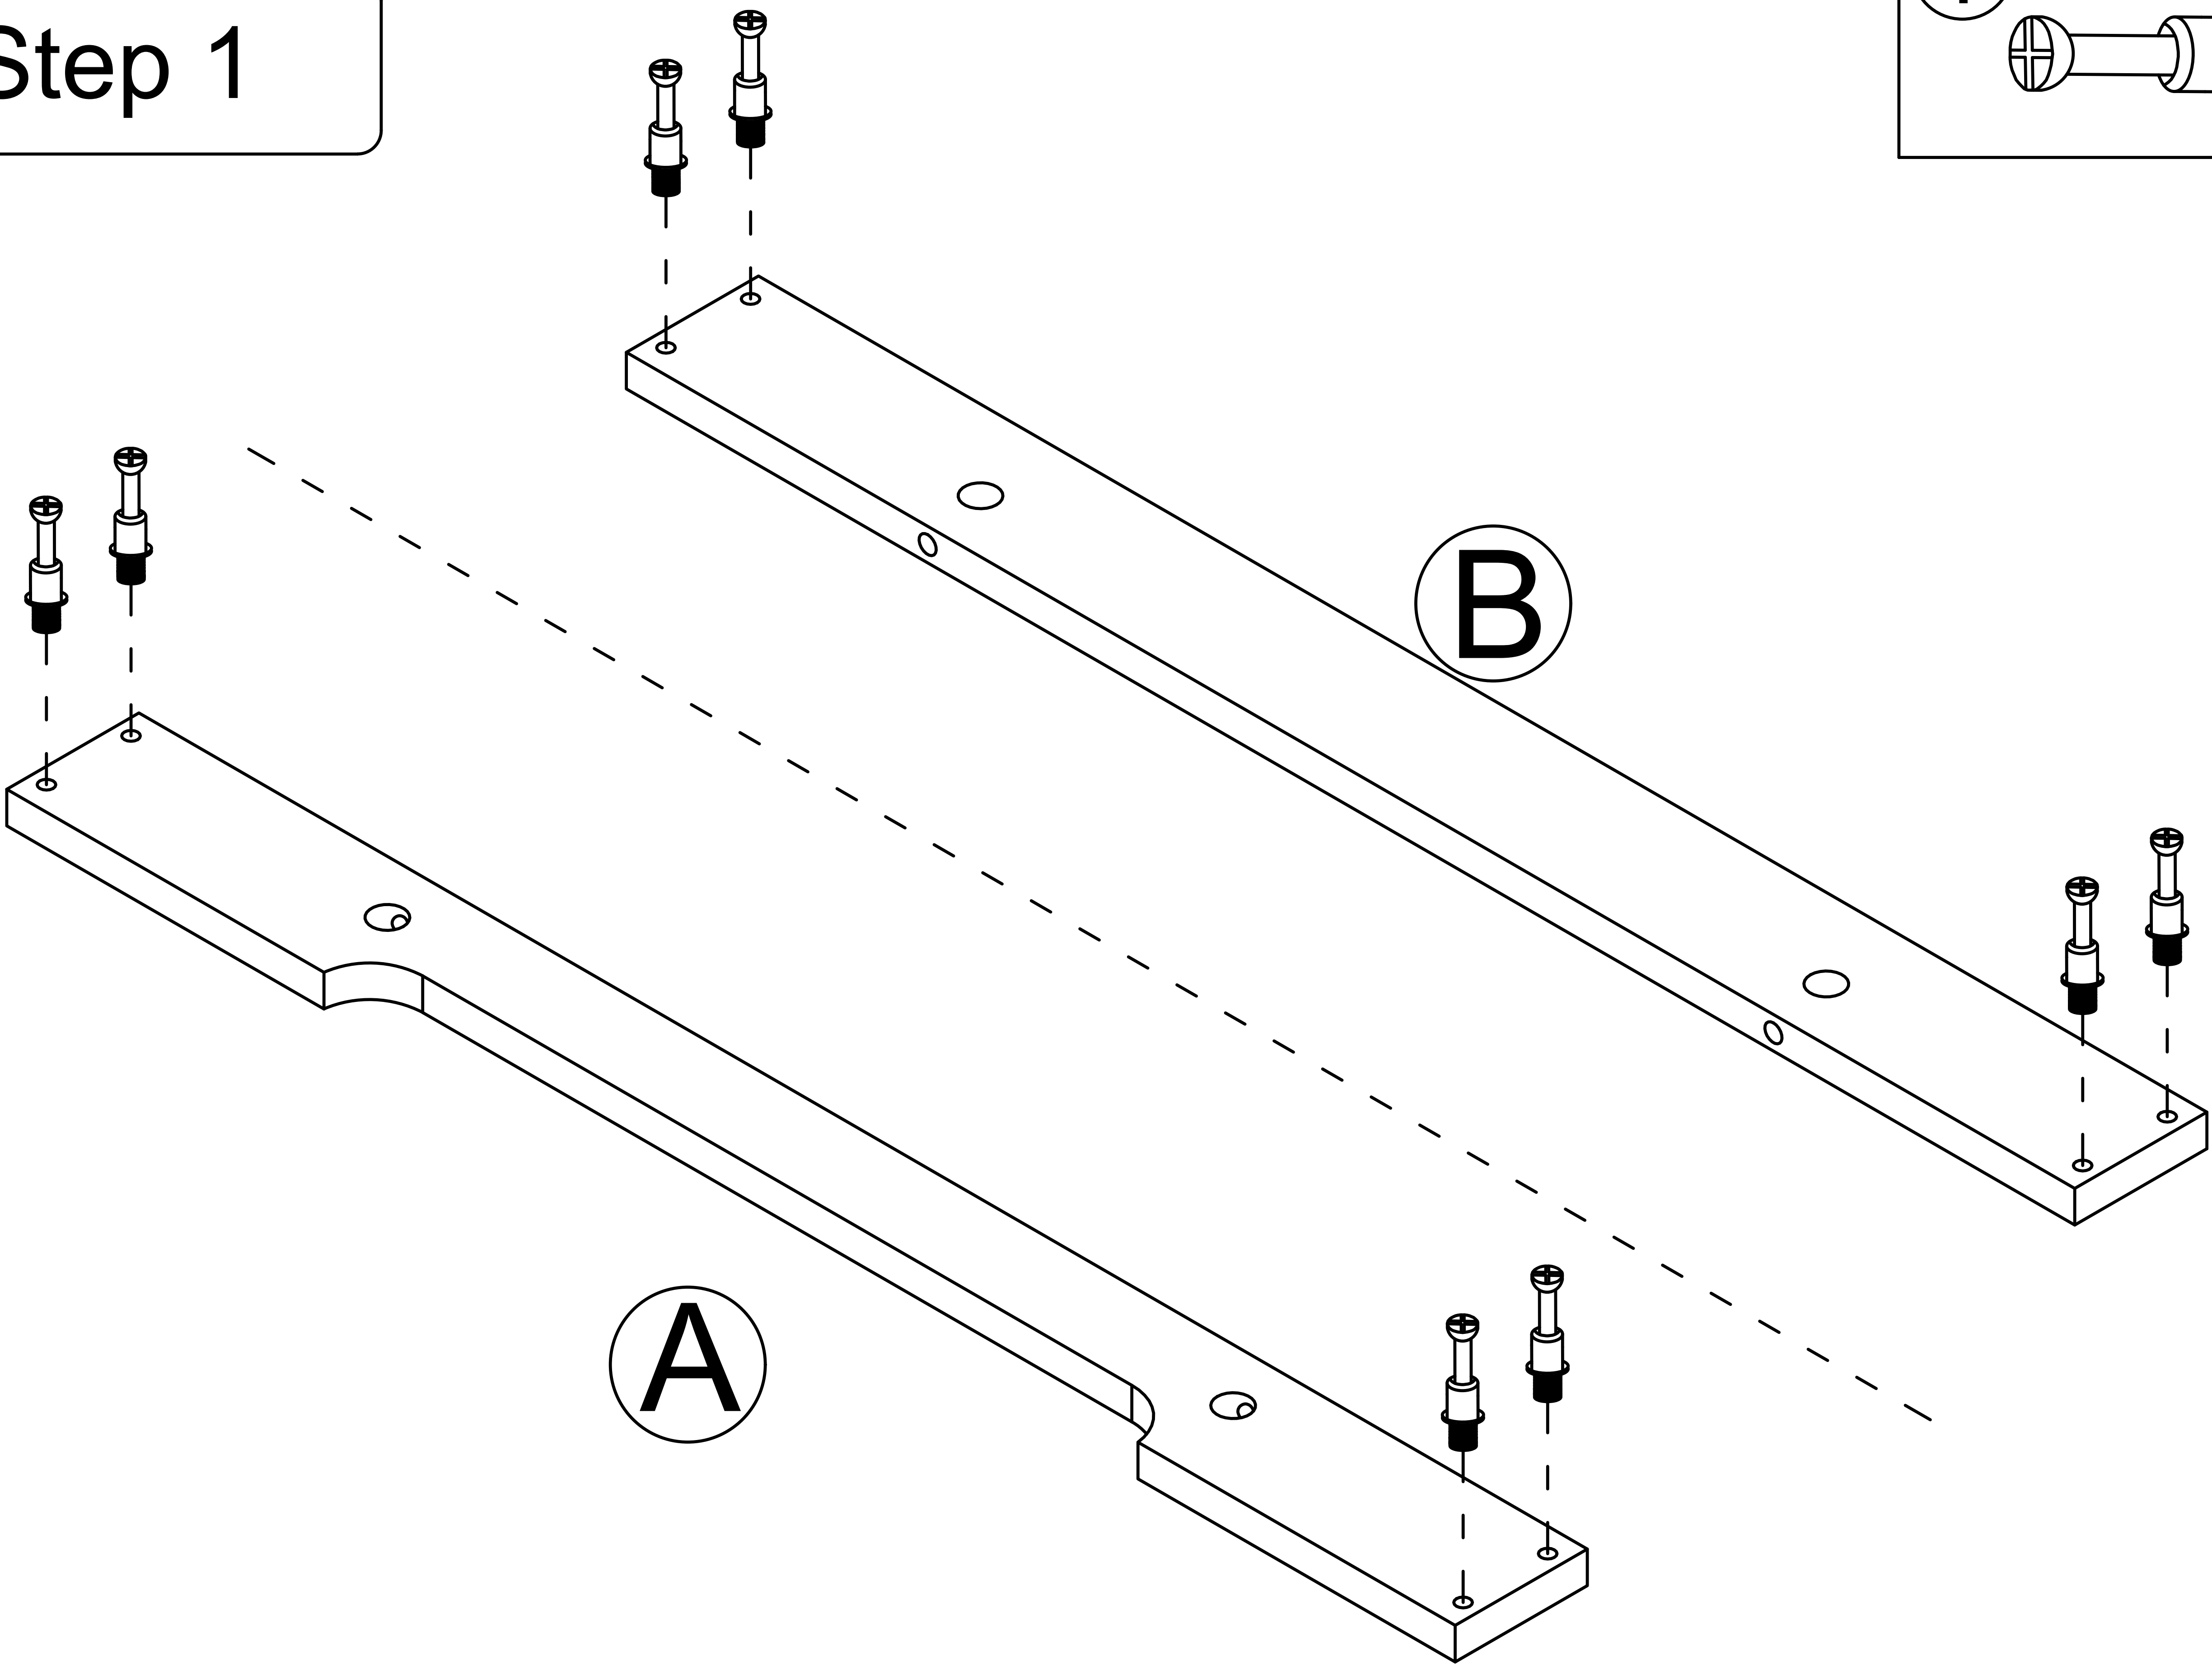


Step 2

2

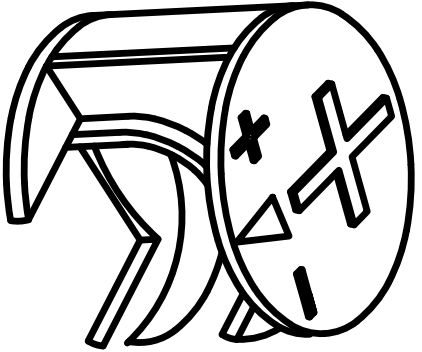


x8

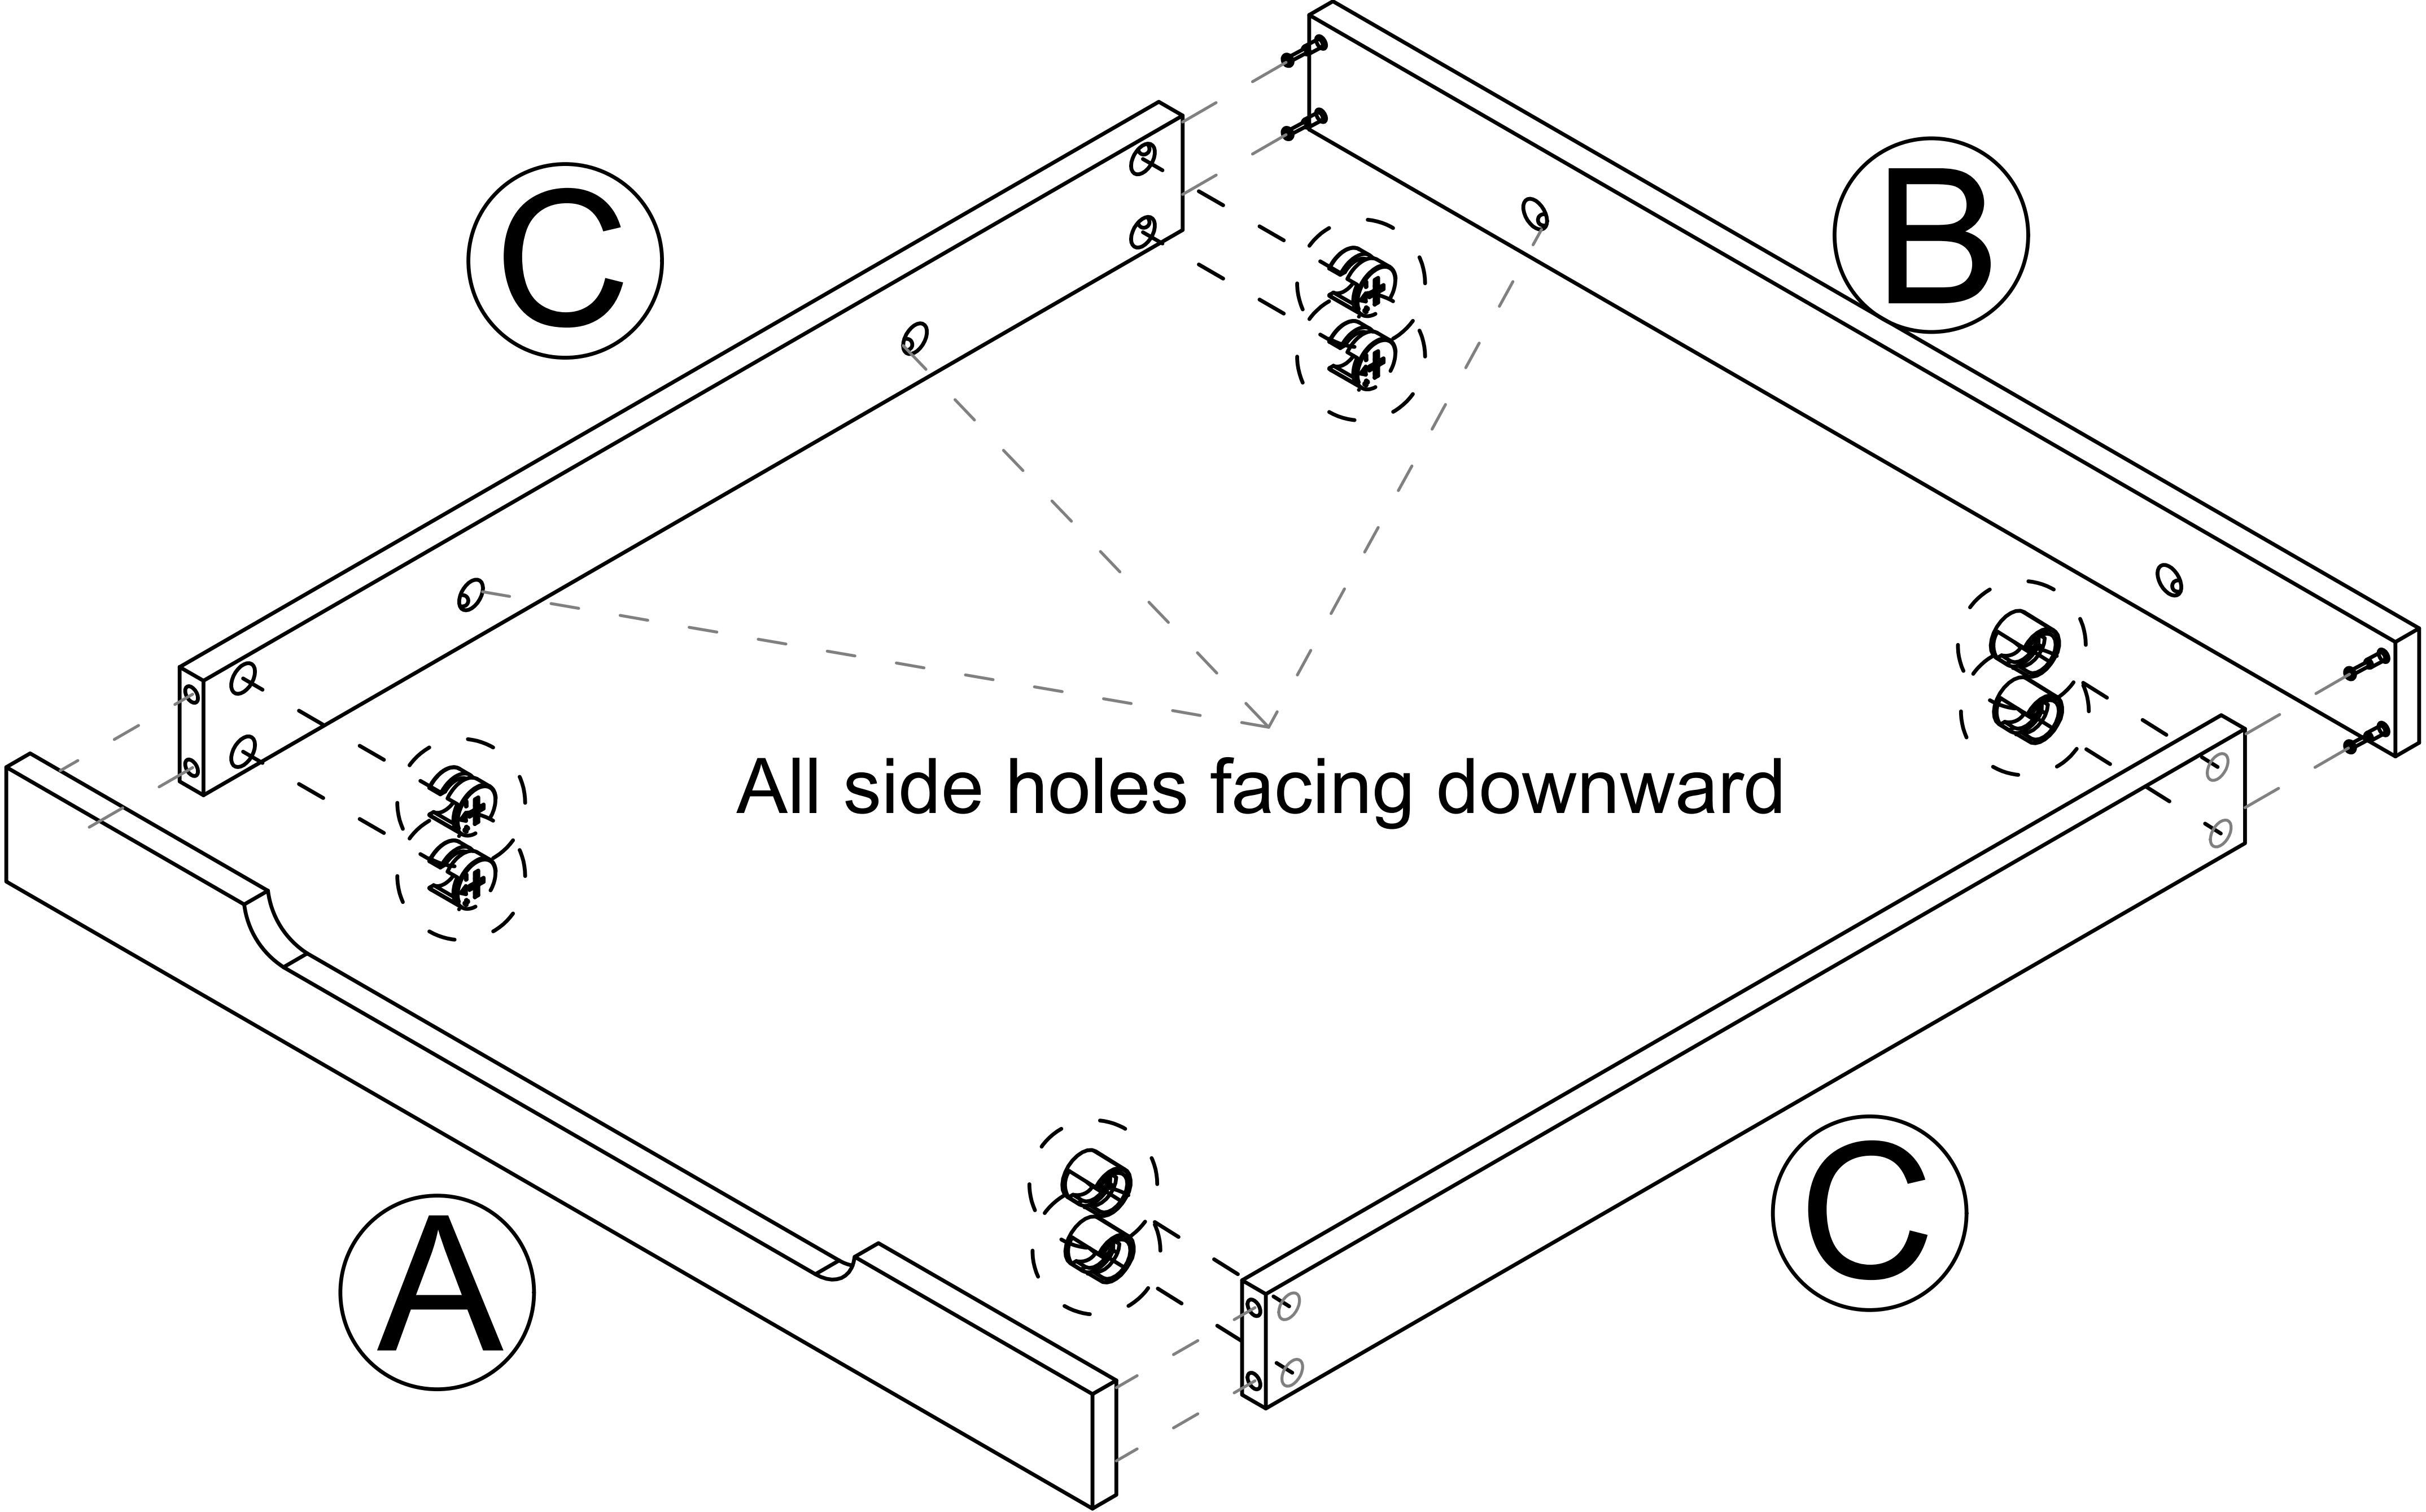


Step 3

1

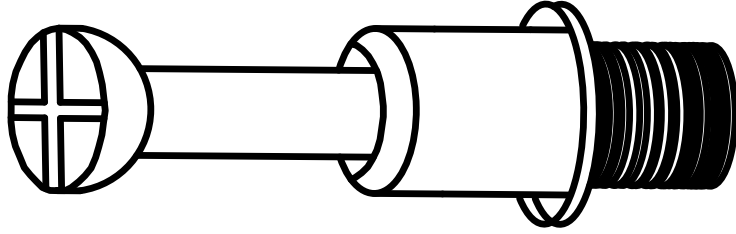


x8

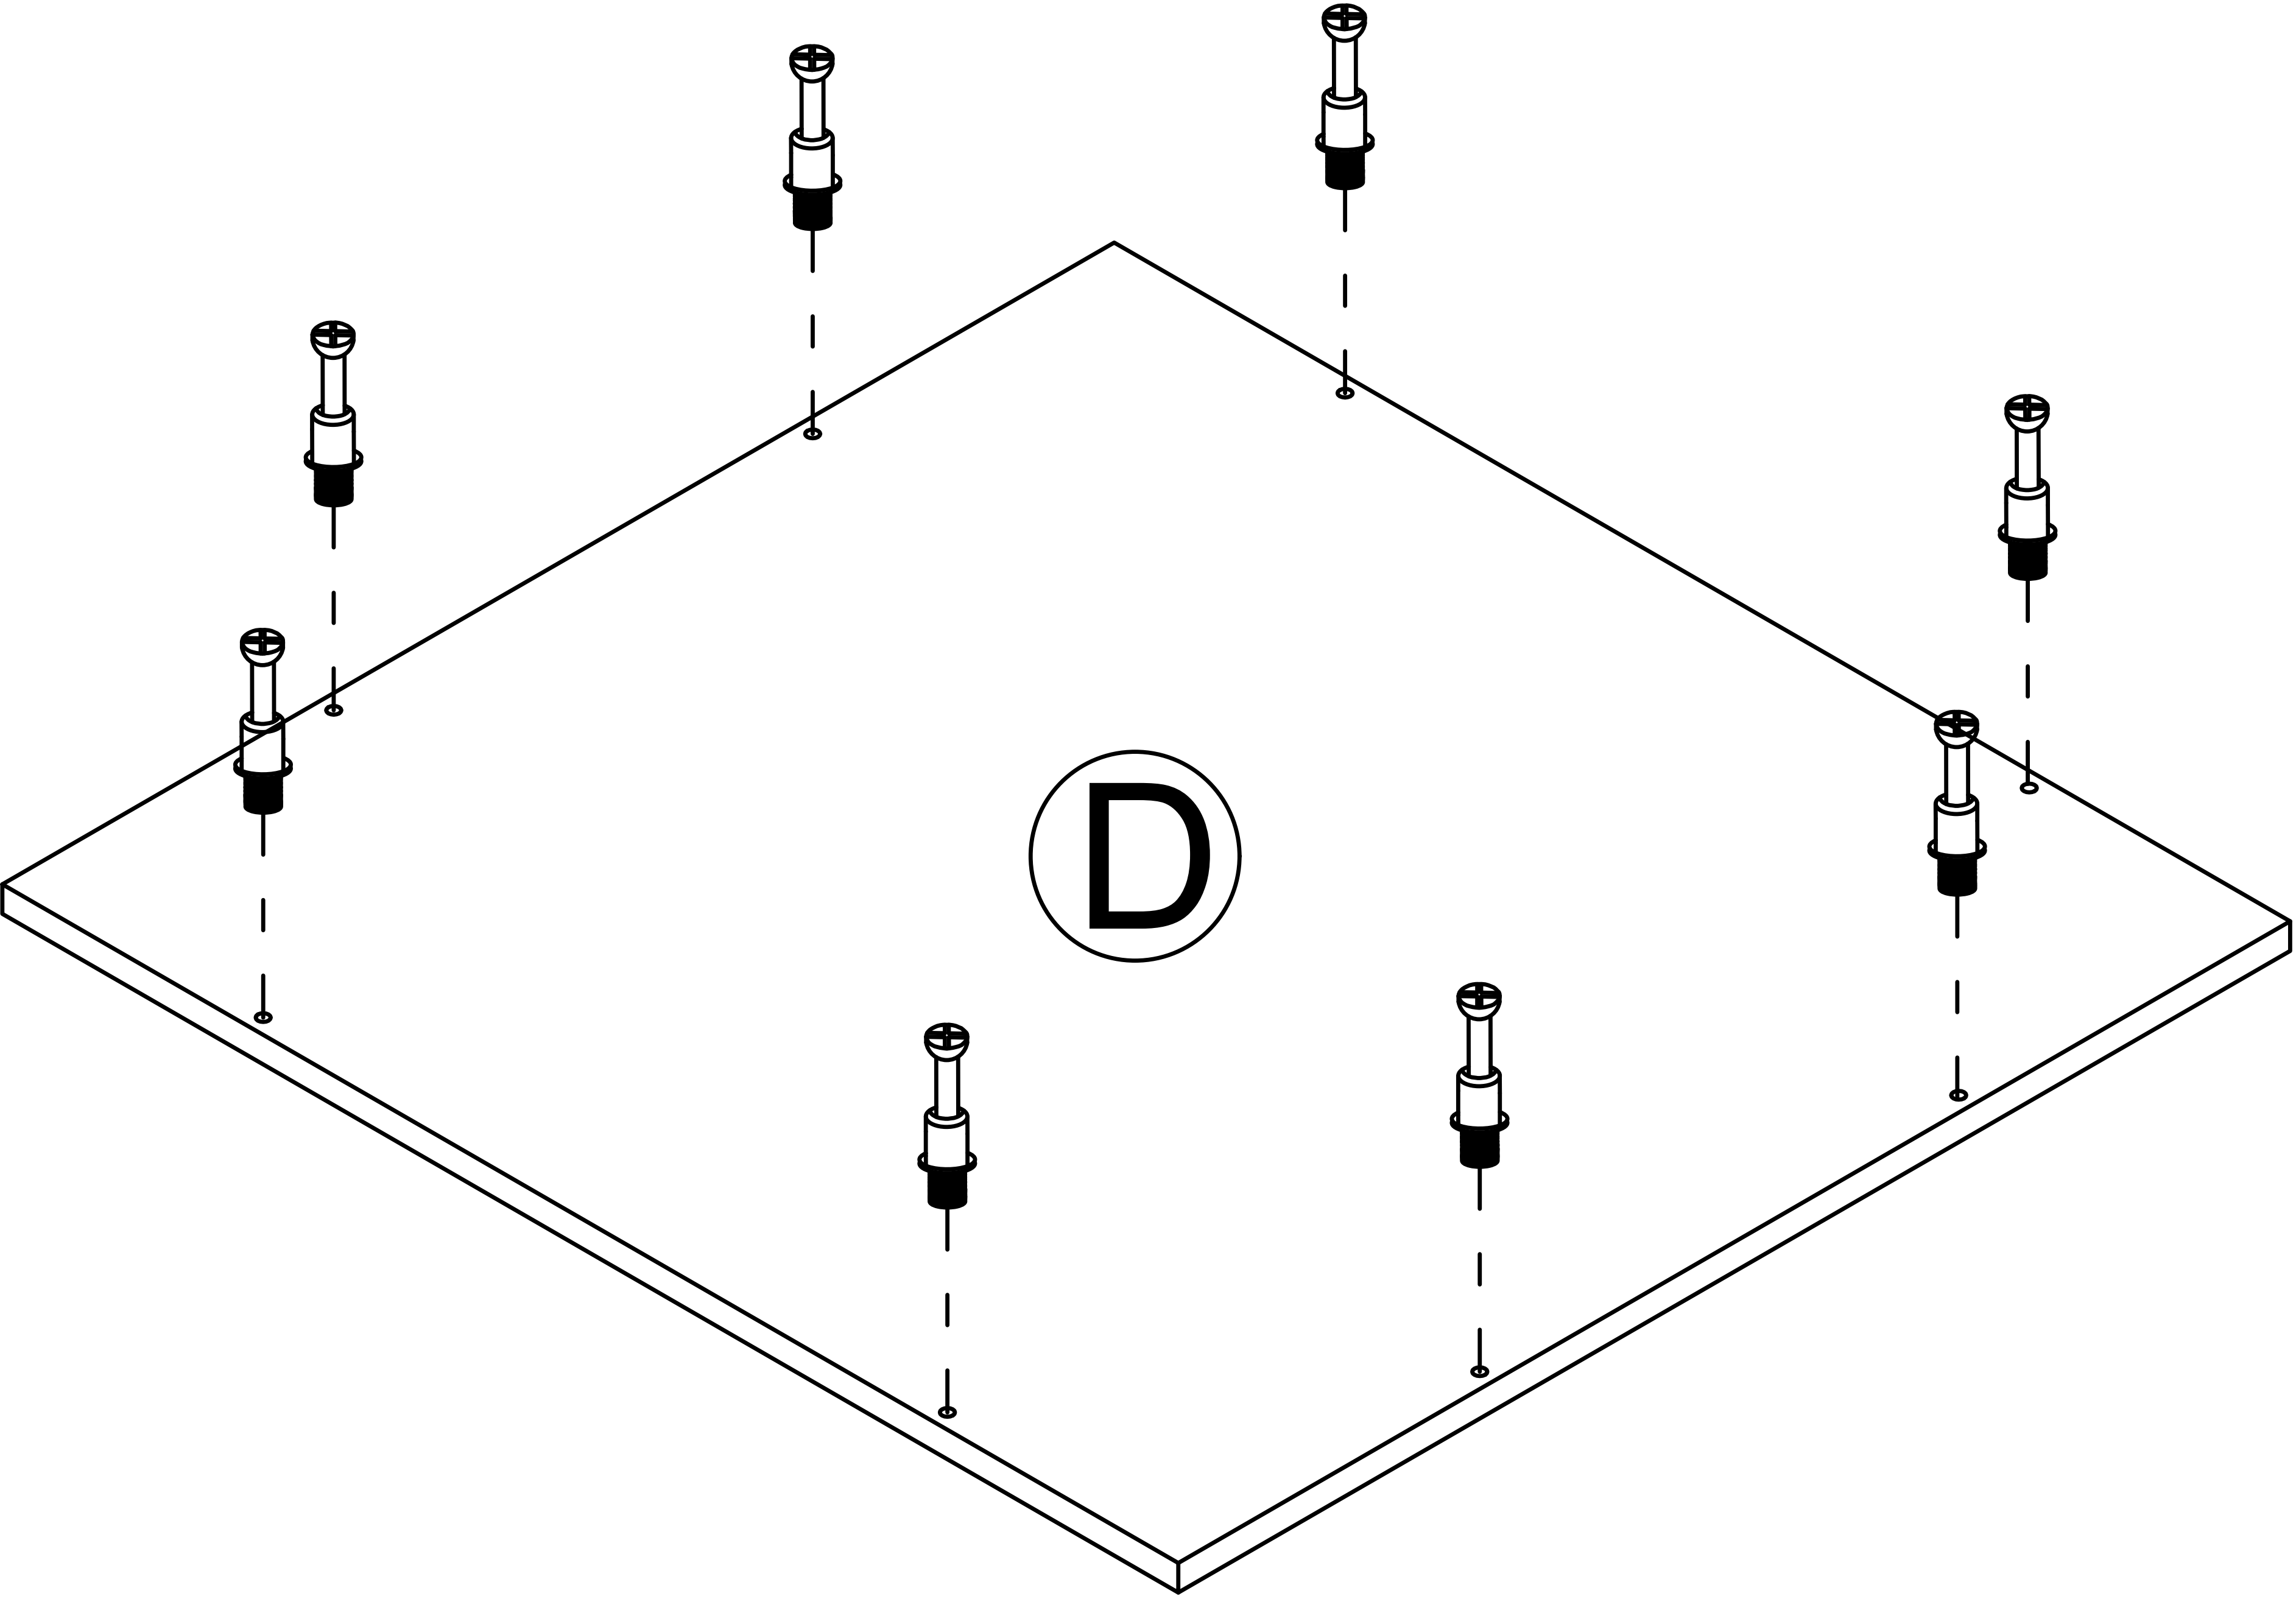


Step 4

2

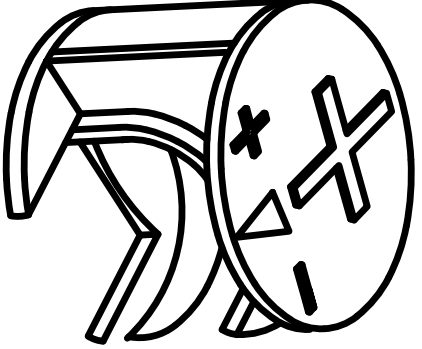

x8


Pay attention to the position of the back slot.

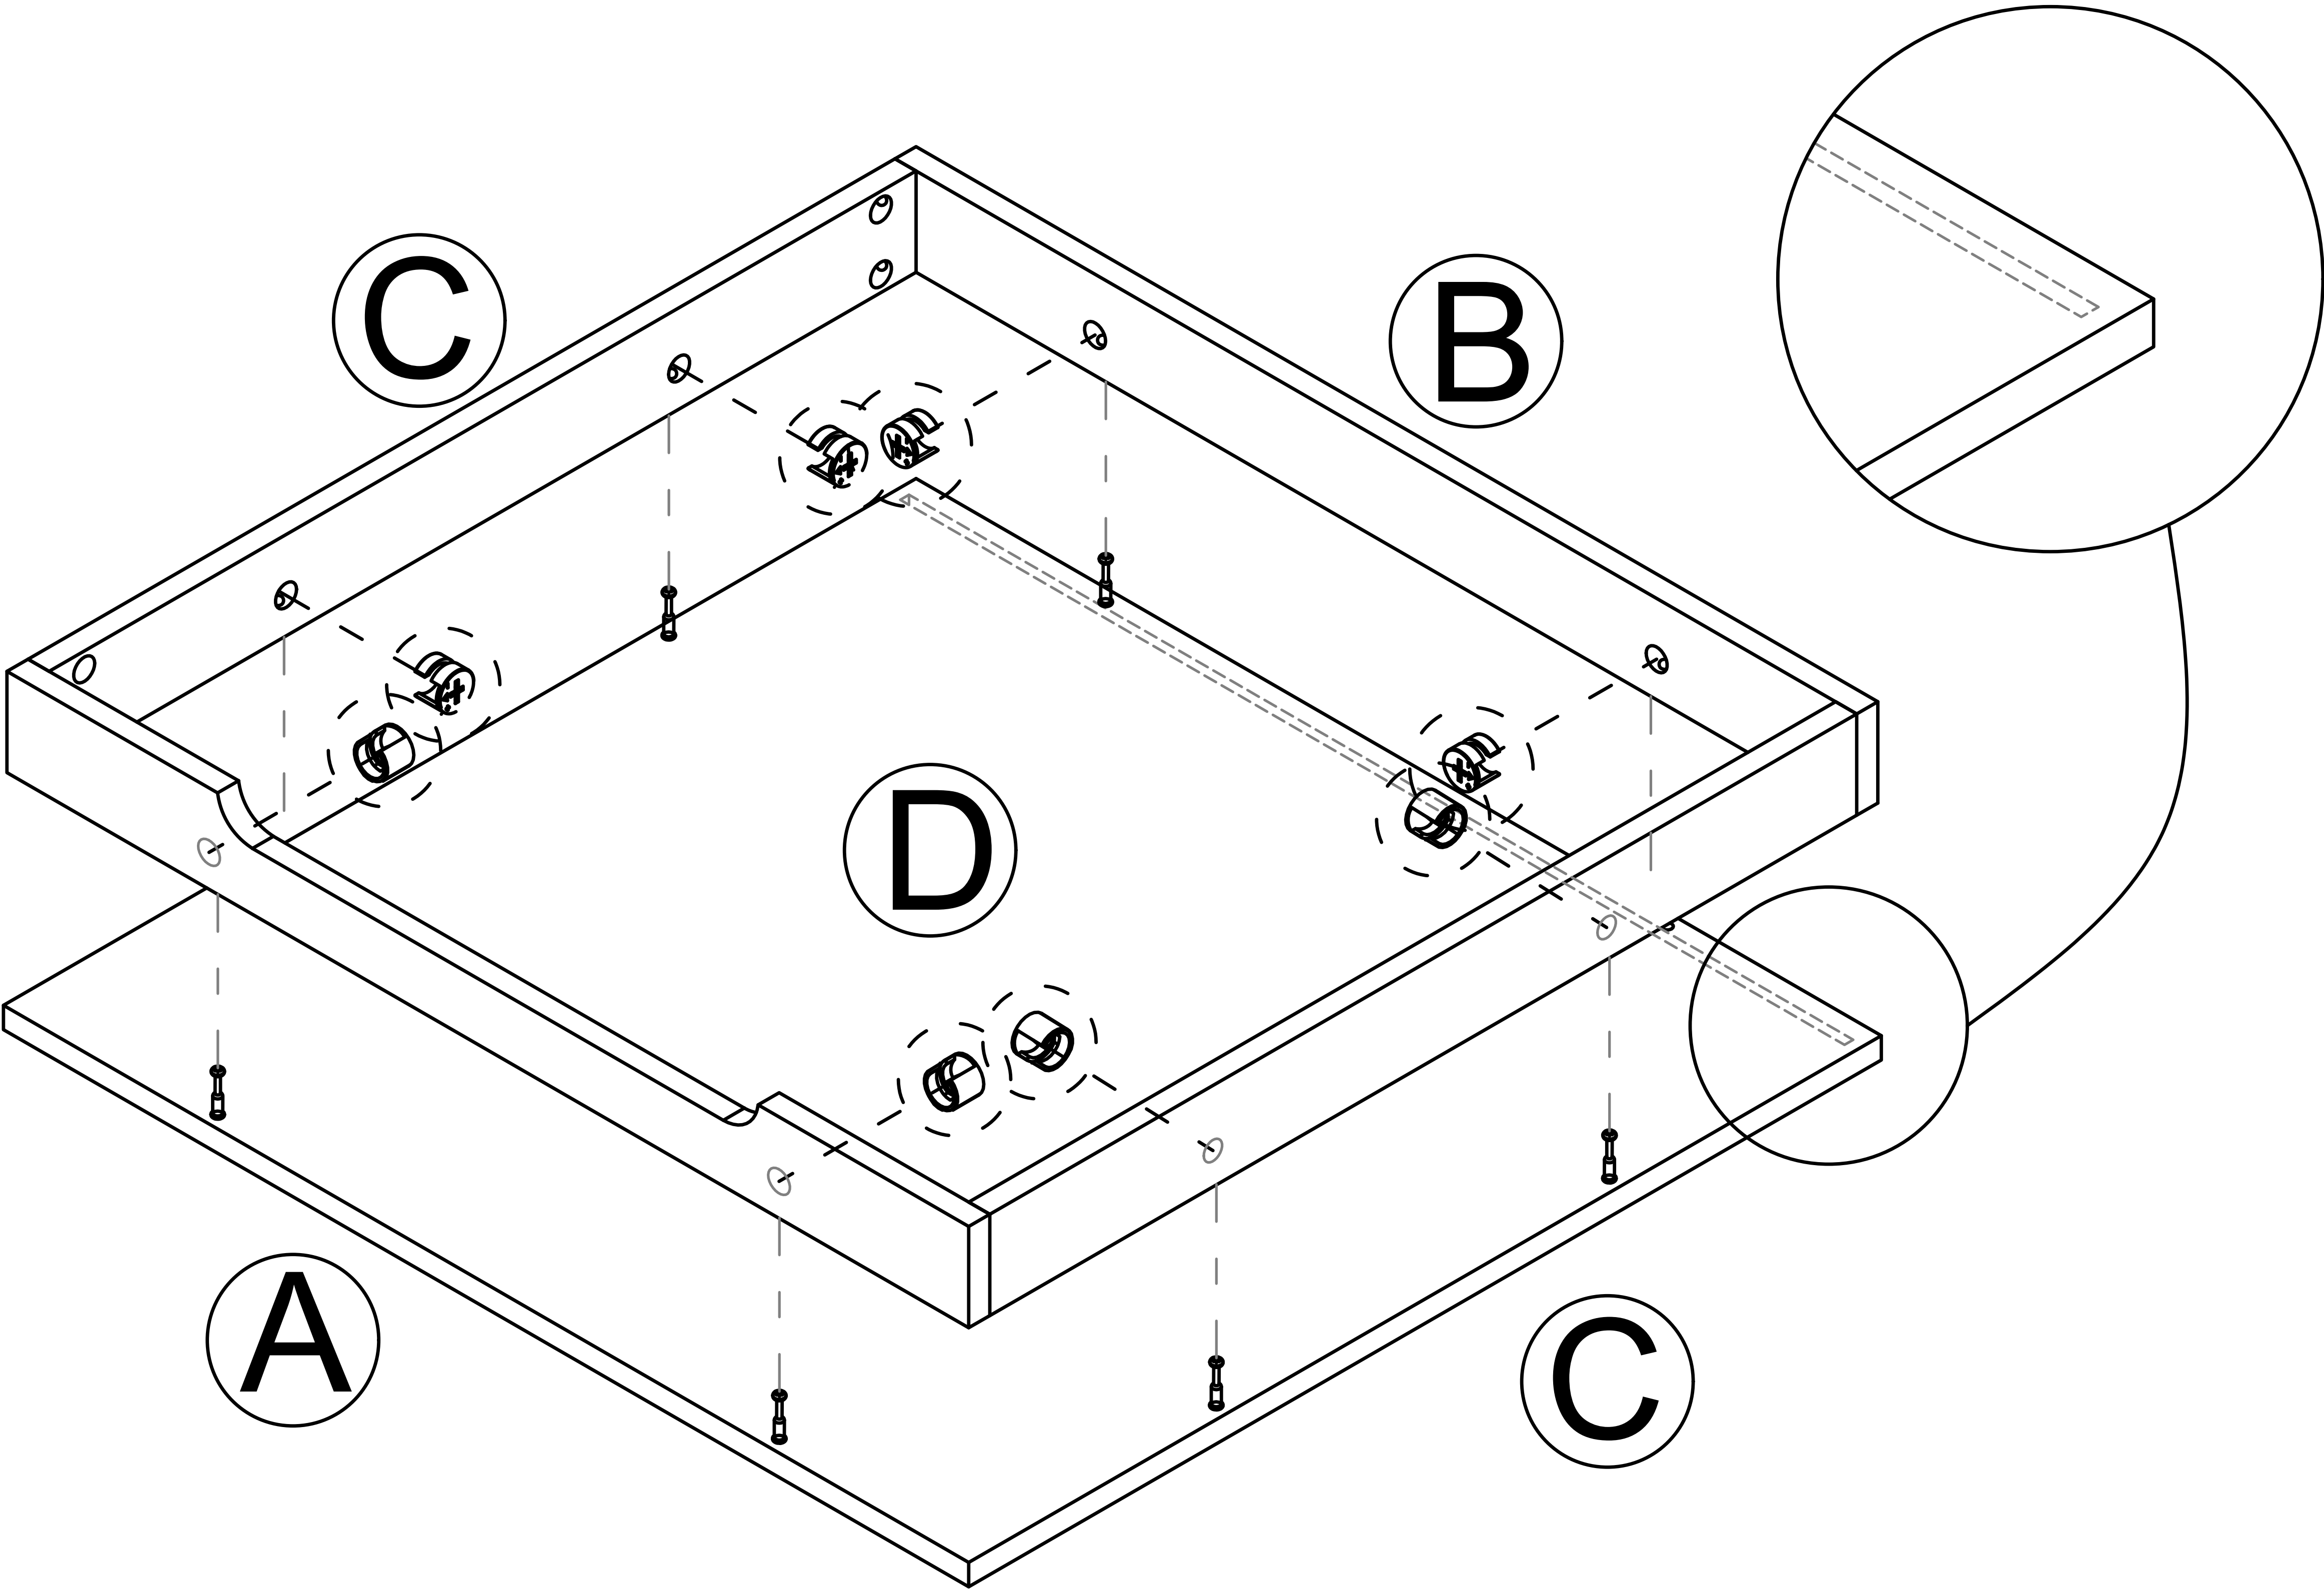


Step 5

Tear off release paper and stick the black foot pad on the board

4

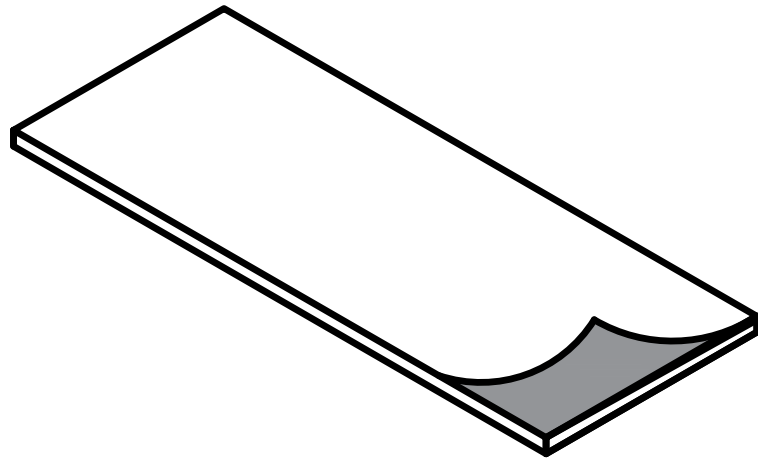



x4

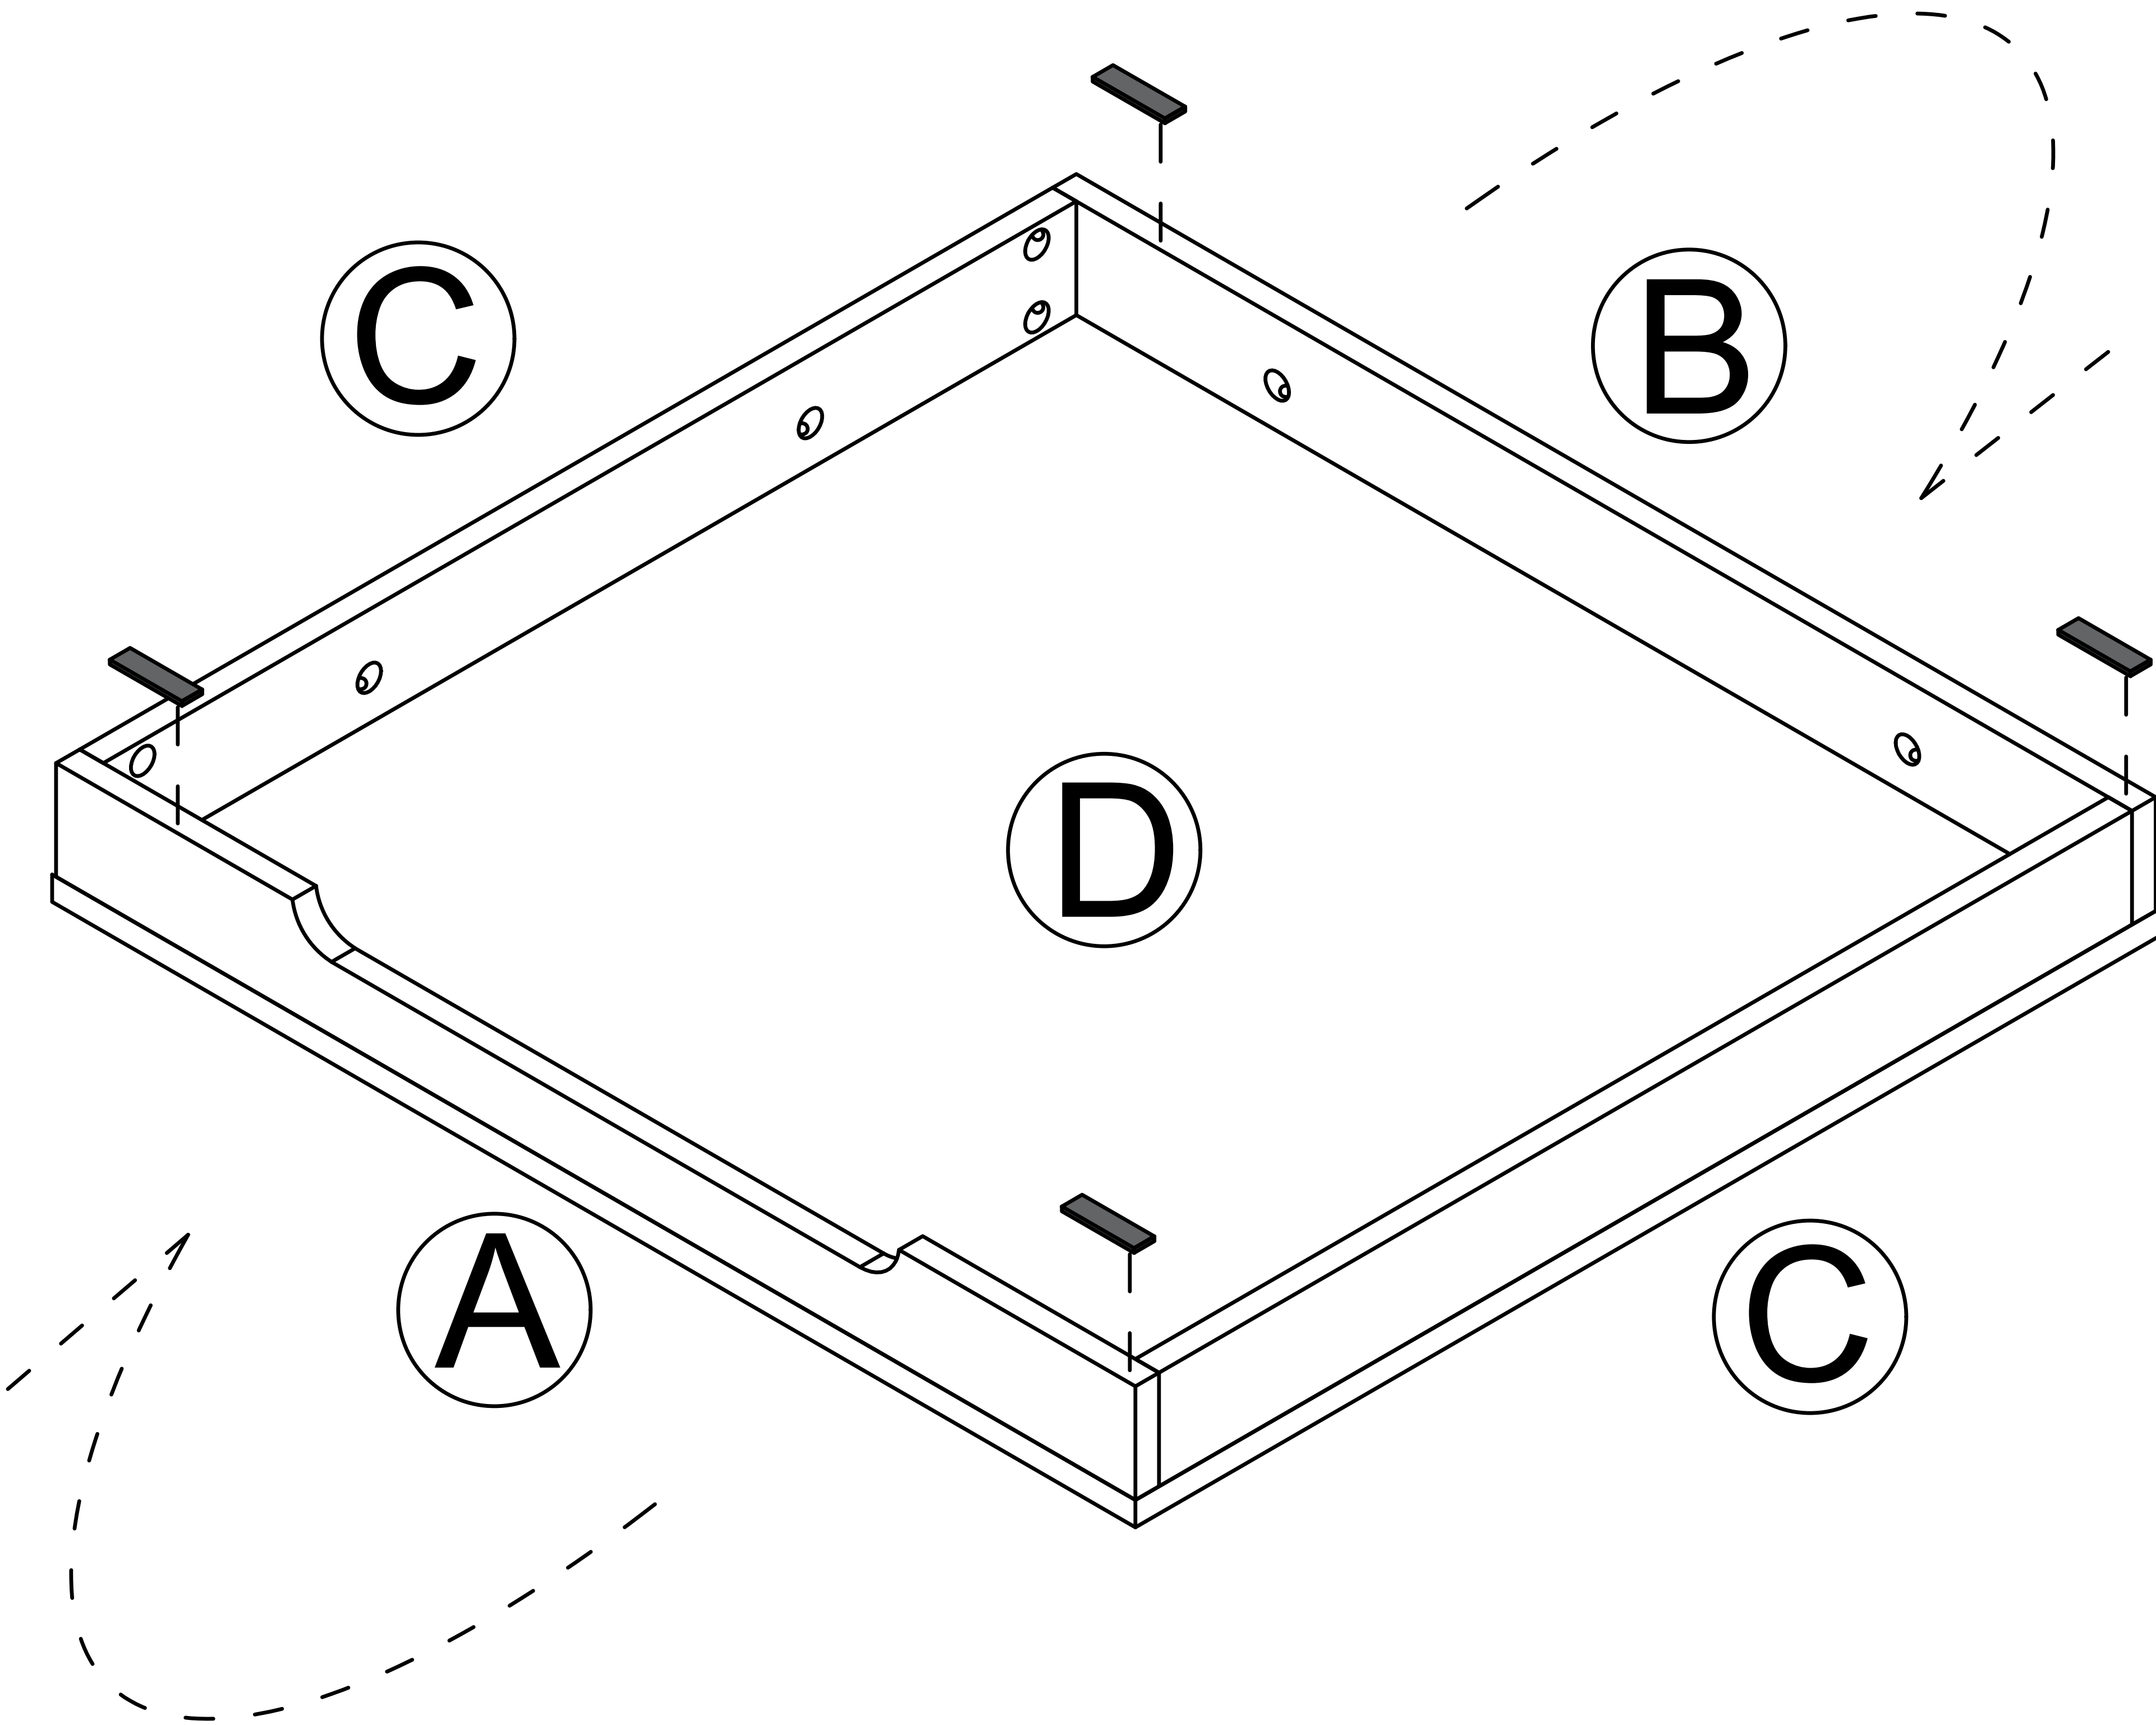


Step 6

- 1

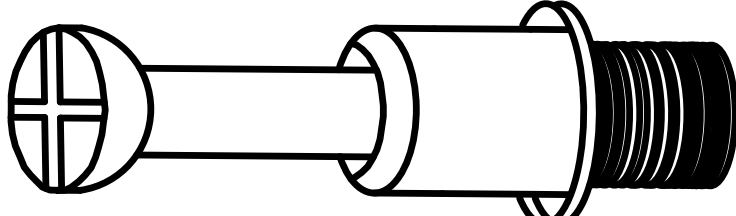
 x4
- 3

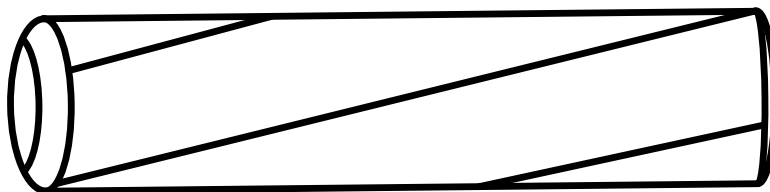
 x4

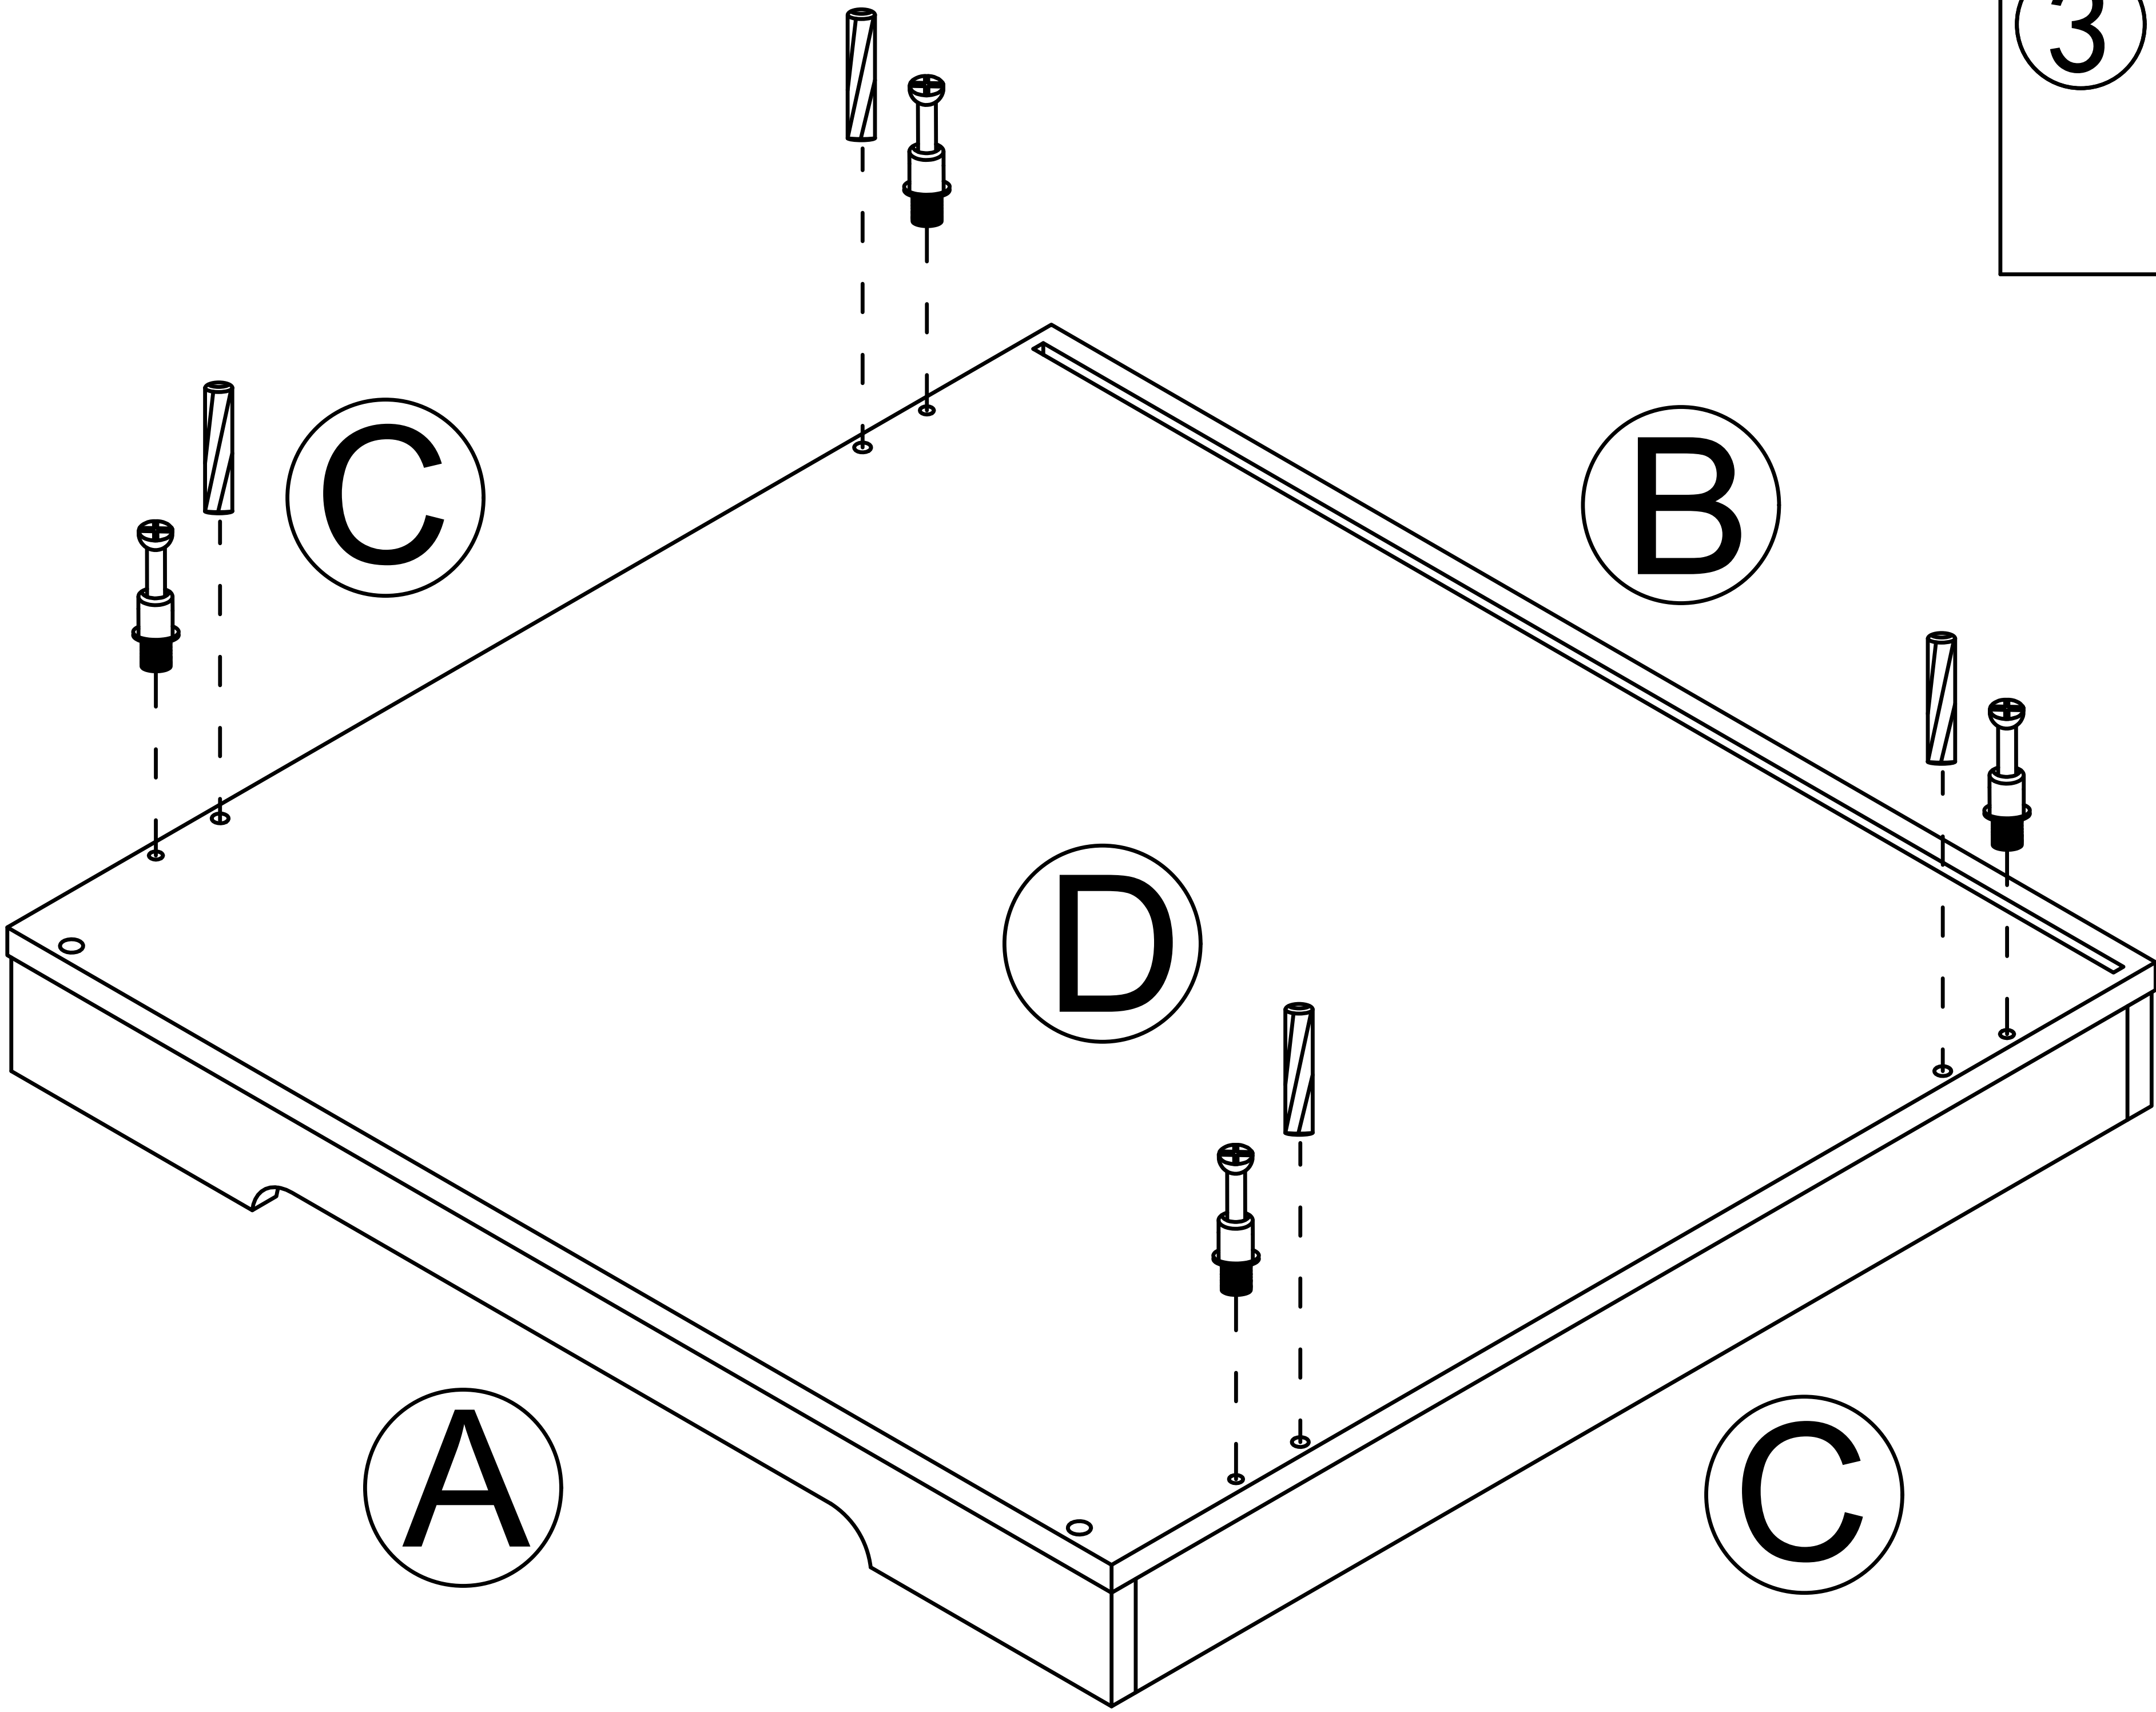

Step 7

- 1

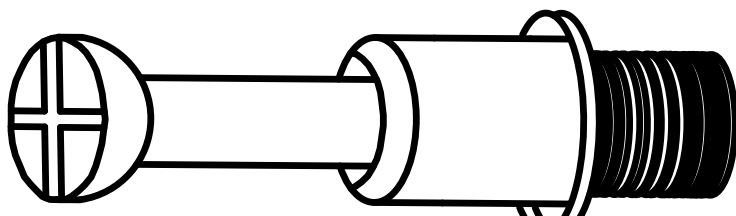
 x8

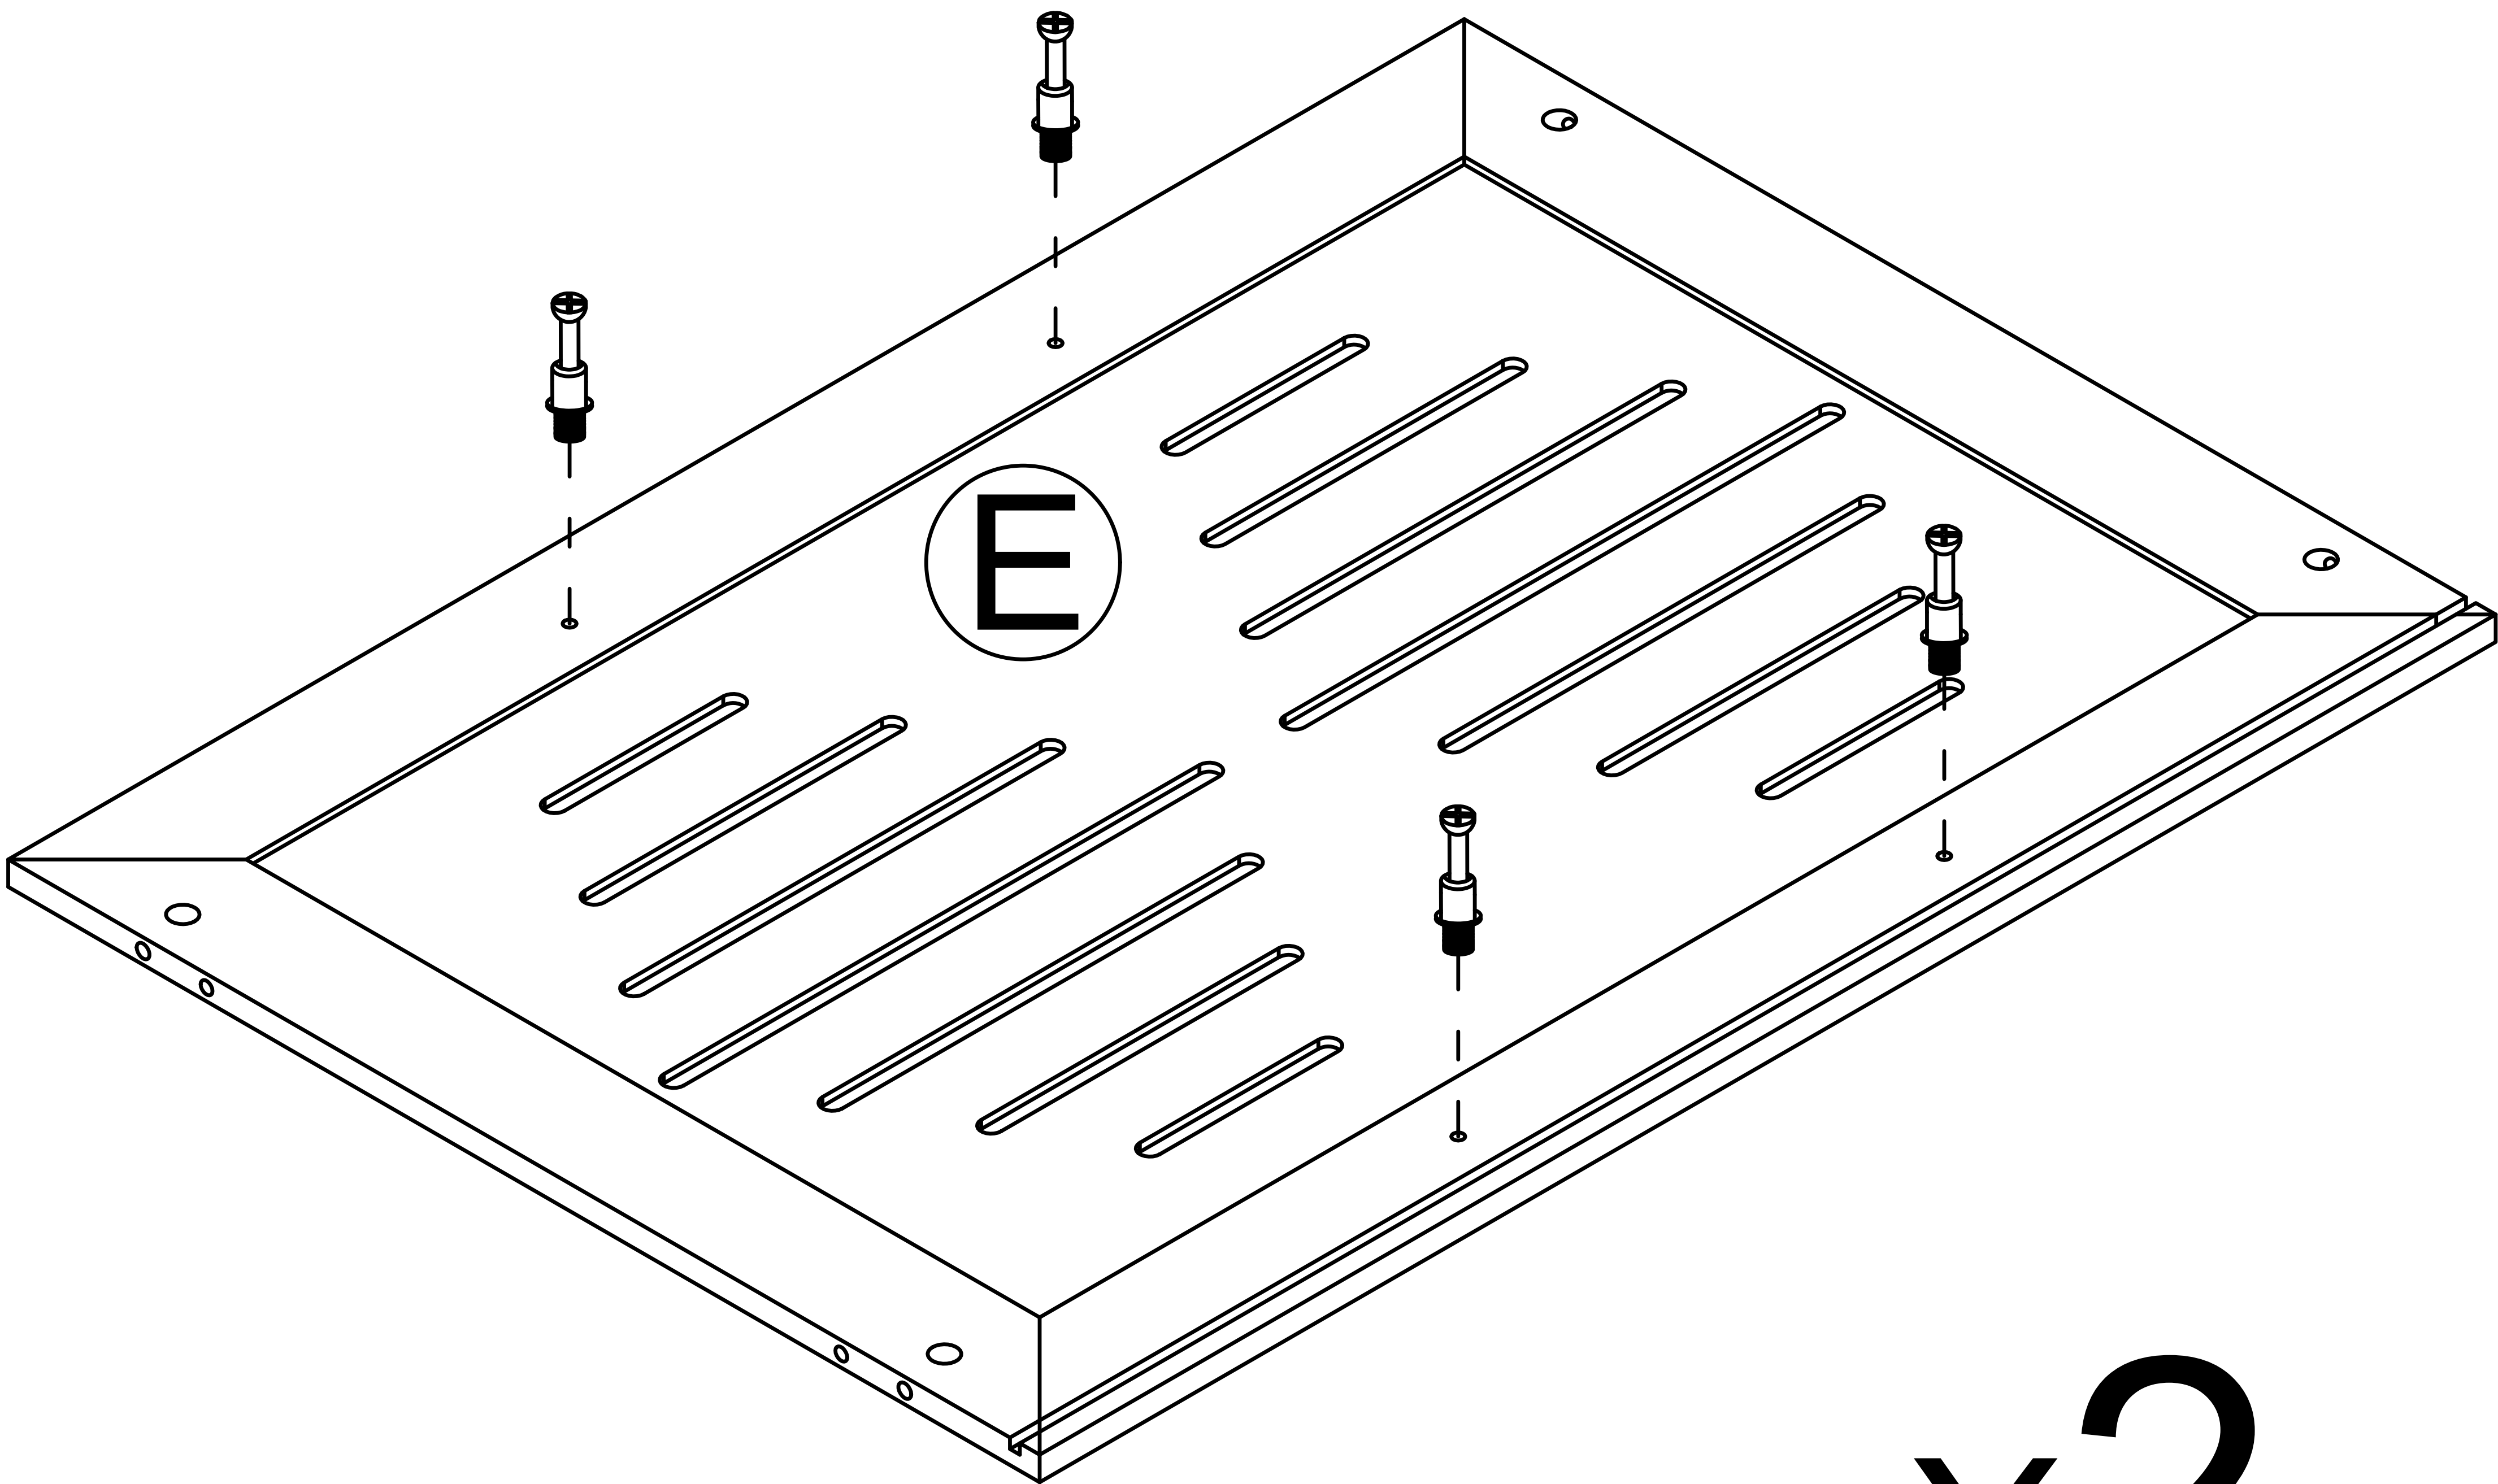


x2

Step 8

2

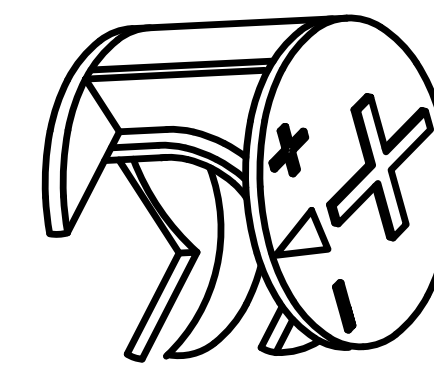


x4

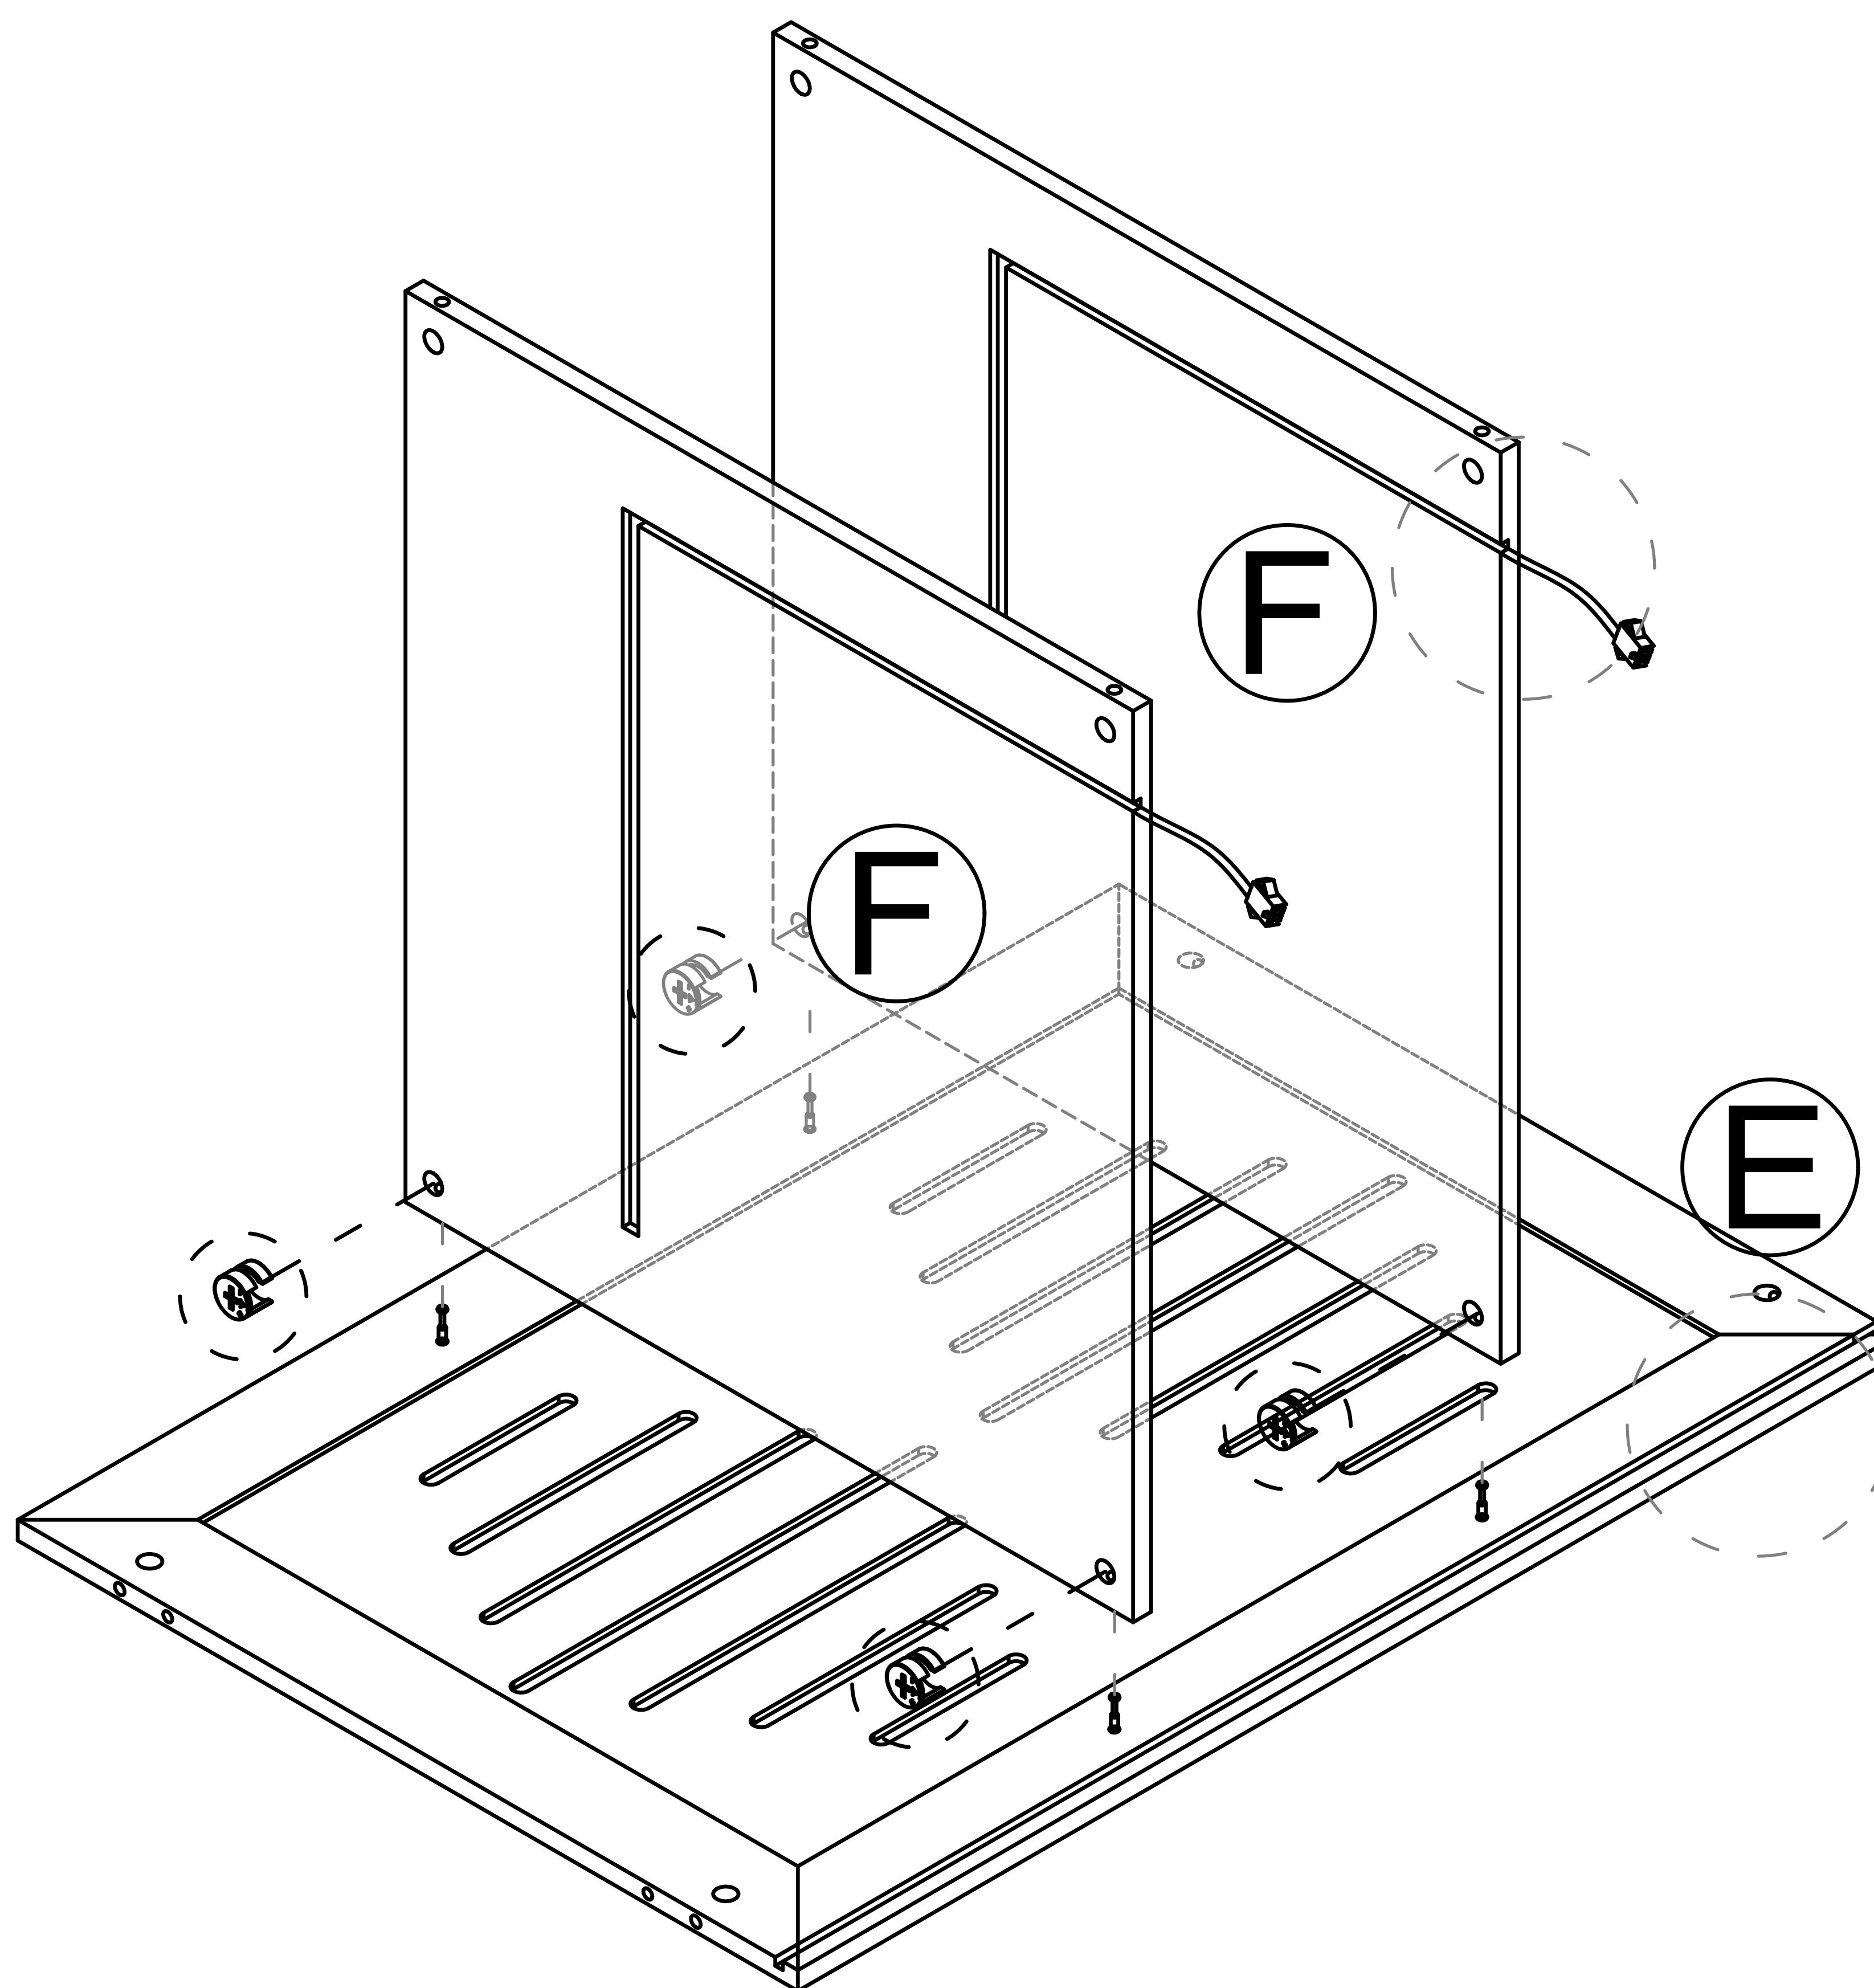


Align the lamp wire of Panel F with the multi-slot direction of Panel E.

Step 9

2

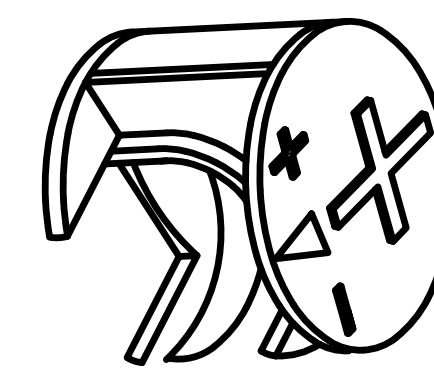


x4

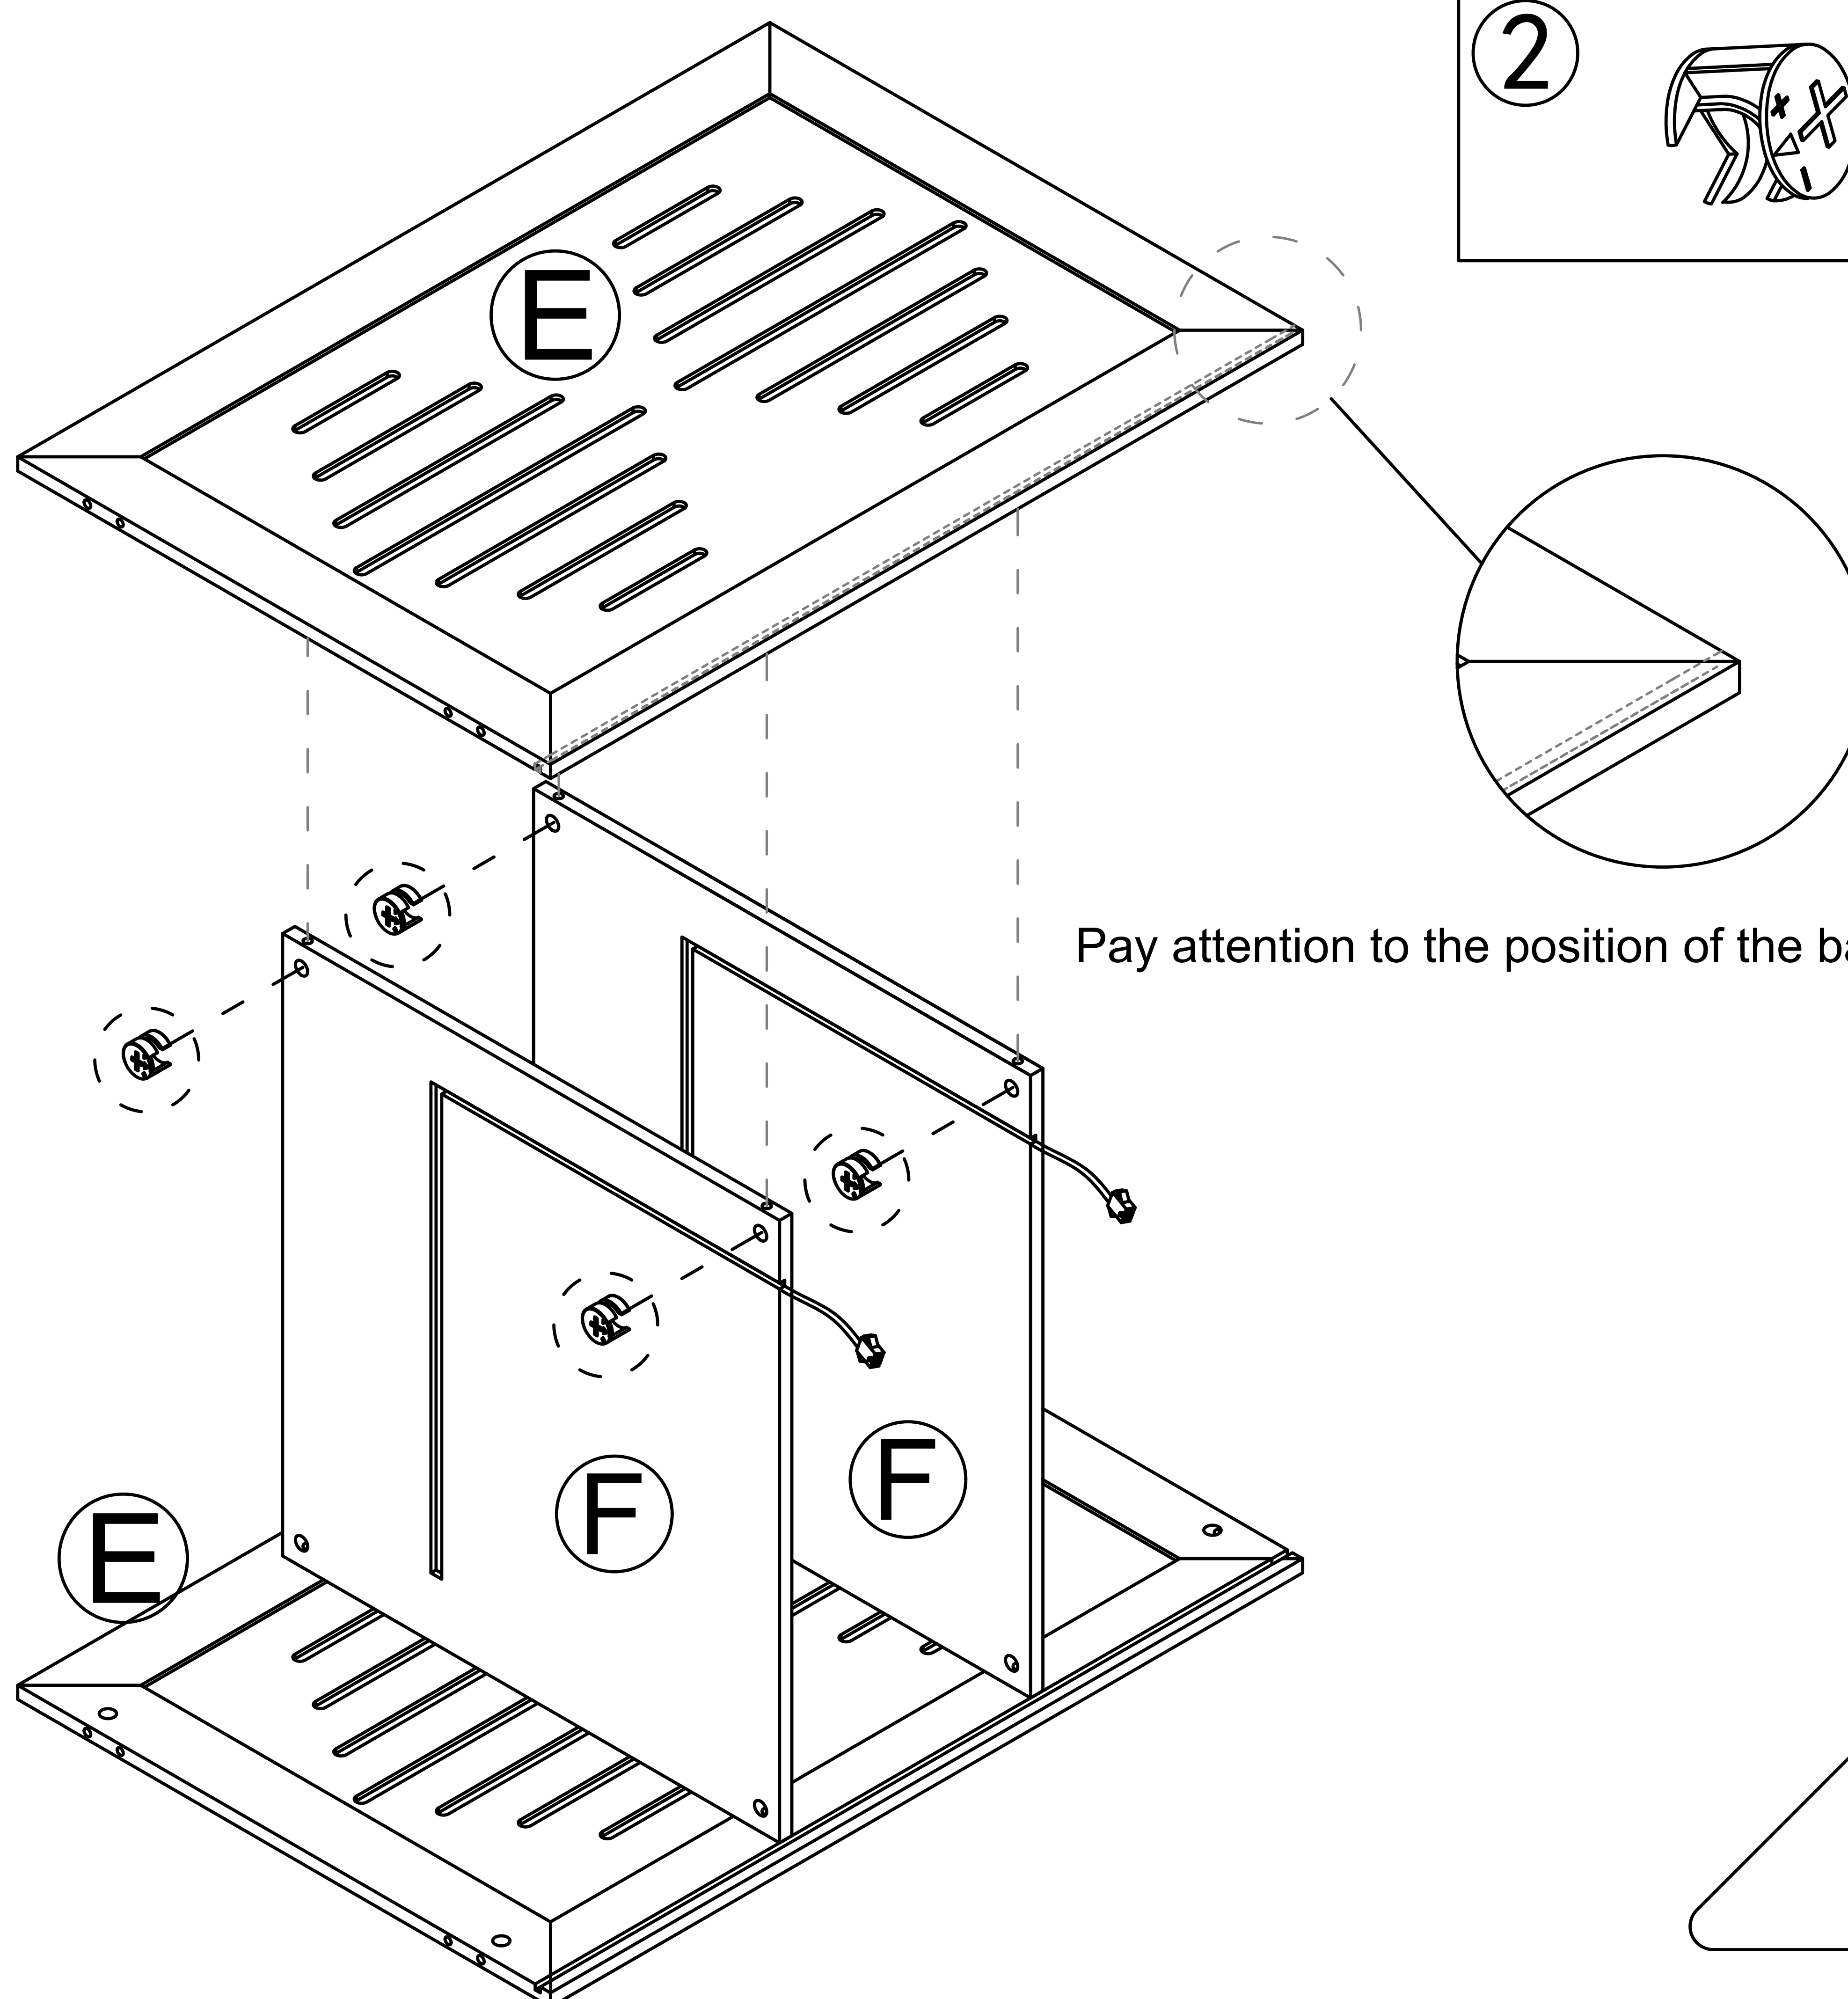

8


Step 10

2

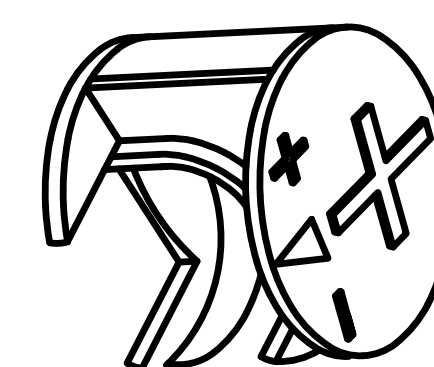



x4

The plate grooves shall be in the same direction.

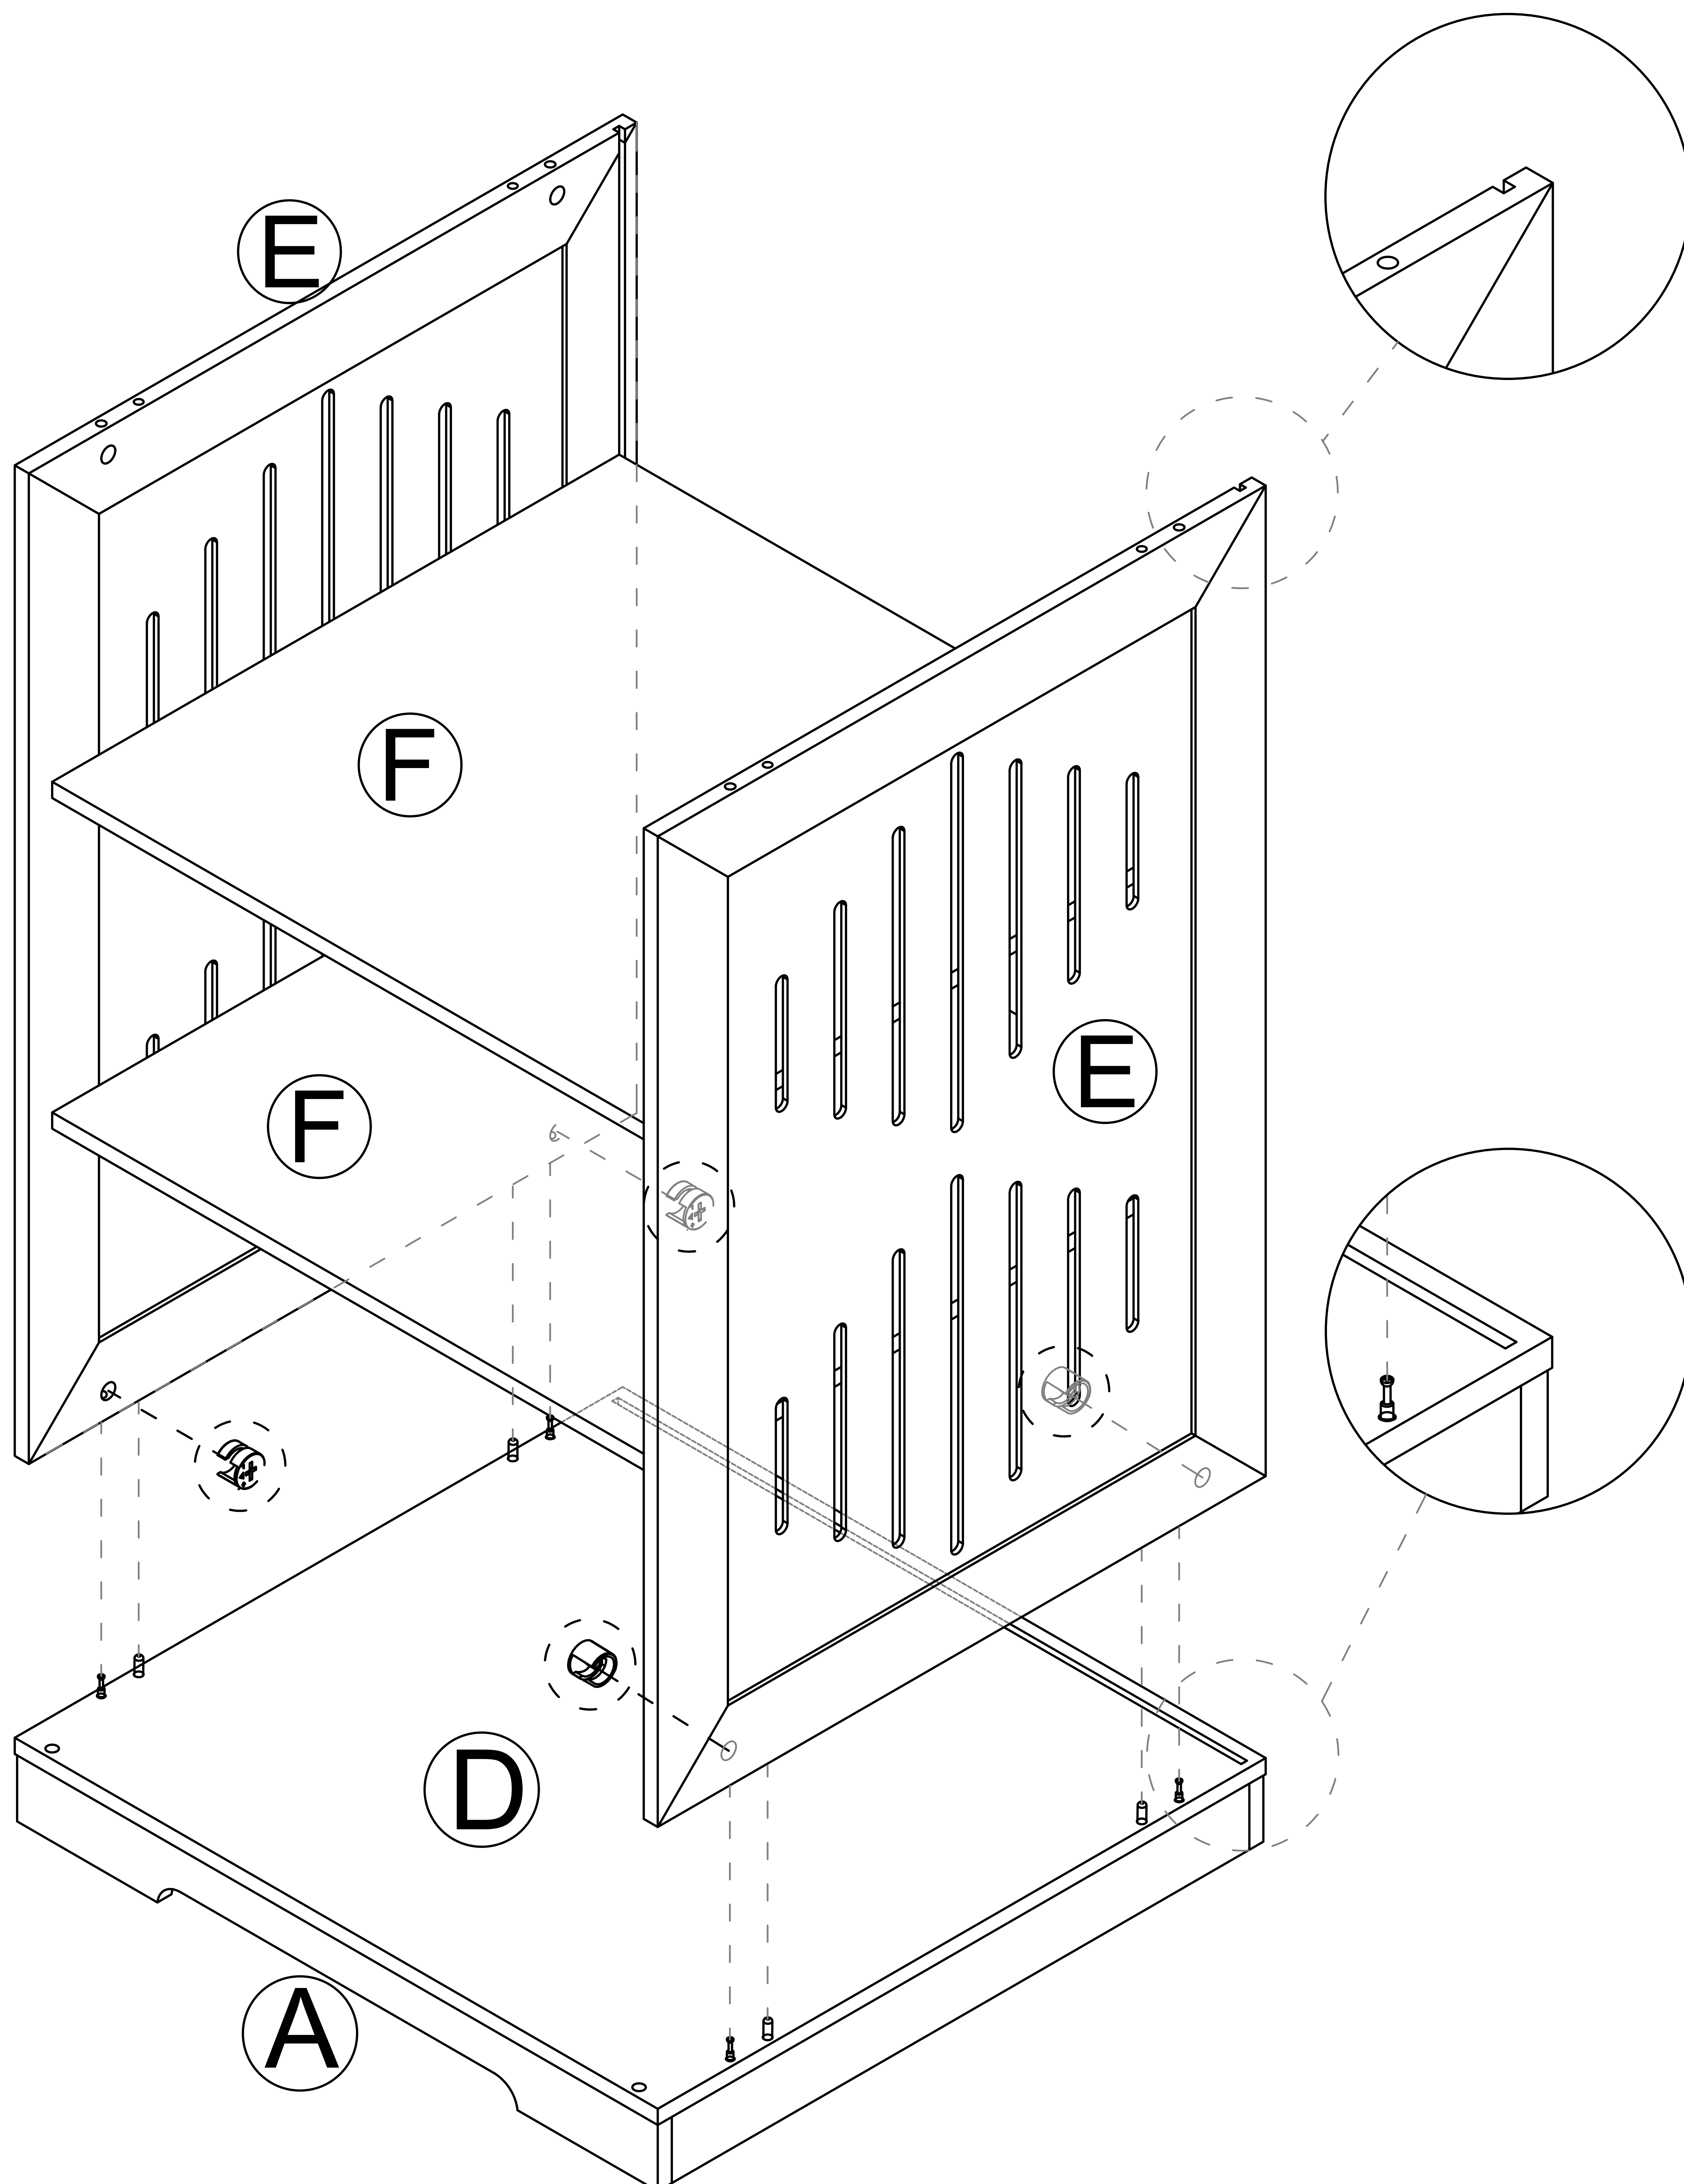





Step 11

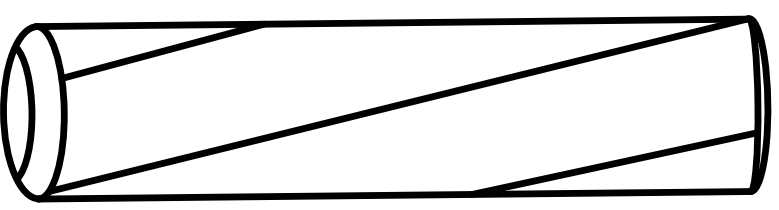3  x4

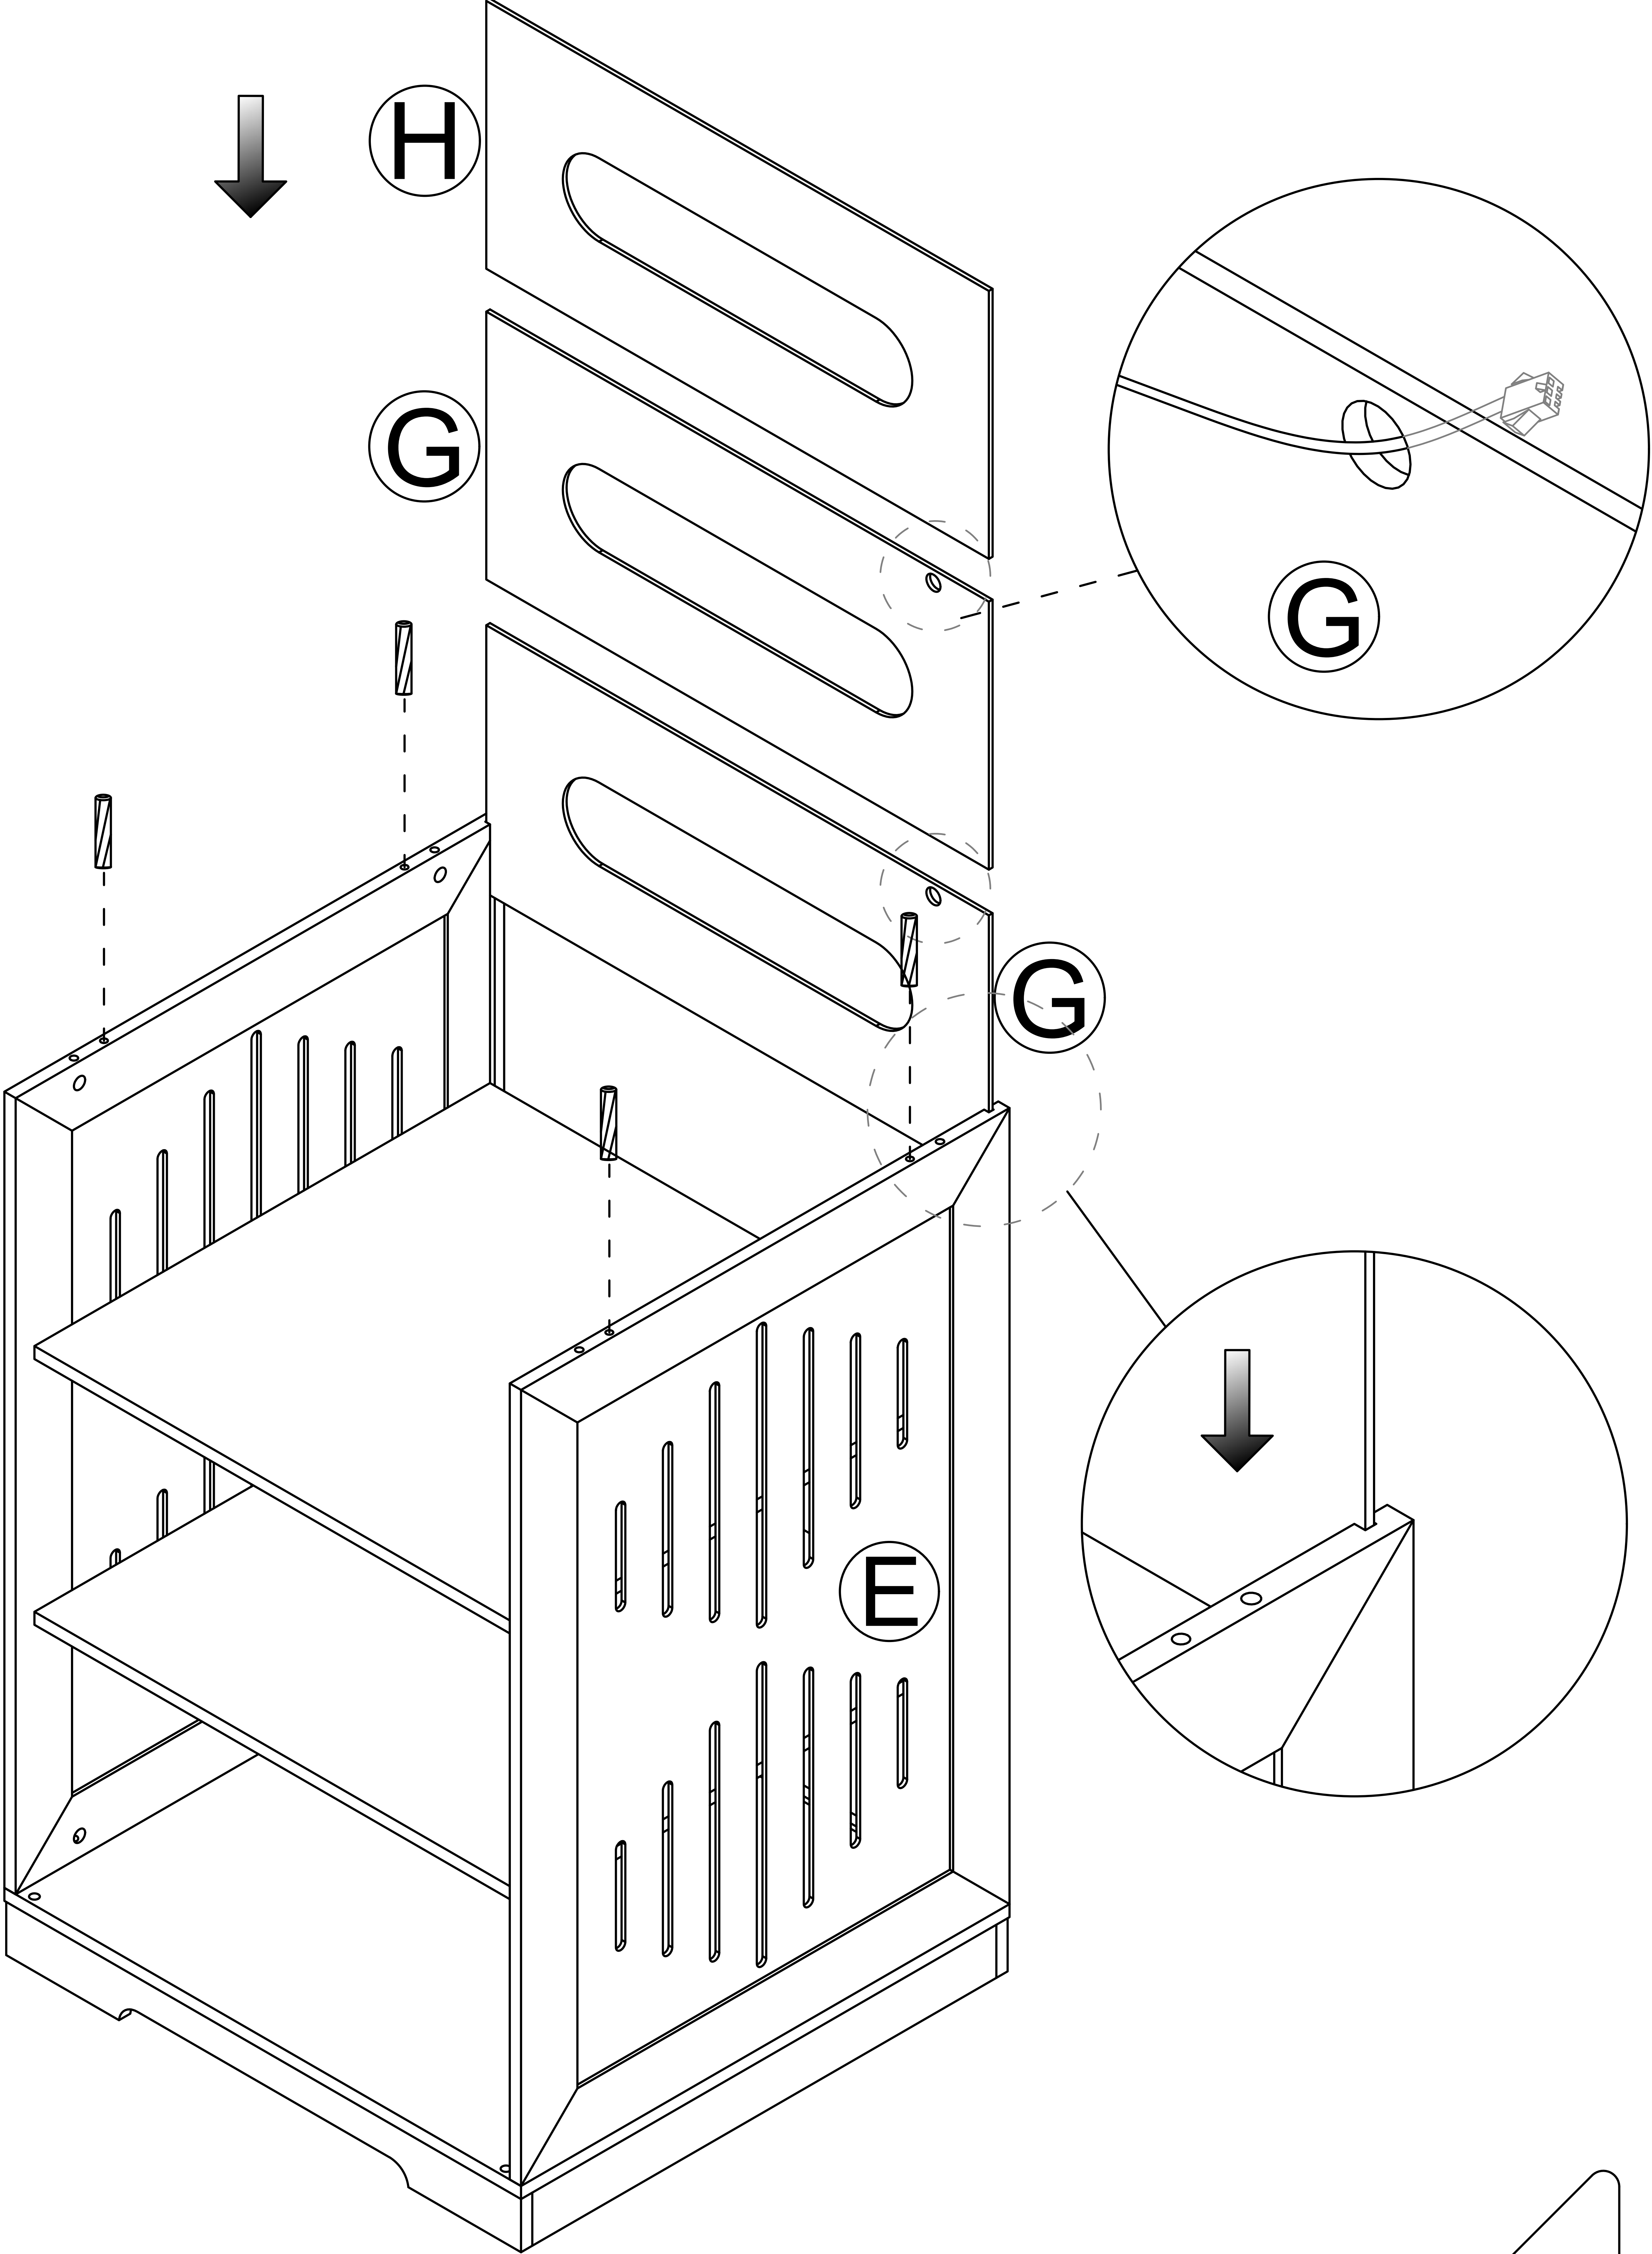



Step 12

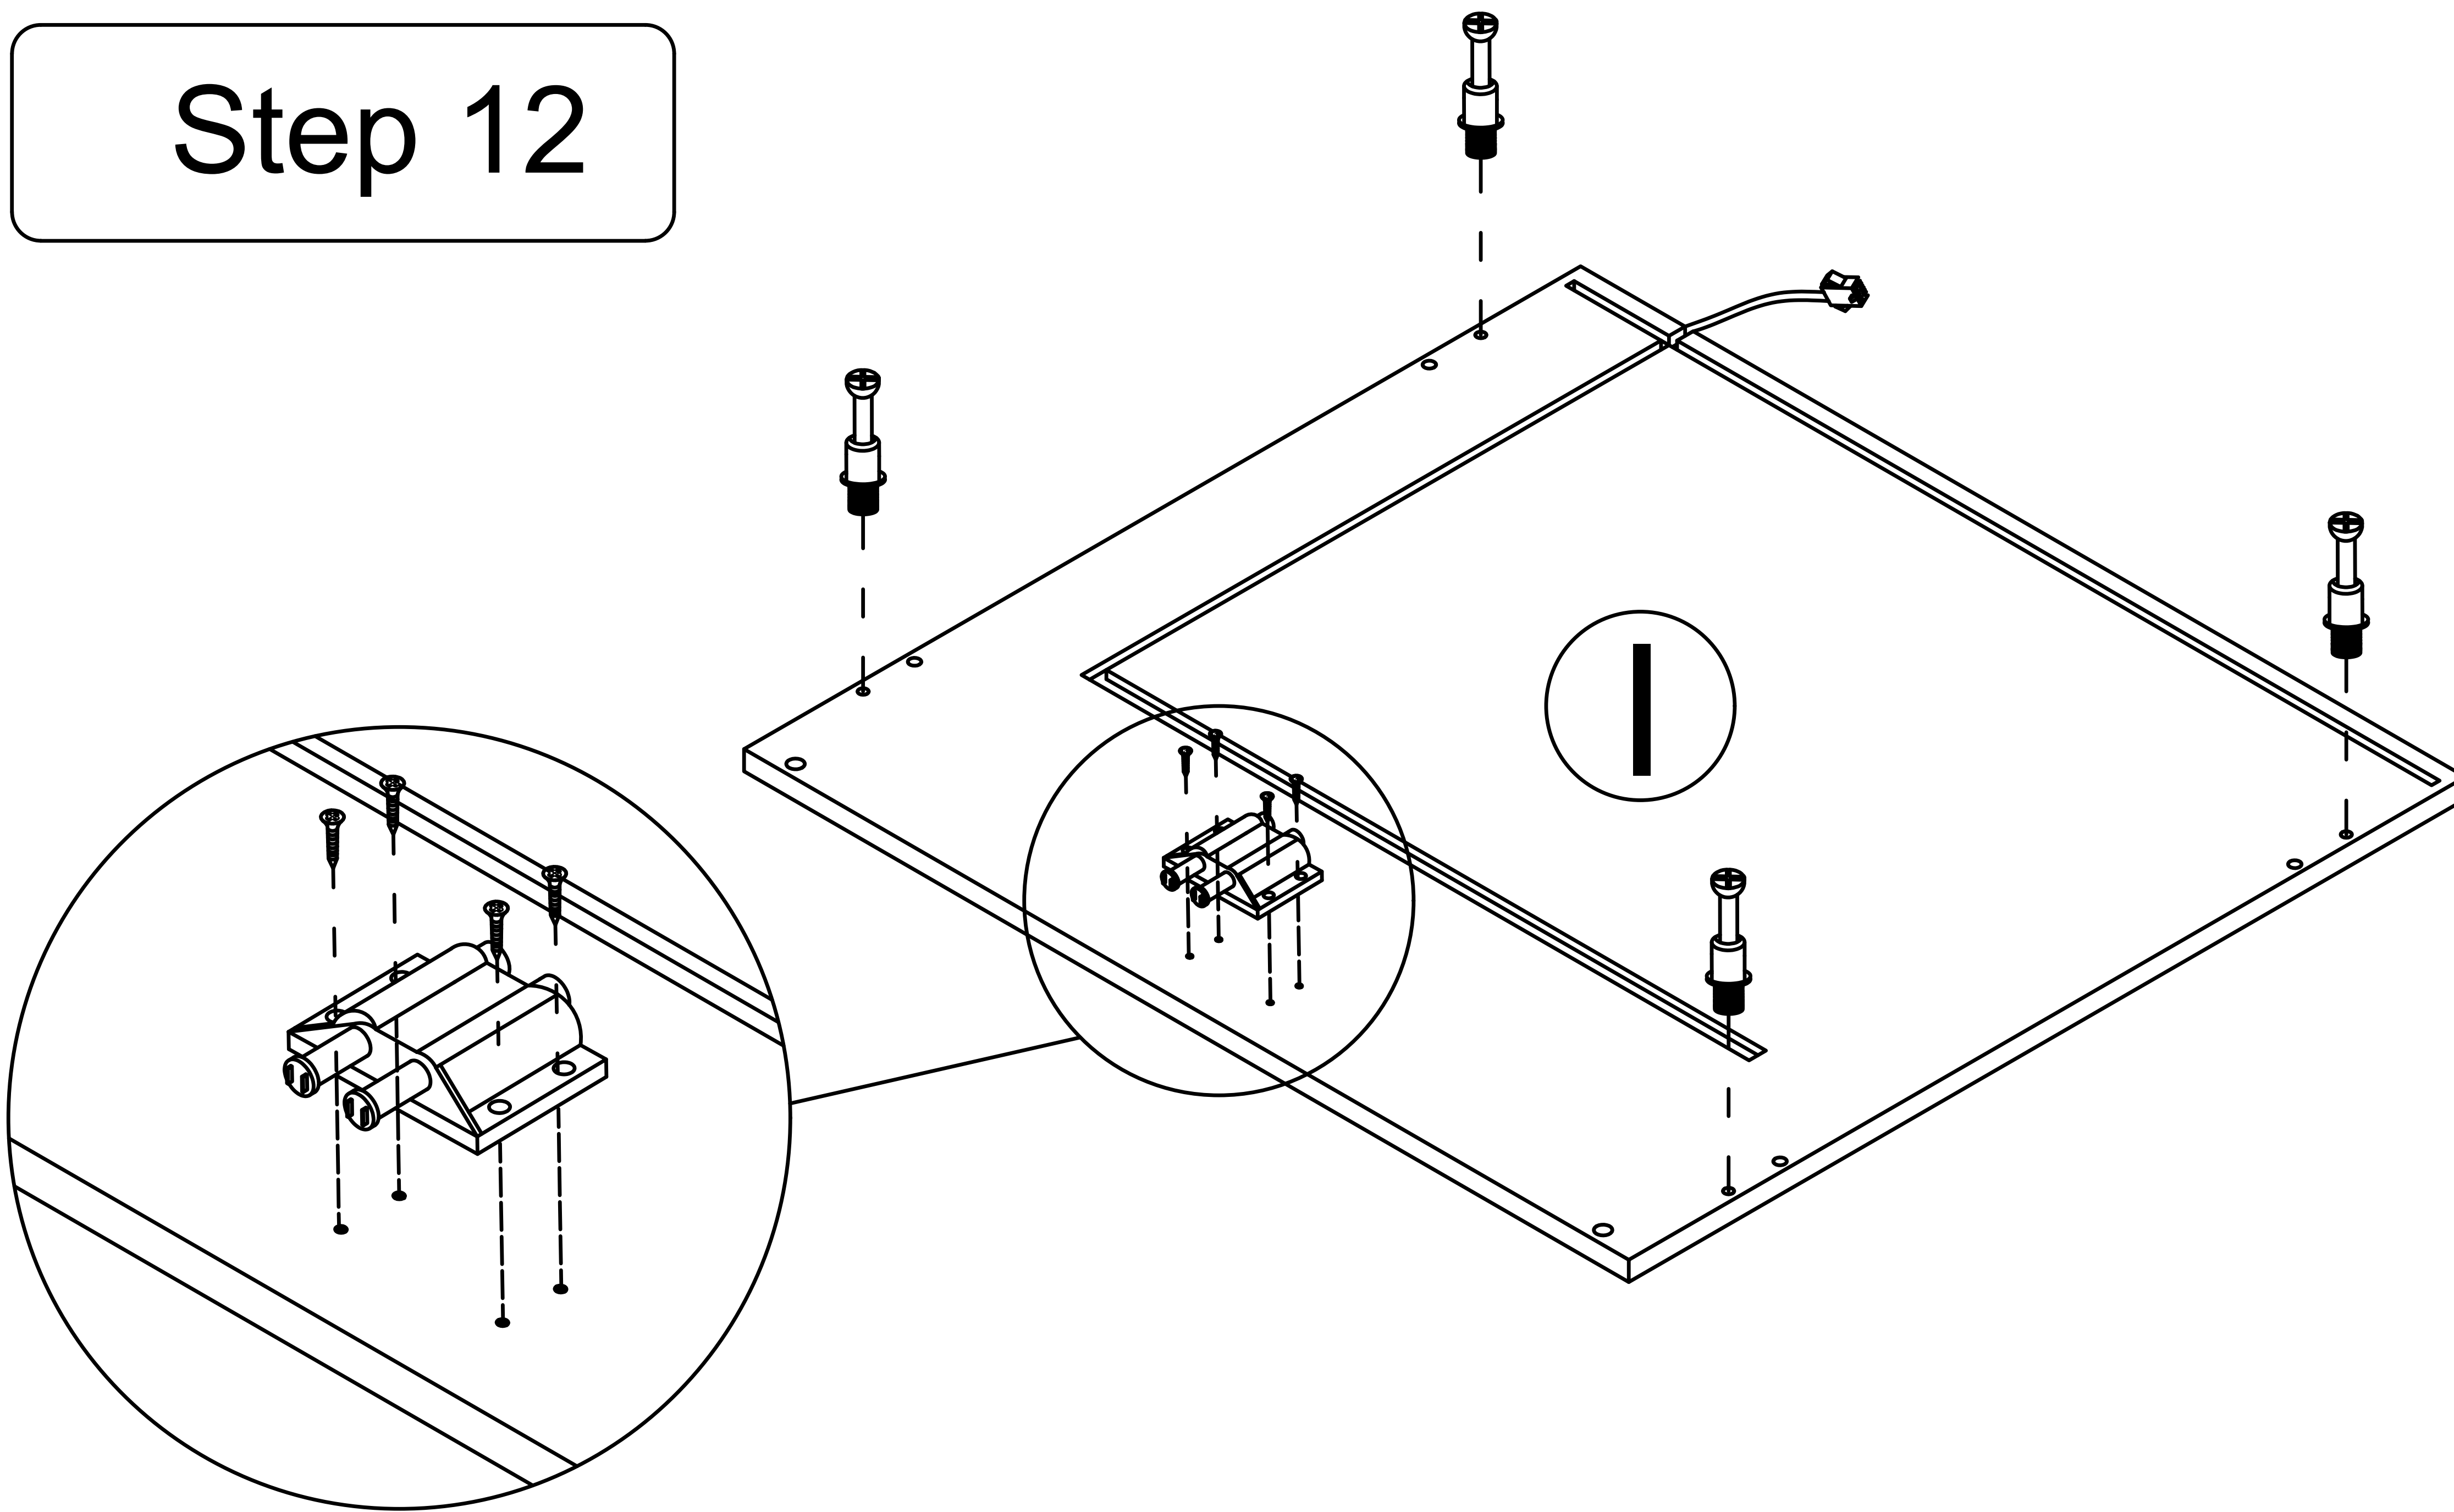

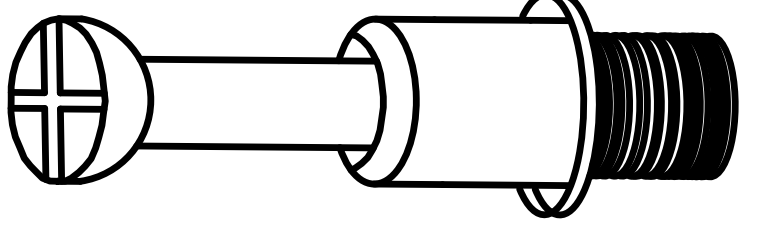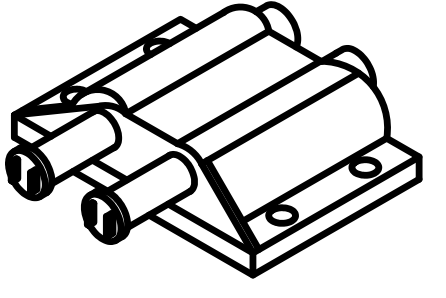
- 1  x4
- 5  x1  x4


Step 13

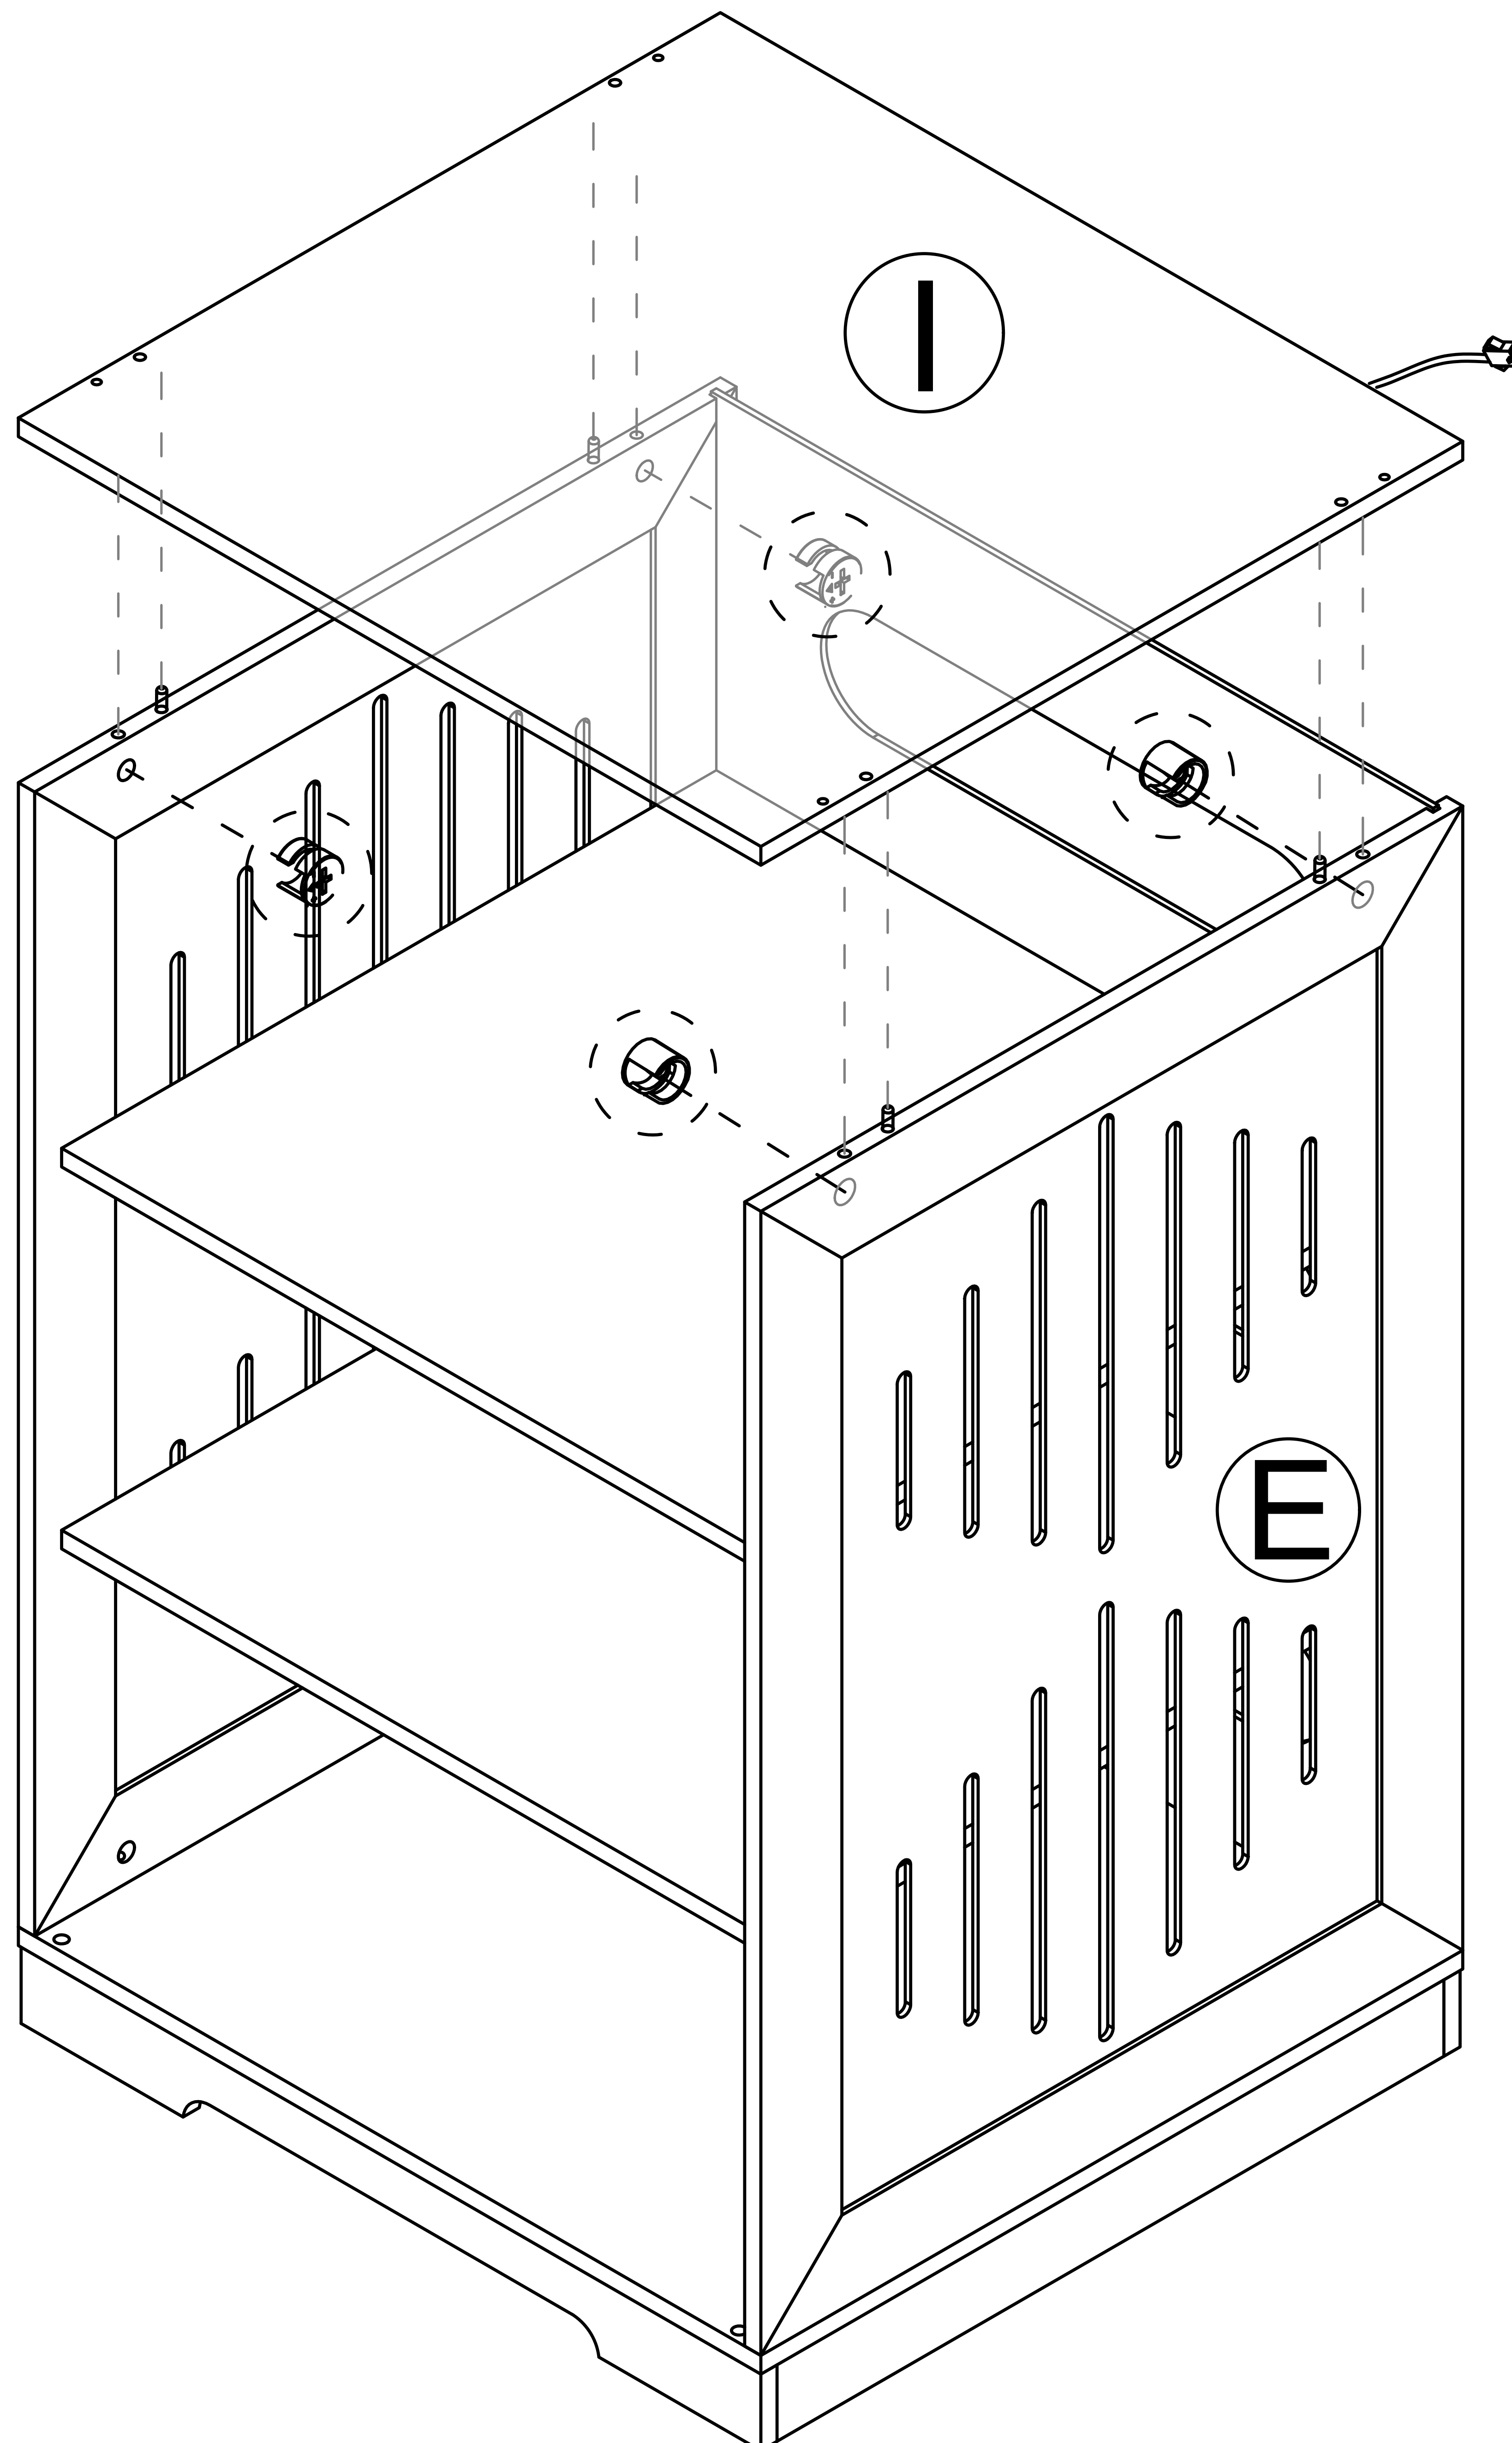


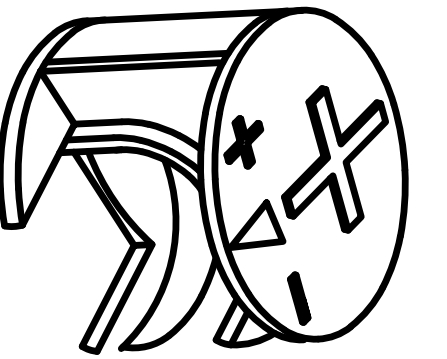- 2  x4


Step 14

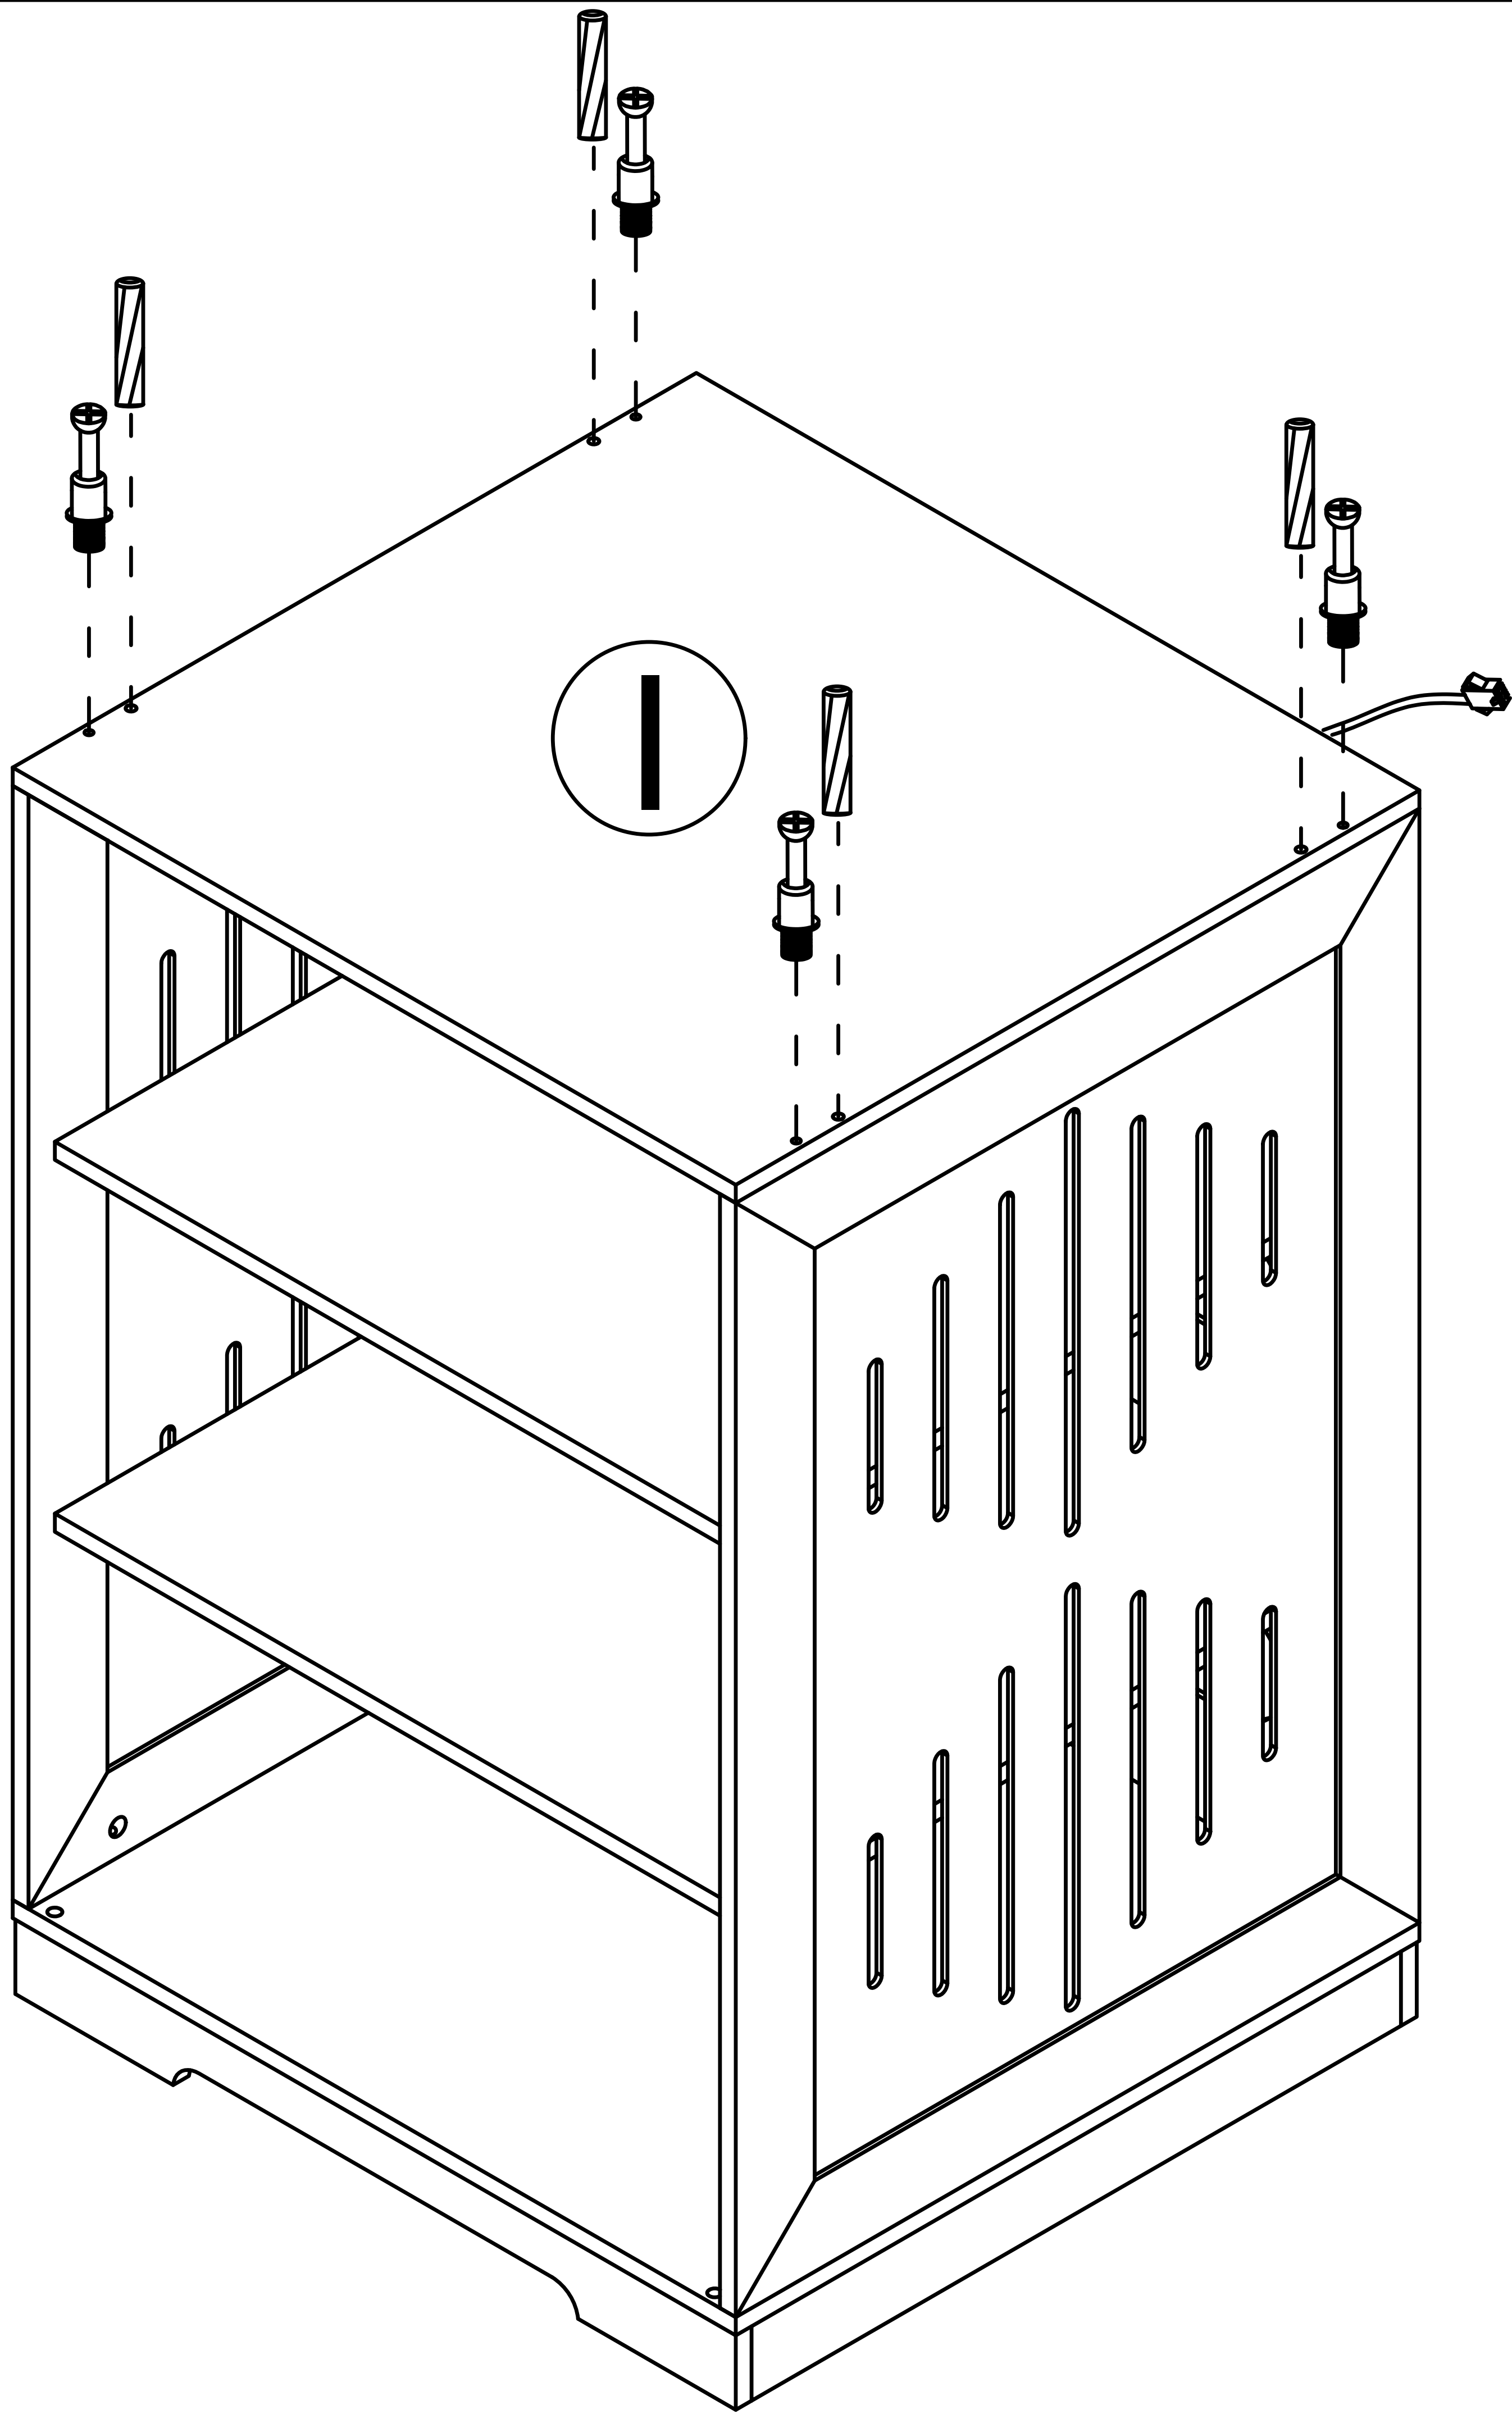


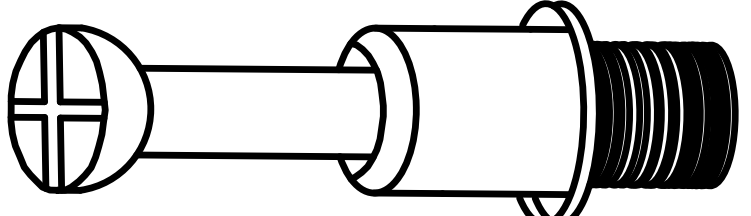
①  x4

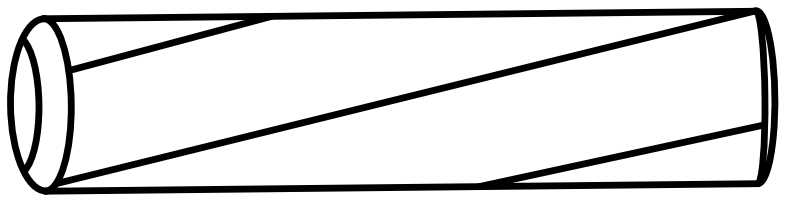③  x4

Step 15

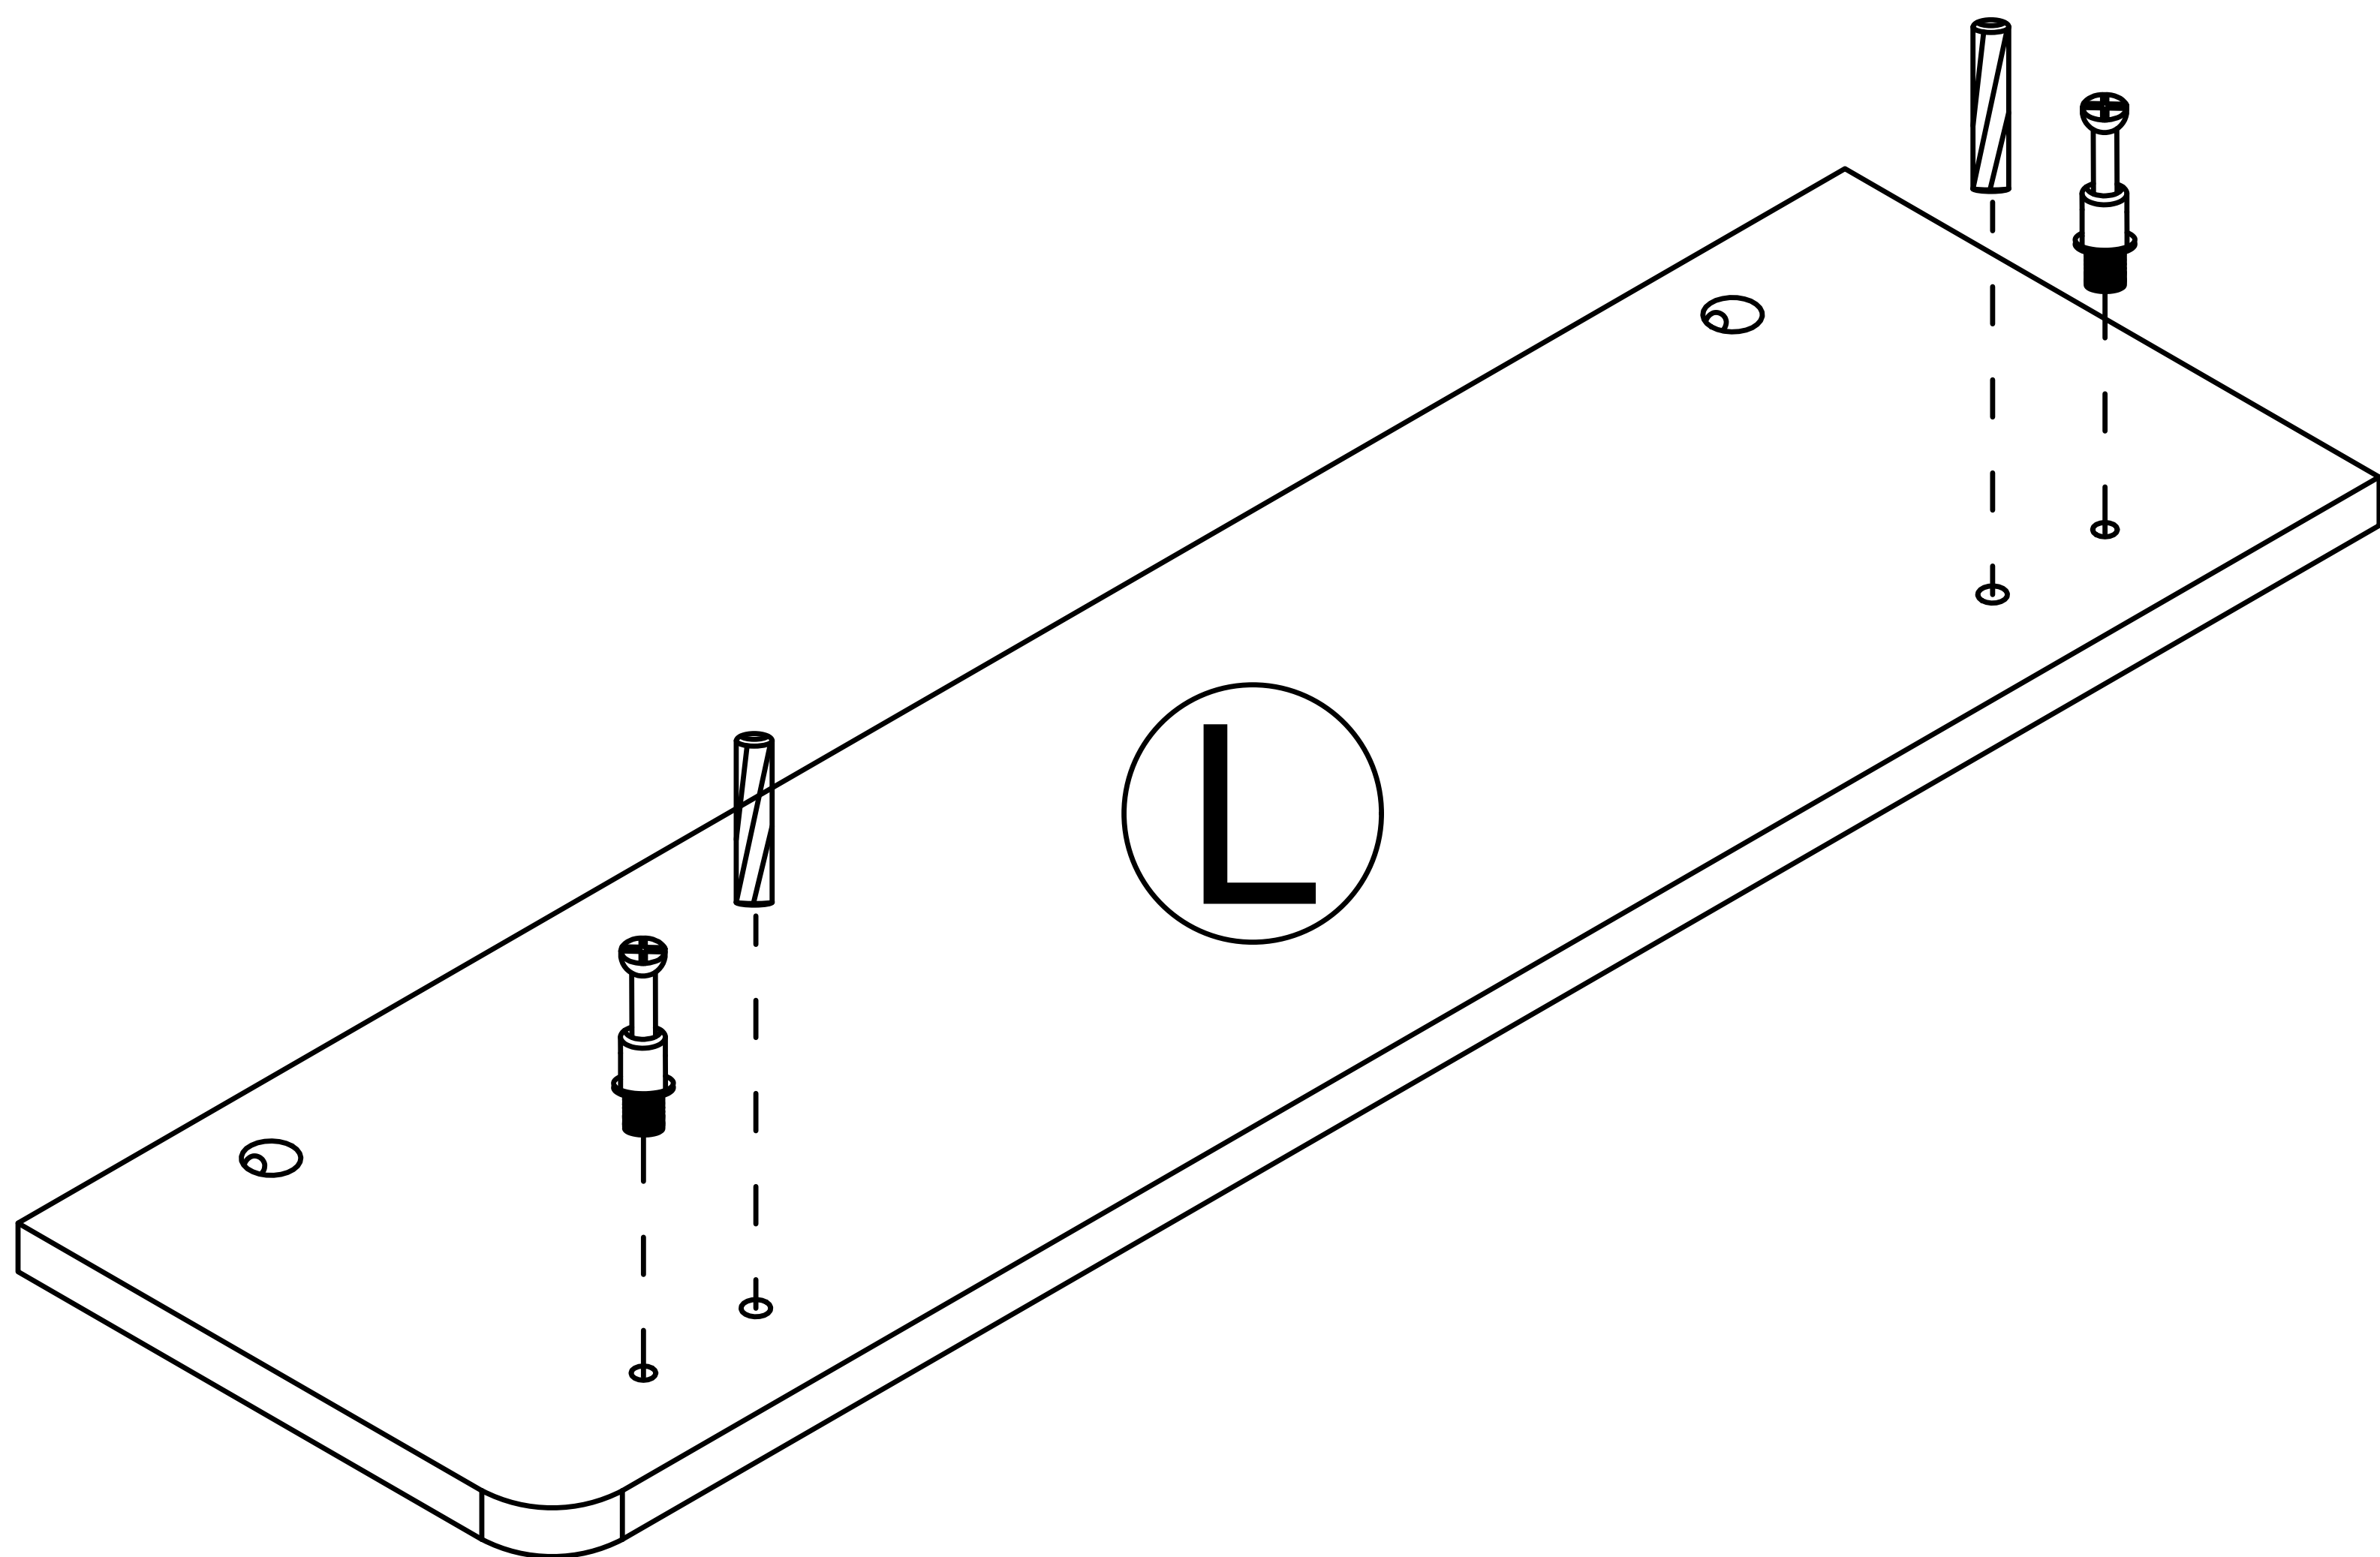


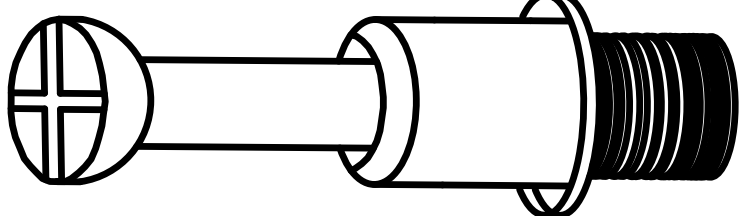①  x2

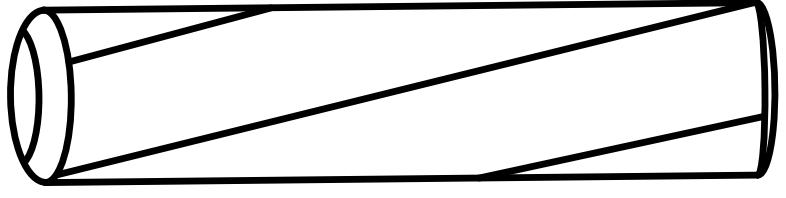
③  x2

Step 16

2

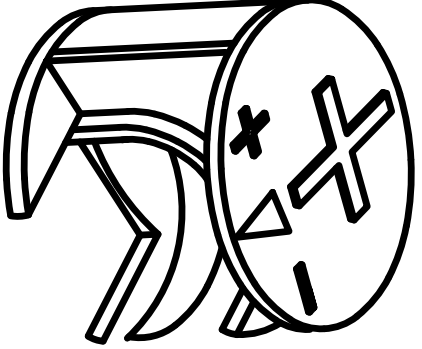


x2

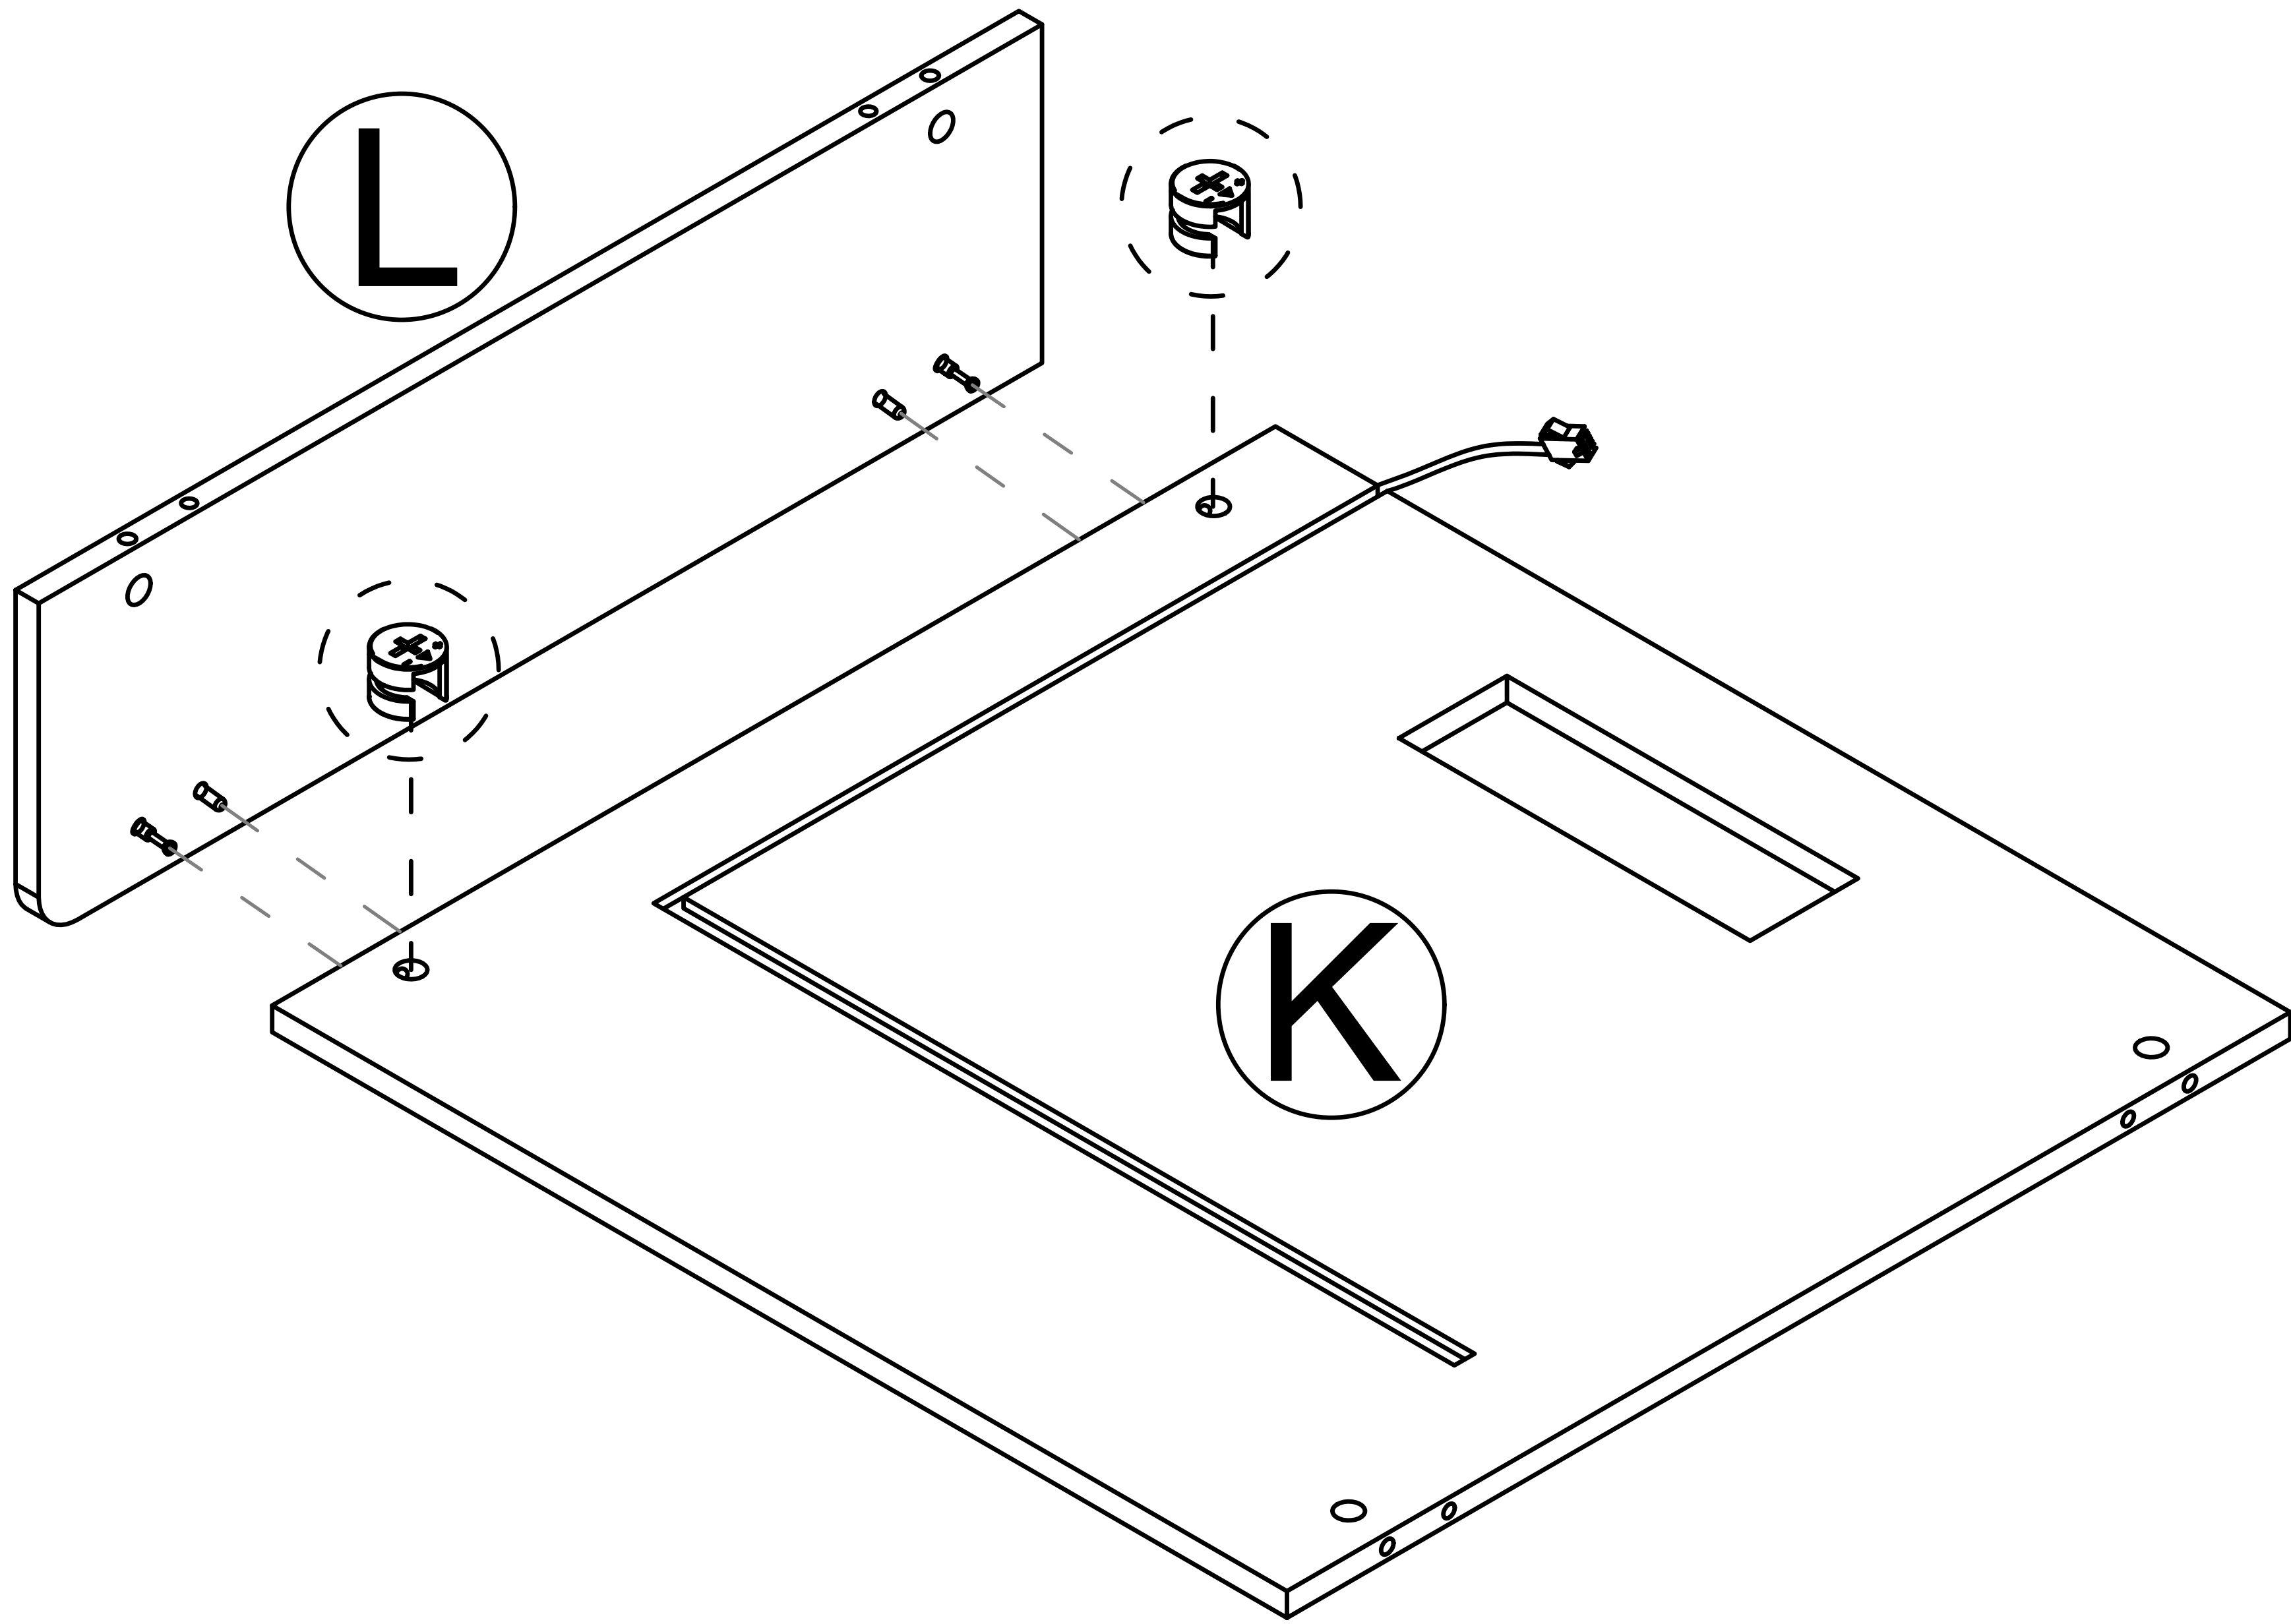


Step 17

1

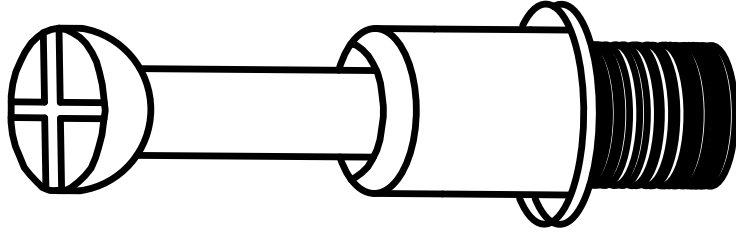


x2

3

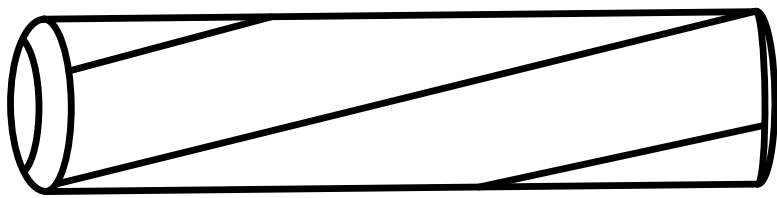


x2

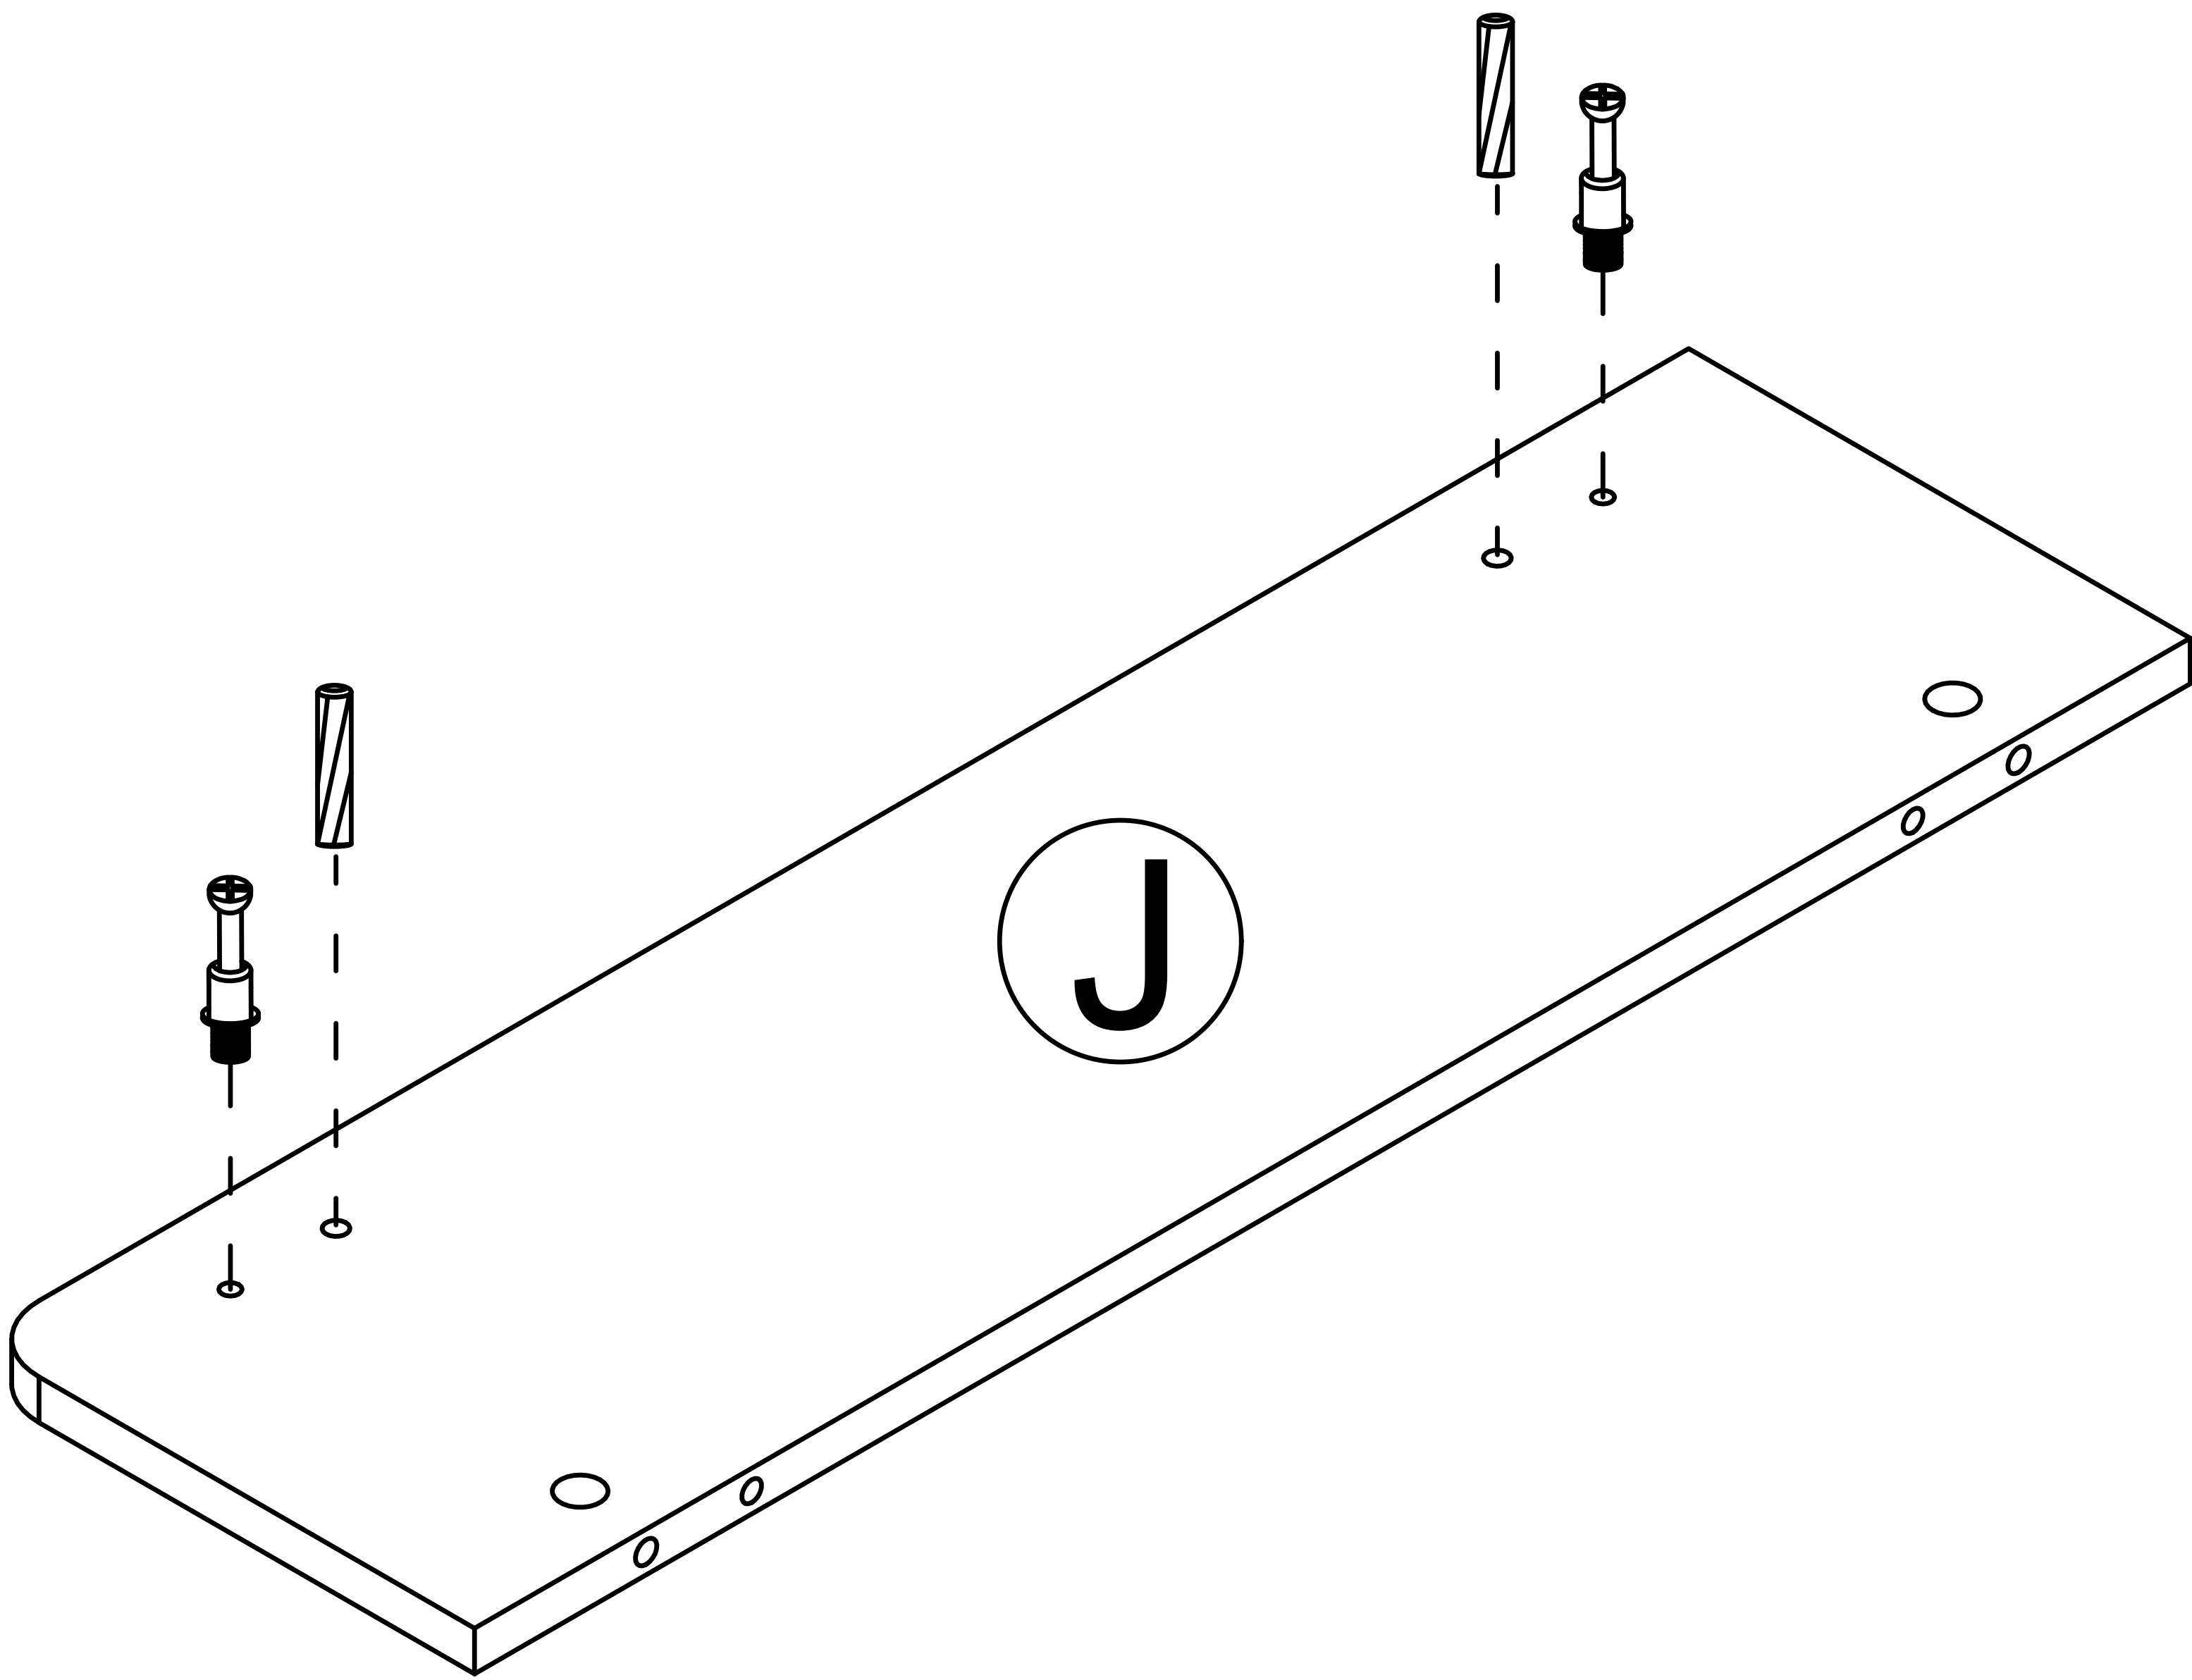


Step 18

2

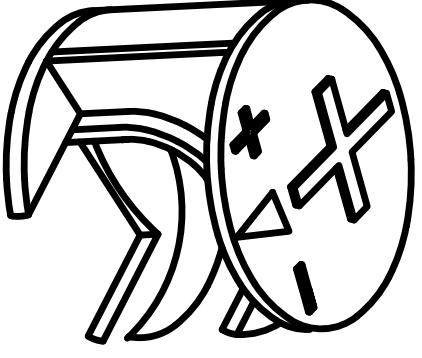


x2

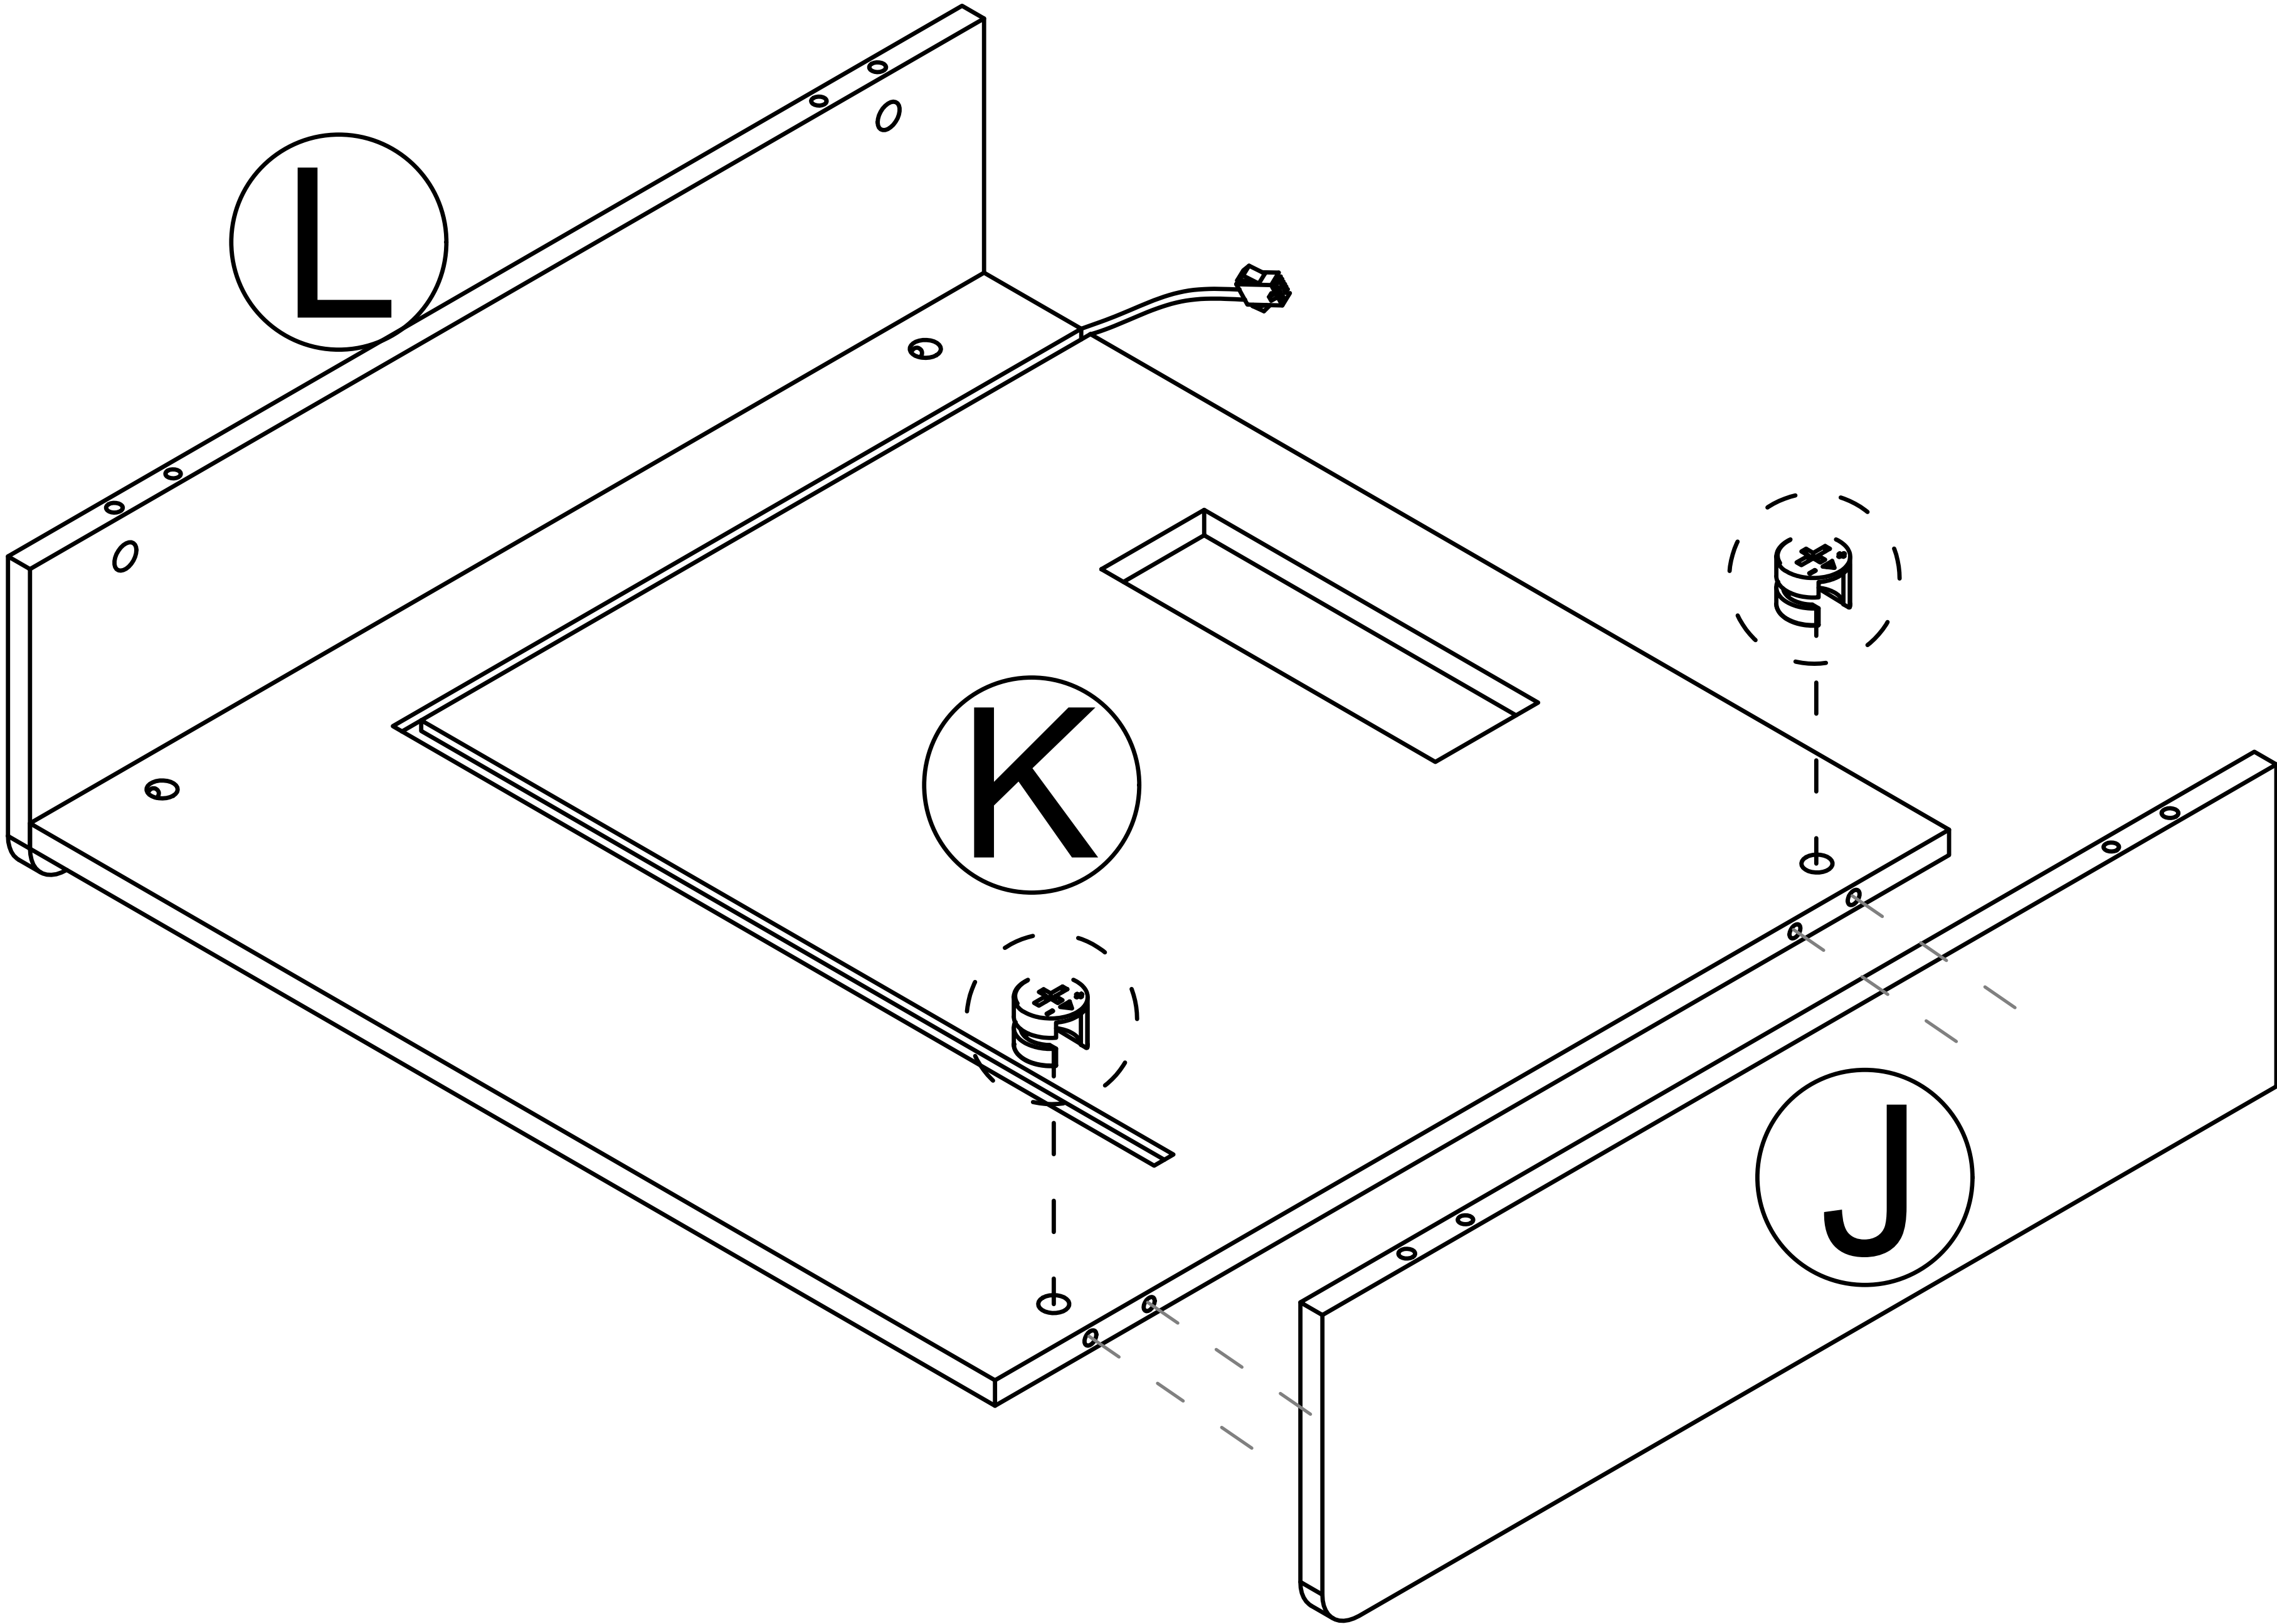


Step 19

2



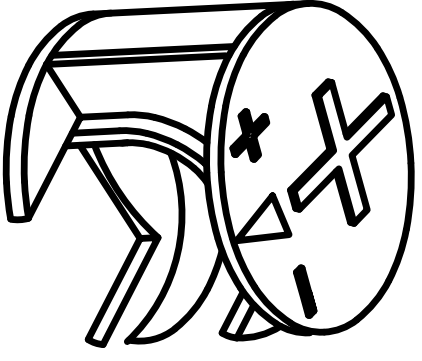


x4

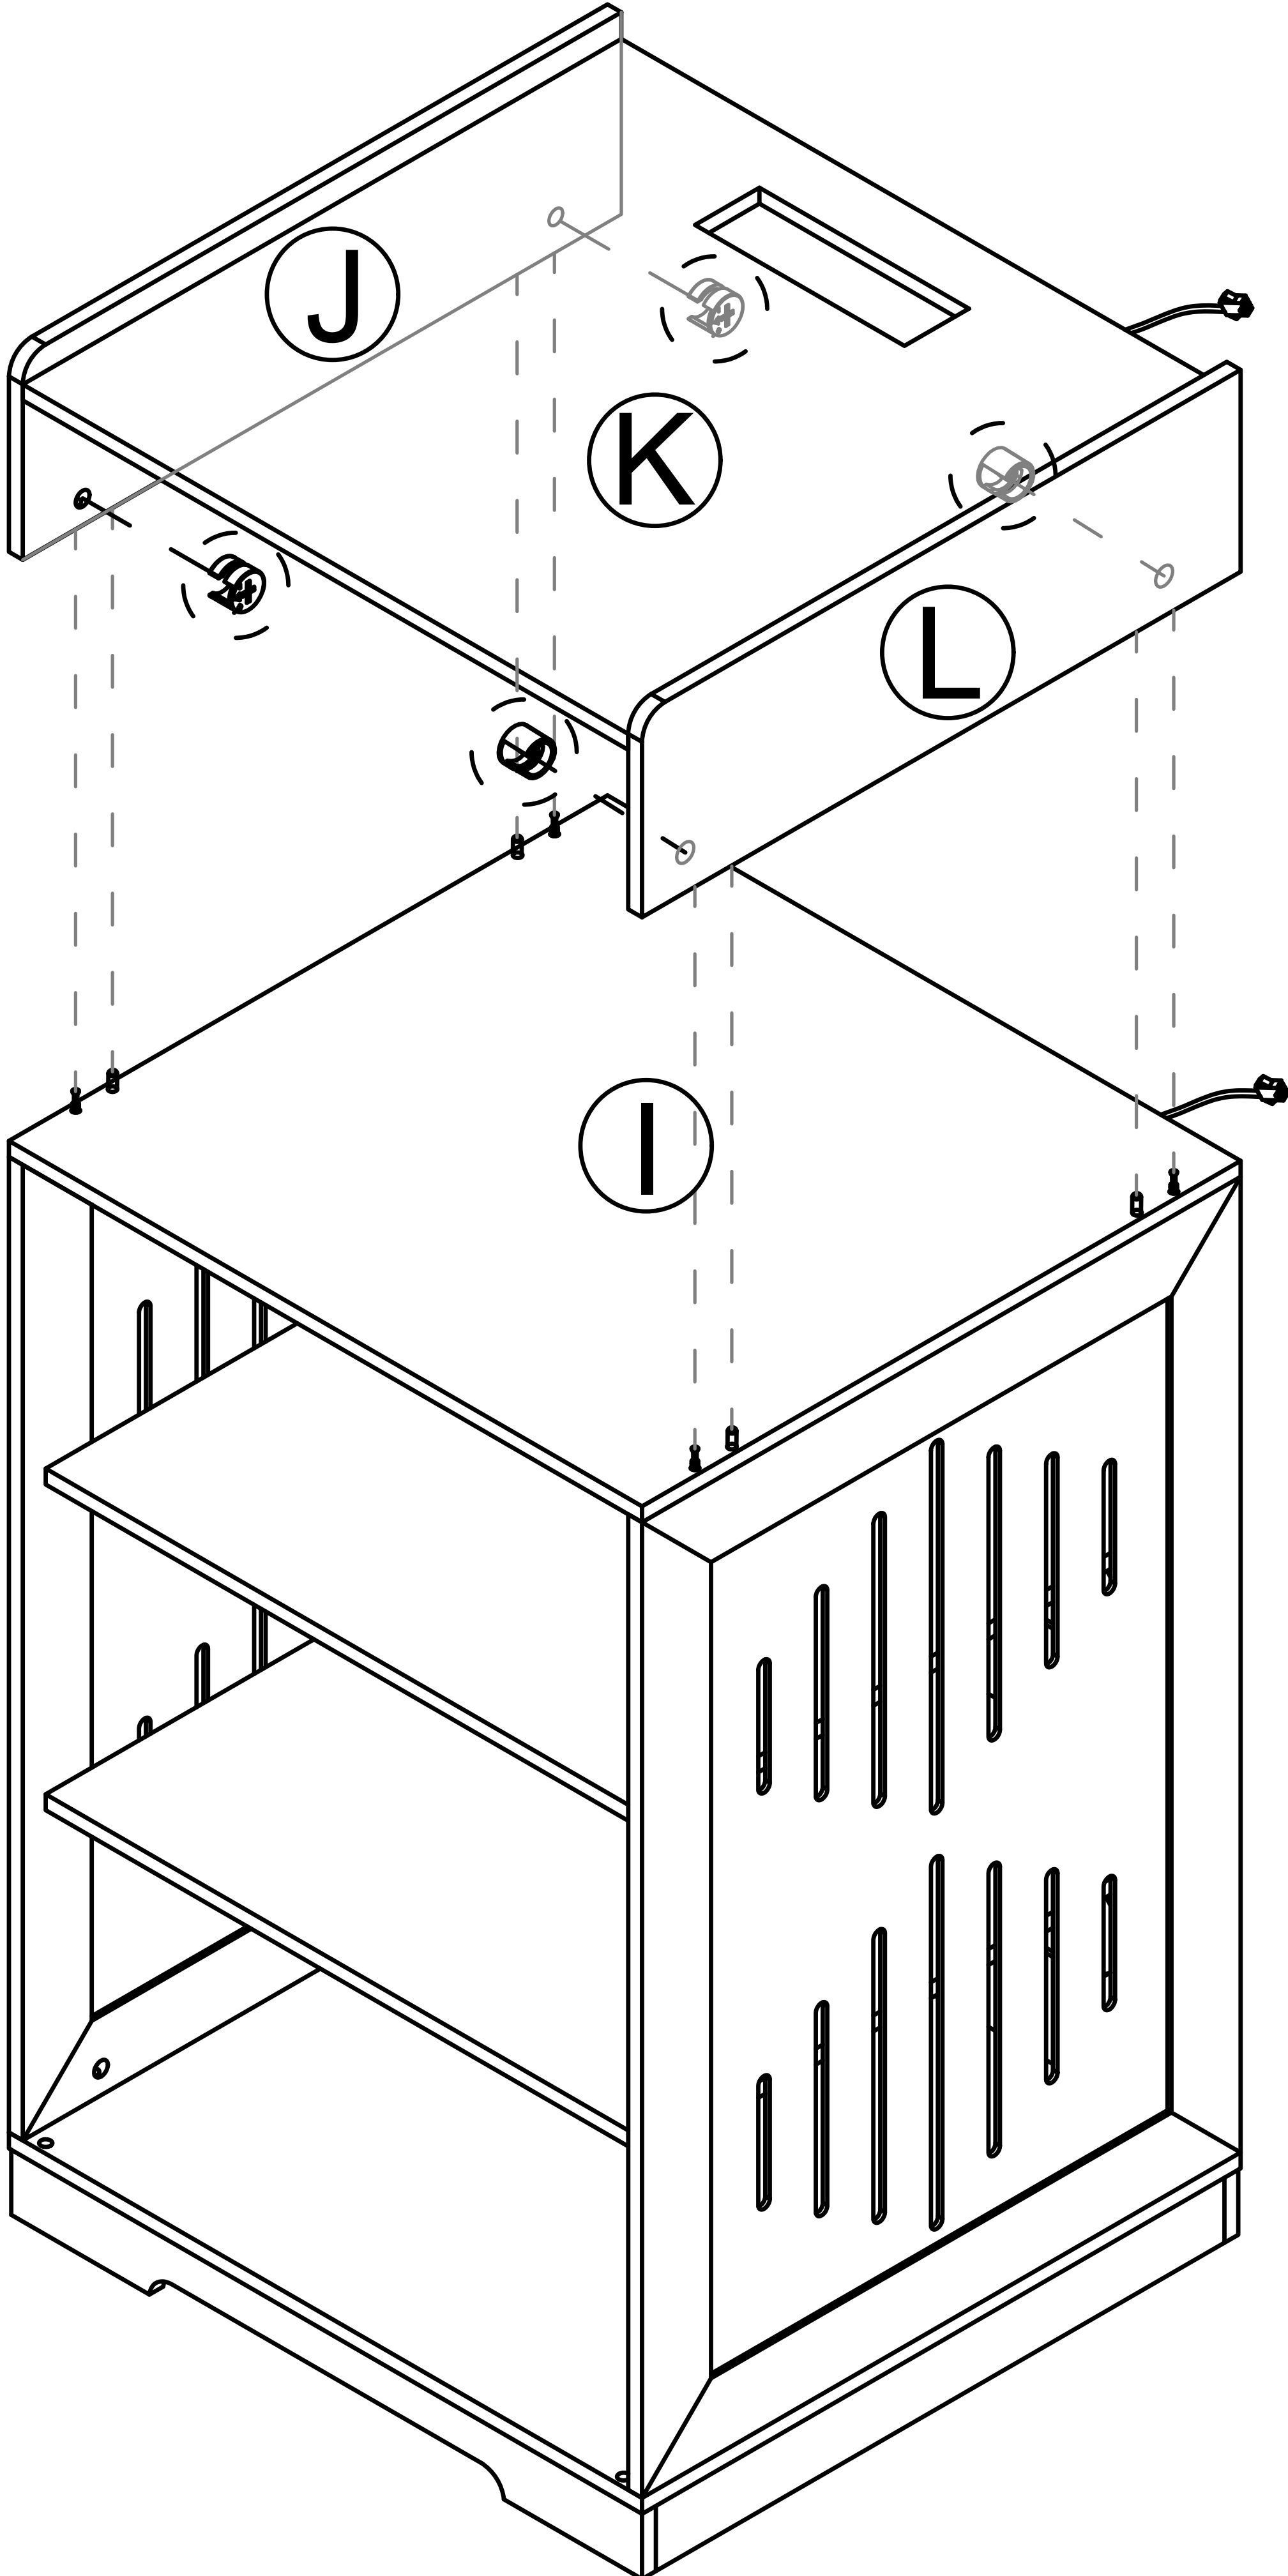

Step 20


First, loosen the screws.

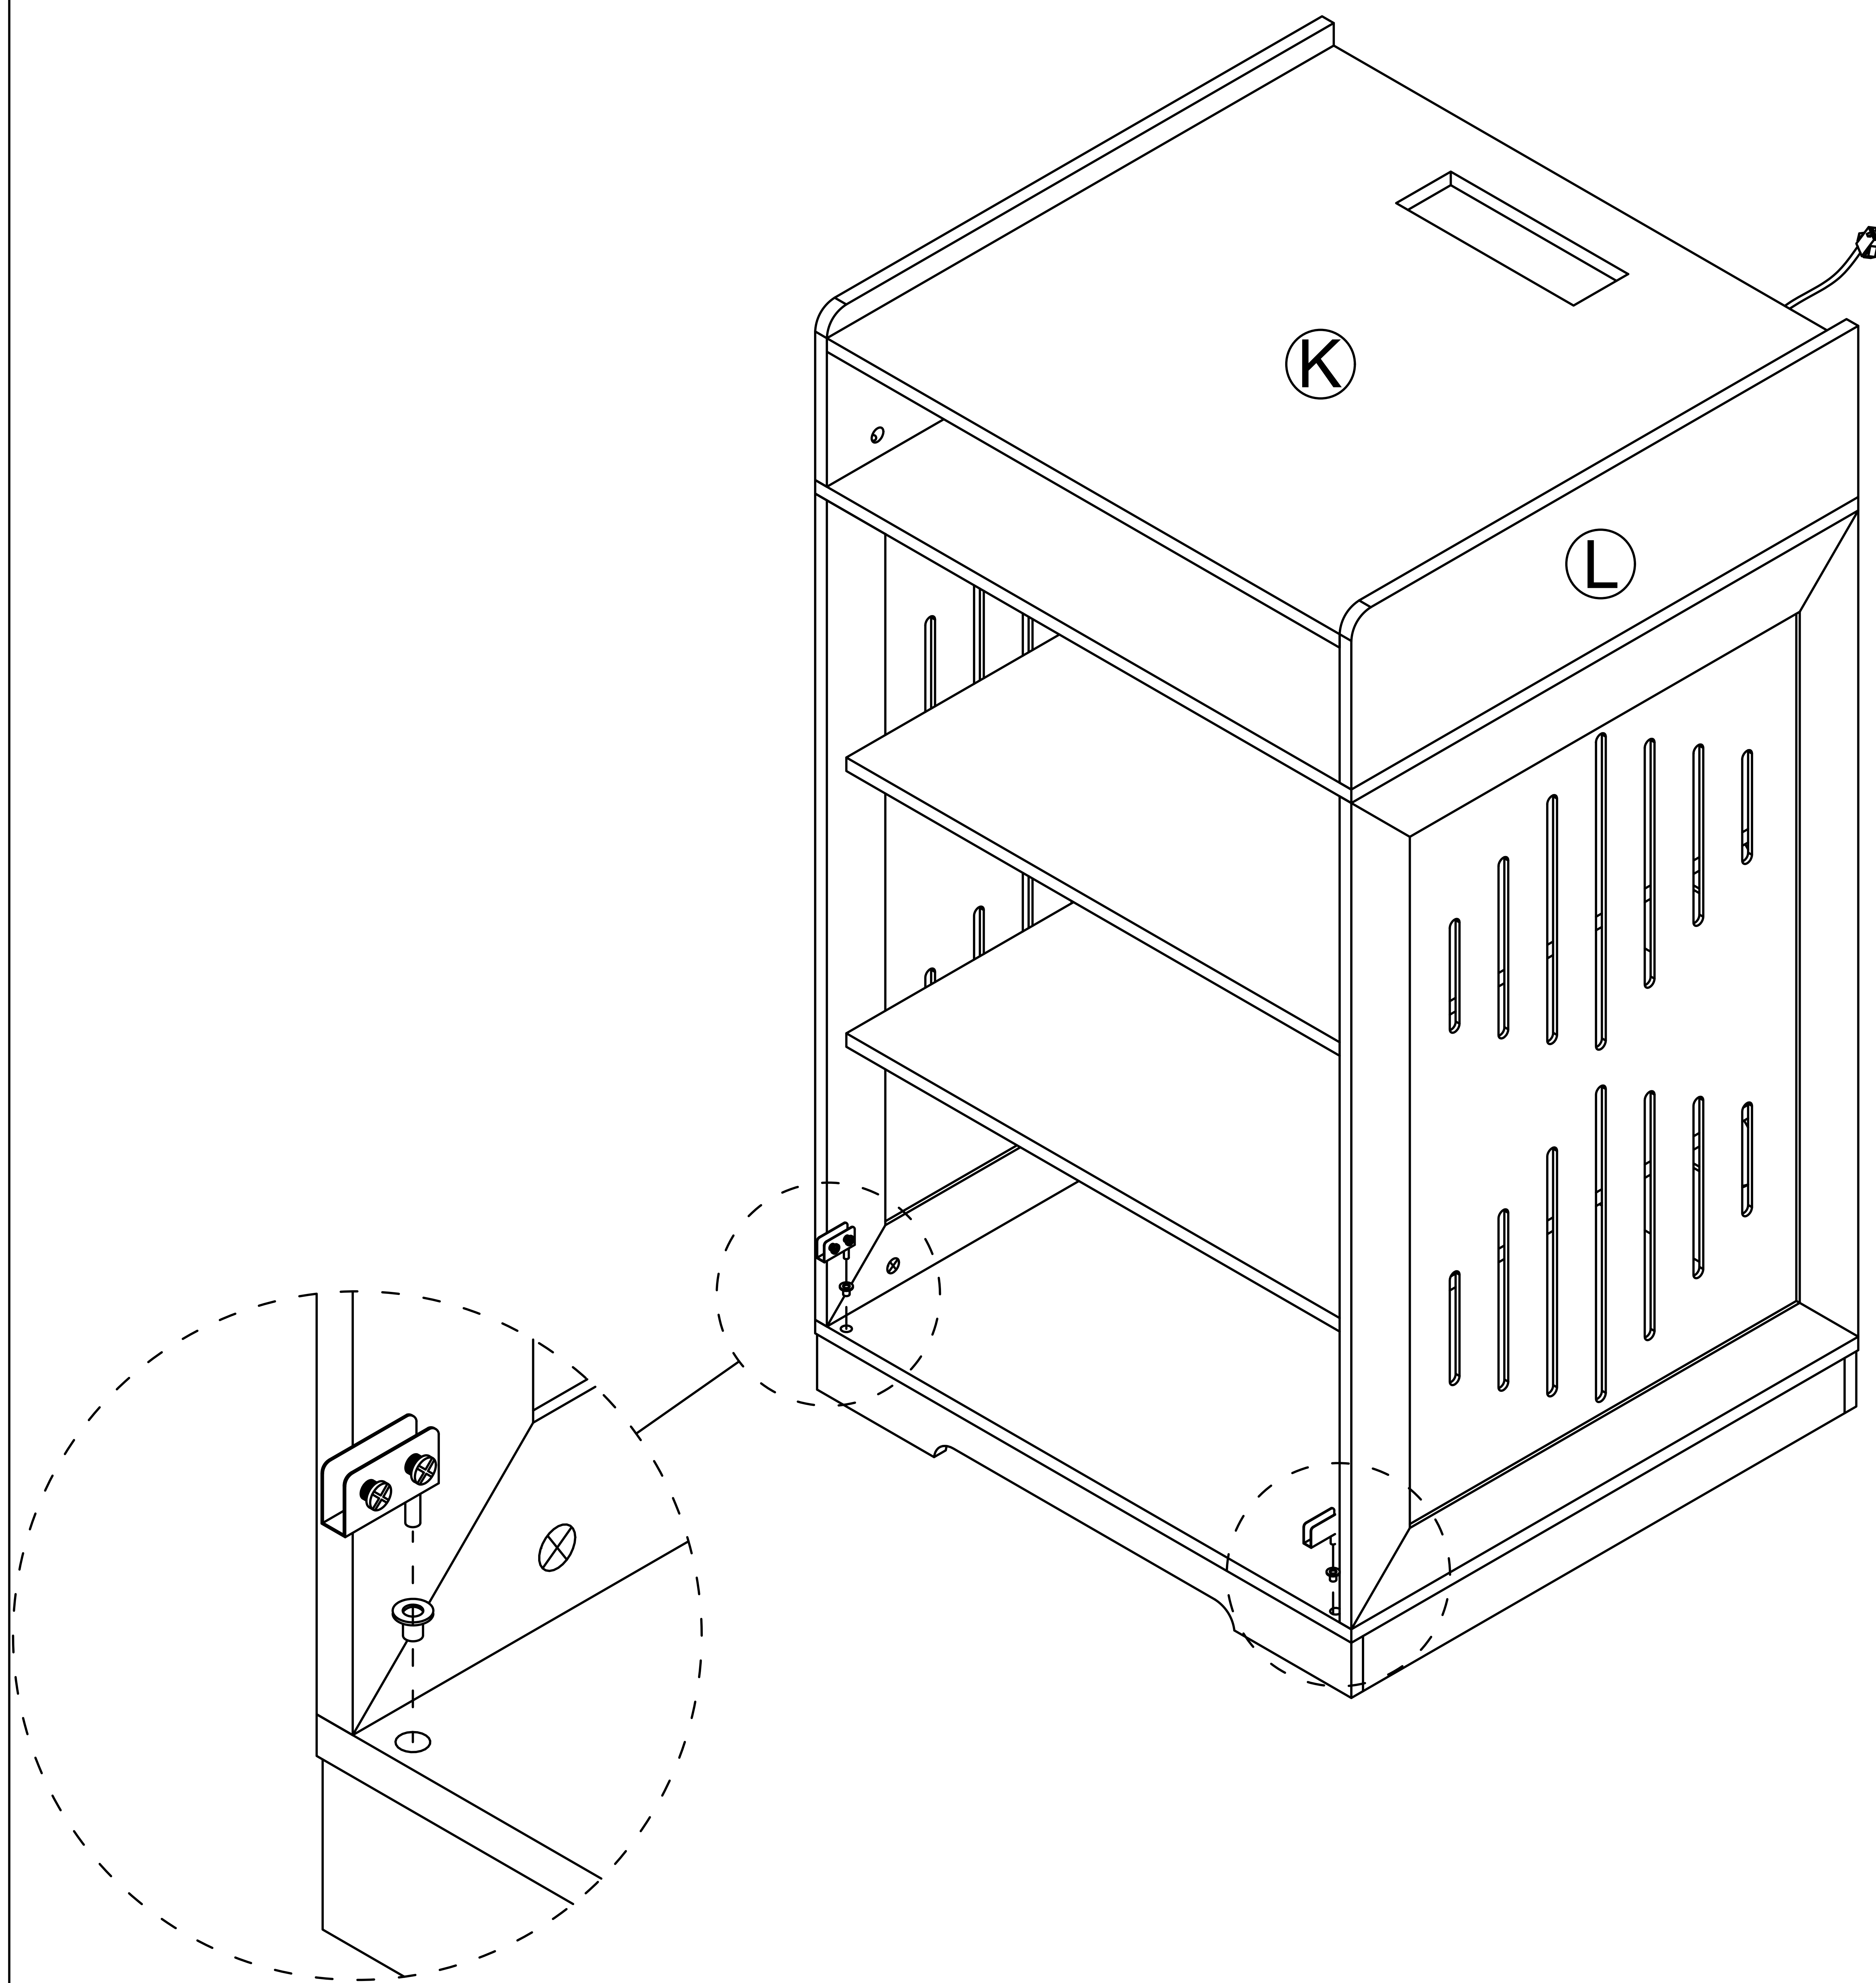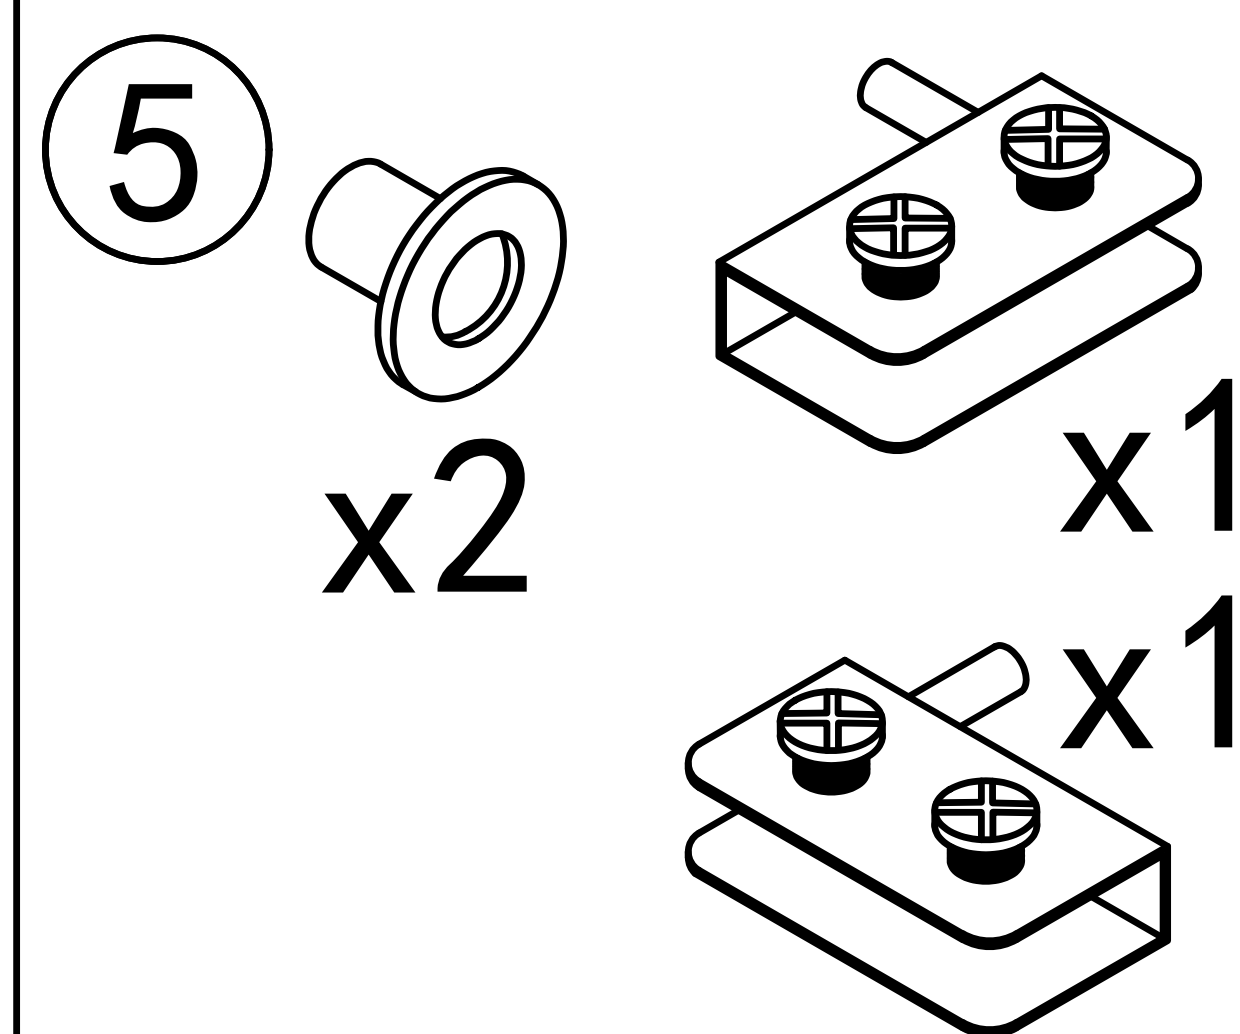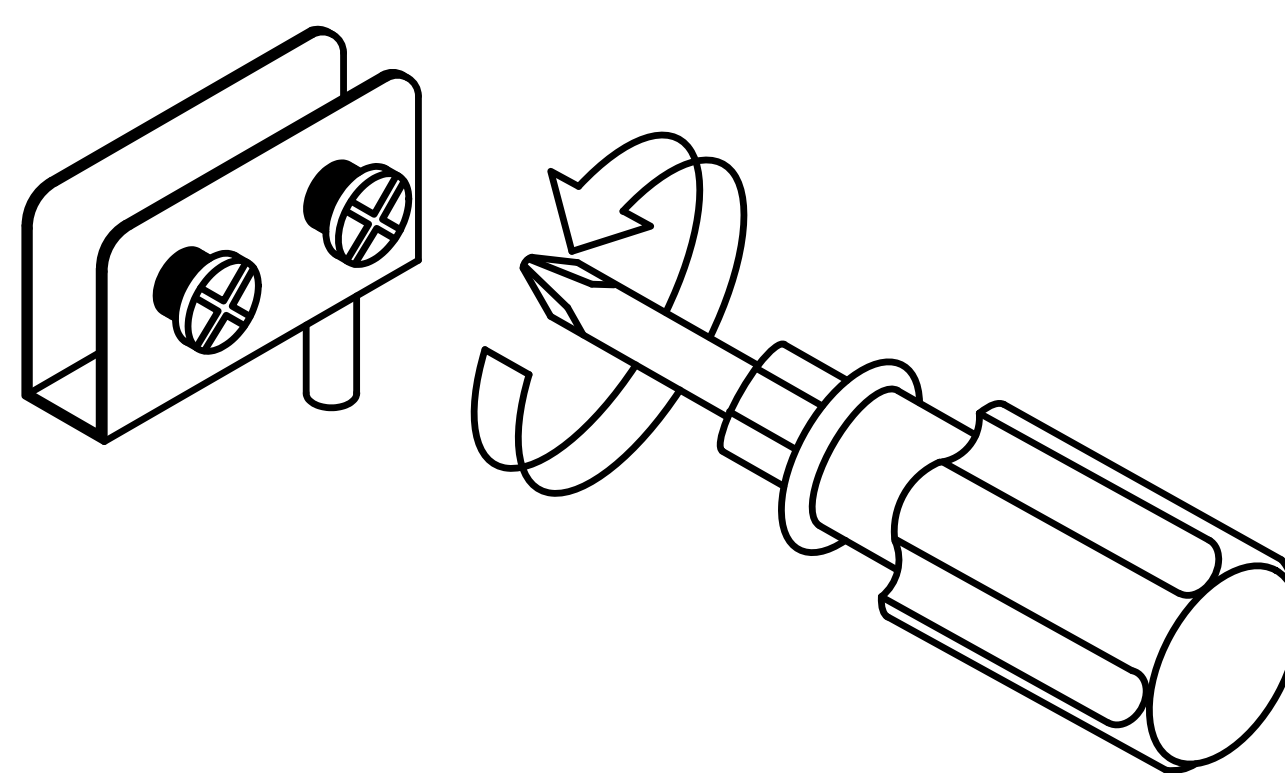


Note the orientation of the door hinge: the end with the screws faces toward the cabinet interior.

Step 21


First, loosen the screws.

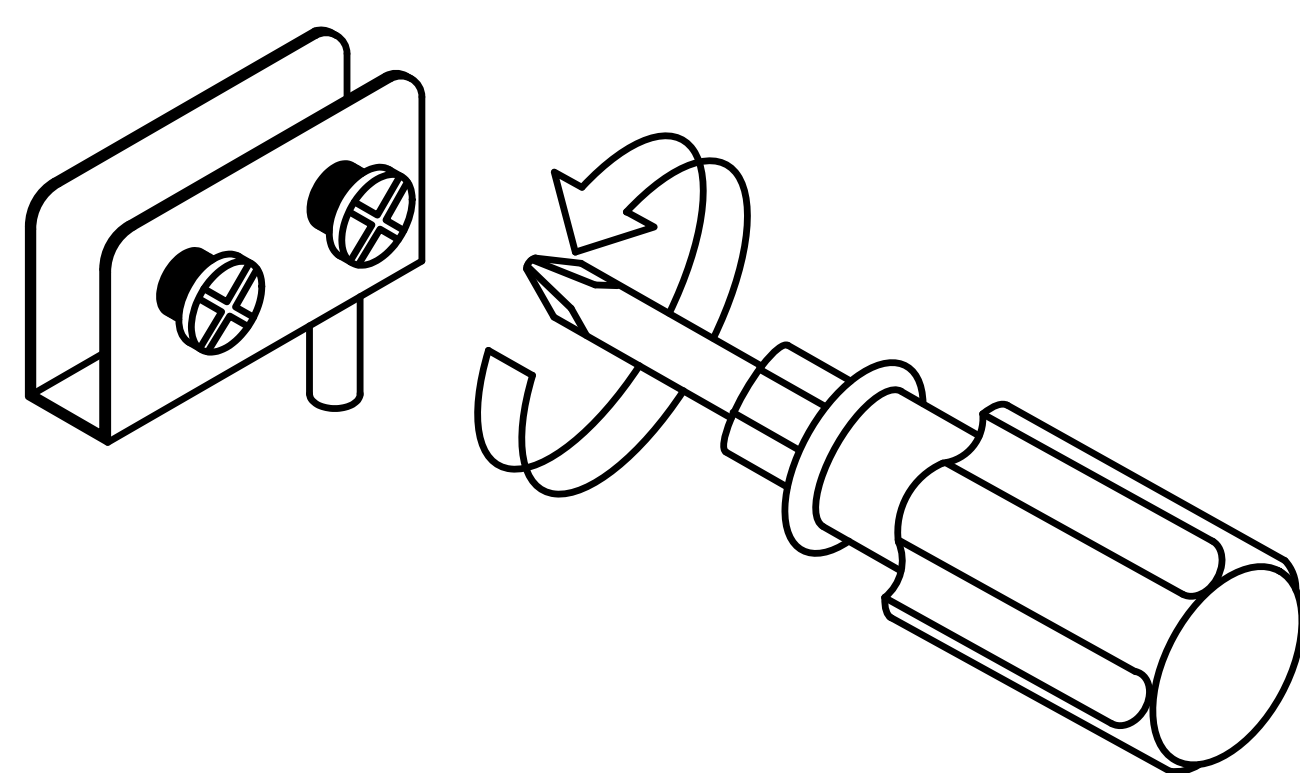

5




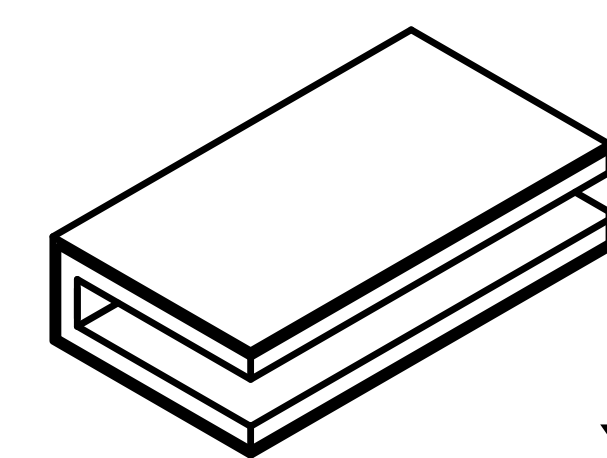


x1

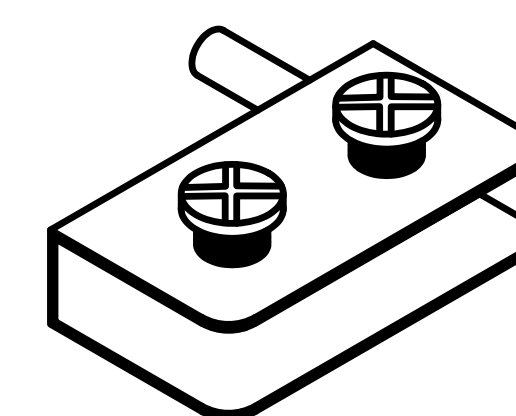


x1

1. Take out the white pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

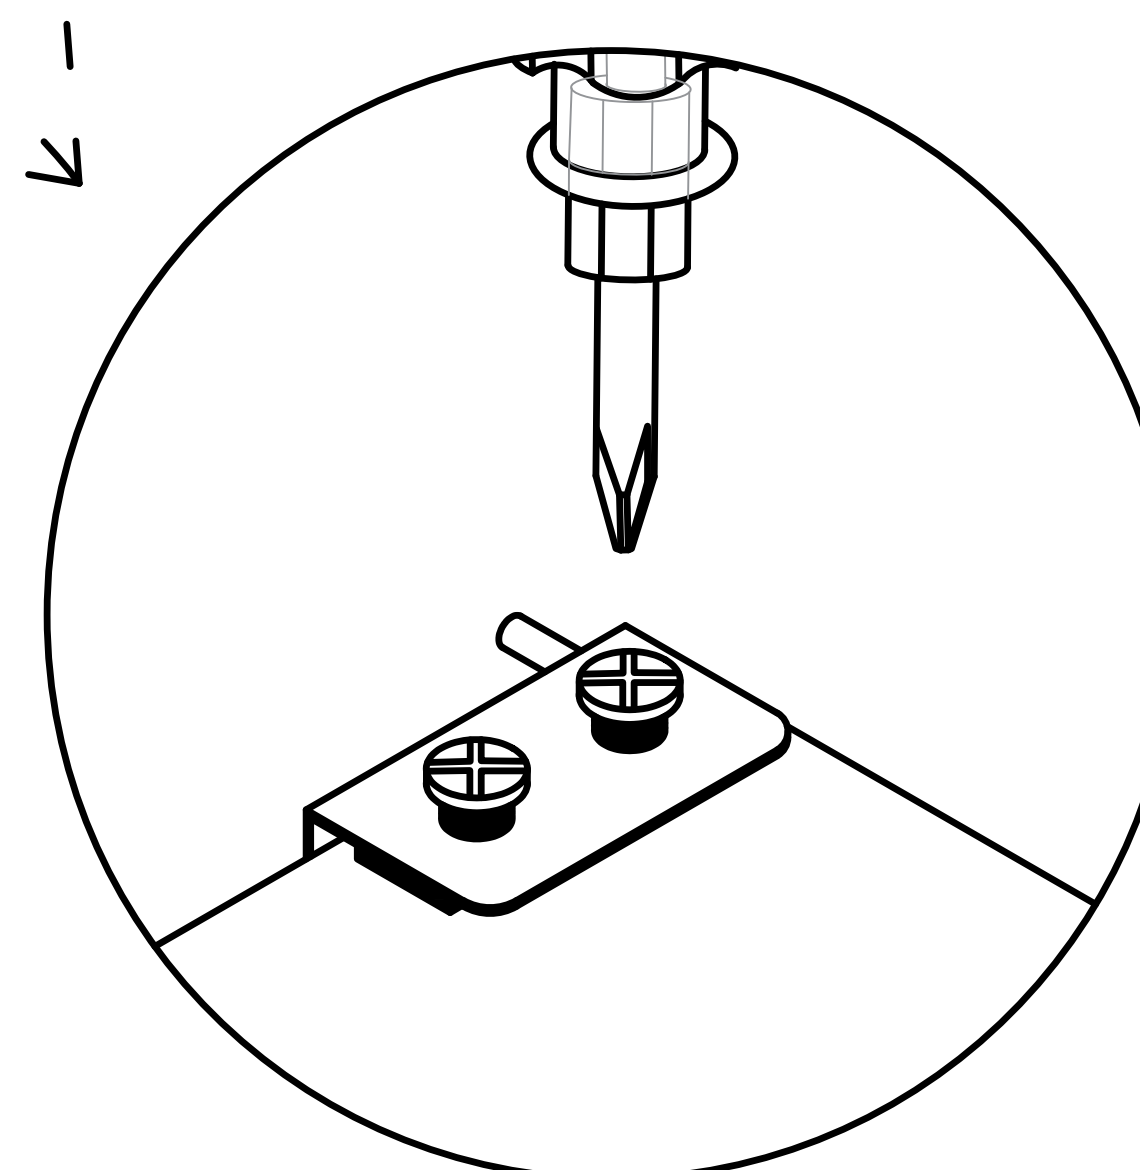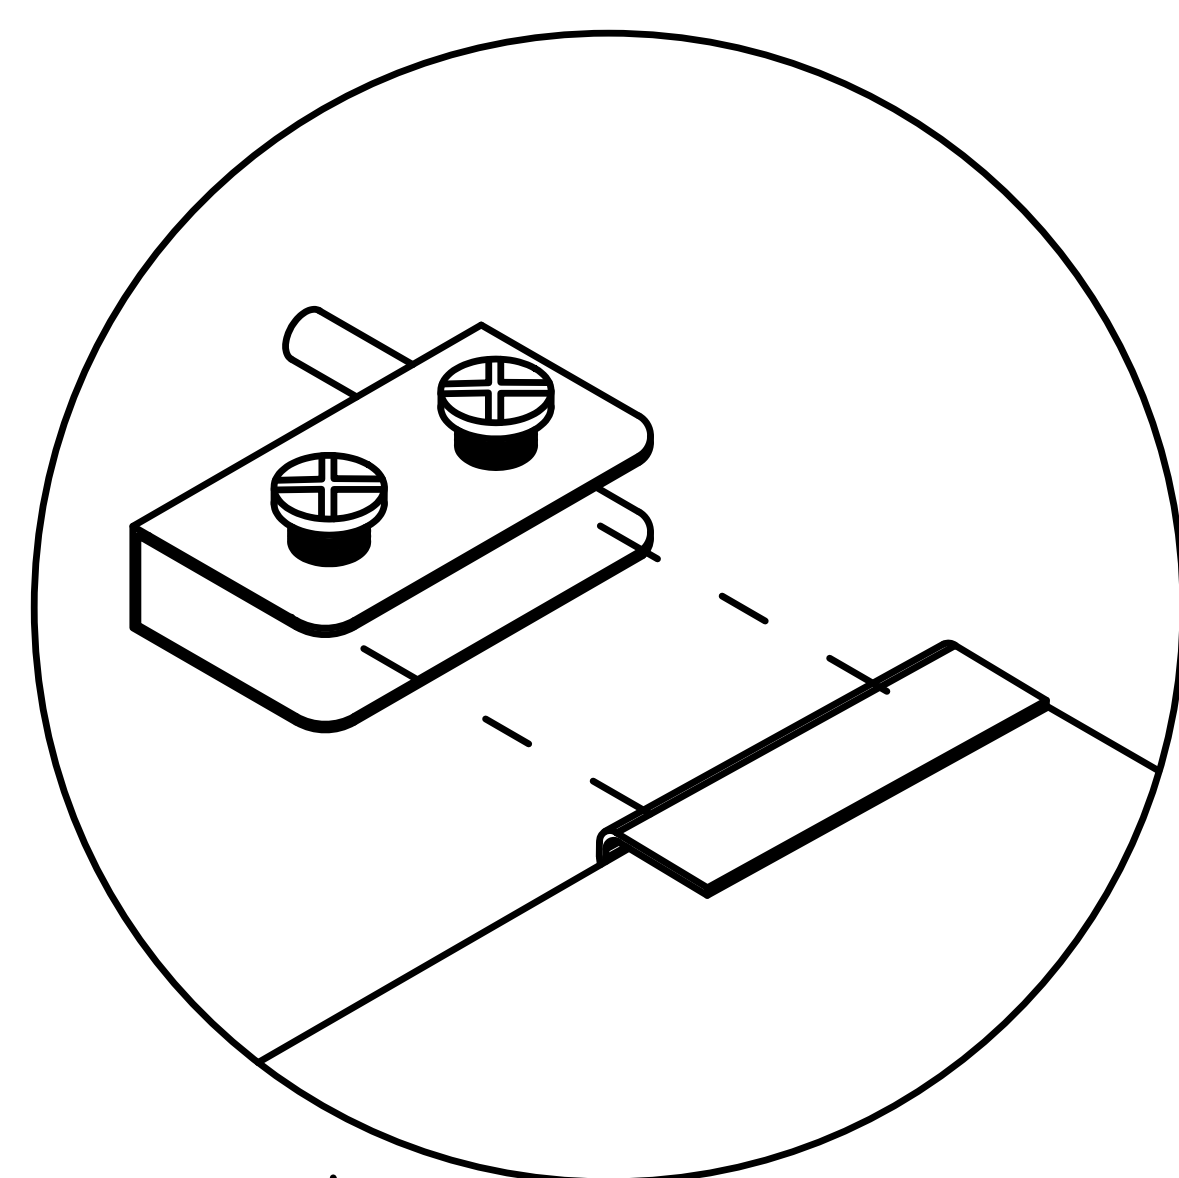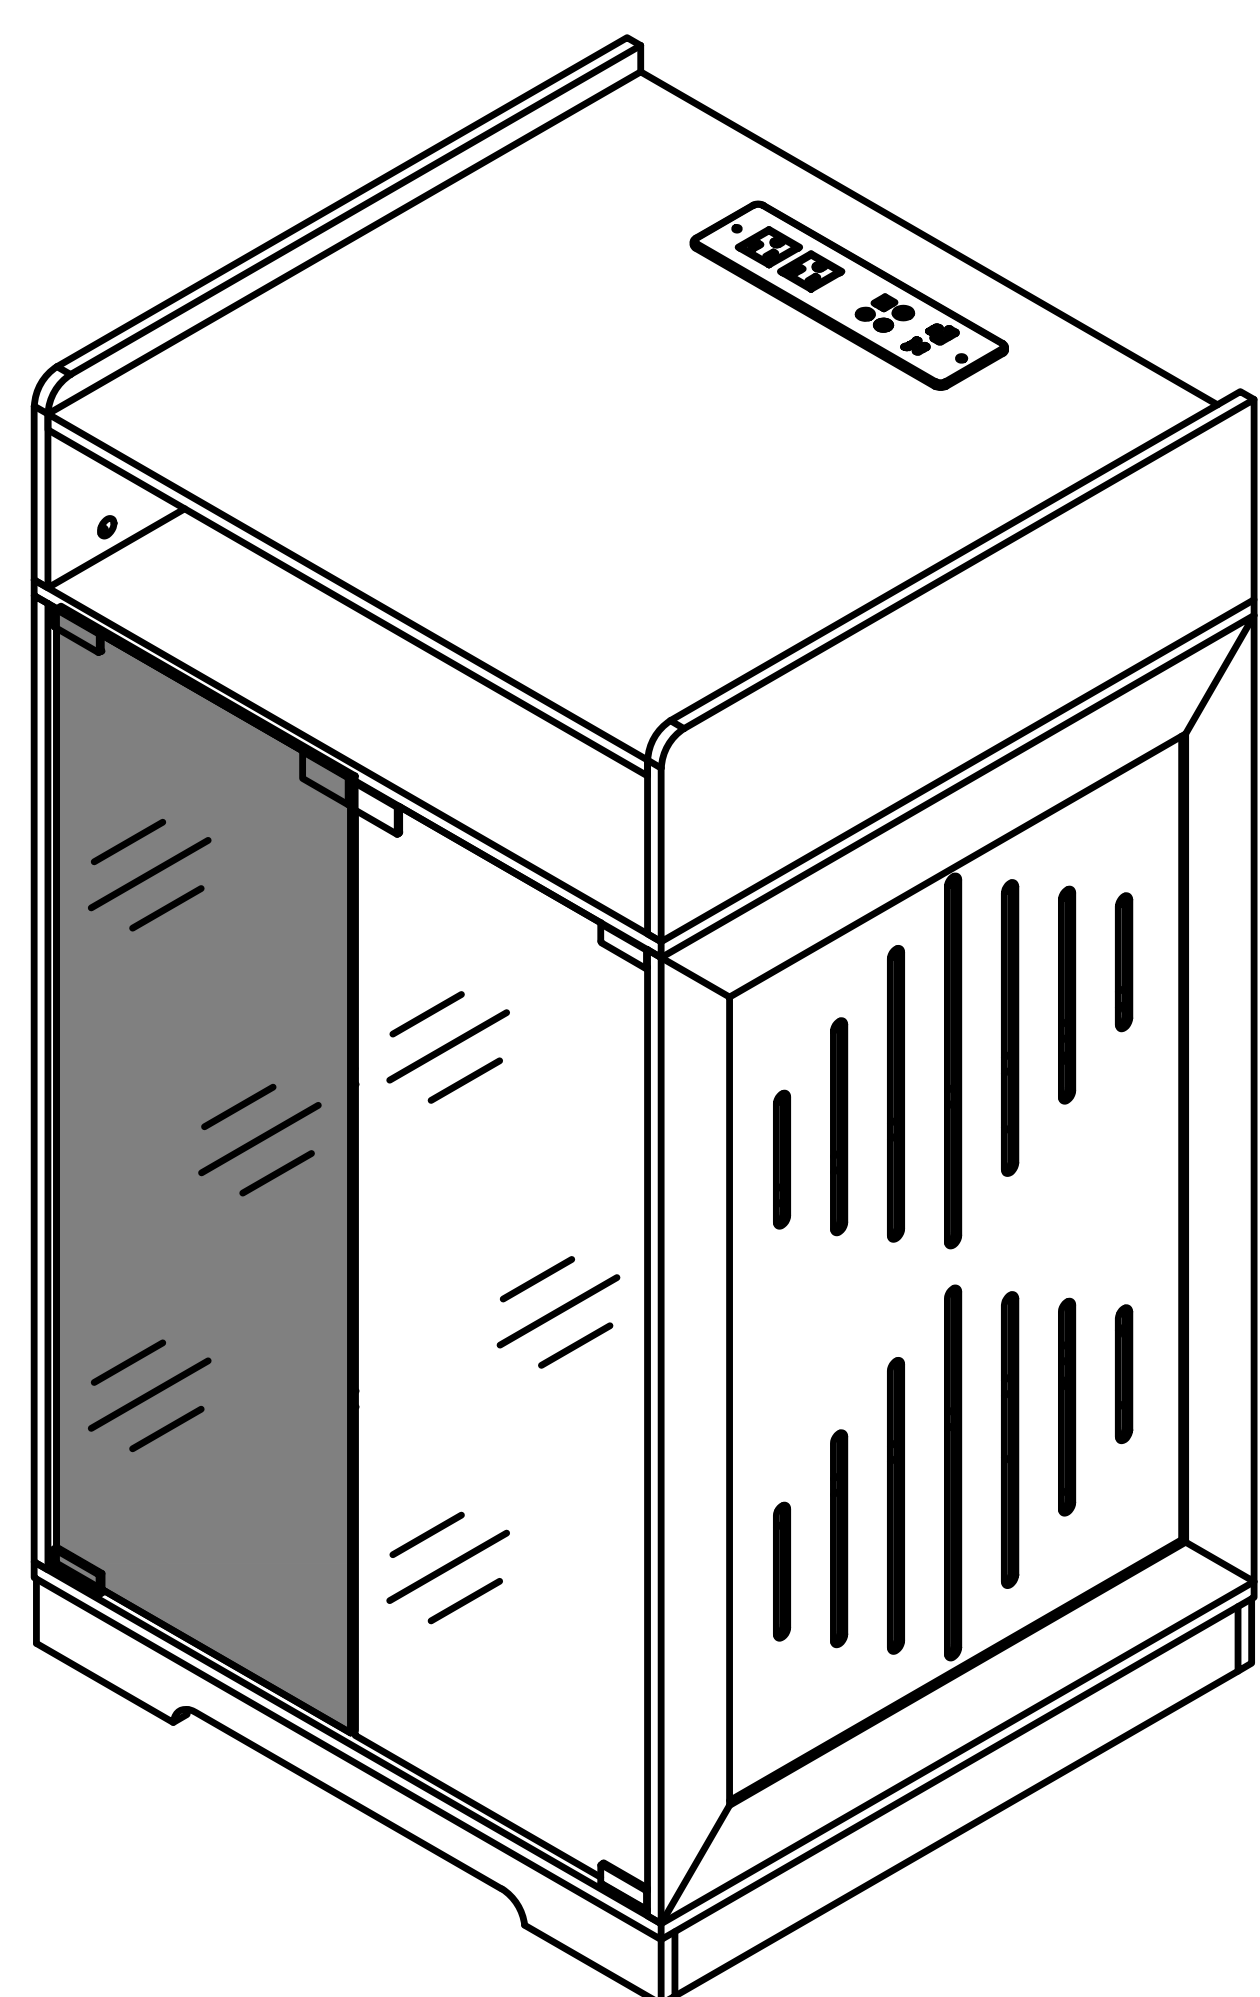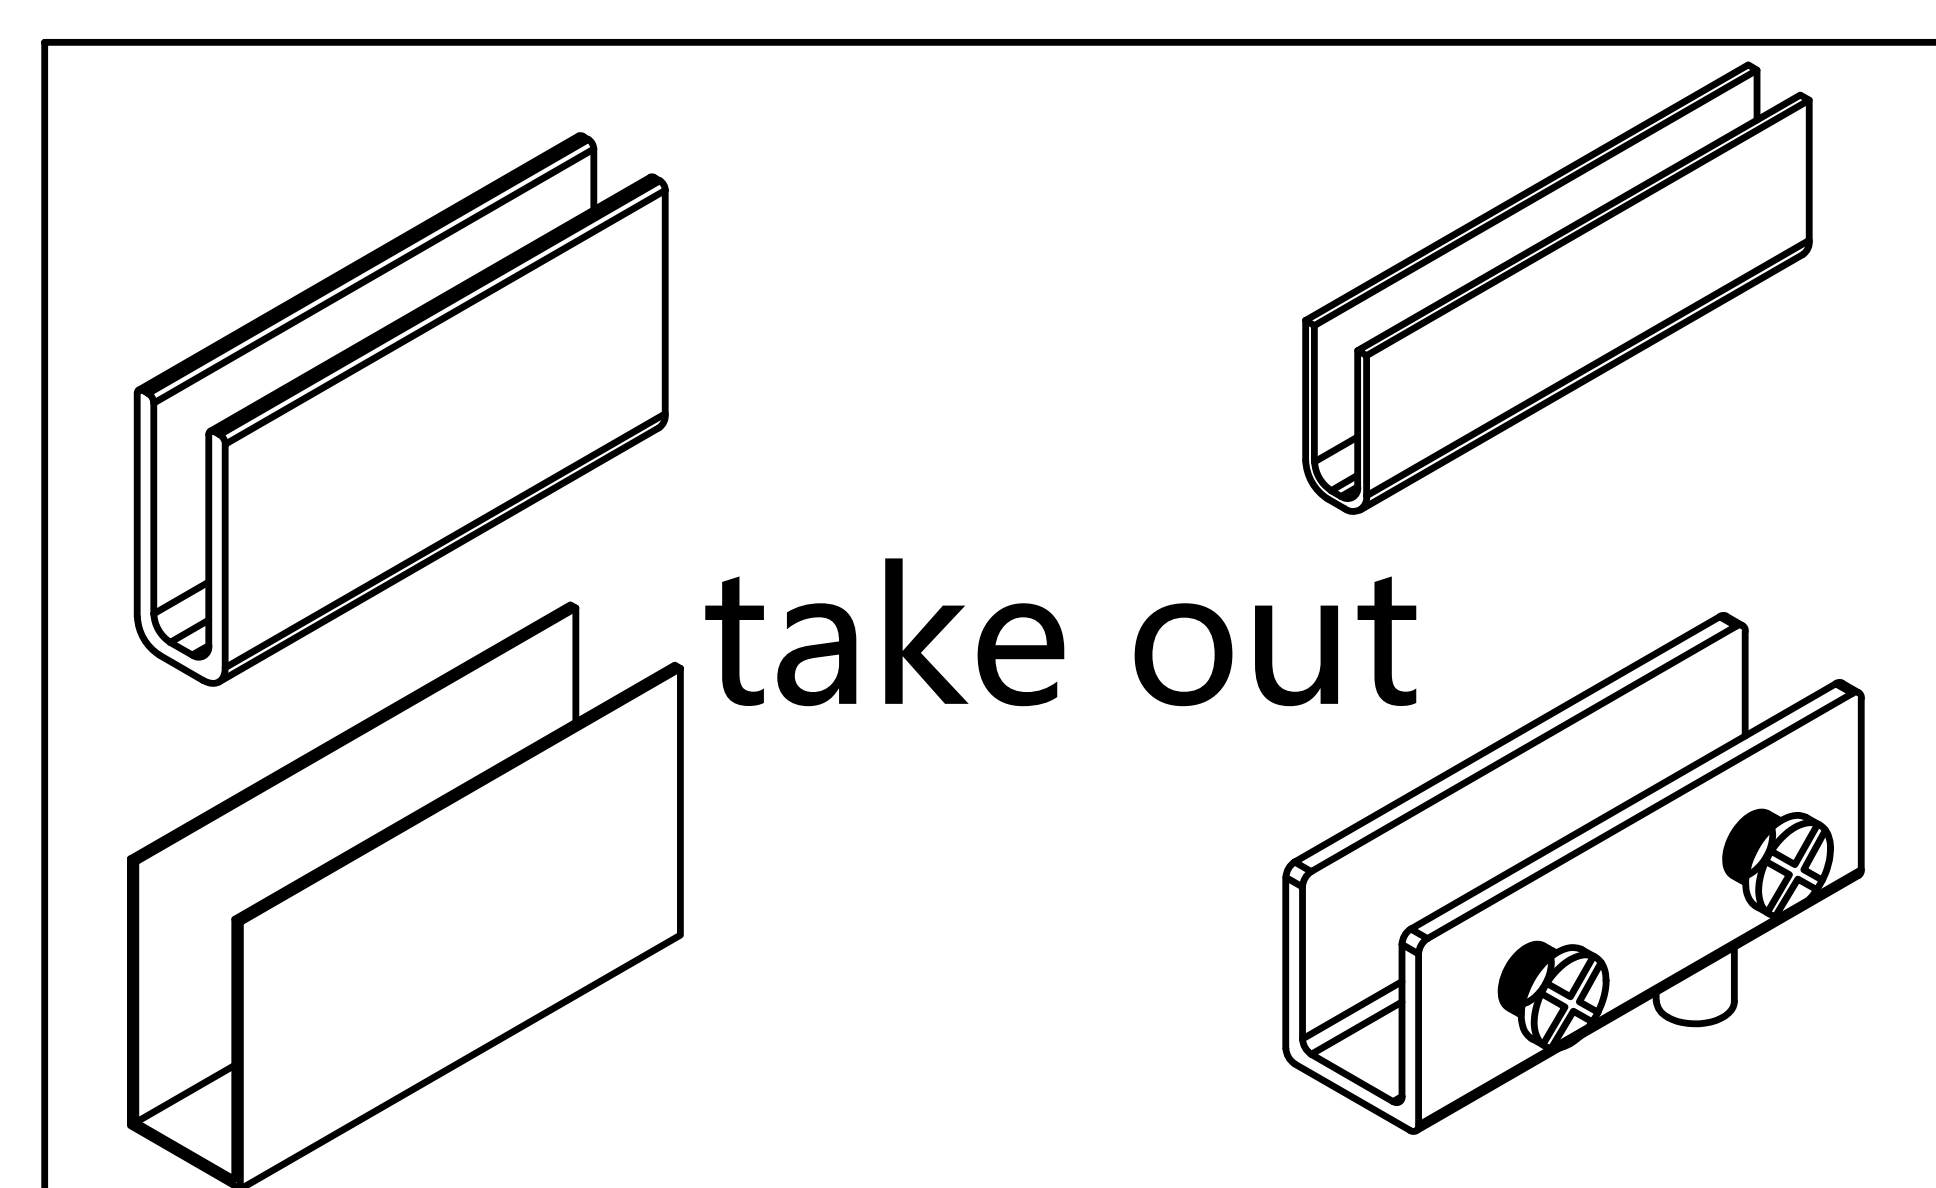


Locking screw

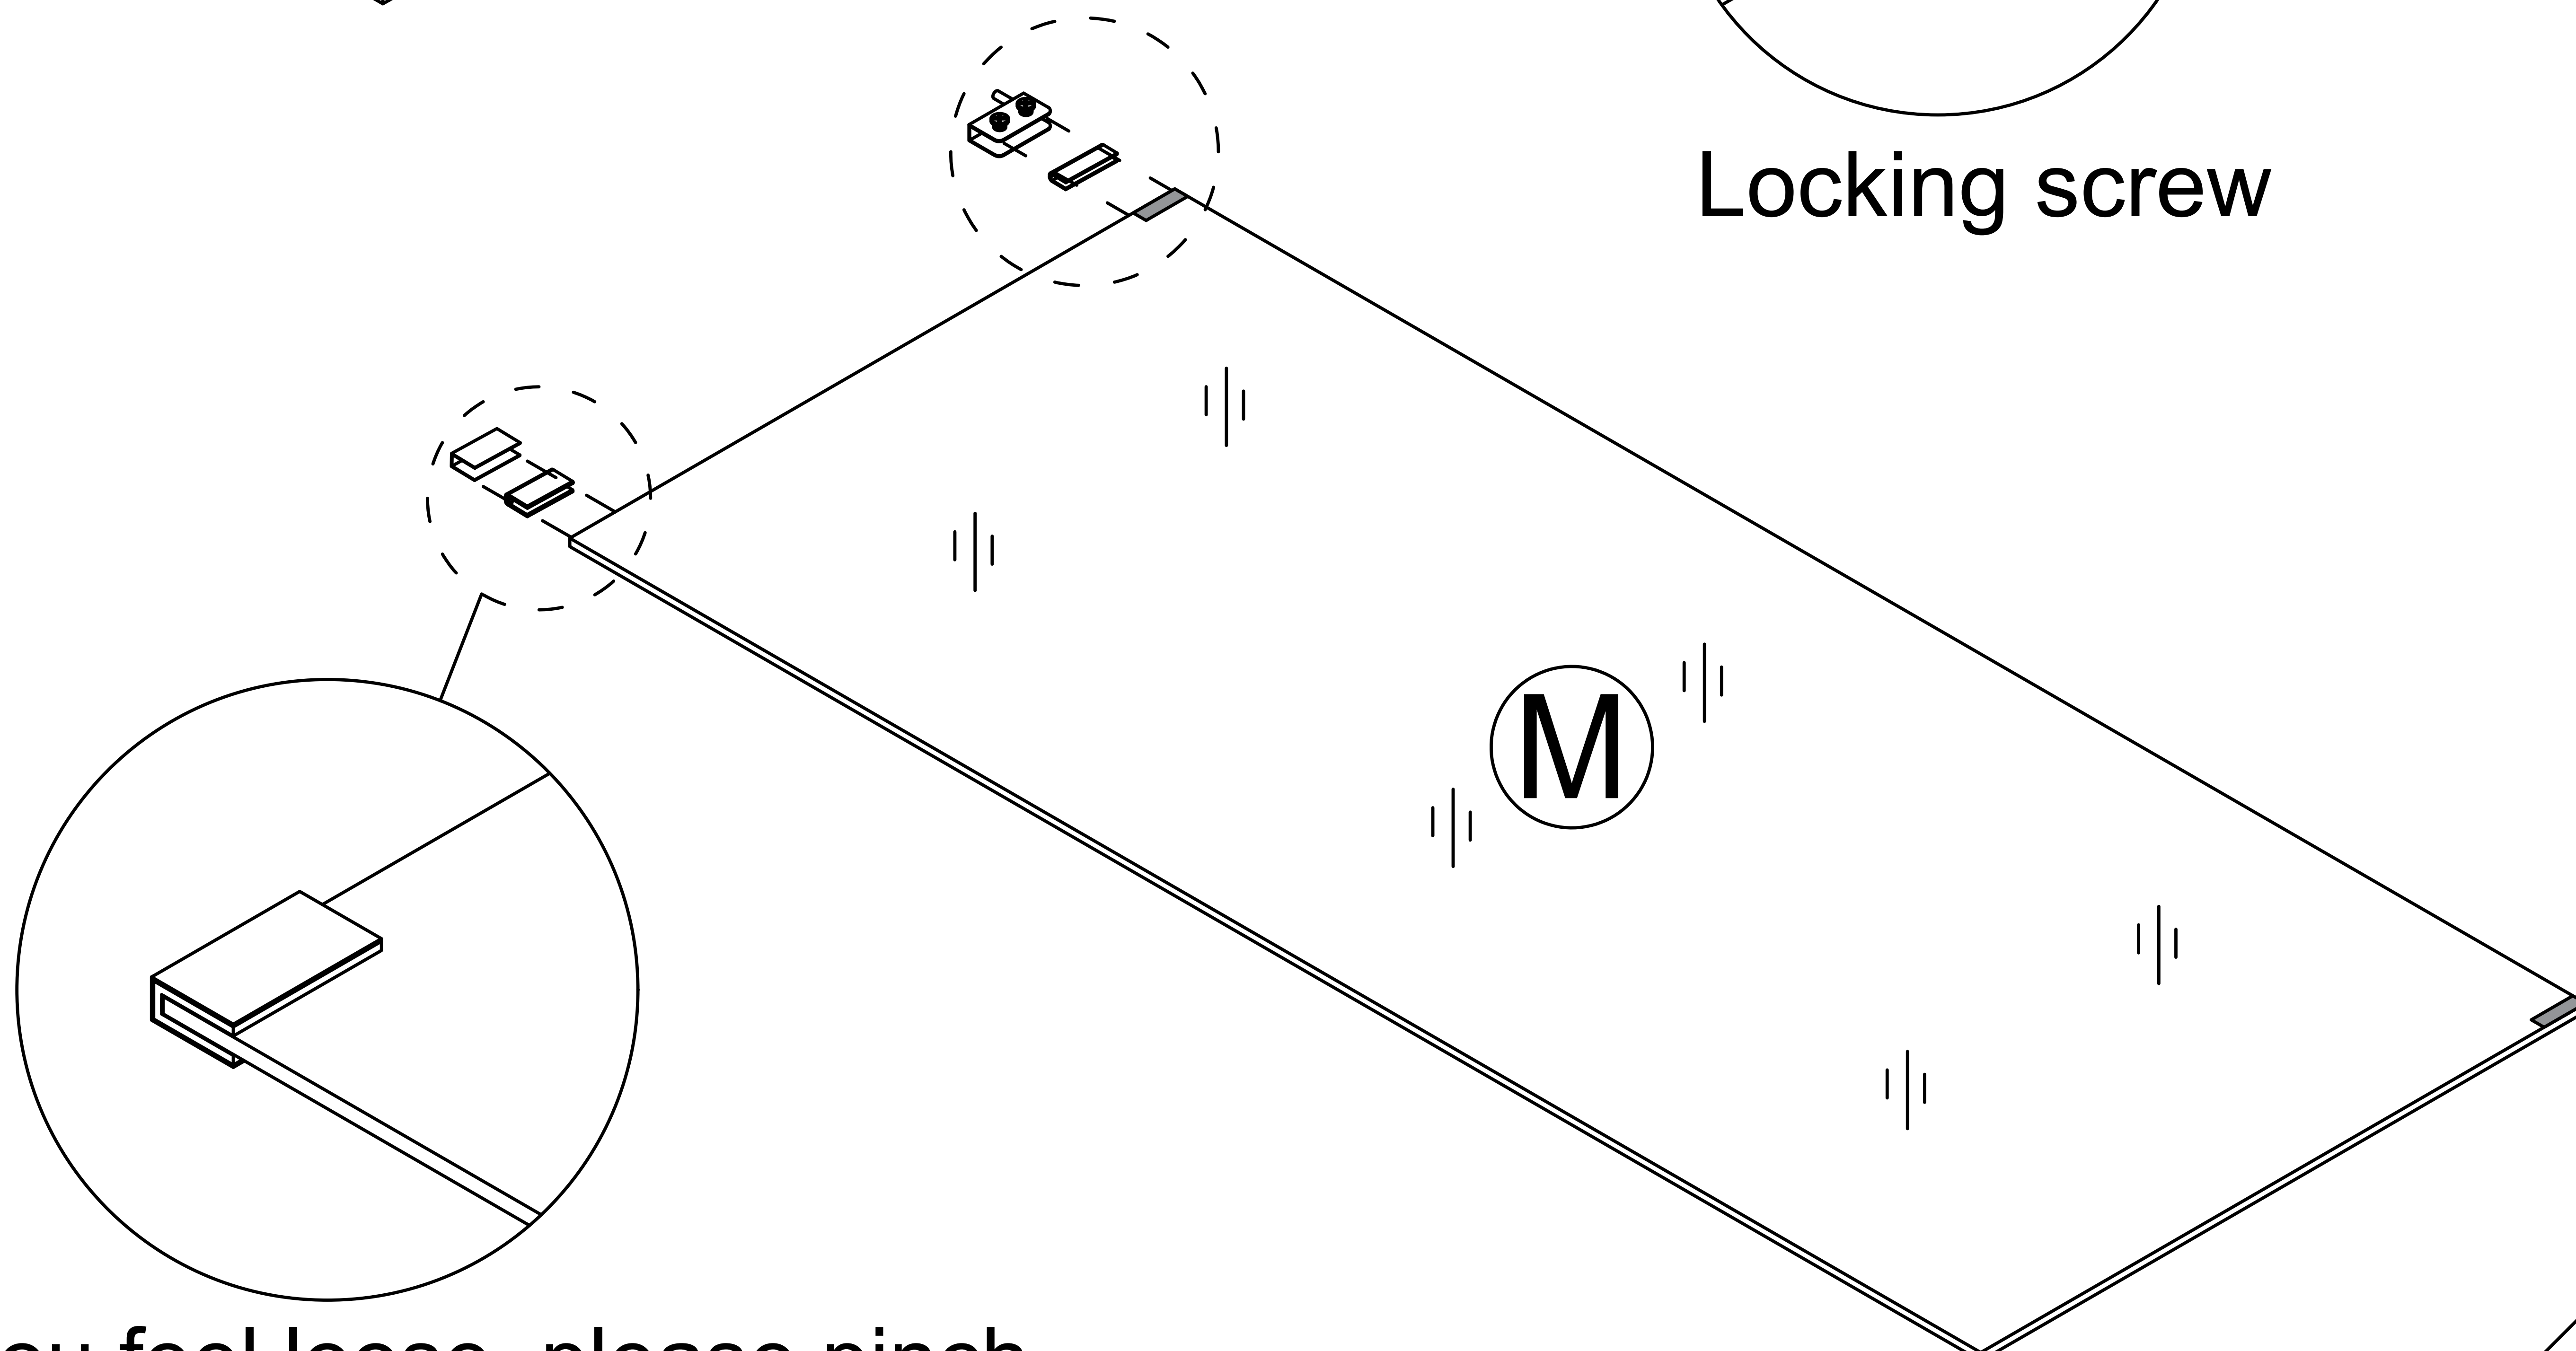


If you feel loose, please pinch the accessory before installation

Step 22


First, loosen the screws.

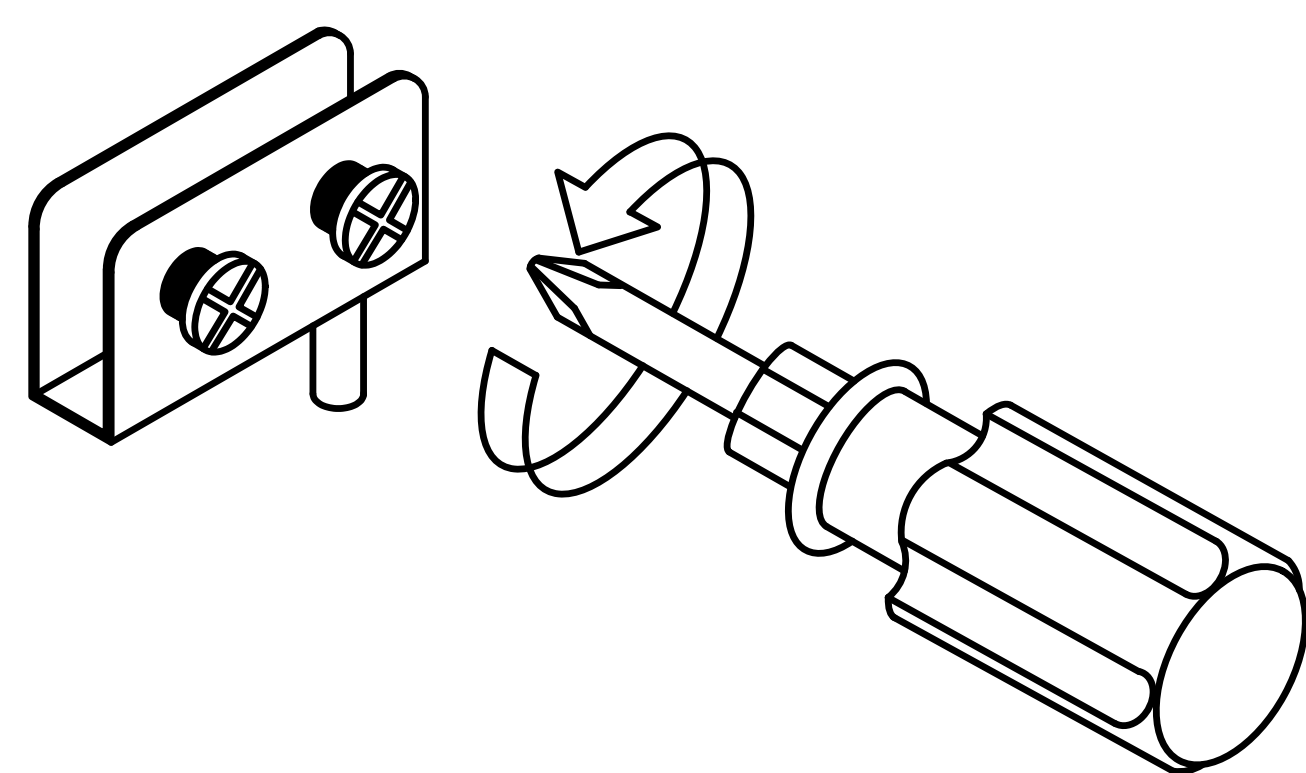

5


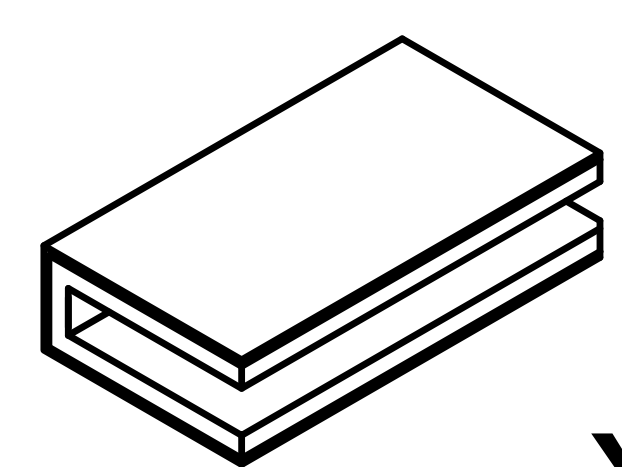


x1



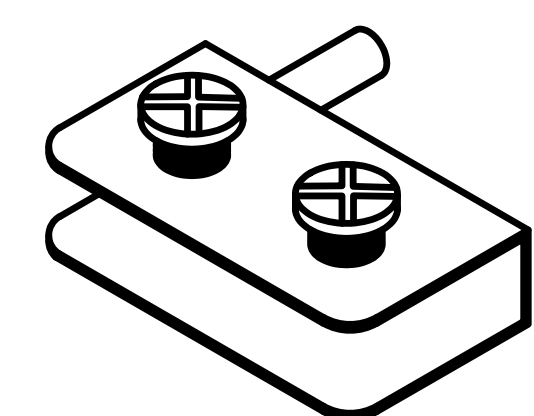


x1


1. Take out the white pad
2. Fit the pad around the edge of the glass panel
3. Then slide the metal clamp over the assembled position
4. Finally, tighten the screws securely

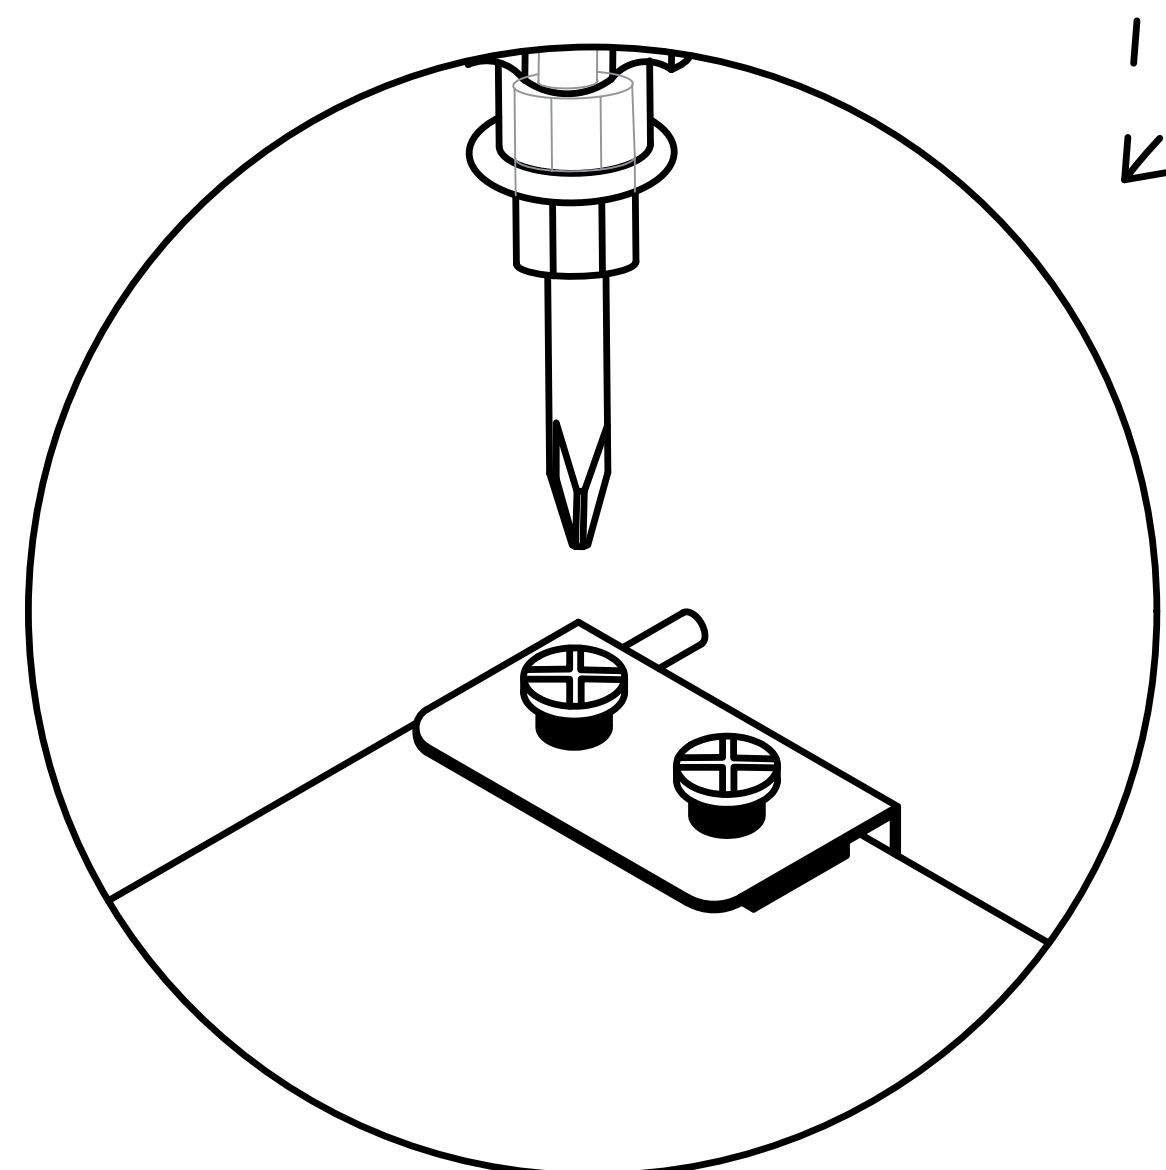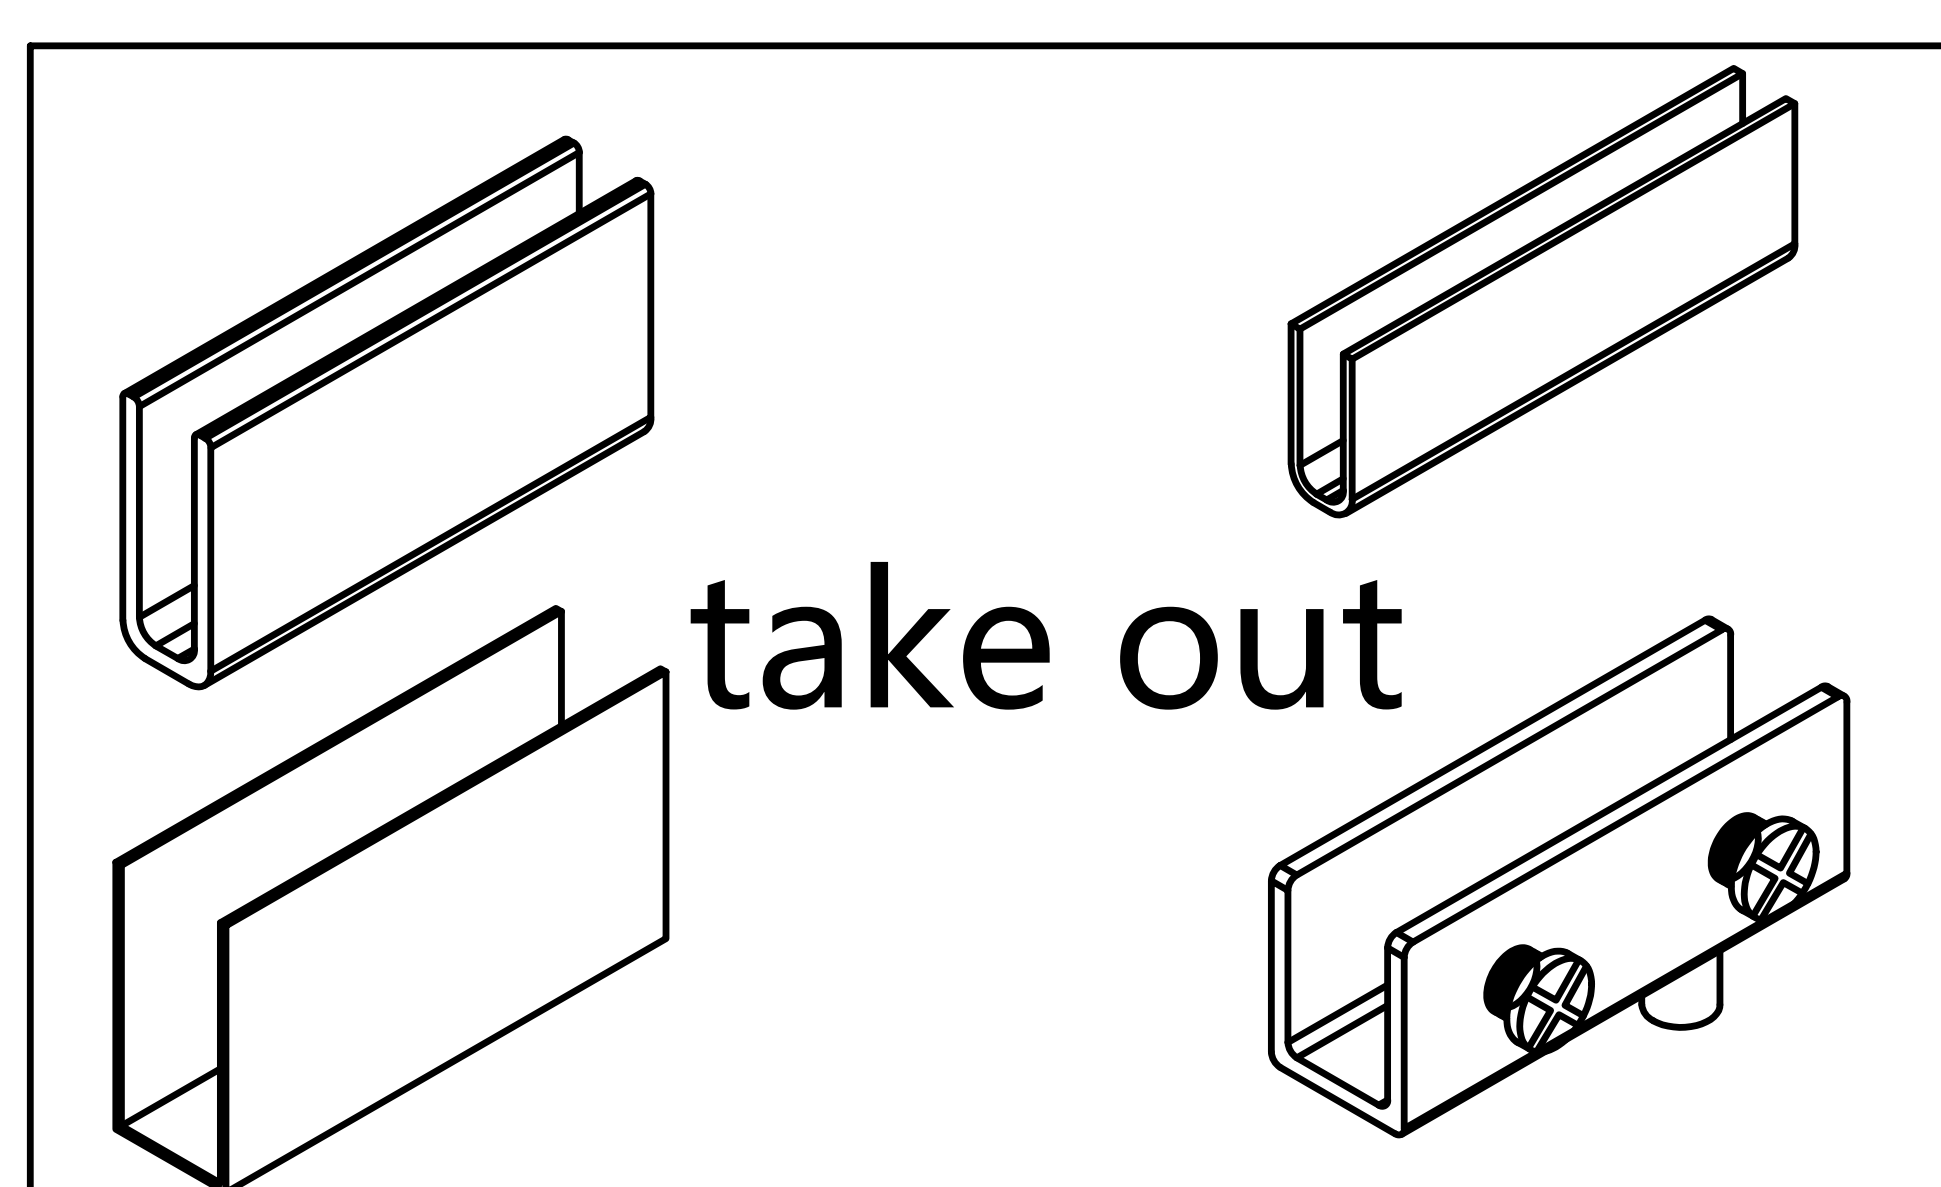

Locking screw

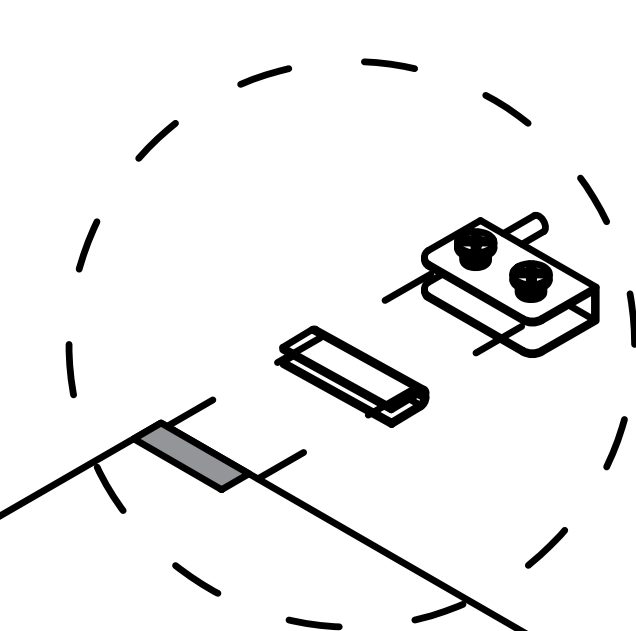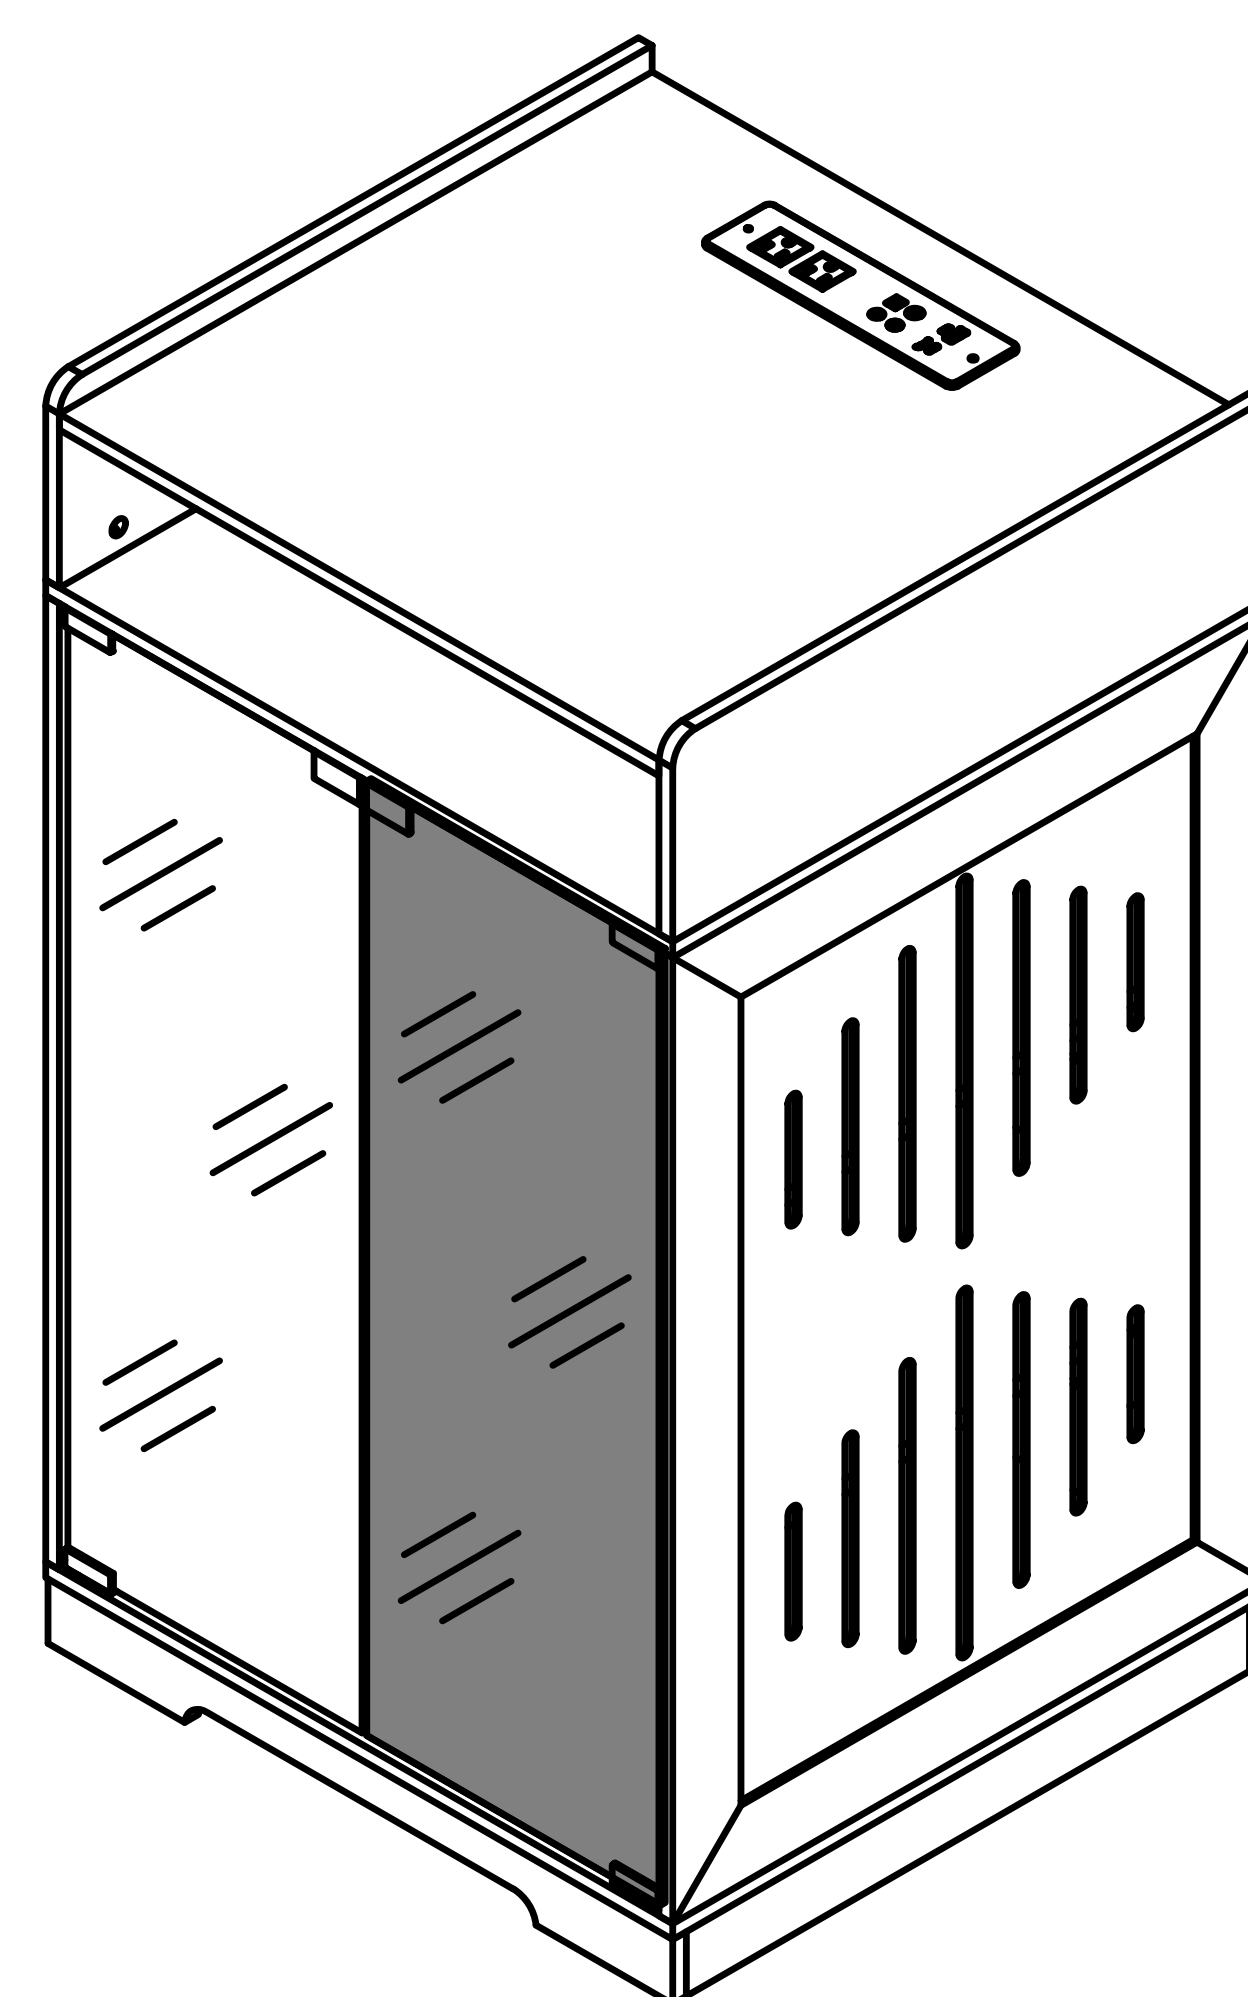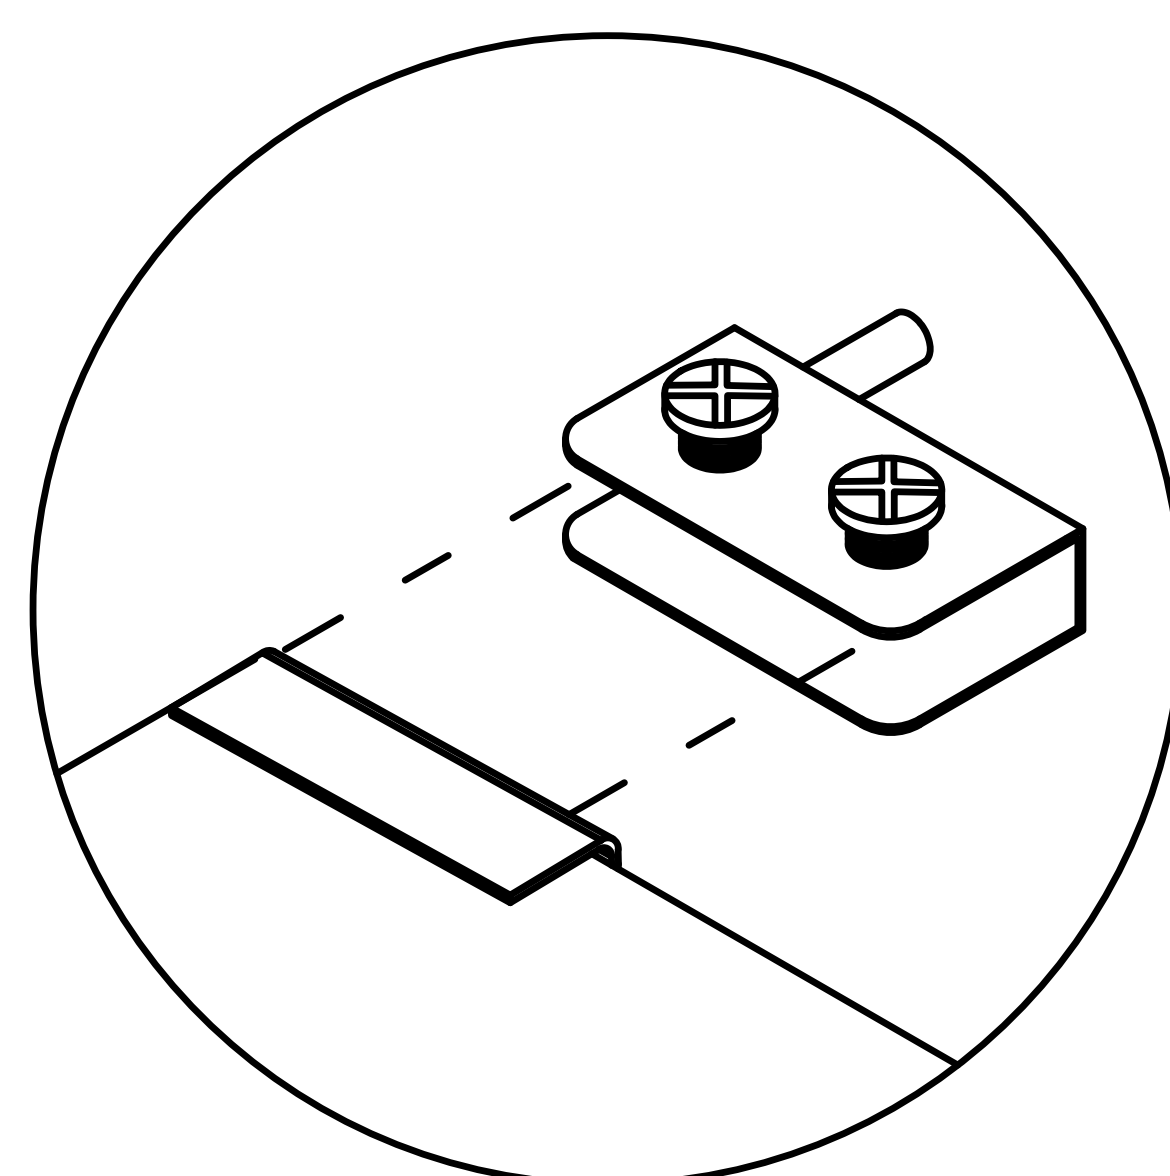

M

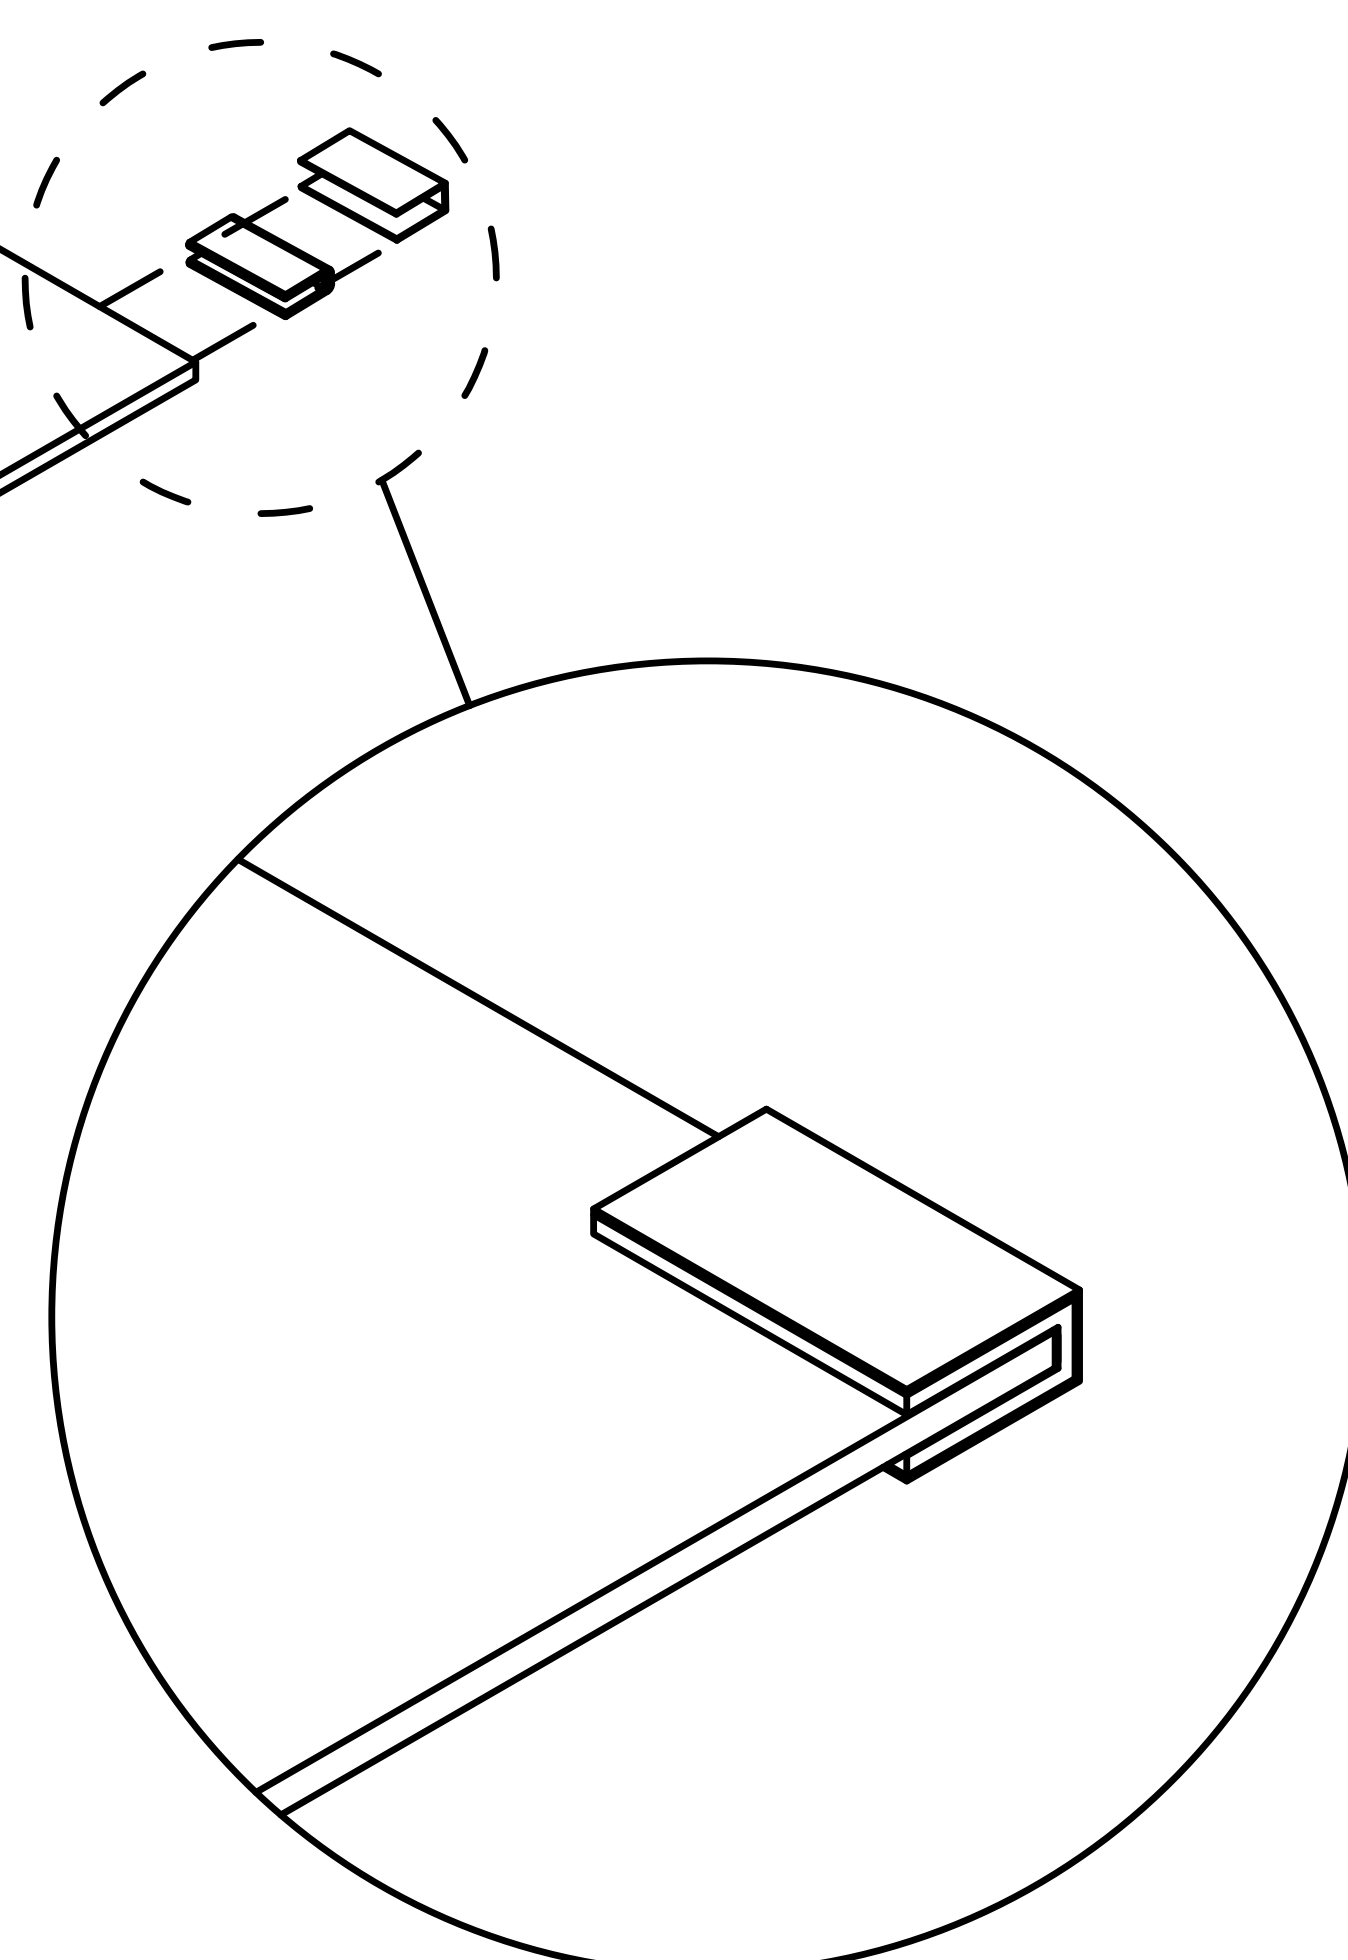


If you feel loose, please pinch the accessory before installation

Step 23


Pay attention to the direction of
the door hinge during installation

5




x2


When installing a glass door, it is recommended to
have two people install it to avoid the glass door
colliding or hitting oneself.

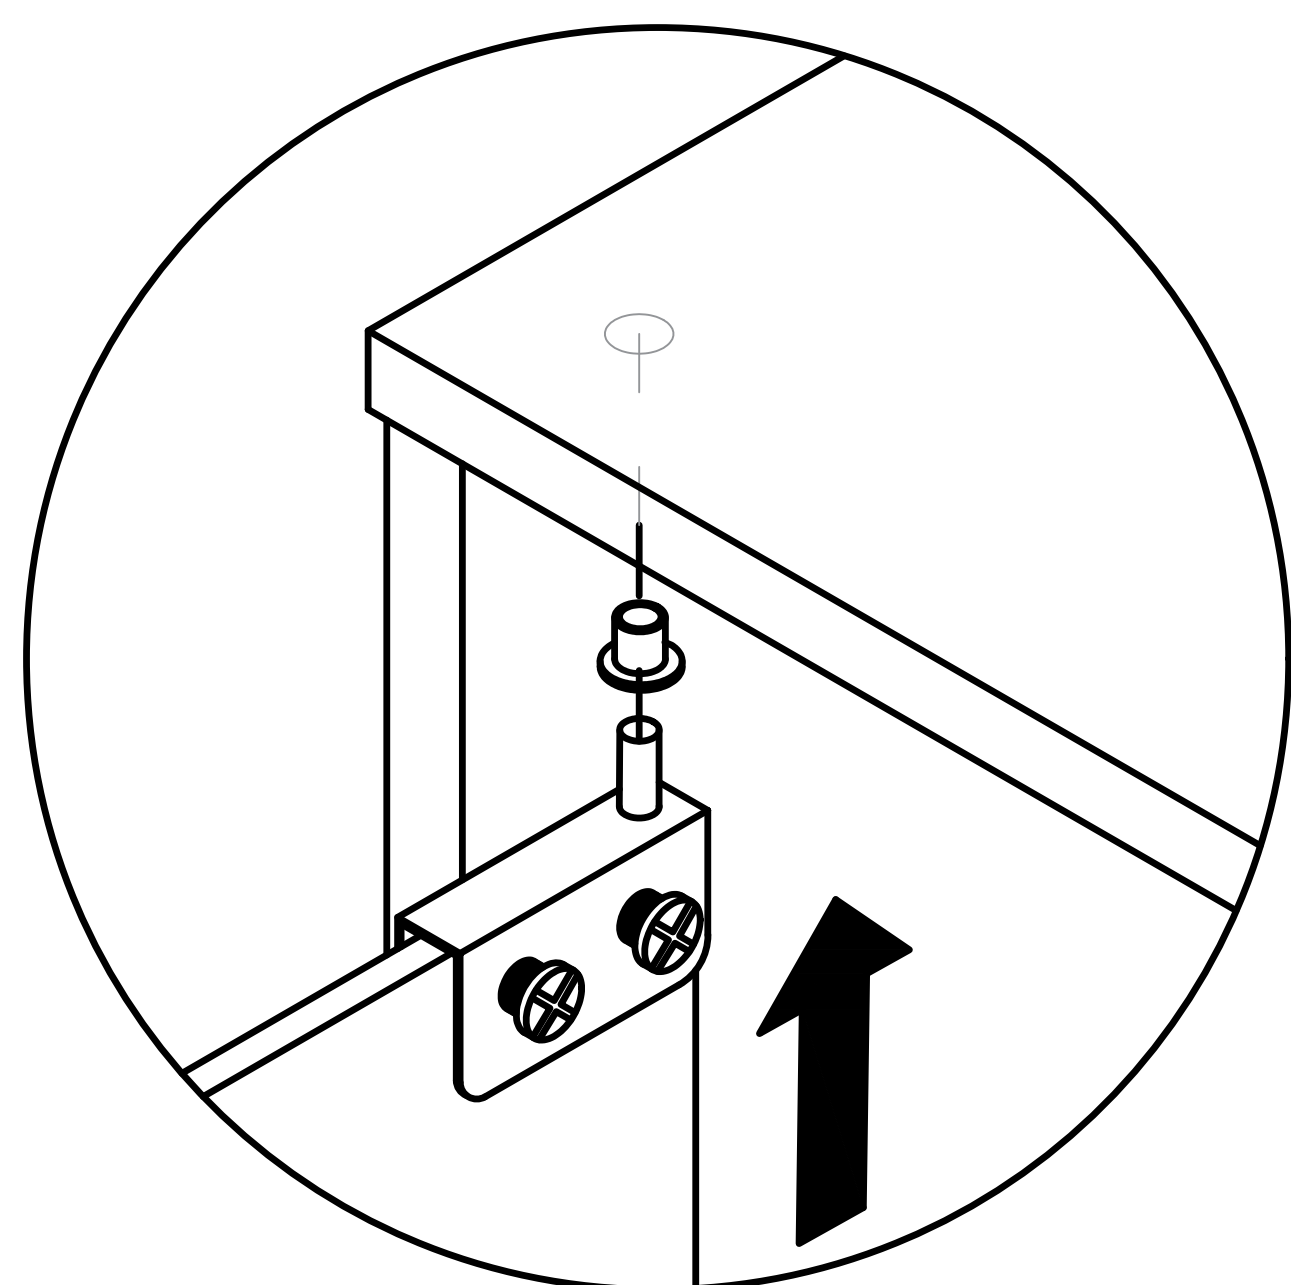

first

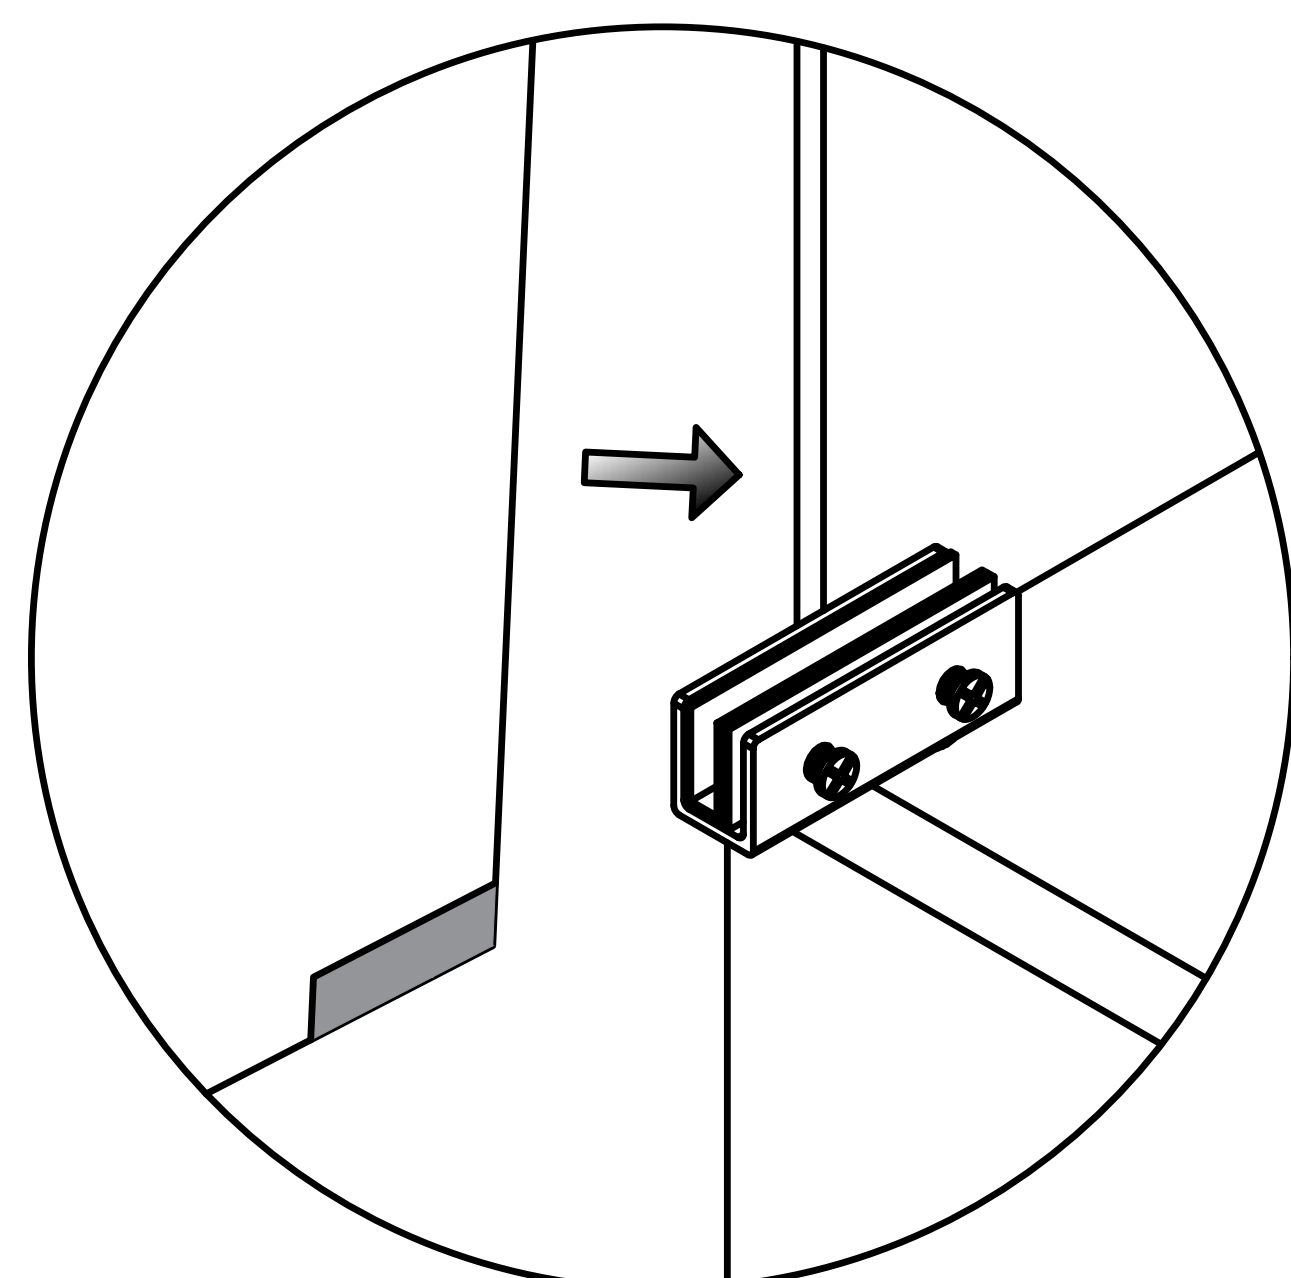


Remove white pad

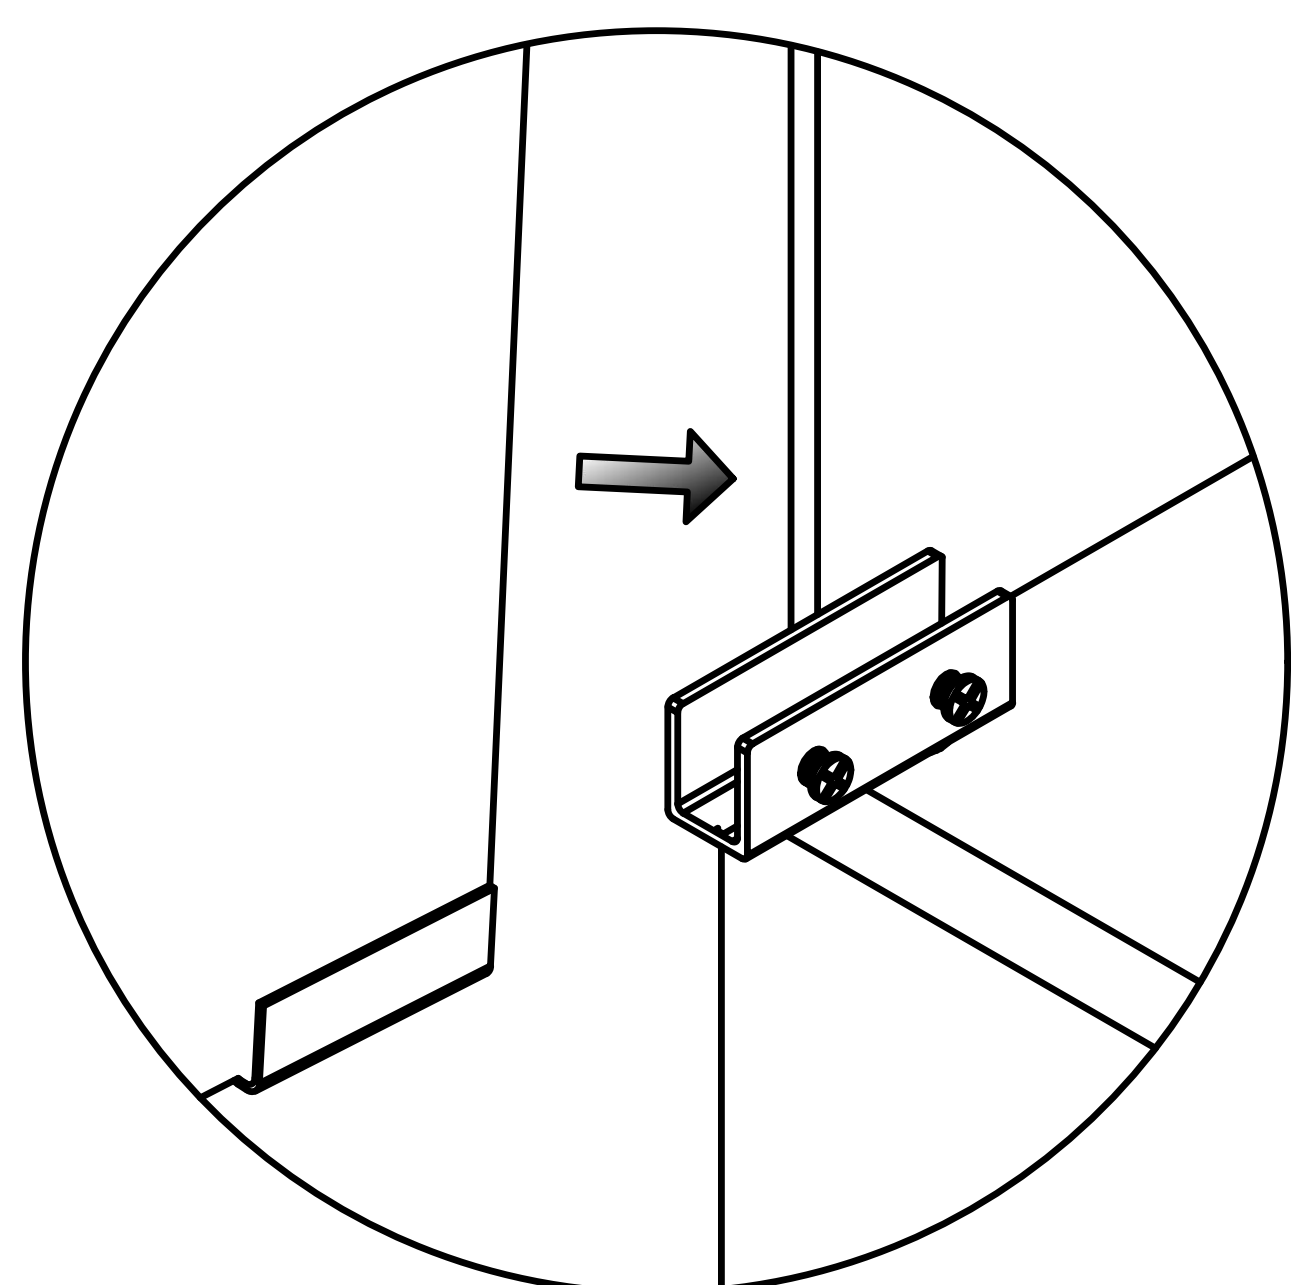

Fit the pad around glass edge


second

Insert the glass into the door hinge's slot.

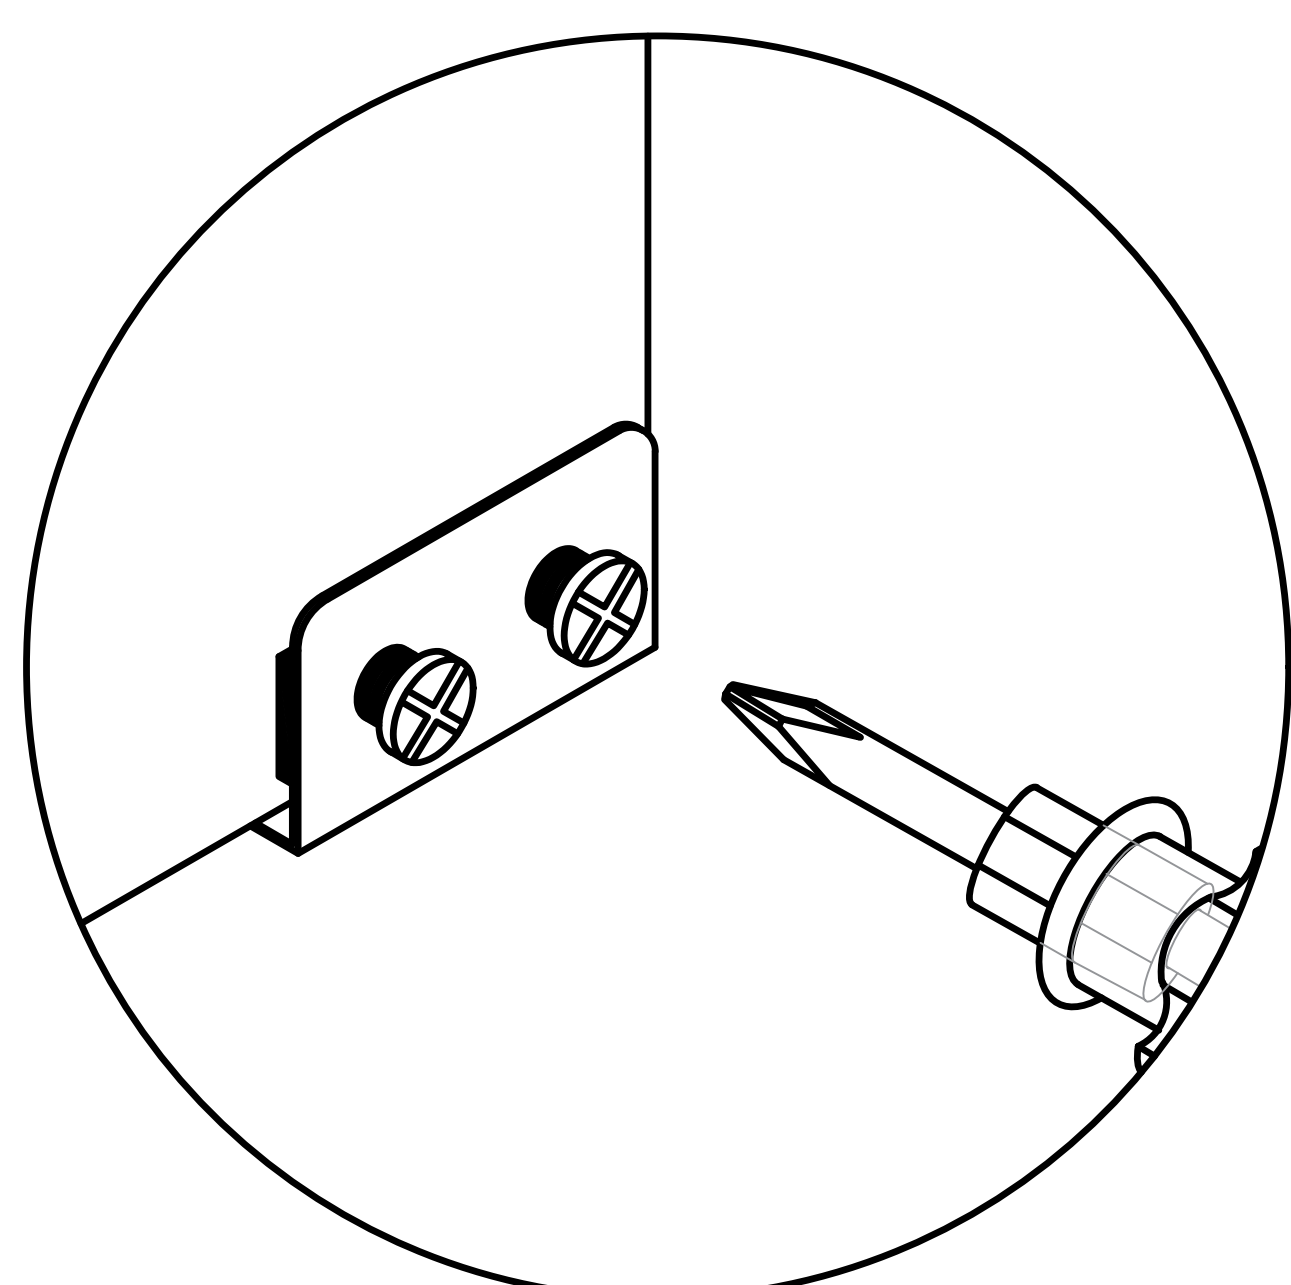


third


Locking screw

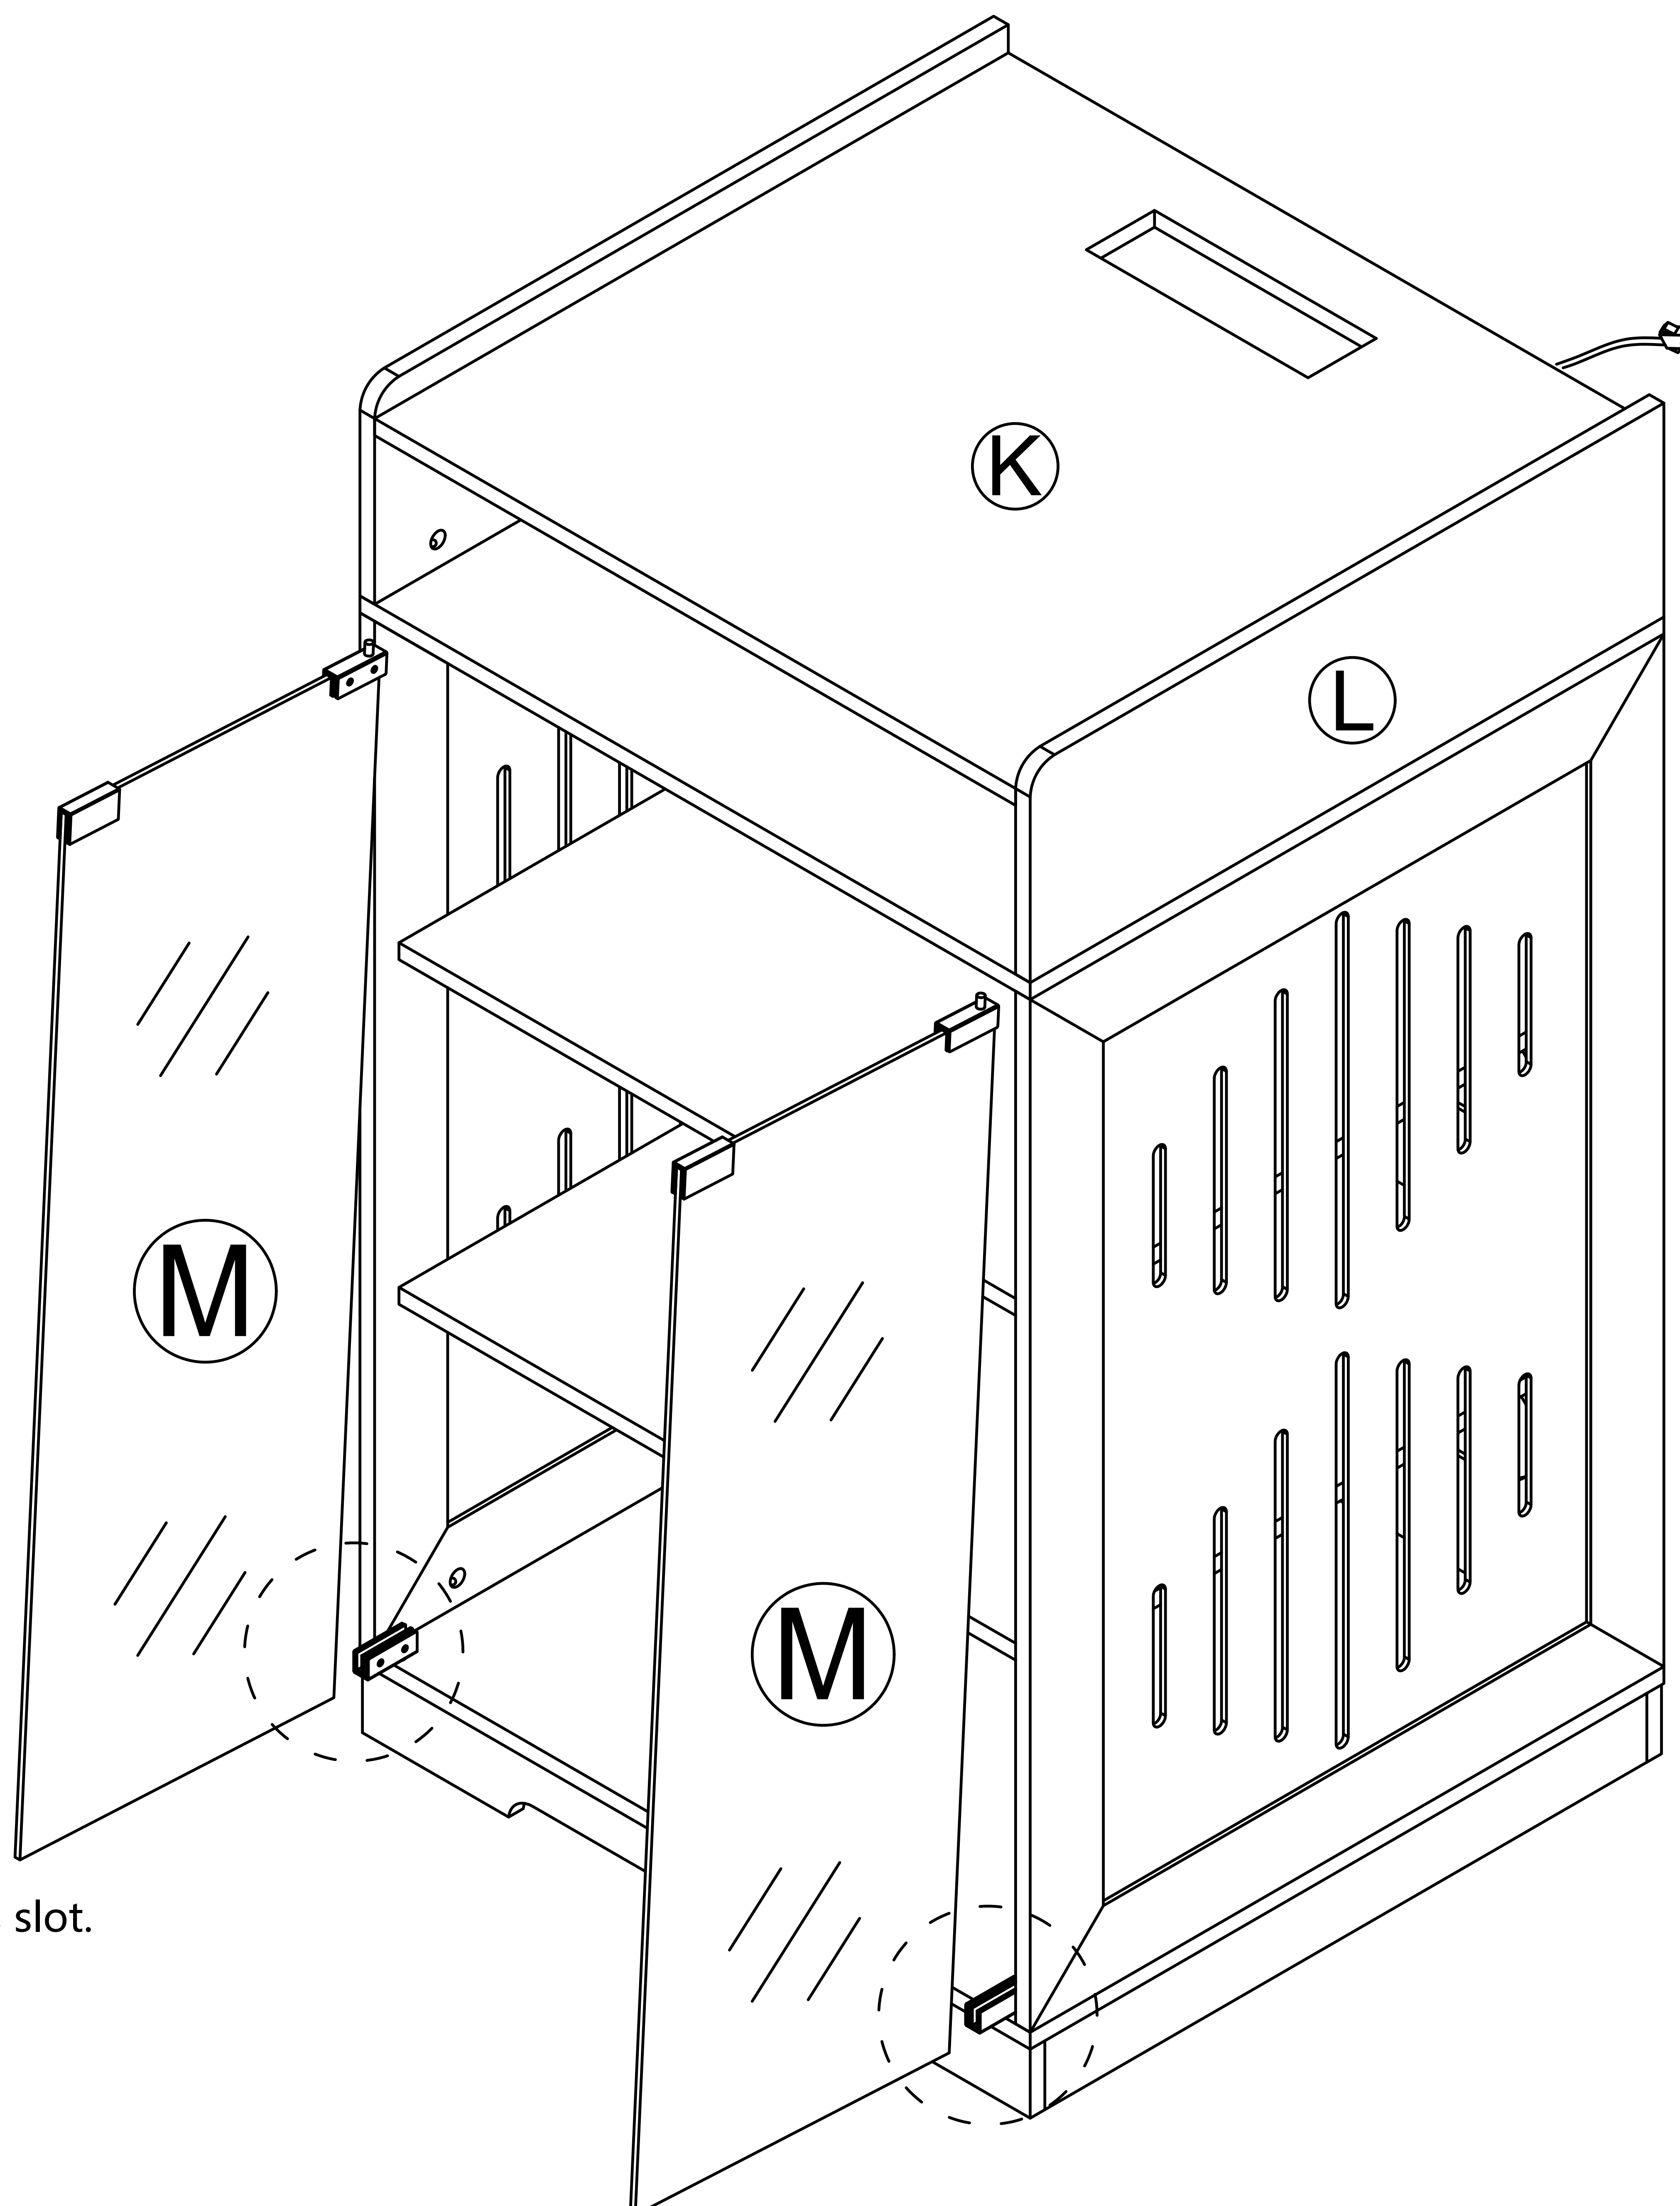


Step 24

6

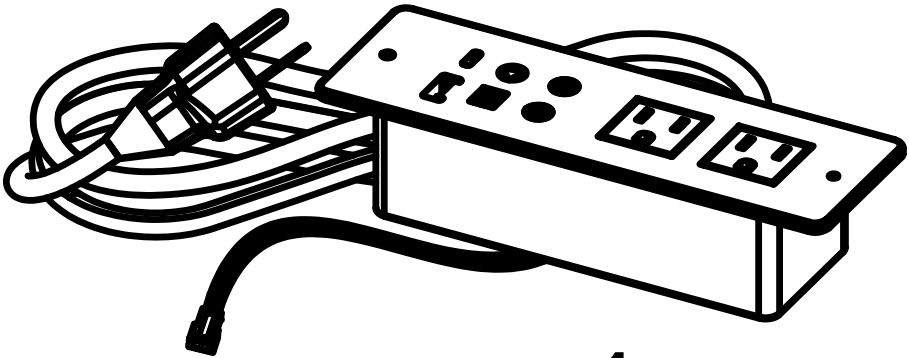

x1

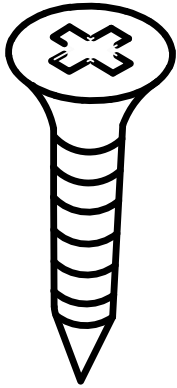
x2

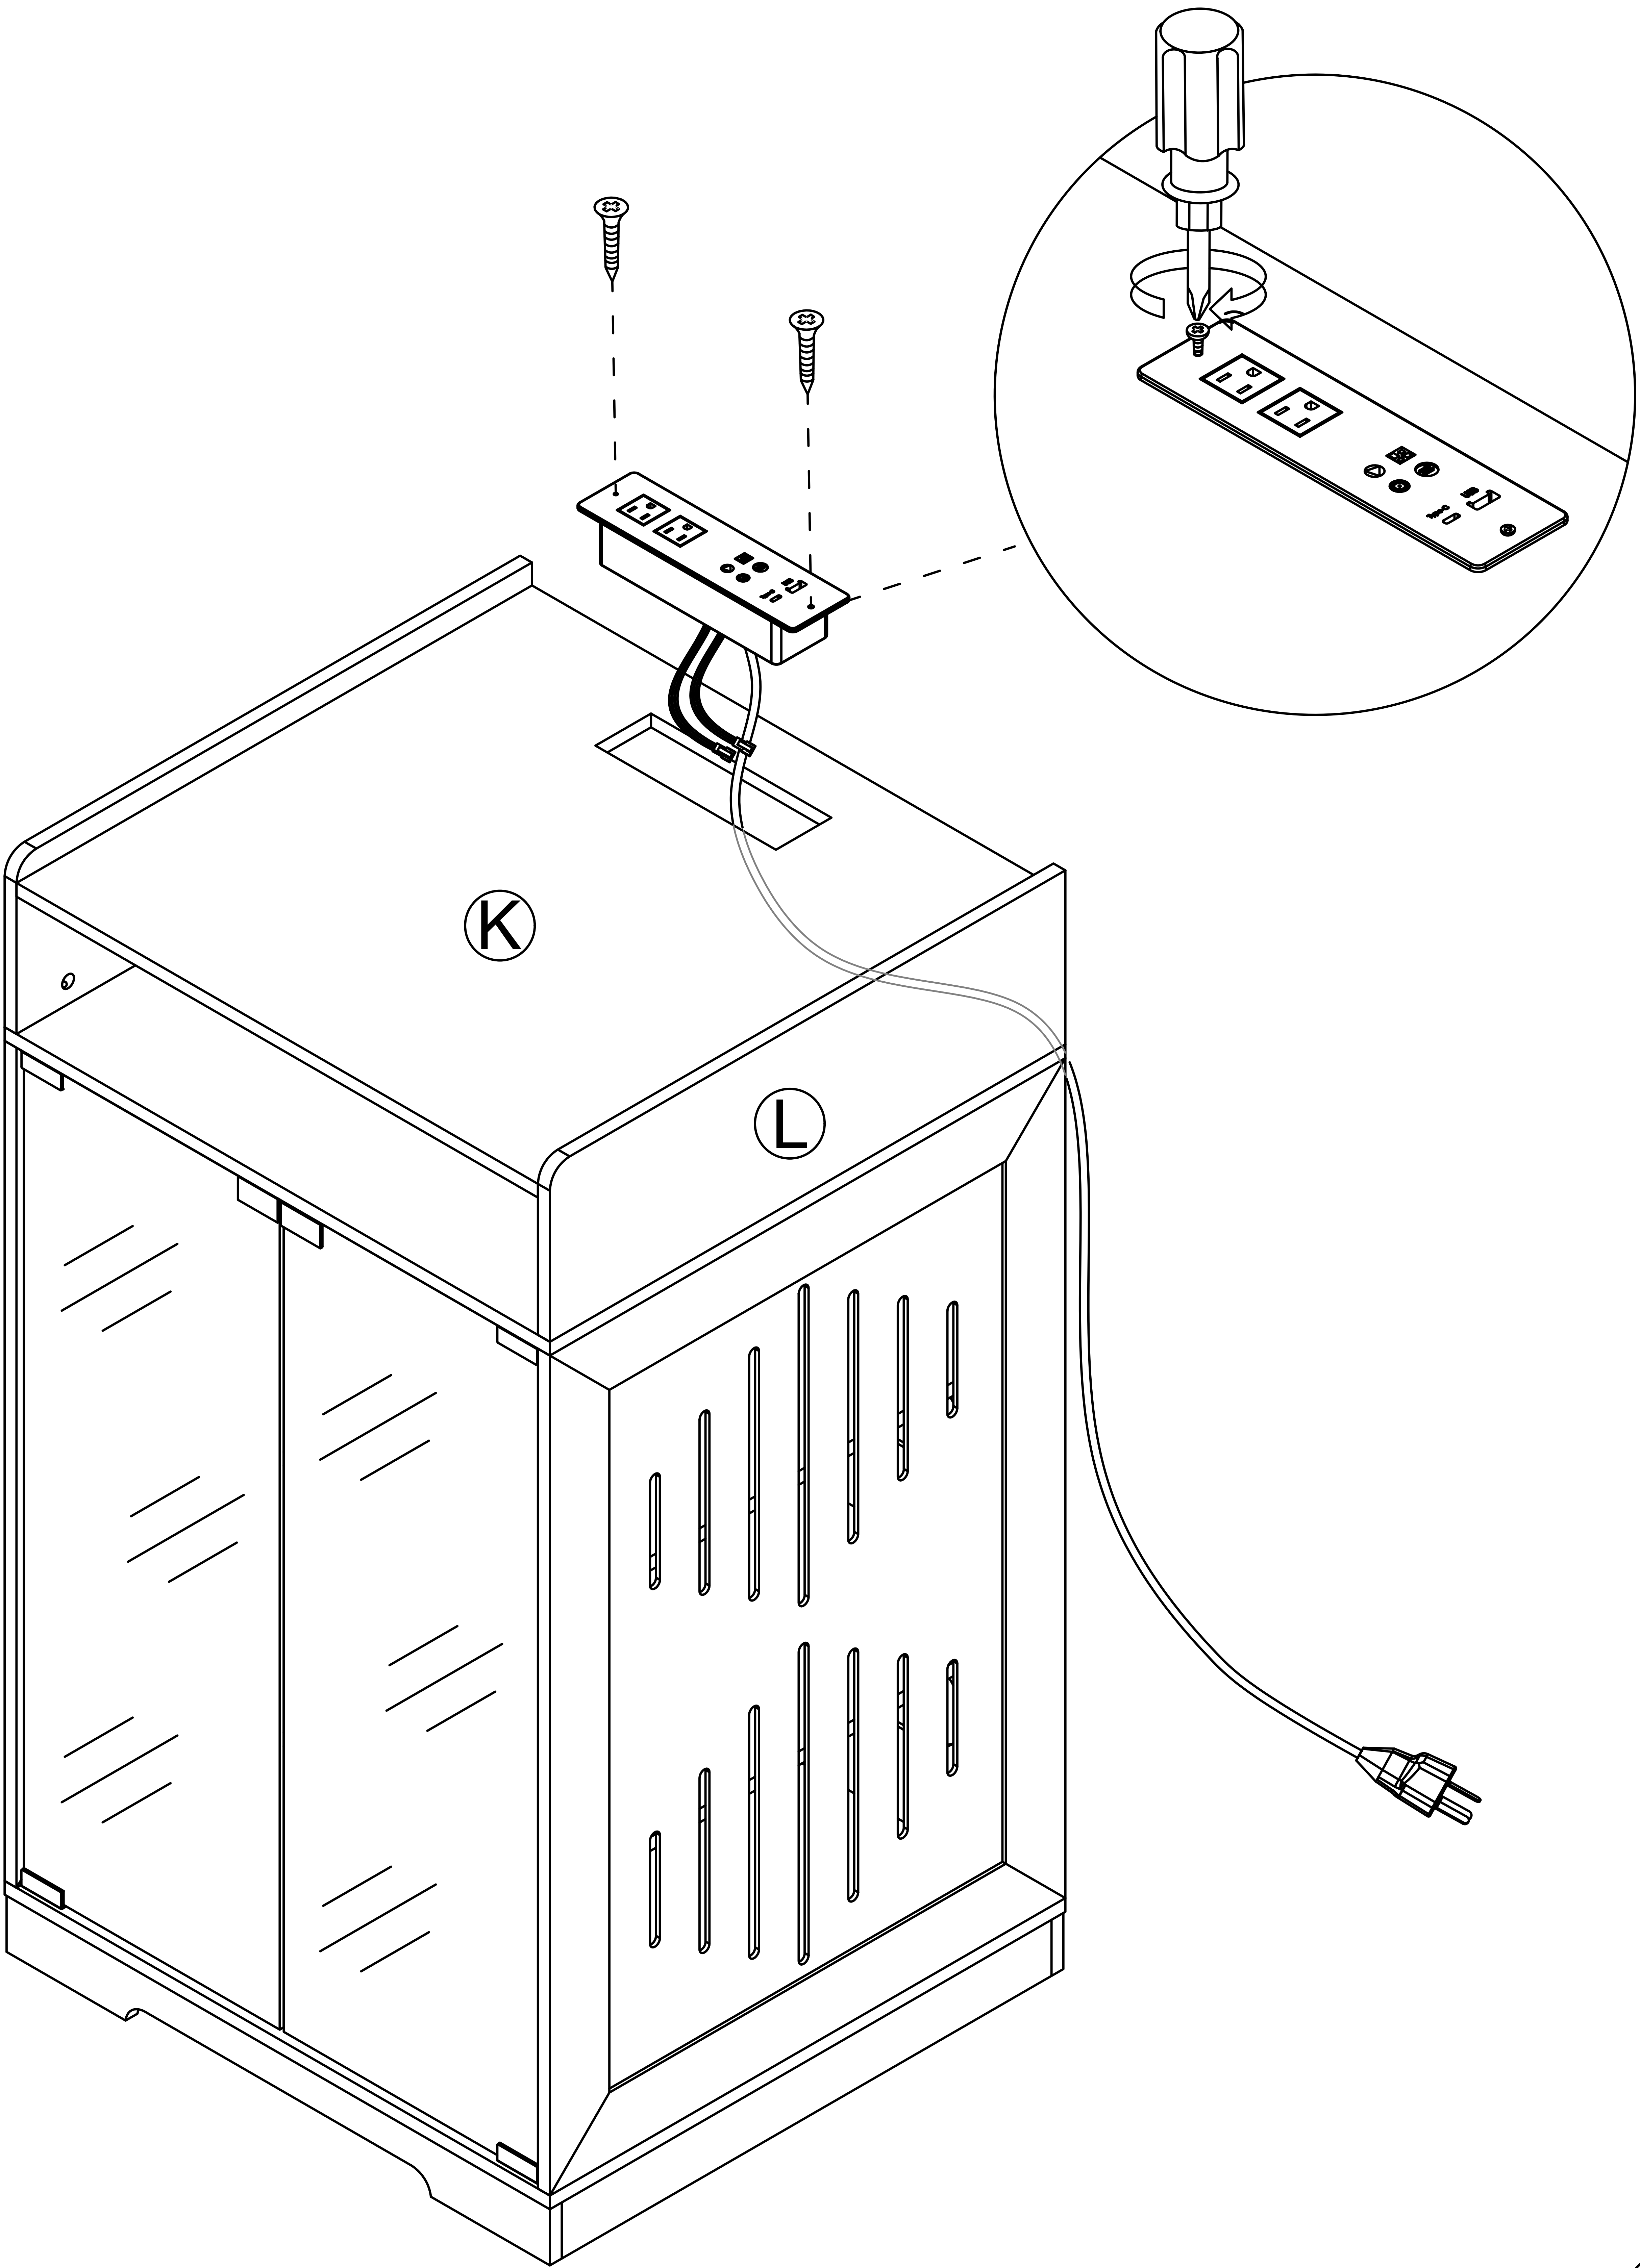


Step 25


- 7

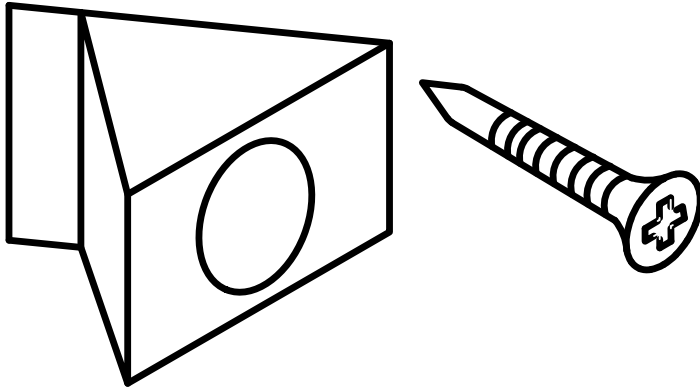



x10
- 8

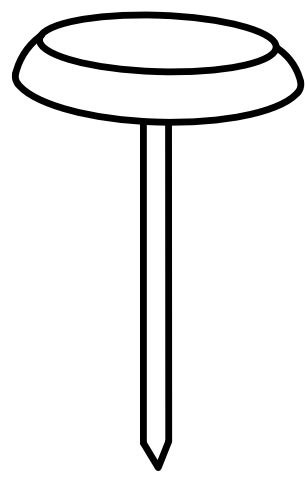

x4

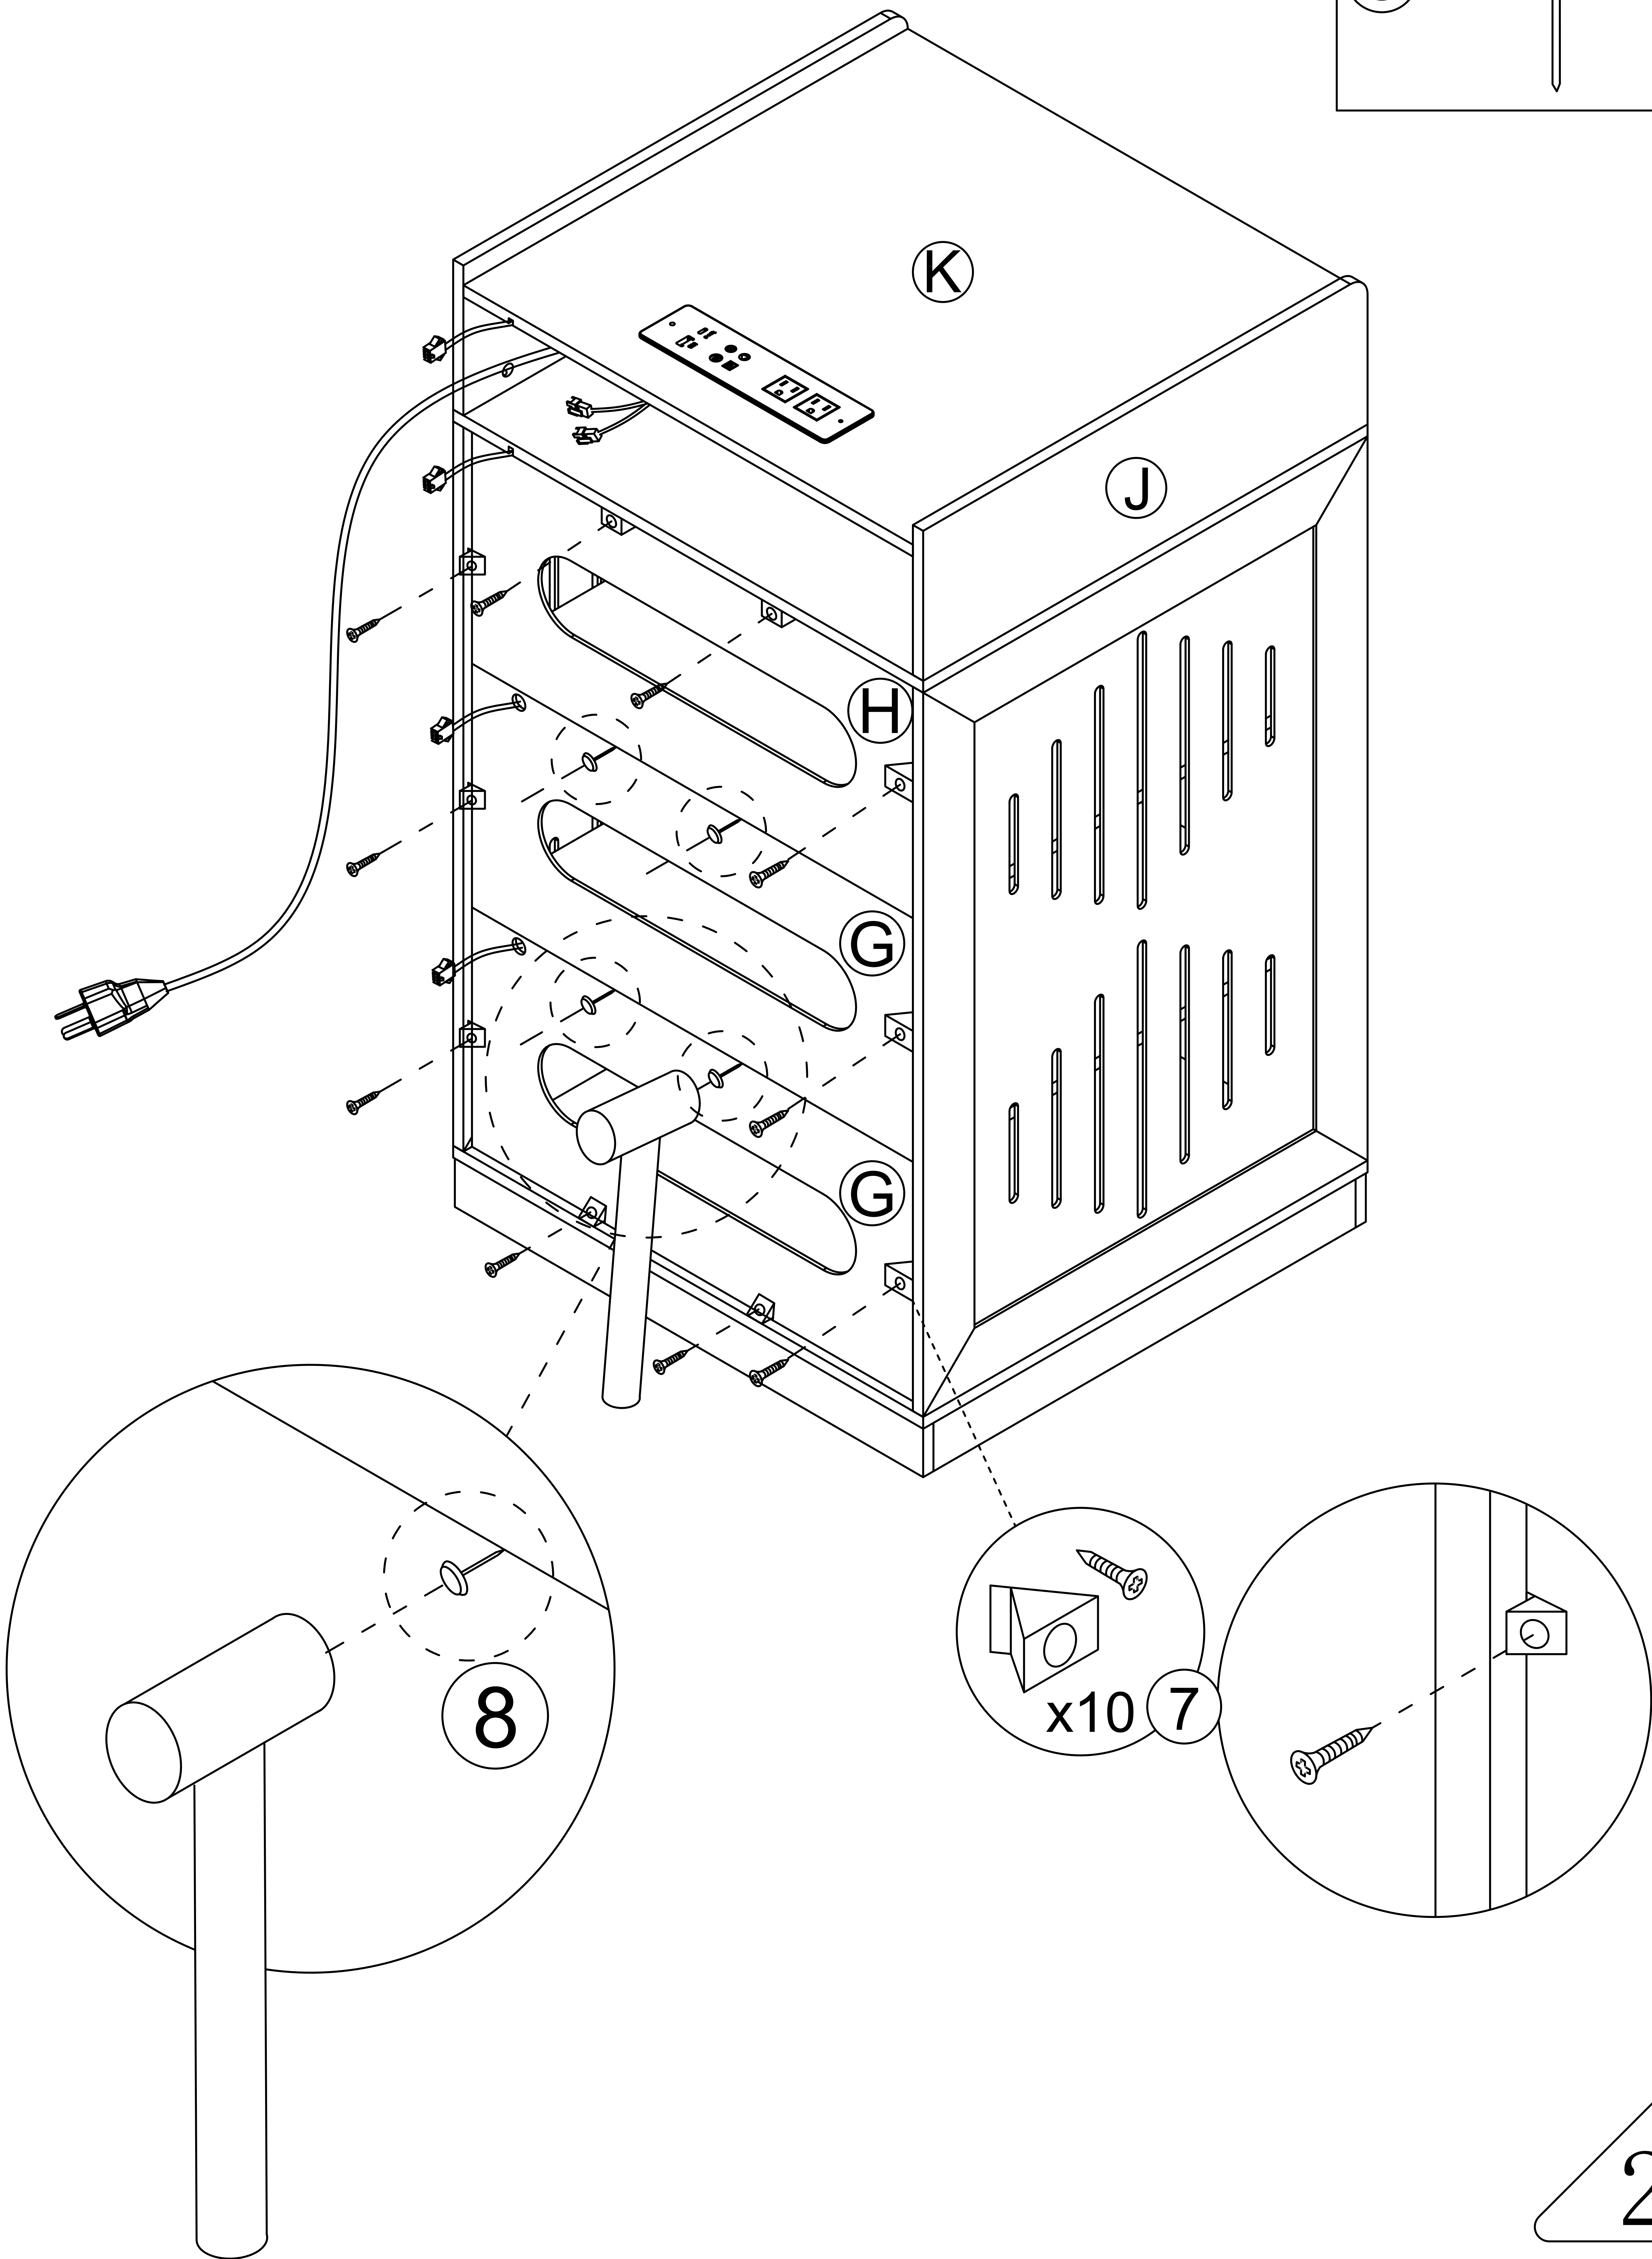


Step 26

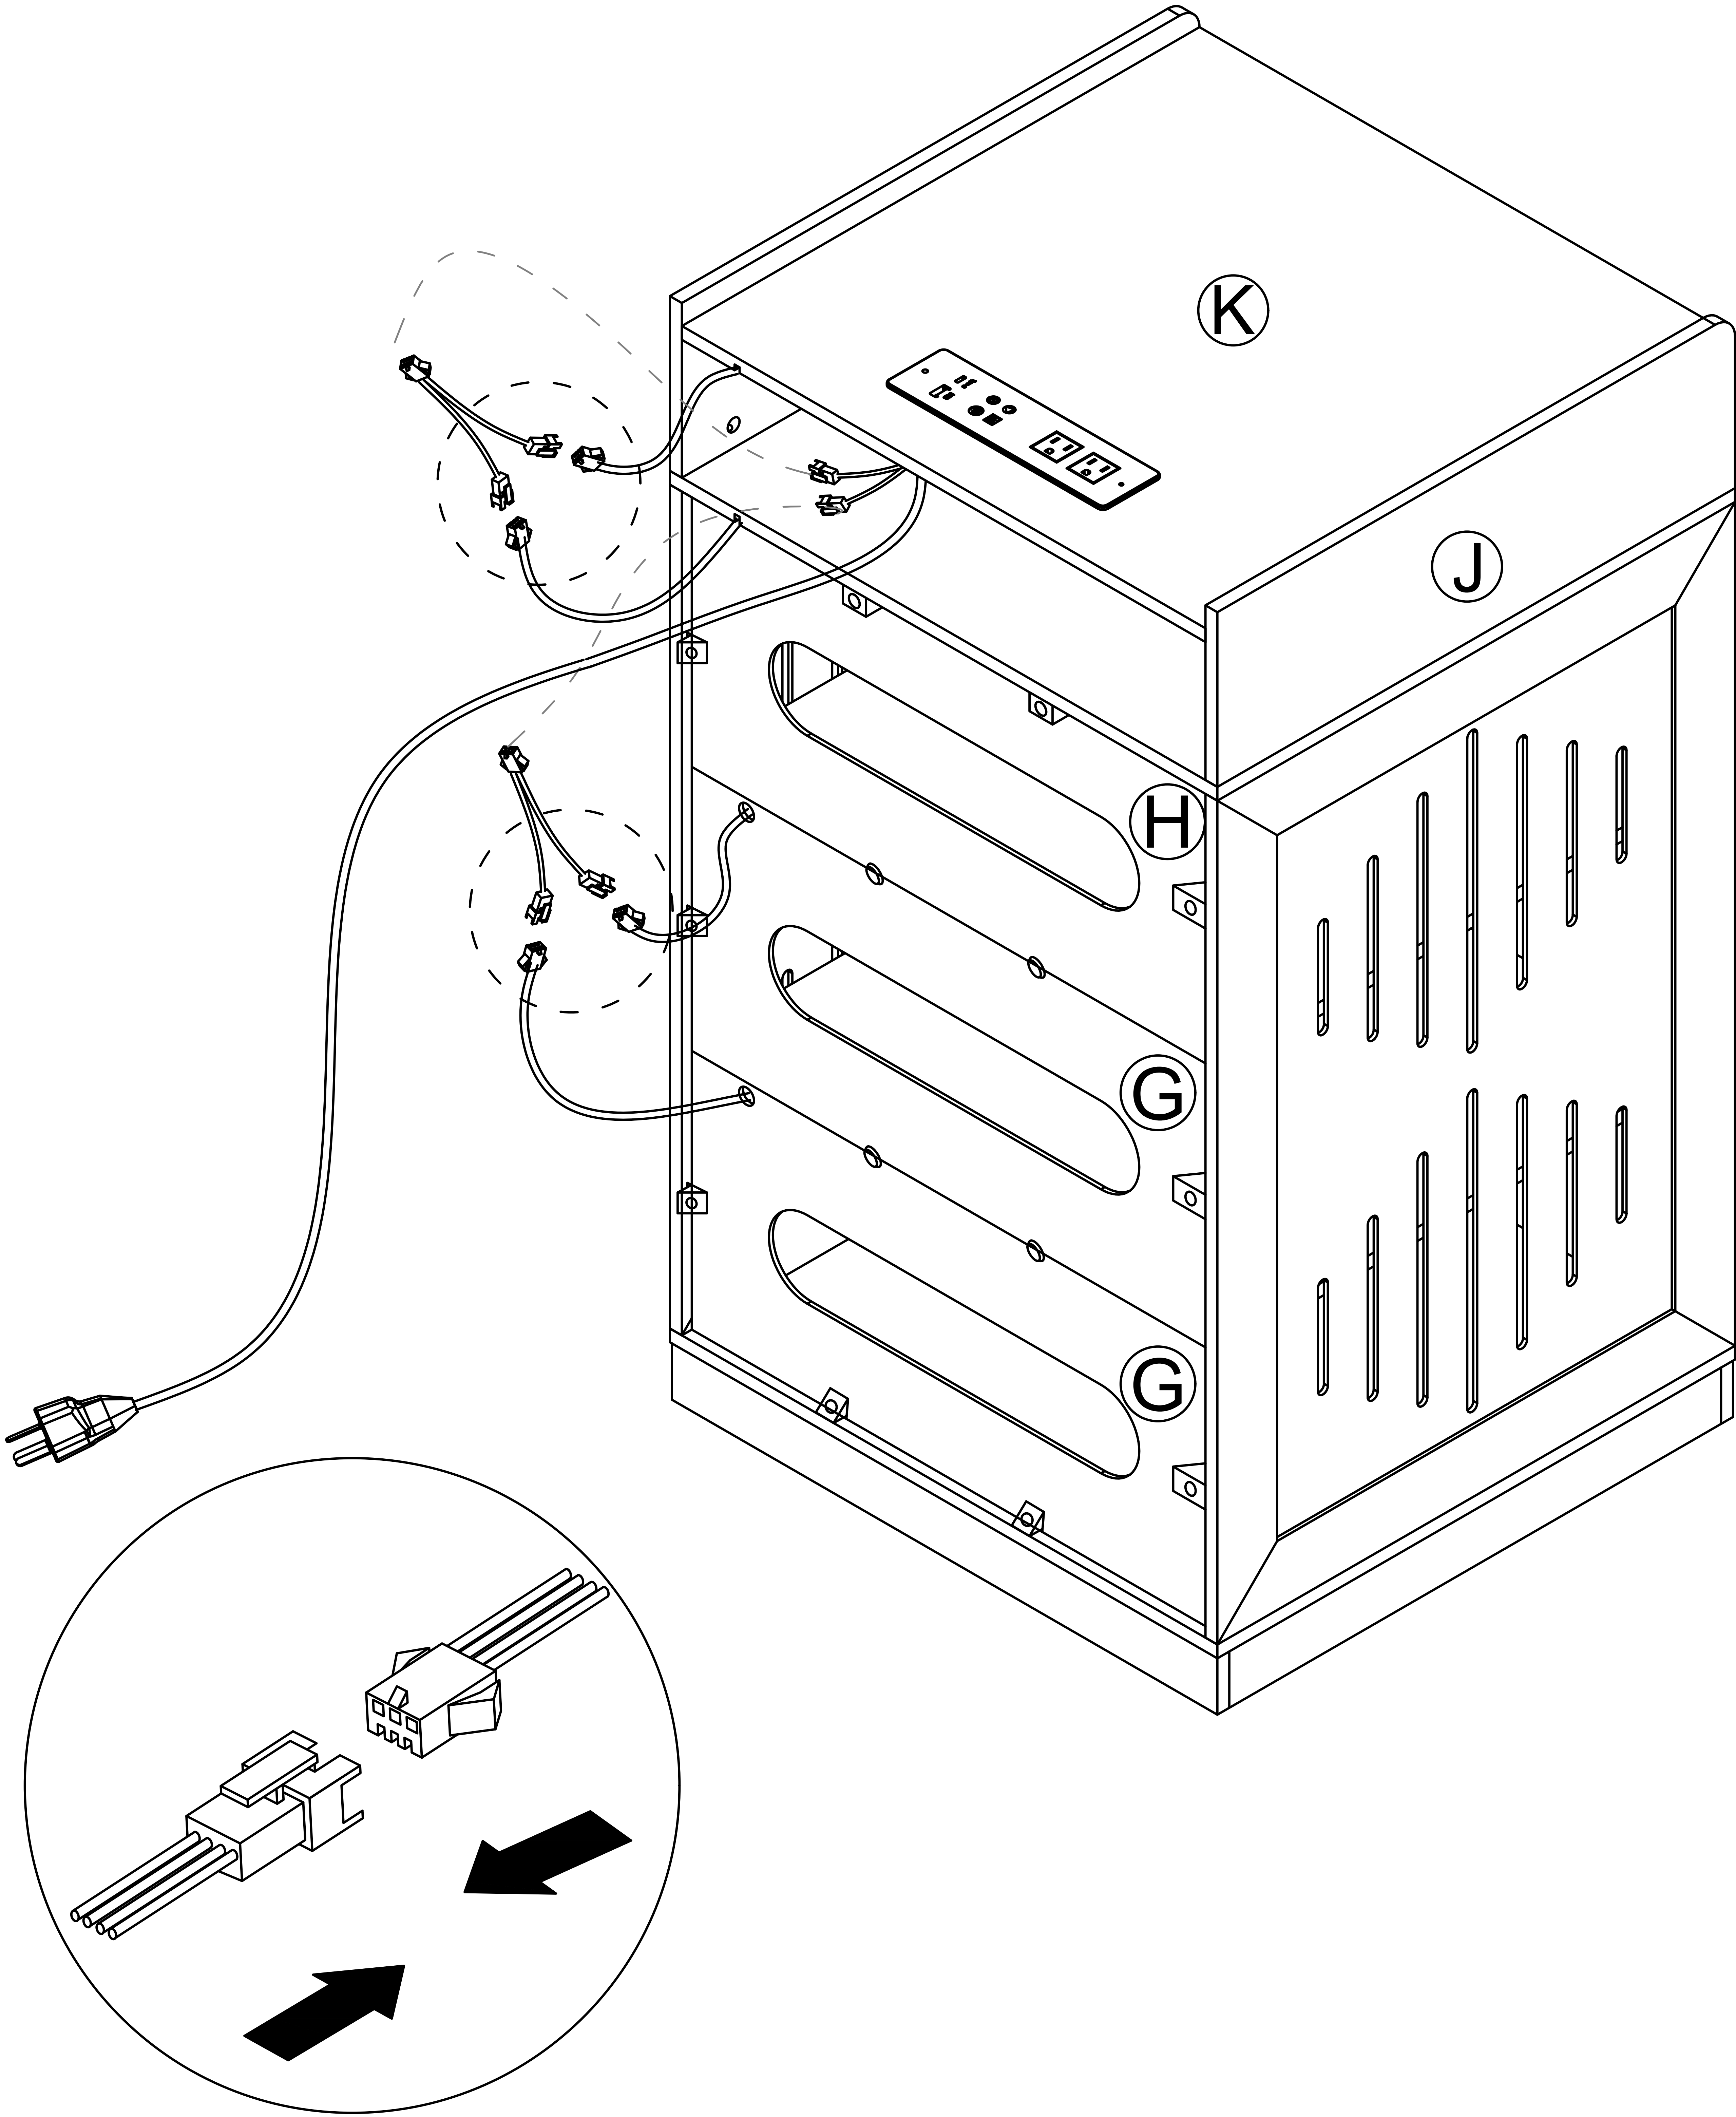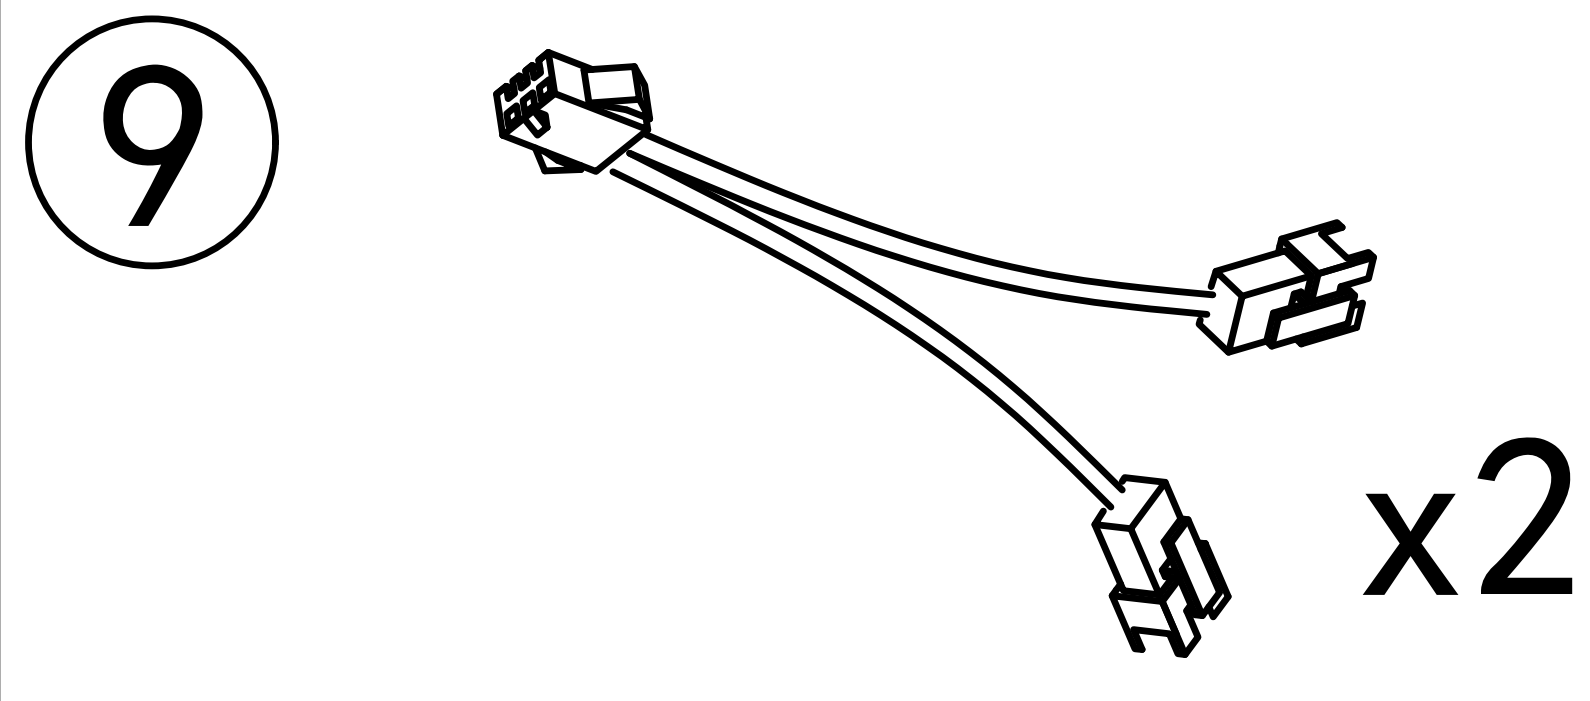



Step 27

10

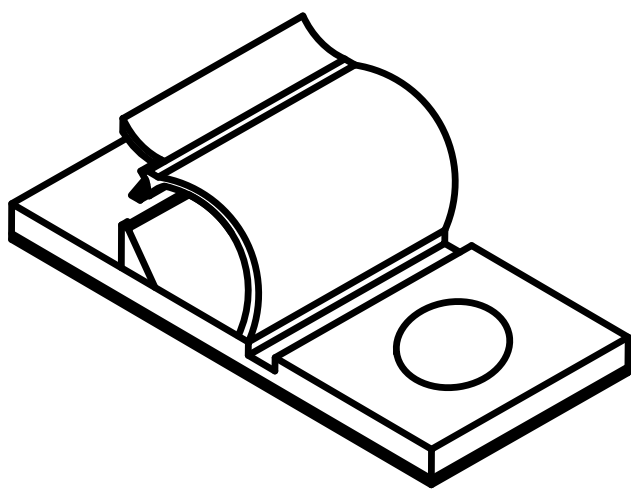

x3


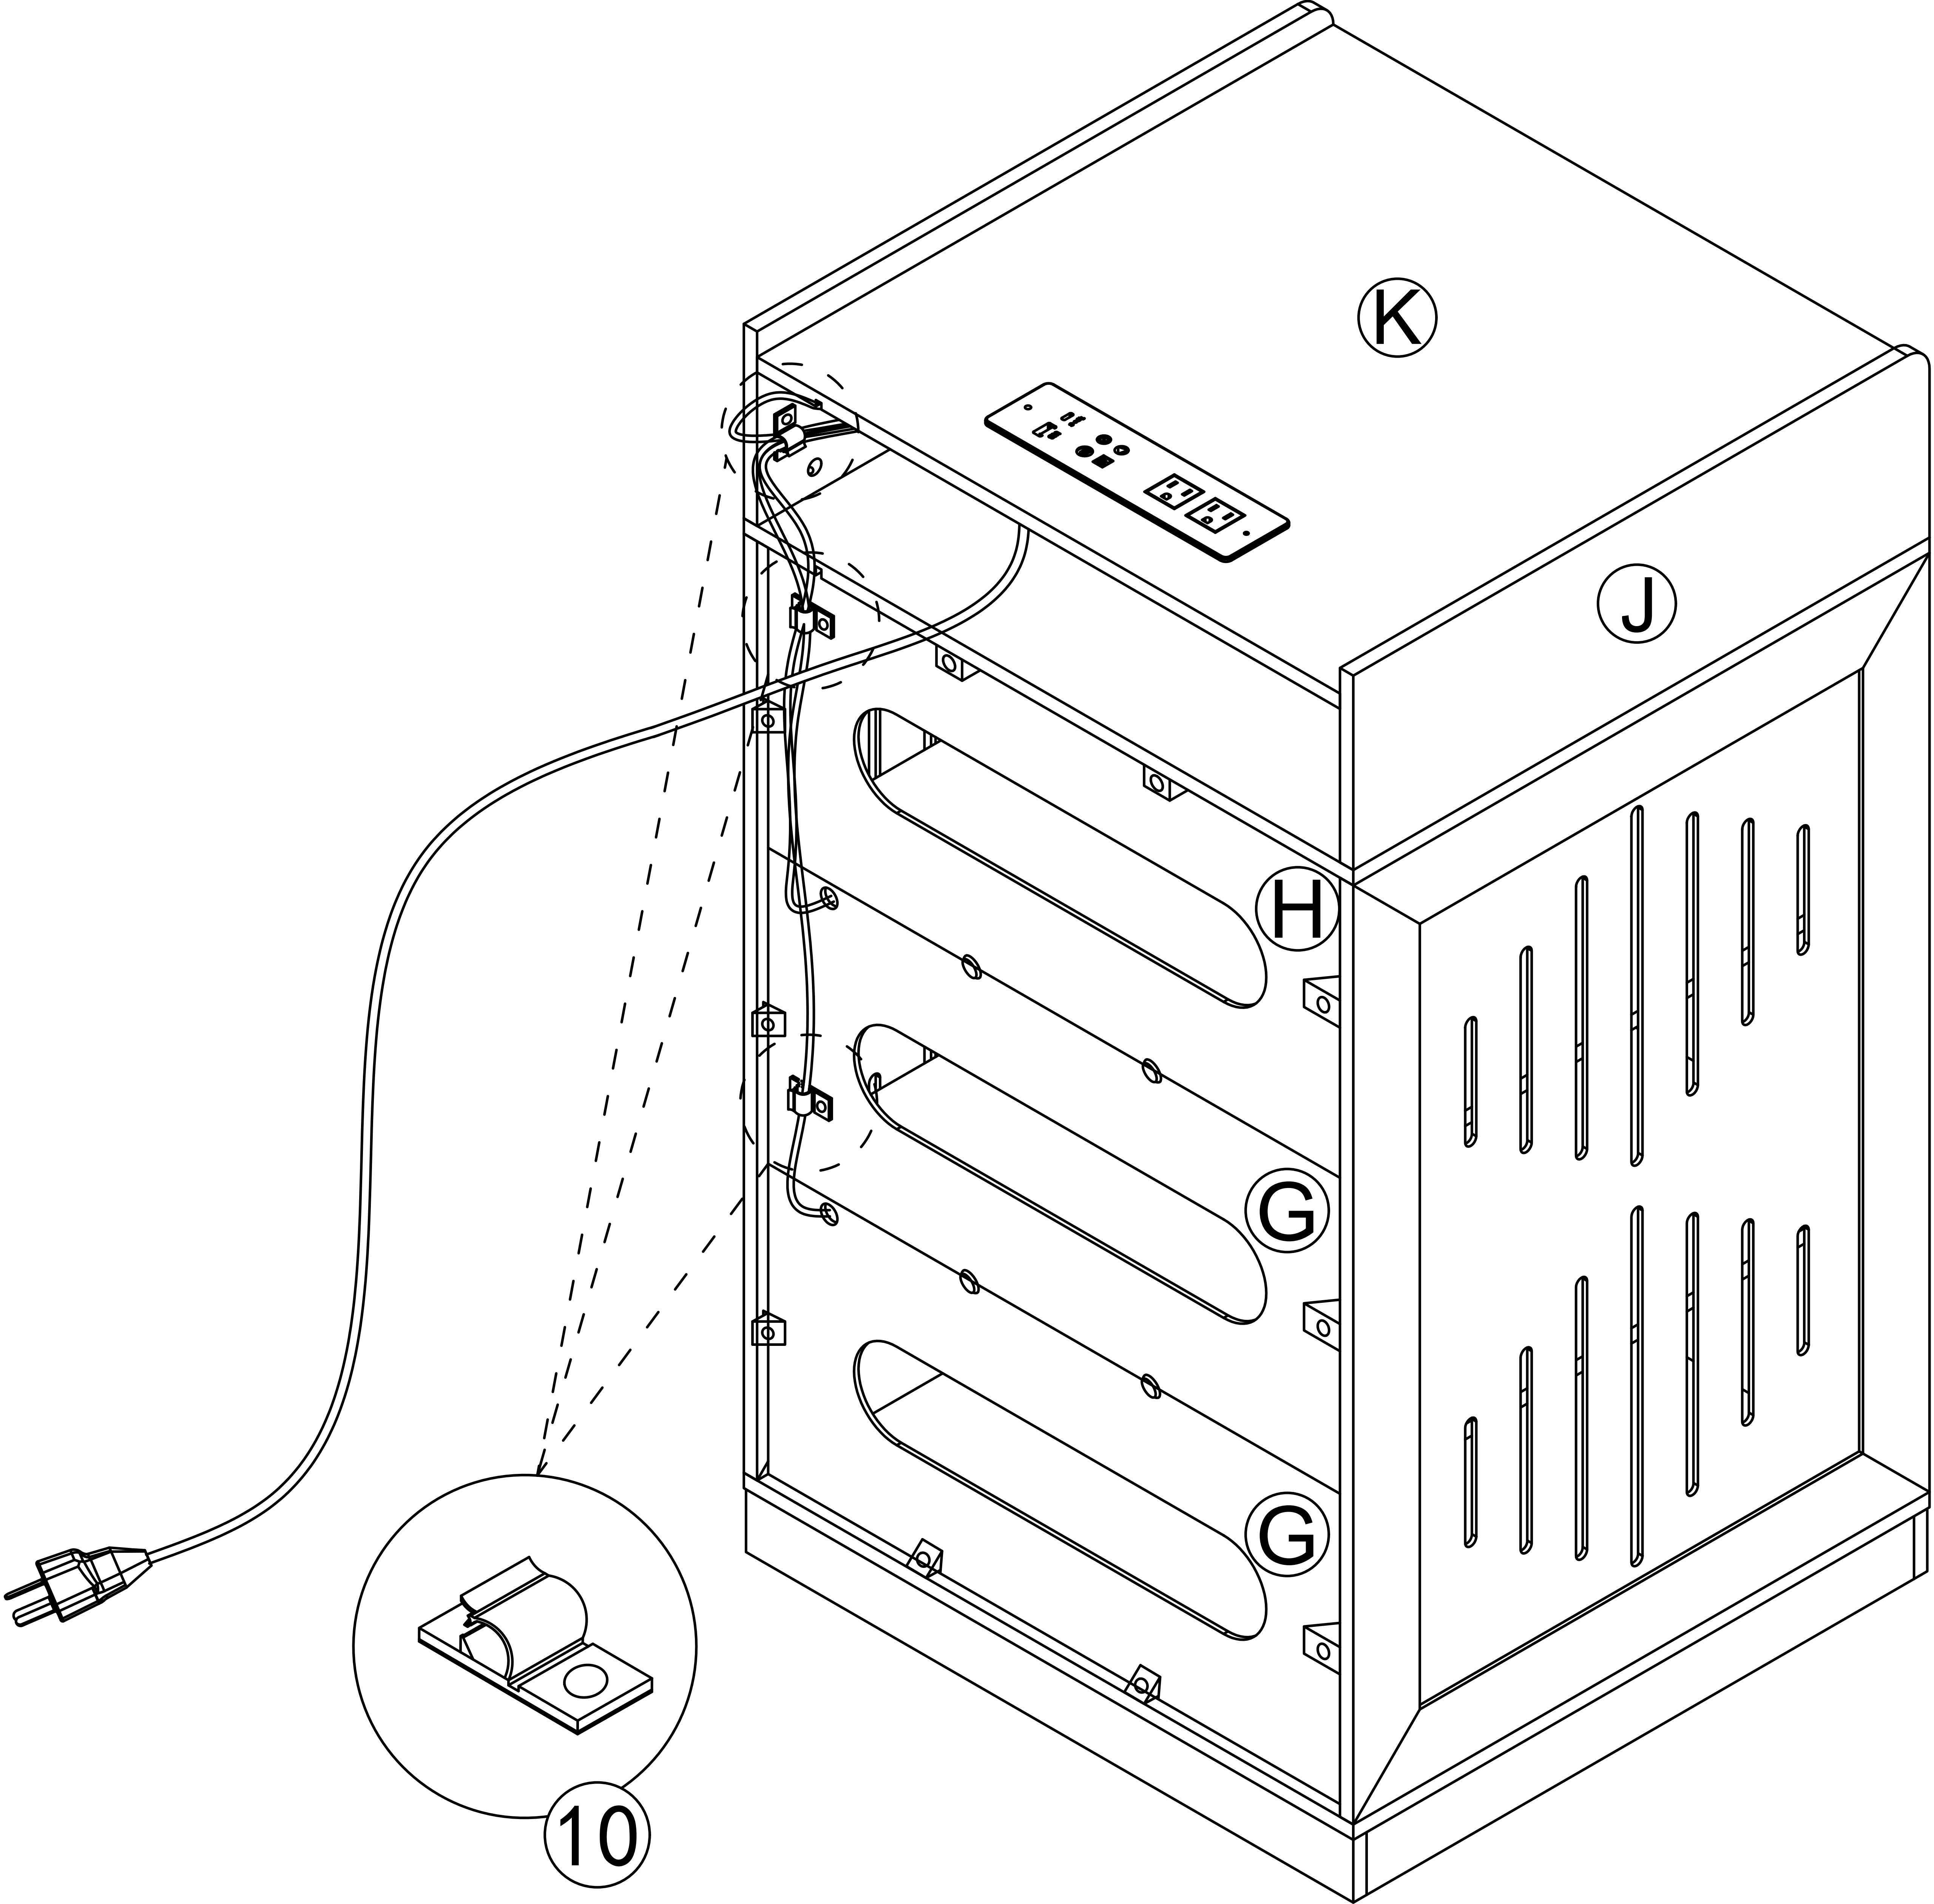


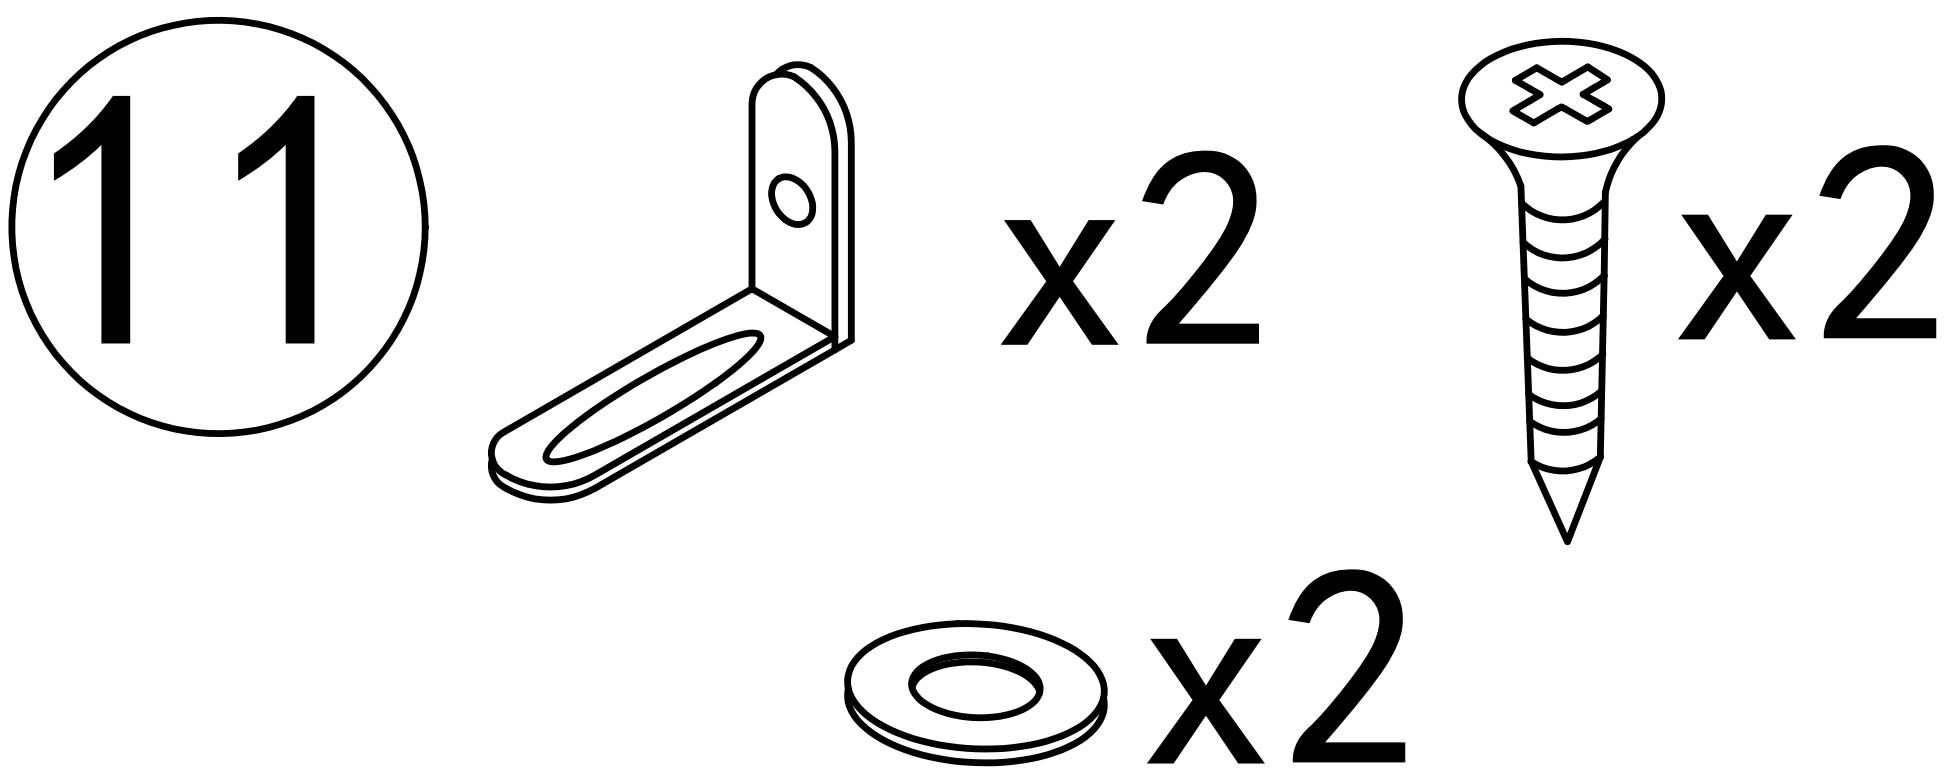



Install as required

Install the anti fall hardware on the cabinet as shown in the picture first

3.5x14mm


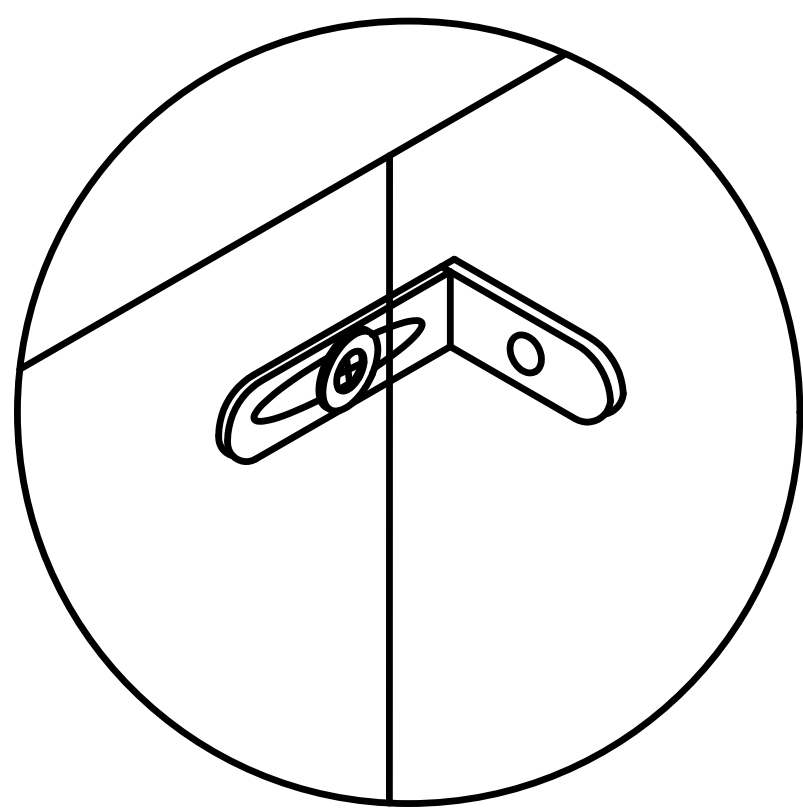
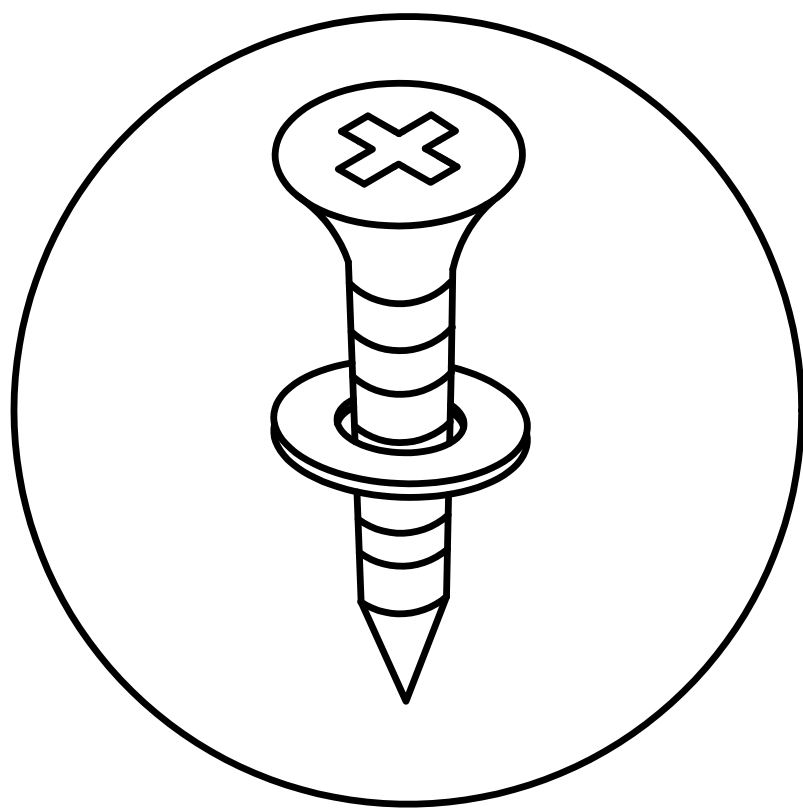


Then mark the wall with a pen through the holes in the anti-fall hardware

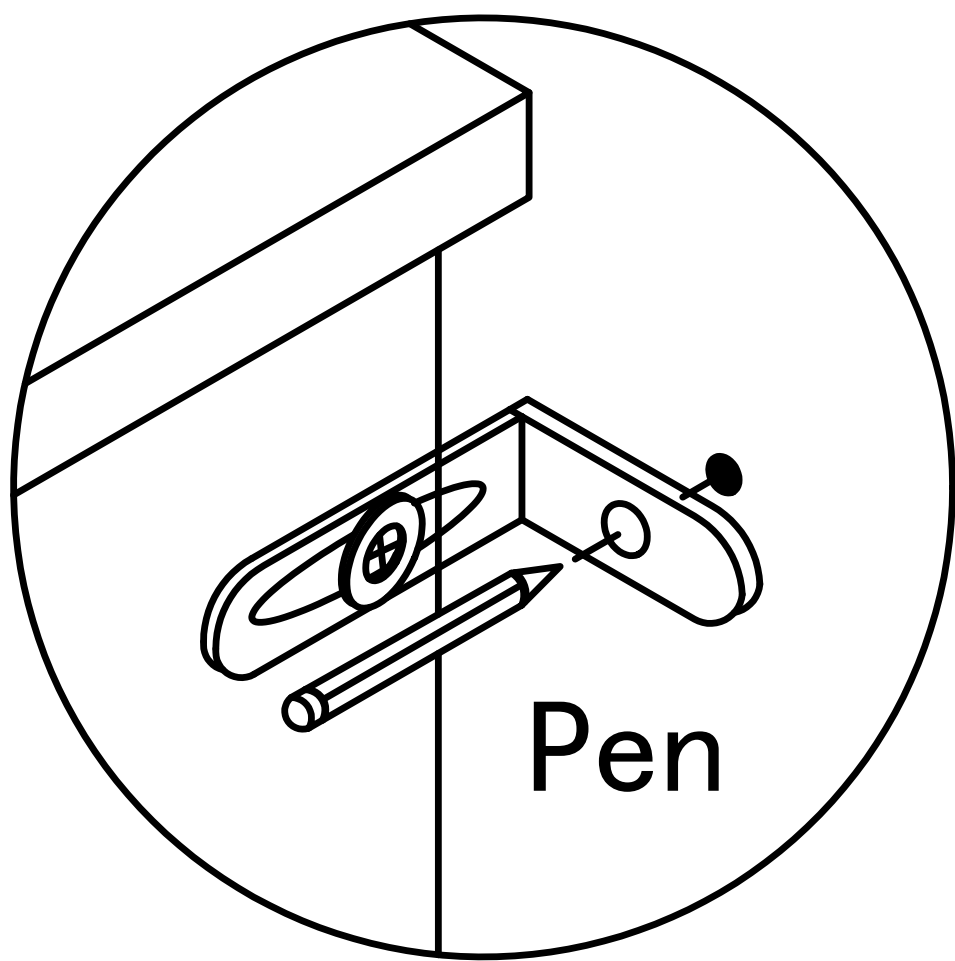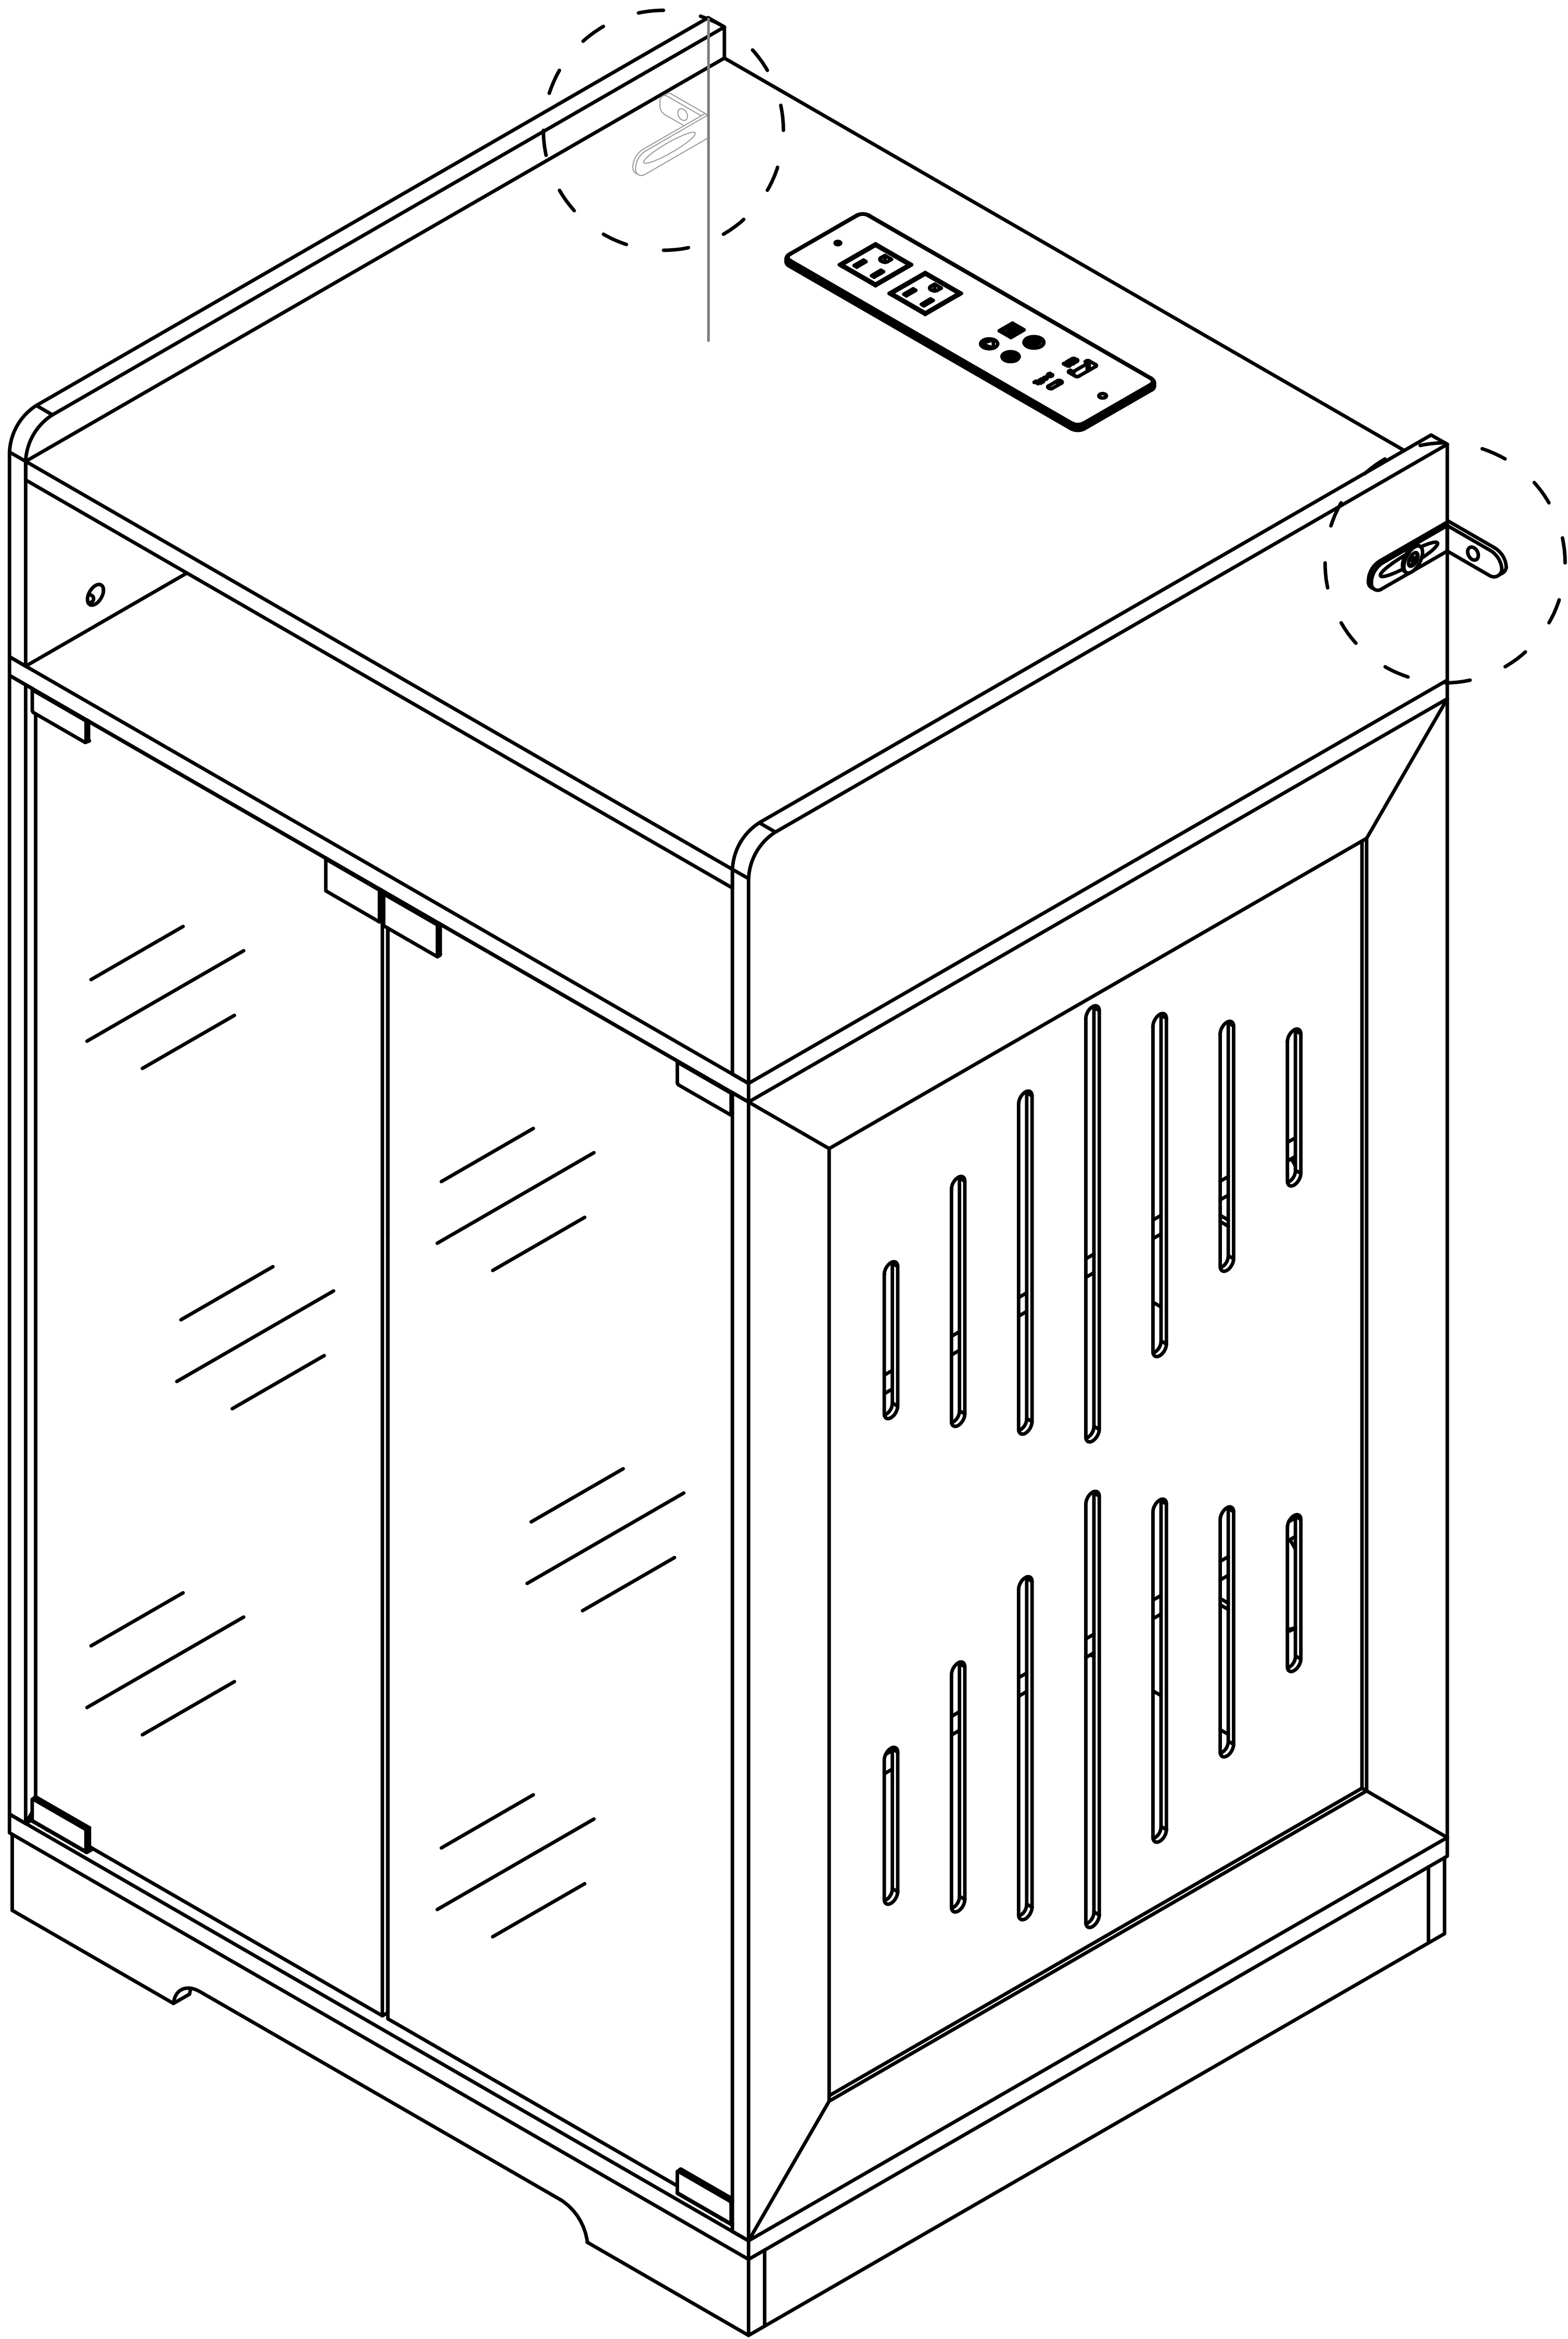


Step 29

Wall Mount

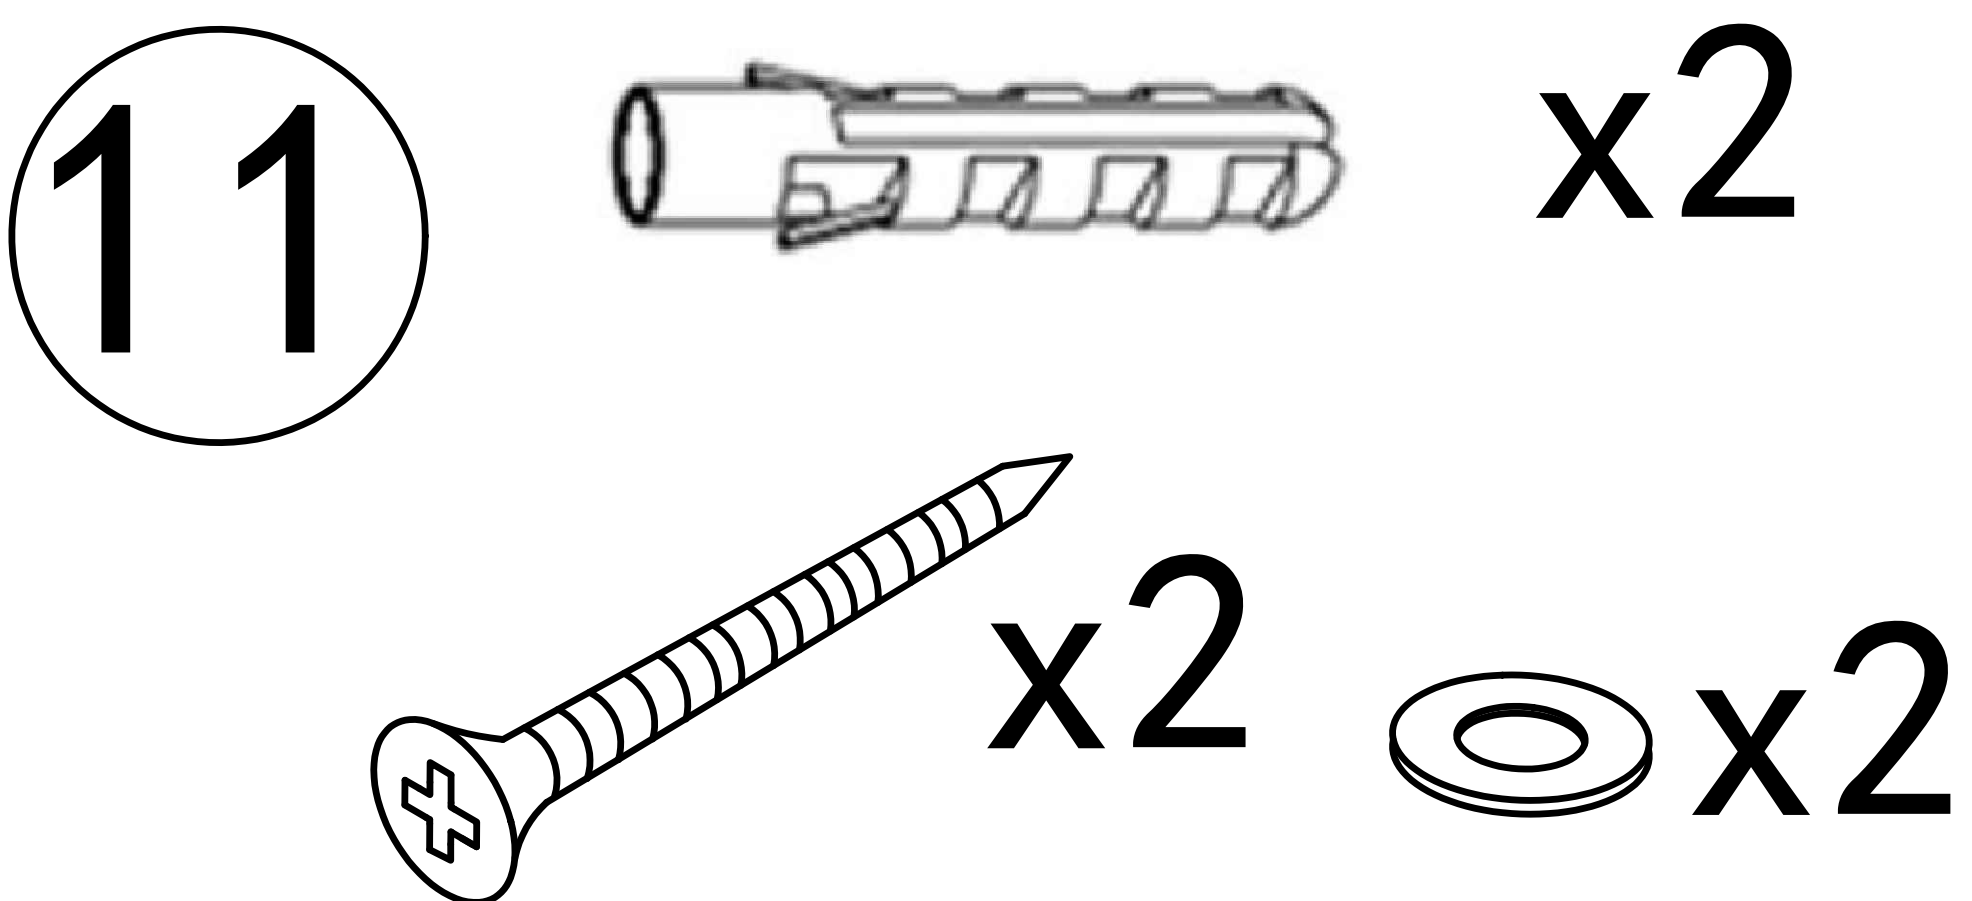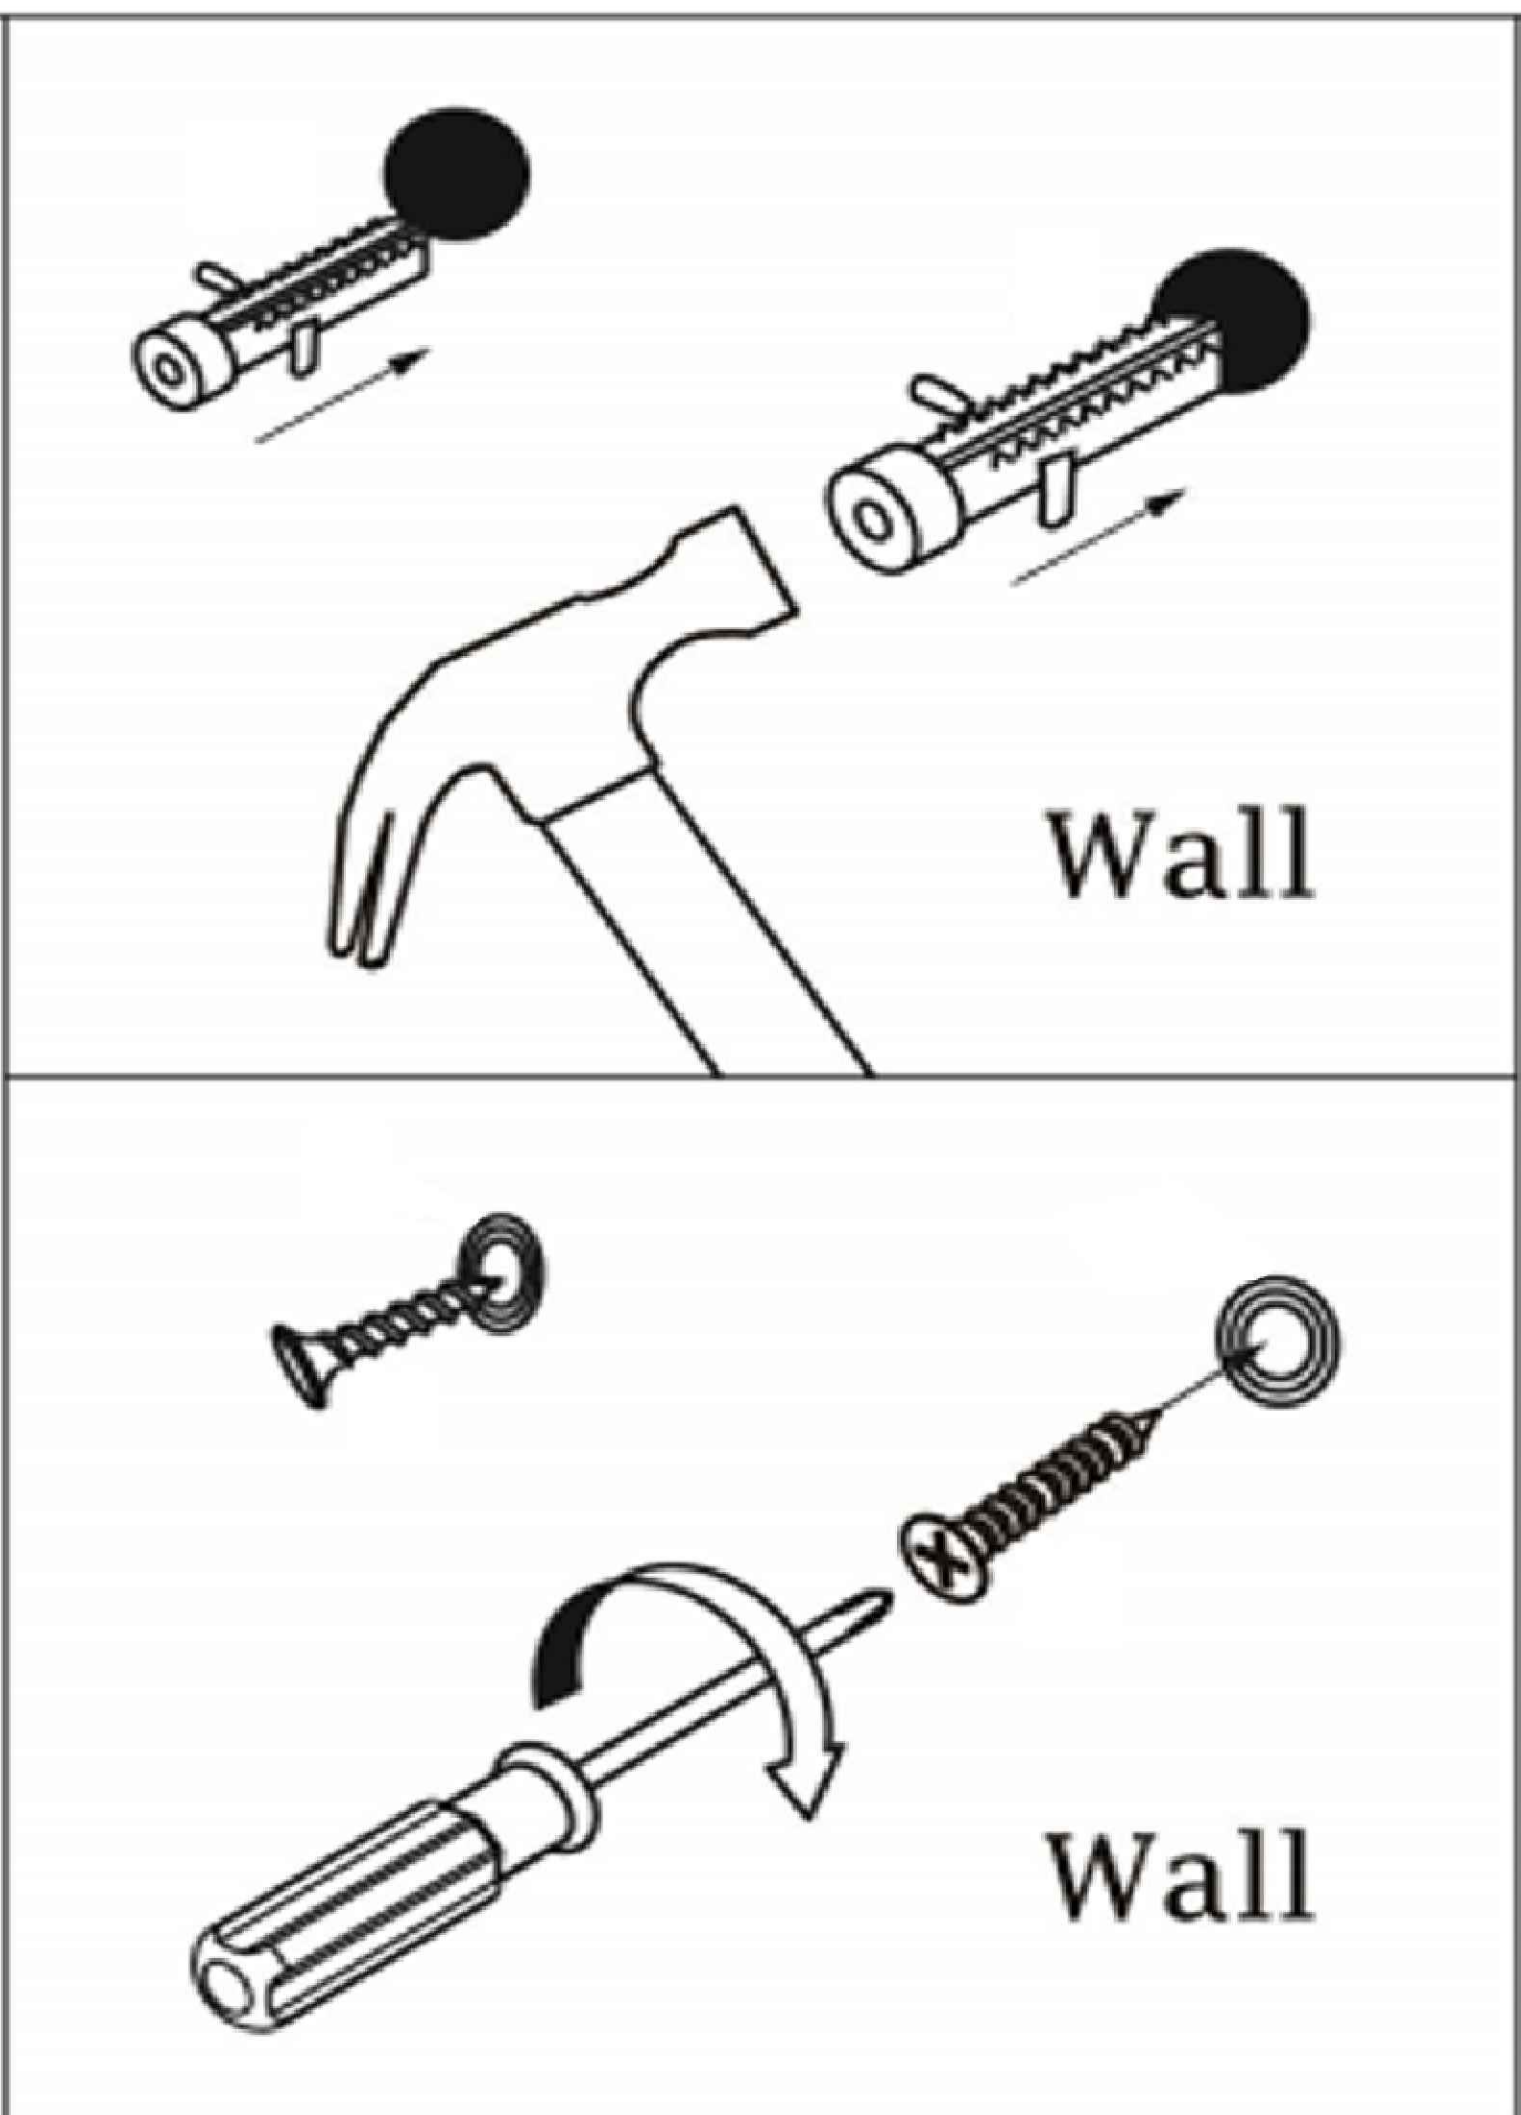
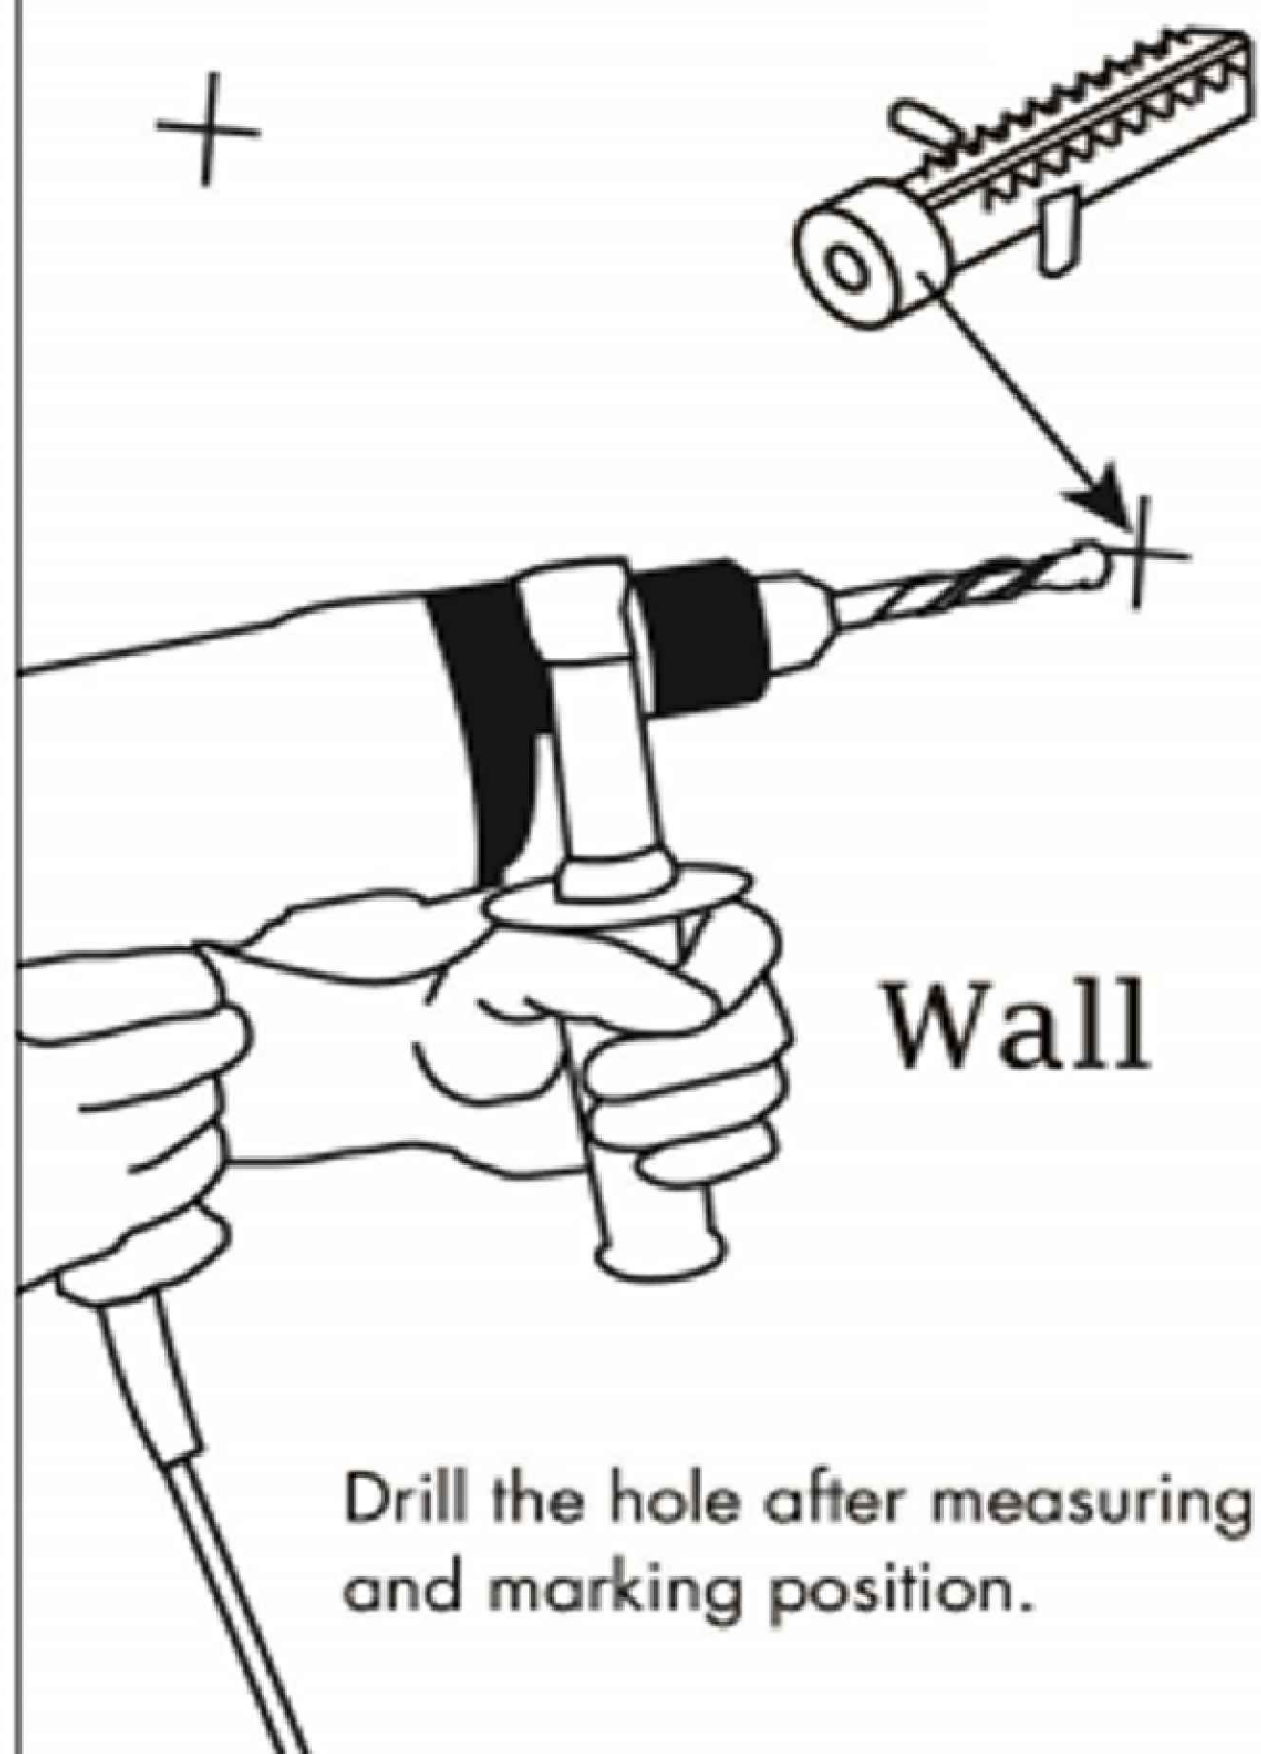


Drill the hole with an electric drill and punch in the colloidal particles

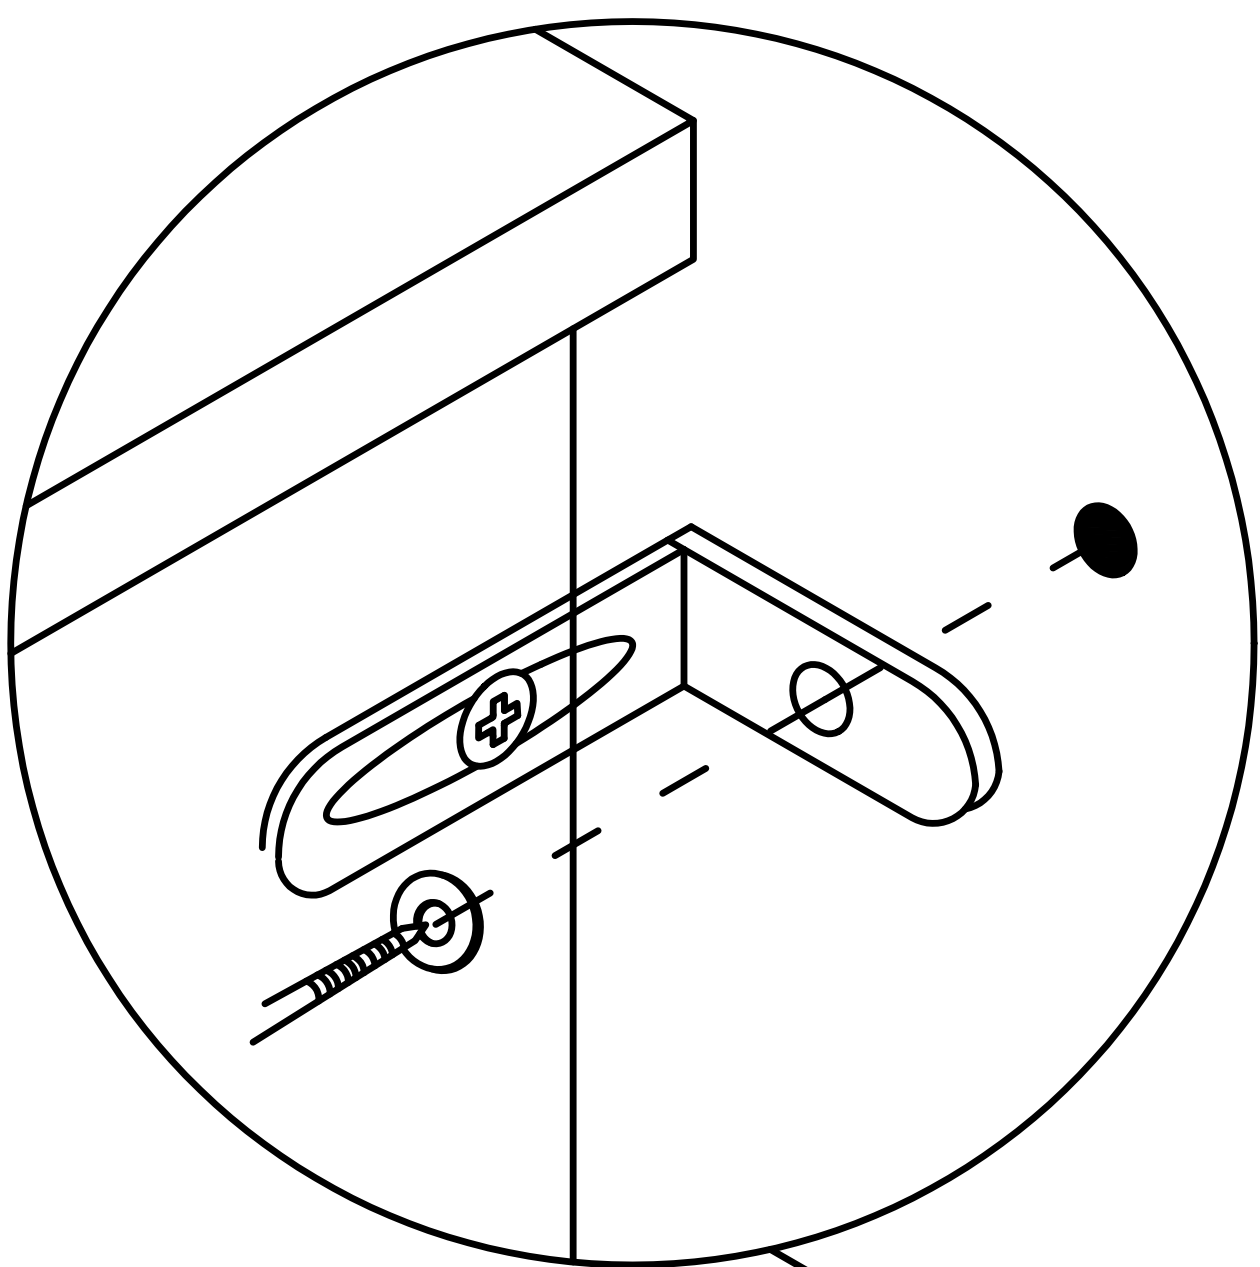

Fix the table to the wall

4x45mm

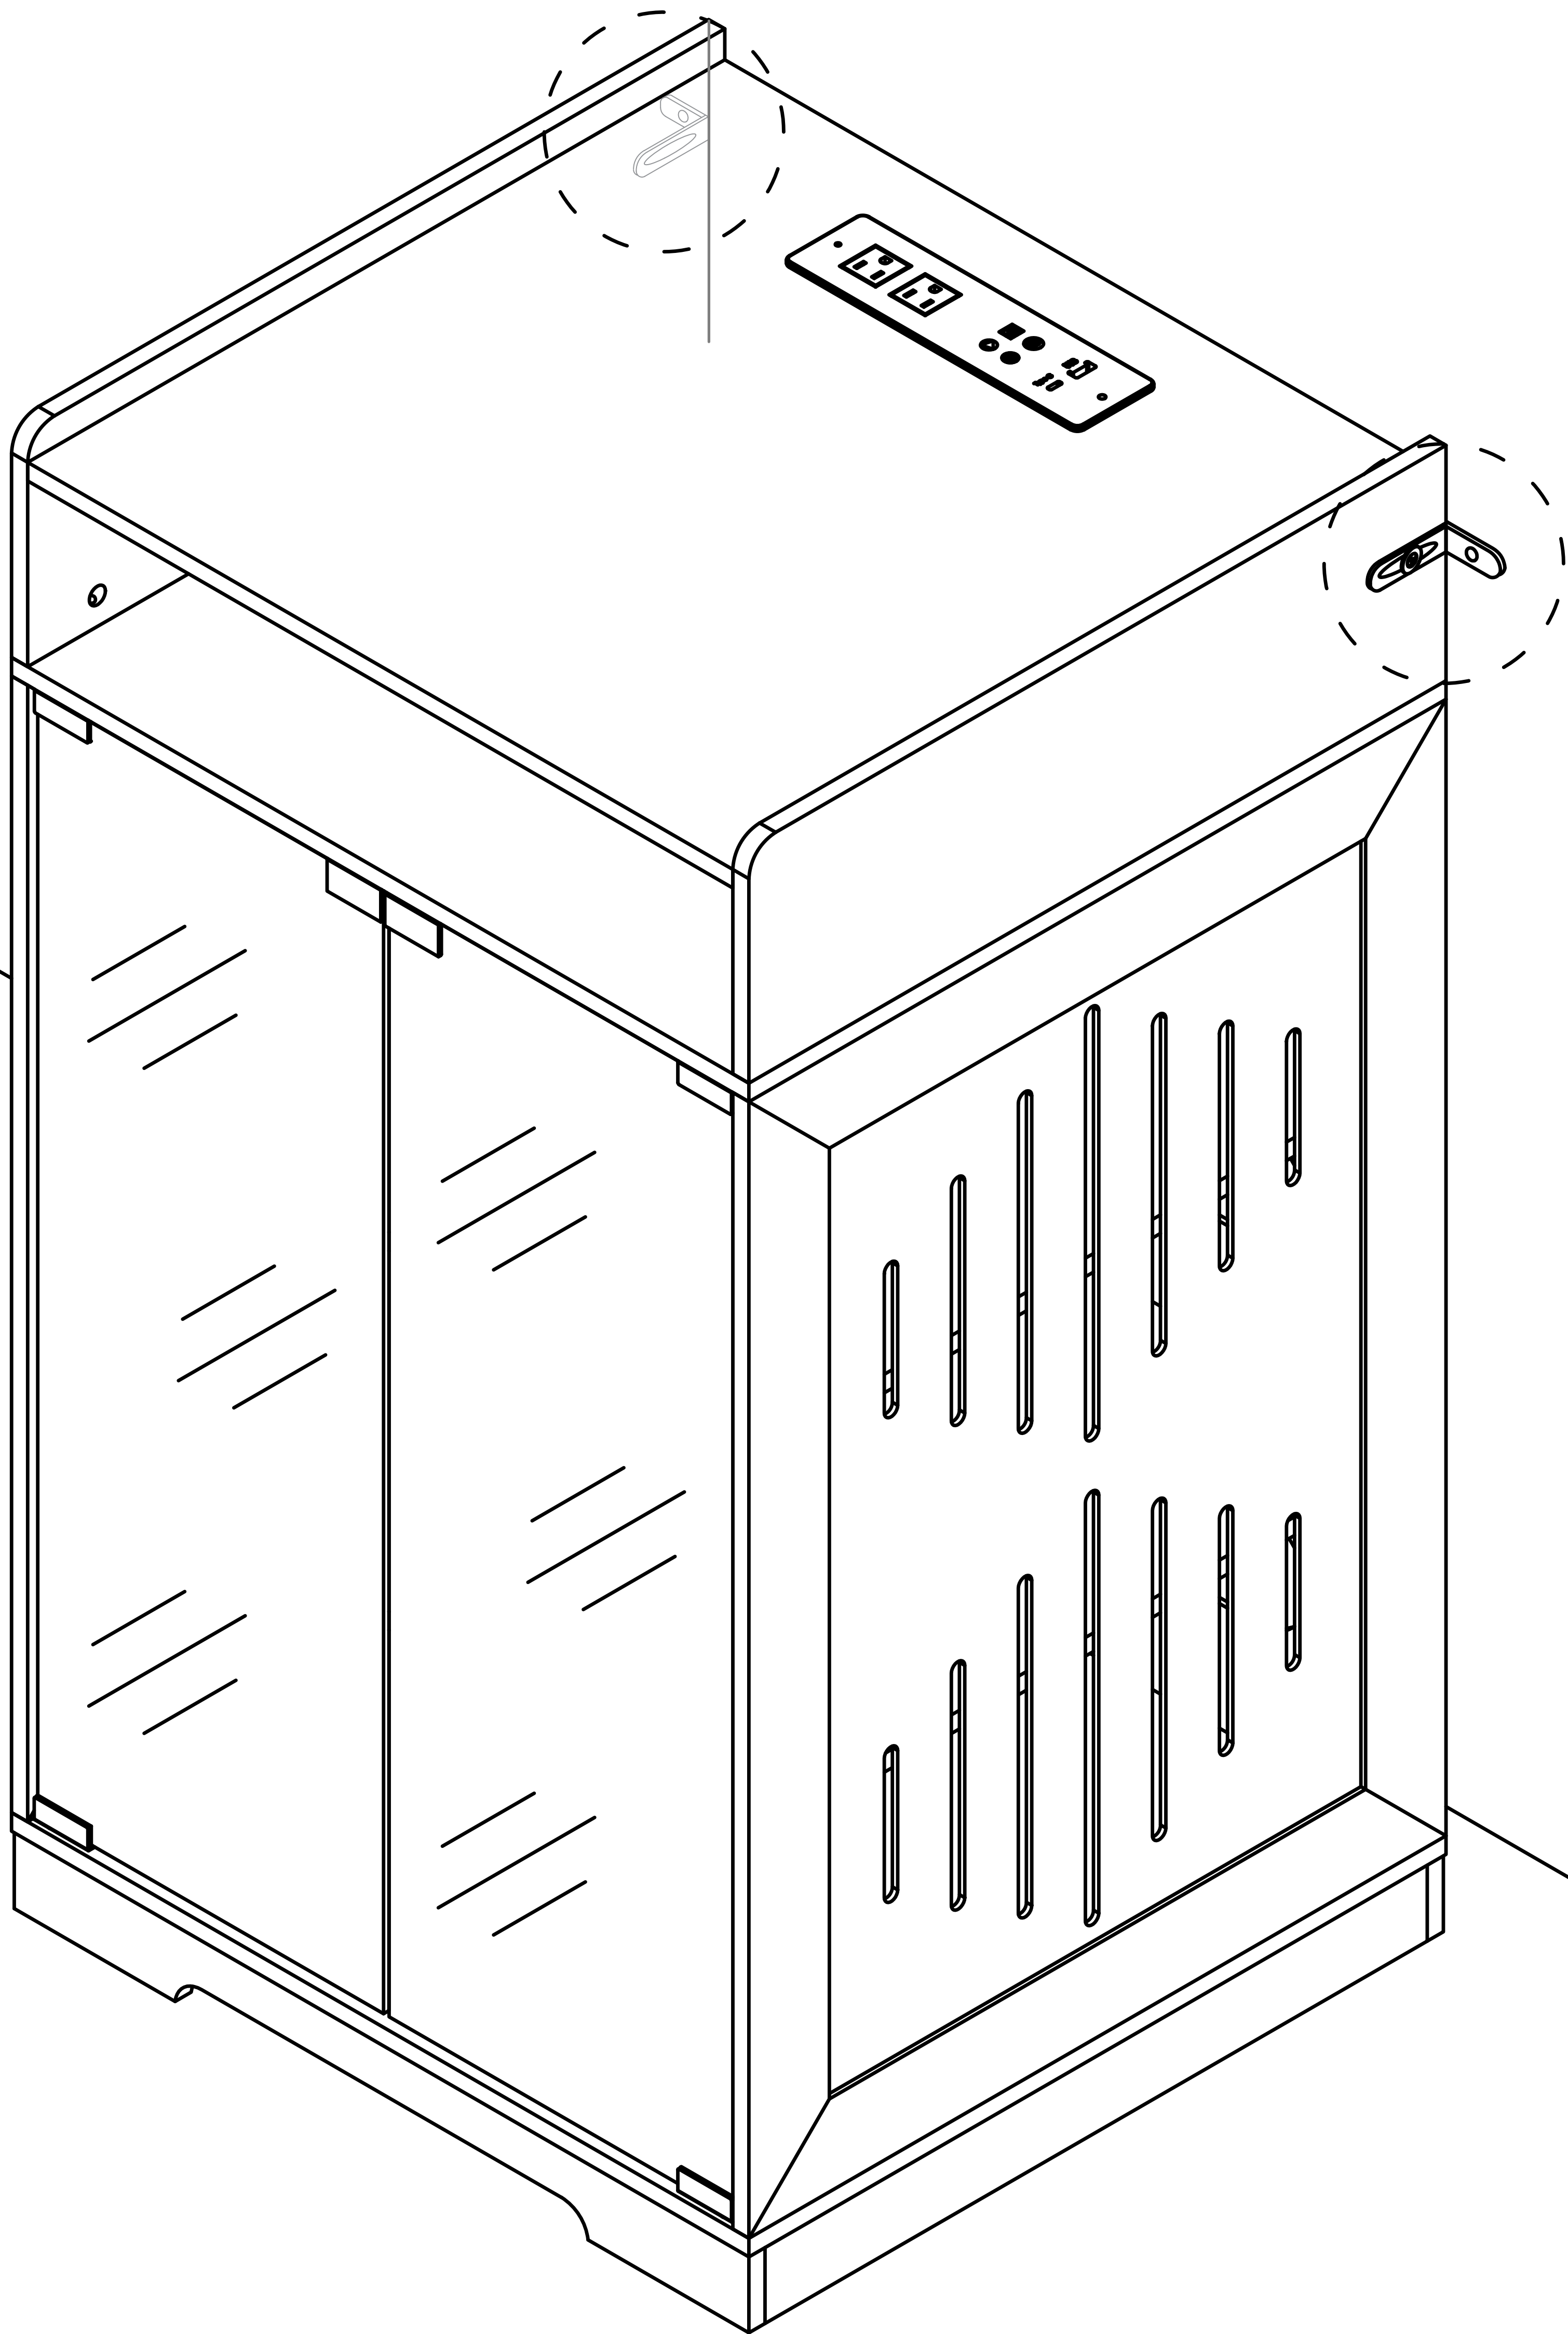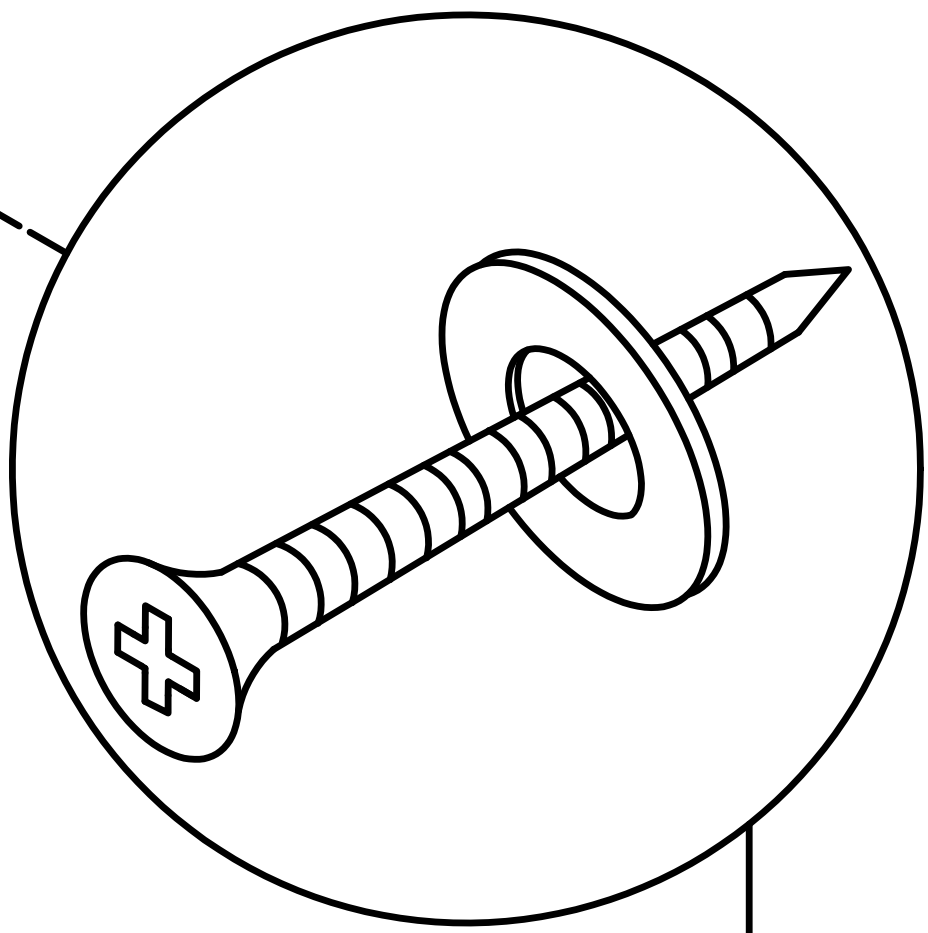



User's Guide

A29

Thank you for purchasing this product.

To use this product, please connect it to a power source.


Please use if the product works normally after connecting to power.

Introduction

The box is an intelligent controller. It has 1 USB output port 1 Type-c port .


With 2 touch buttons, it can turn. ON/OFF the light, change light colors, and adjust the light luminance.it can and turn ON/OFF the induction function.

Operation

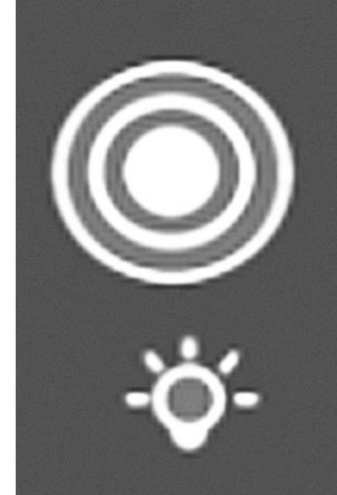


This touch button is used to turn on/off, change colors, and adjust brightness.

- A. Short touch -> lighting on -> short touch -> change light color -> short touch -> change light color -> short touch -> lighting off.
- B. Long touch -> adjust the luminance. (The brightness of each color can be adjusted individually)

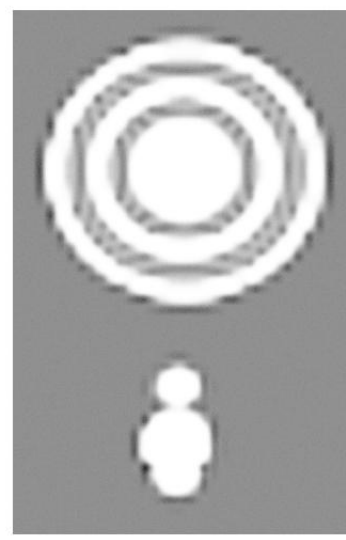

This touch button is used to turn on/off the induction function.

- A. Short touch to turn on the induction function. It can auto-turn on the light when people are close to the controller in 1 meters. It can auto power off the light when the body is far away from the controller after 30 seconds.
- B. Long touch to turn off the induction function.
- C. Note: When you touch the light button to change the light modes, the induction function will automatically turn off. It is best to turn on this function after selecting the light color and adjusting the brightness you want.

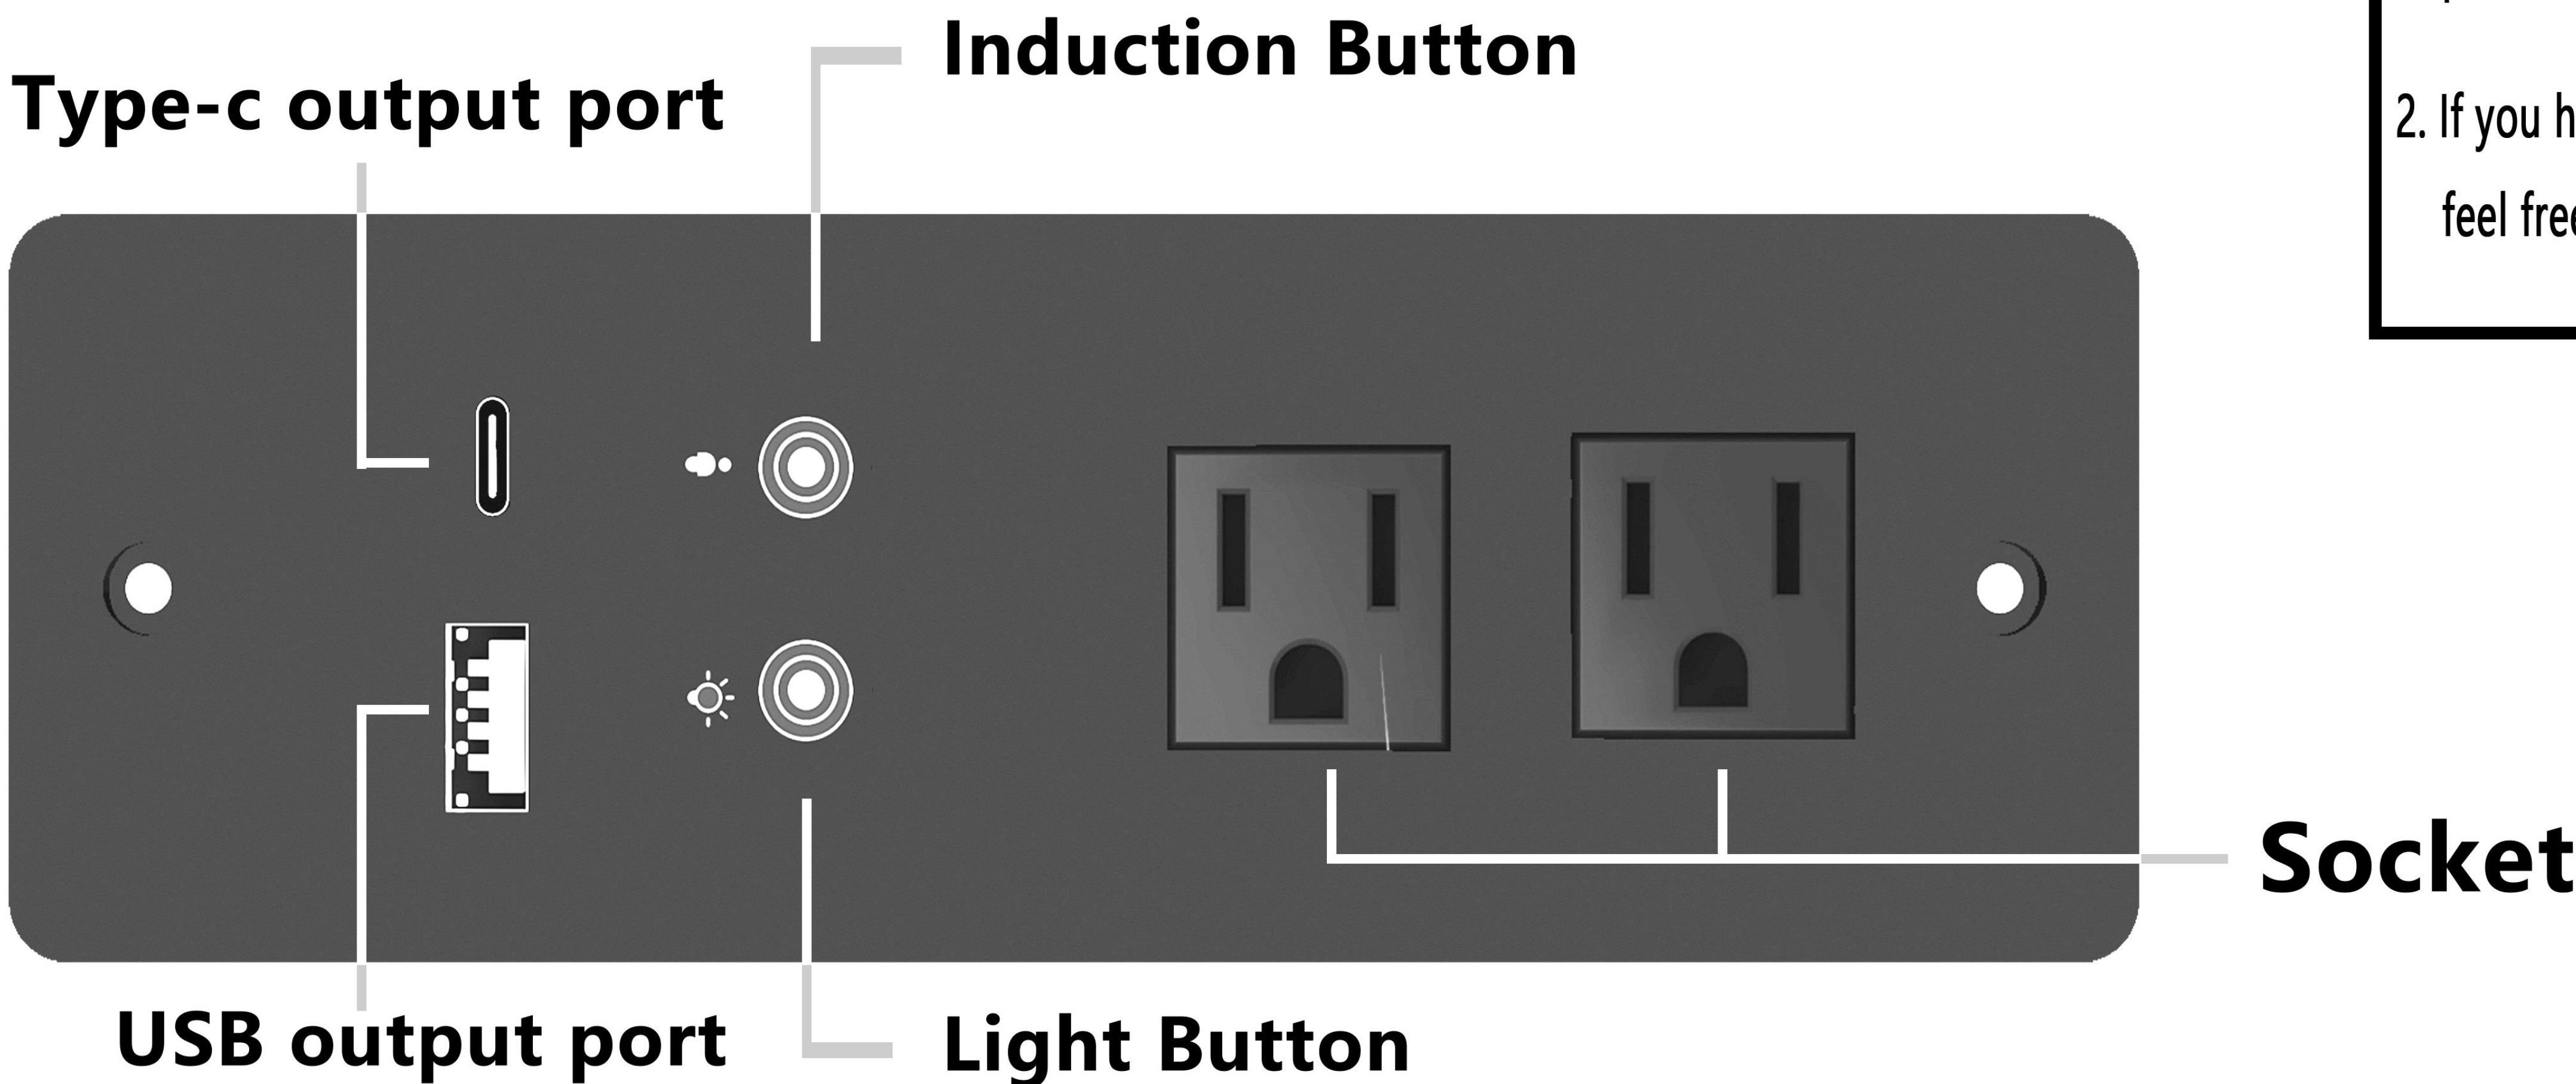

ATTENTION PLEASE

- 1. If there is no touch response suddenly, Re-plug the power to reset the touch static electricity.
- 2. If you have any questions when installing, please feel free to contact us. Thank you.