

Installation Instruction

CAUTION:

- Before installing the light fixture, please make sure the power to the circuit is turned off at the main fuse box.

IMPORTANT SATETY INSTRUCTIONS:

- These instructions are provided for your safety. It is very important that they are read carefully and completely before beginning the assembly and installation of the light fixture.
- We strongly recommend that a professional electrician install all direct wire fixtures.

PRE-ASSEMBLY:

- Remove all parts and hardware from the box along with any plastic protective packaging.
- Do not discard any conctects until after assembly is complete to avoid accidentally discarding small parts or hardware.
- For your safety, it is strongly recommended that two people install the light fixture.

WARNING:

- To reduce the risk of fire, electrical shock or personal injury, always turn off light fixture and allow it to cool prior before replacing the light bulb.
- Do not touch bulb when light fixture is turned on.
- Do not look directly at a lit bulb.
- Keep flammable materials away from lit nulp.

TOOLS REQUIRED (NOT INCLUDED):

- The following installation tools are for reference only.



Step Ladder




Phillips Head, Flat
Blade Screwdrivers



Plier



Wire Cutter/Stripper

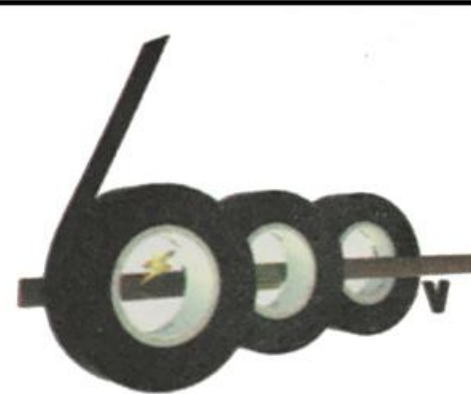

Electrical Tape

CARE INSTRUCTIONS:

- Wipe clean with a soft, dry cloth or static duster.
- Avoid the use of harsh chemicals or abrasive cleaners as they may cause damage the light fixture's finish.

NOTE:

- Please tum off the power switch before installation.
- It is better to have a helper to hold the lamp when it is installed.



Lamp Canopy (A)



Lamp Holder (B)



Lamp Shade (C)



Ground wire (D)



Screw (E)



Insulated(F)



Wire nut(G)

1



Connect the lamp arms onto
the metal ceiling base.

2




Attach the metal cage to lamp
socket by fixing the plastic ring.

3





Instal the E26 based bulbs
(Not Included).

4

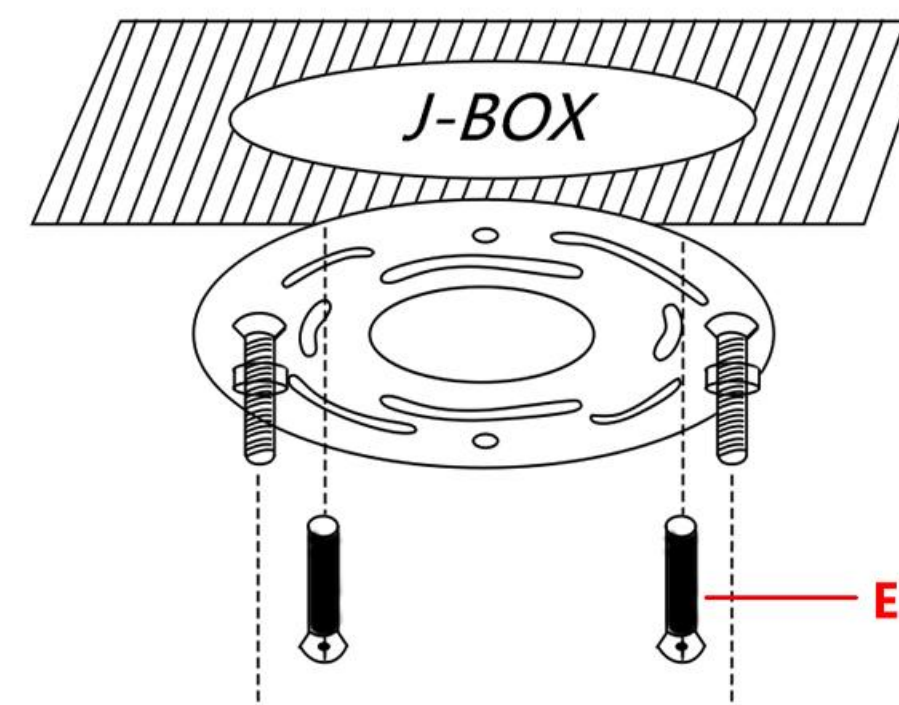

Tighten the mounting plate onto the outlet box.

5

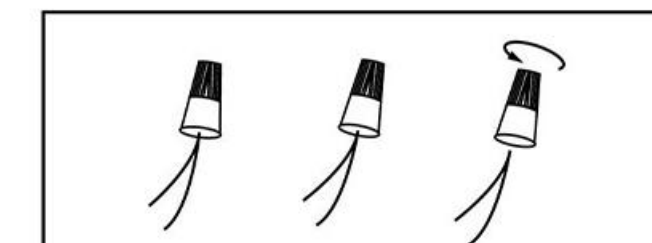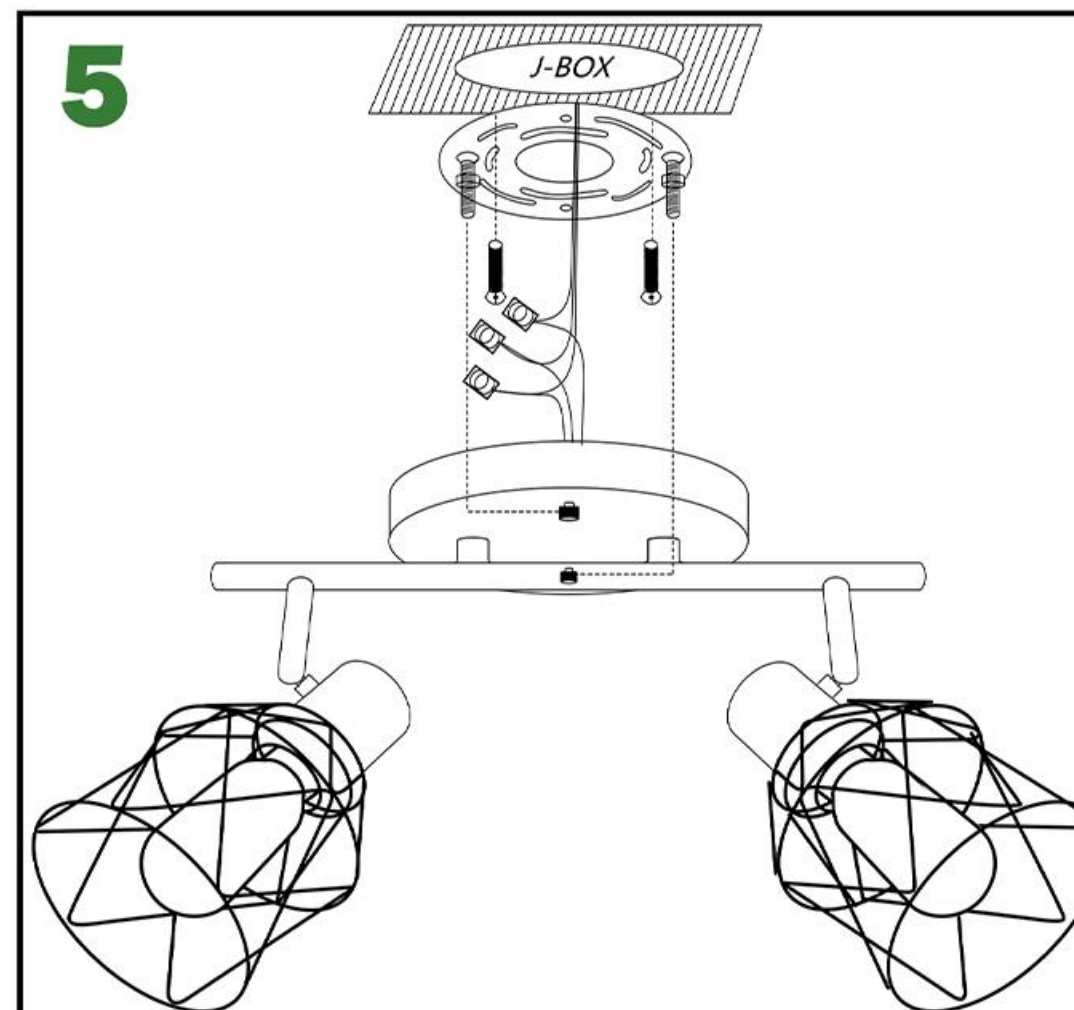

Step ①: **A.** Attach the white wire from the house and 3 white wires from the light fixture.

B. Twist on wire nut (provided). Repeat the process to connect the black wires.

C. Heat the black shrink tube (provided) to contract it.

Step ②: Attach the bare wire fromn the house to the bare wire from the light fixture, then twiston a wire nut(provided).

NOTE: If there is not ground wire in your house, attach ground wire to green grounding screw marked GND.

WARNING: It is imperative that the outlet box in your home be property grounded.

Step ③: Gently tuck the wires into the junction box through the center of mounting bracket . Push the white and black wires apart so they won't touch each other.