



USER MANUAL

Thank you for purchasing our kitchen faucet
Please read this manual carefully before you install it
Please keep this manual properly for the reference in the future

MULTIFUNCTIONAL LED SPRAYER

LED lights have three color variations as
the water temperature changes



Cold Water
(0-85)°F



Warm Water
(85-105)°F



Hot Water
(>105)°F




 **CAUTION**

Read all instructions prior to installation.


Failure to read these instructions prior to installation may result in personal injury, property damage, or product failure. Manufacturer assumes no responsibility for product failure due to improper installation.

1

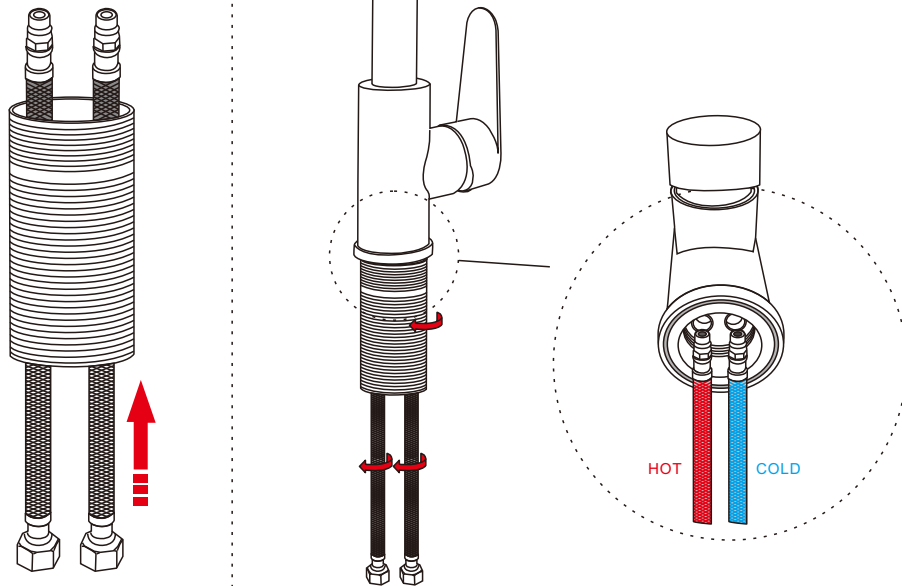

Insert supply lines through the shank from bottom of the shank. Thread hot and cold supply lines to the faucet (Thread Hot supply line to H side, thread Cold supply line to C side), then thread the shank onto the bottom of the faucet.


2

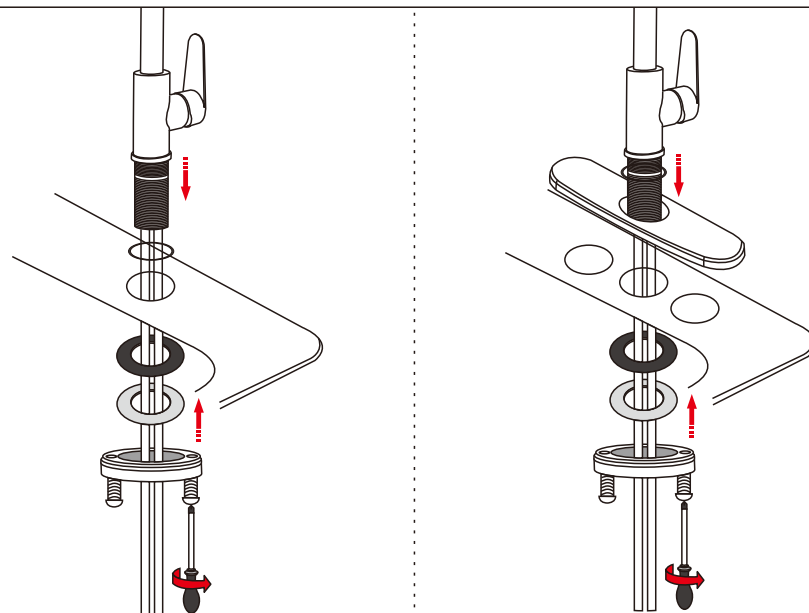

Slide mounting shank through sink from above, then slide the shank through the rubber washer, then through the steel support washer. Ensure base is aligned with sink, fully tightening mounting nut, tightening the screw.


If the sink has three holes, Slide mounting shank through deck plate and sink from above, then slide the shank through the rubber washer, then through the steel support washer. Ensure base is aligned with sink, fully tightening mounting nut, tightening the screw.

3

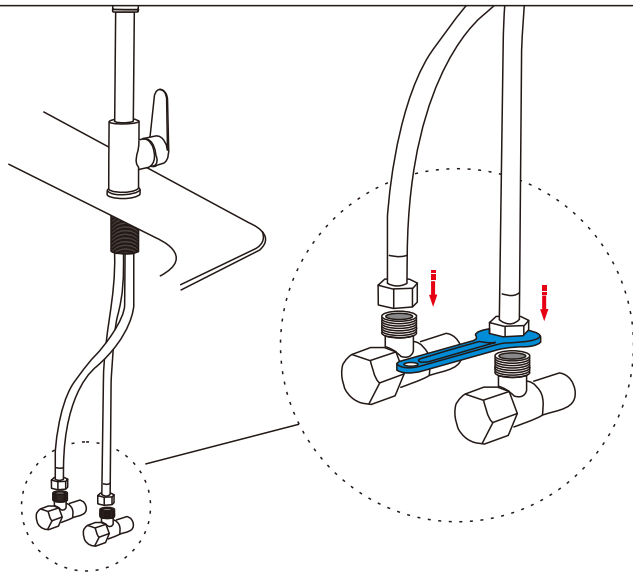

Thread hot and cold supply lines to angle valves using wrench.

4

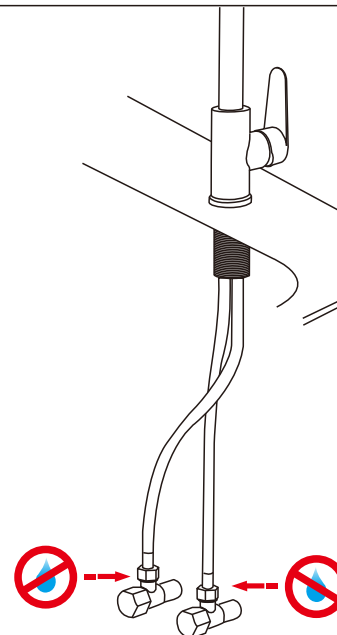

Turn on both water supplies at angle stops and faucet handle, check for leaks at all connections made during this installation, Refer back to the appropriate installation instructions and retighten if necessary.