



Castia® by Studio McGee | K-T35910-3

Wall-mount bath faucet trim

Features

- Designed in collaboration with Studio McGee
- Two cross handles offer separate control of hot and cold water
- 11.0 gpm (41.6 lpm) maximum bath faucet flow rate at 45 psi (3.1 bar)
- Coordinates with other products in the Castia collection
- Requires valve (sold separately)



Available Colors/Finishes

Color tiles intended for reference only.

CP	Polished Chrome
SN	Vibrant Polished Nickel
BN	Vibrant Brushed Nickel
BL	Matte Black
2MB	Vibrant Brushed Moderne Brass



1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.
8-04-2026 06:00 - US-CA

THE BOLD LOOK
OF **KOHLER**

Codes/Standards

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

ADA CSA B651 OBC

ASME A112.18.1/CSA B125.1

ADA

ICC/ANSI A117.1

CSA B651

OBC

Required Products/Accessories

- K-20716-K Two-handle wall-mount bath faucet valve

Warranty

See website for detailed warranty information.

KOHLER® Faucet Lifetime Limited Warranty

Technical Information

All product dimensions are nominal.

Handle

Handle Style/Type: Cross

Spout

Spout Reach: 8" (203 mm)

Flow Rate

Faucet Flow Rate: 11 gpm (41.6 l/min)

Material

- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Recommended Products/Accessories

K-23726 Drain treatment

K-35925 18" towel bar

K-35926 24" towel bar

K-35927 Double robe hook

K-35928 Towel ring

K-35929 Toilet paper holder

K-23723 Faucet cleaner




1-800-4KOHLER (1-800-456-4537)

Kohler Co. reserves the right to make revisions without notice to product specifications.

For the most current specification sheet, go to www.kohler.com USA or www.kohler.ca Canada.

8-04-2026 06:00 - US-CA

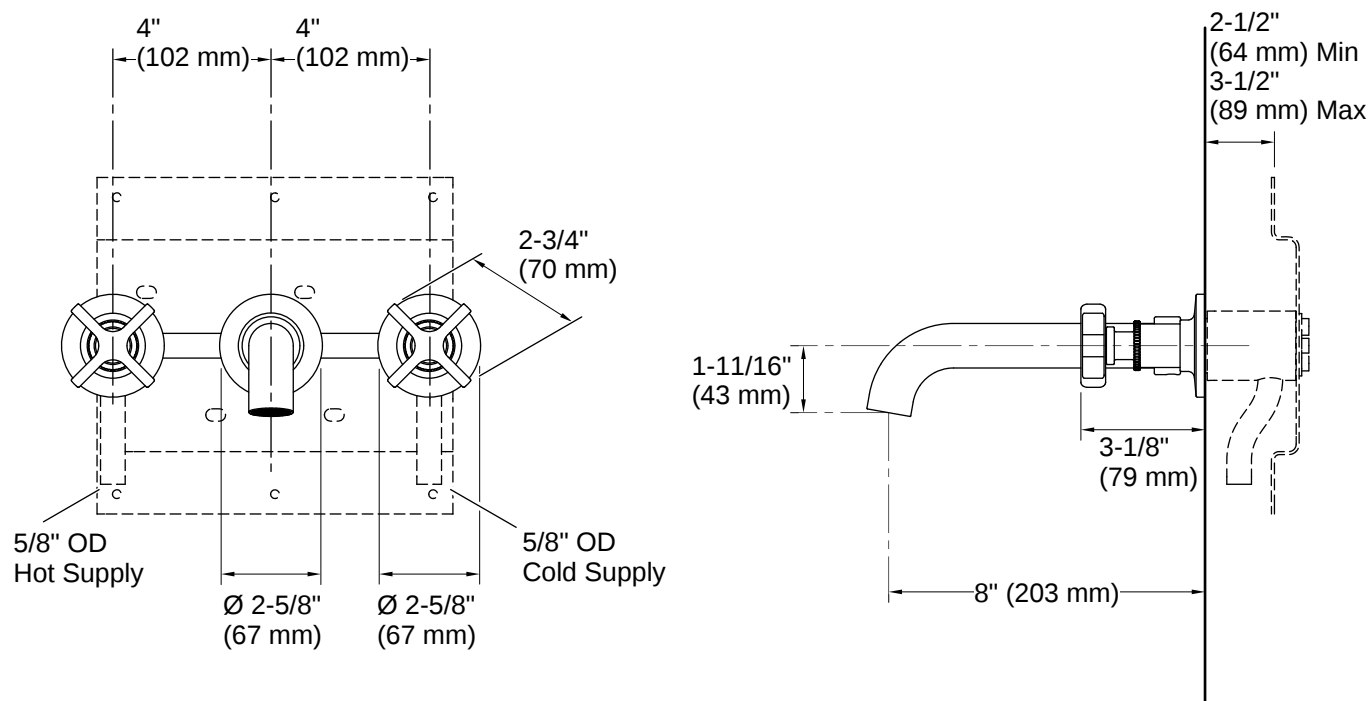

Installation

- Wall-mount

Installation Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

