ASSEMBLY INSTRUCTIONS

CAUTION

- Inspect the wire insulation for any cuts,abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture,disconnect the power by turning off the circuit breaker of by removing the fuse at the fuse box.

TOOLS REQUIRED




Ladder



Safety glassed




Phillips screwdriver




Wrench

PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

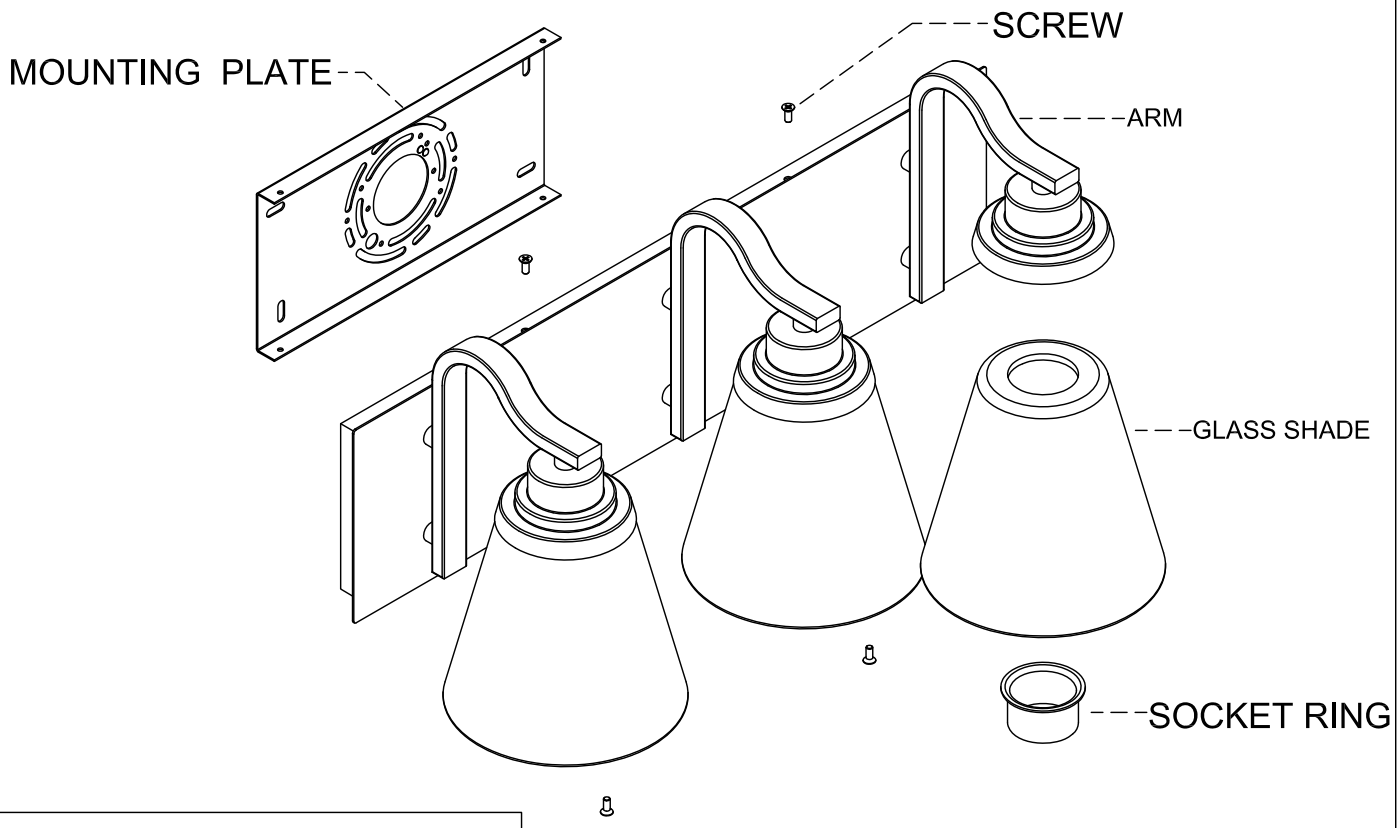


PART BAG

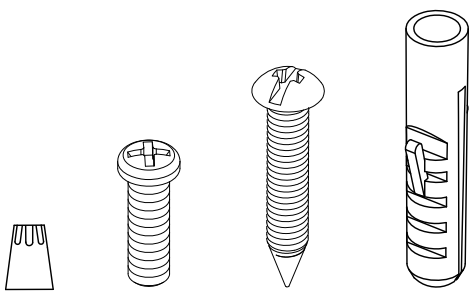

X3 X2 X4 X4


Step 1

Use the mounting screws to attach the mounting plate to the junction box(not included).
Disconnect the power supply before starting installation.

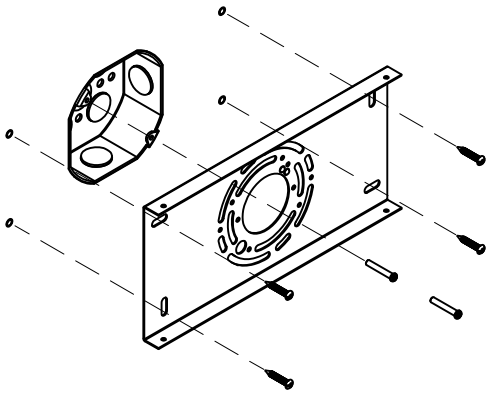


Step 2

Install lamp arms with short wires in the center position,And install lamp arms with long wires on the left and right sides.
Tighten all mounting nuts securely using a wrench.

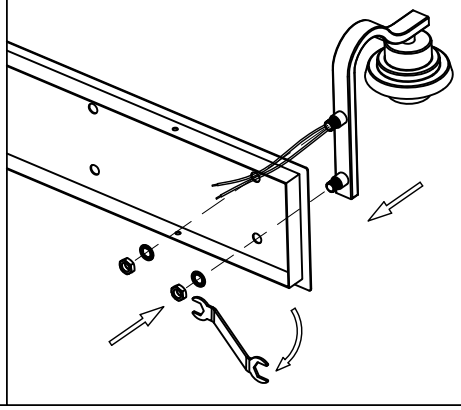

Step 3

a. Connect the wires from each lamp arm to the corresponding wall wires:
   -Live Wire (L): Typically black or red (connect to wall's black/red wire).
   -Neutral Wire (N): Typically white (connect to wall's white wire).
   Note: Ensure connections are tight and insulated to prevent short circuits.
b. Attach the sconce to the mounting plate
c. Secure the glass shade to the lamp holder using the provided socket ring.
d. Install the bulb (compatible with maximum 60-watt, E26 base bulbs, bulbs not included).

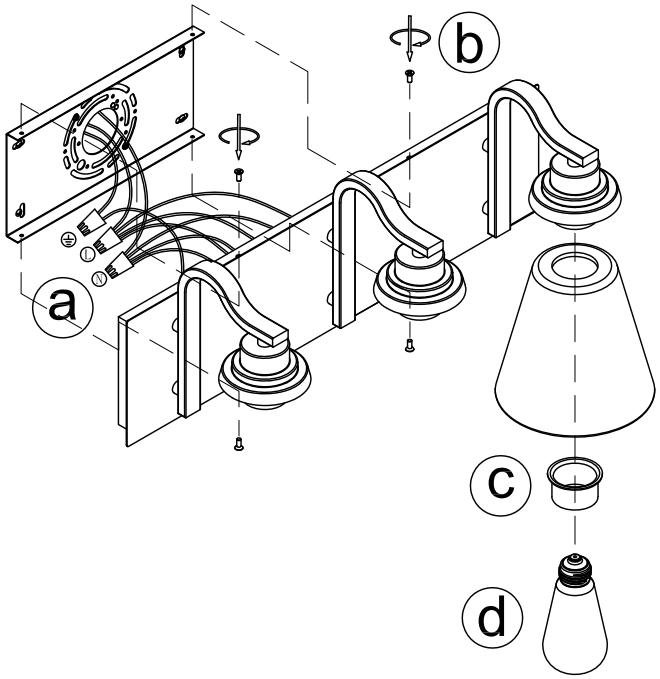

BATHROOM LIGHTS

