

# MOUNTING AND ASSEMBLY INSTRUCTIONS

NOTE: ALWAYS TURN POWER OFF BEFORE INSTALLING LIGHTING FIXTURES!

## Installation (see Fig.A)

1. Carefully unpack and place all parts on a soft surface.
2. Connect supply wires(2,3) and fixture wires(5,6) together by wire nut connector(4) and then cover them with insulation glue(see Fig.B).
3. Fix mounting canopy cover(8) onto ceiling outlet box(1) by box screw(10) and screw(9).
4. Slide canopy(14) up, fix to the canopy cover(8) with canopy nut(7).

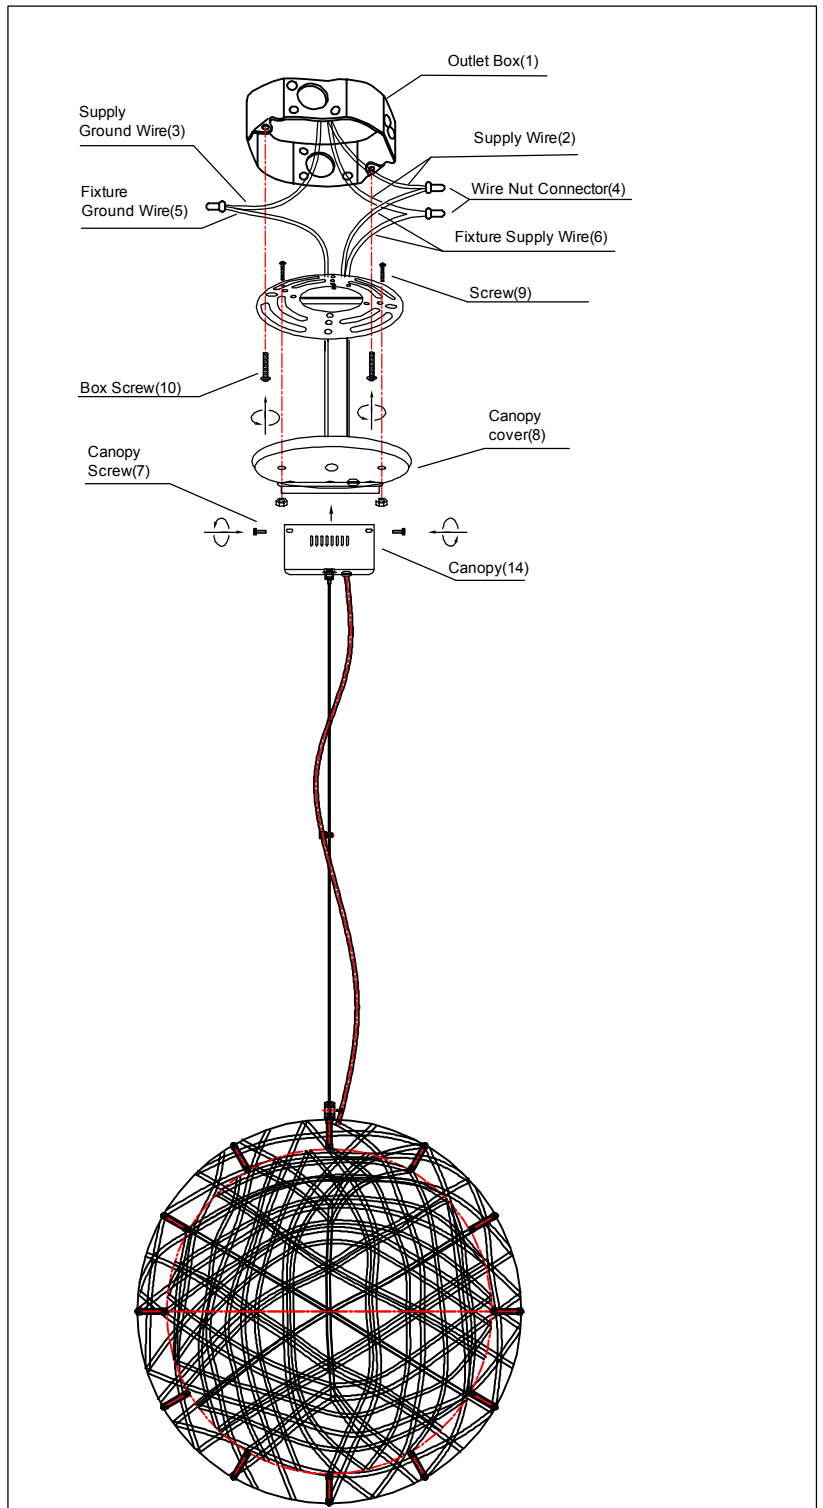


Fig.A

### IMPORTANT SAFTY INSTRUCTIONS

Power at the fuse box should be disconnected before installing the fixture.  
 The fixture ground wire (bare wire) is NOT connect to current carrying supply wires.  
 Not bare wires are exposed outside the wire connectors when joining current carrying wires.  
 The insulation on any of the wires must not be damaged during installing.  
 No rough or sharp edges are in contact with any of the wires.  
 Fixture wires are connected to the proper house supply wires. If you have any doubt about which house supply wire is the white and which is the black, please contact a licensed electrician.  
 Light bulb(s) with wattage no greater than those specified for the fixture are used.  
 Power is off when installing light bulb into the fixture.

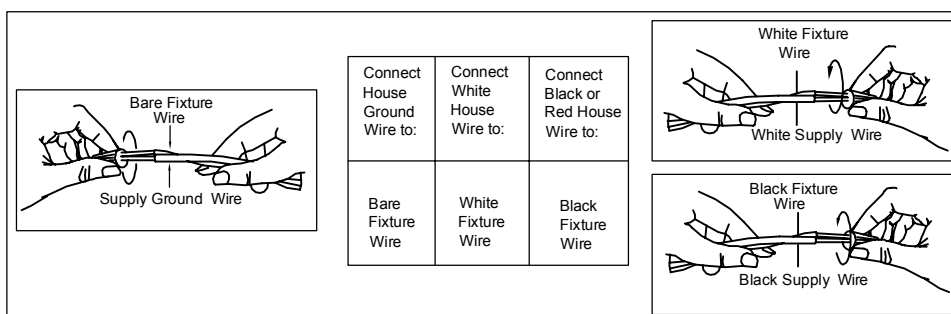


Fig.B