

FORK MOUNTED RUG-RAM - CRF-144

APPROX WEIGHT: 436.96 lbs.

*** ANY ADDITIONS, DELETIONS, OR OMISSIONS MUST BE CORRECTED ON THIS DRAWING AS THIS DRAWING WILL BE CONSIDERED ALL INCLUSIVE *** ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

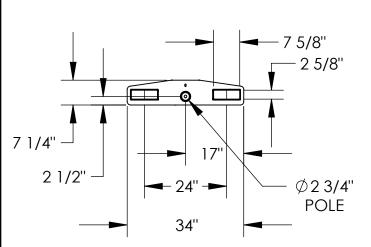

HORIZONTAL CENTER OF GRAVITY: 62 7/8" VERTICAL CENTER OF GRAVITY: 2 15/16" LOST LOAD: 437 LBS. (APPROX.)

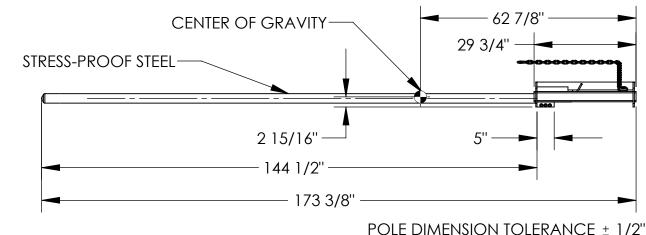

3-D VIEW FOR REFERENCE

FOR INTERNAL USE ONLY

PROJECT SIGN OFF

SALES

ENG.

FAB.

POWER

SAFETY RESTRAINT

CHAIN TO SECURE

UNIT TO FORK TRUCK-

NOTE: NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES. DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

STANDARD FEATURES

MODEL NUMBER: CRF-144

CAPACITY: 1,800 LBS. UNIFORM CAPACITY

POLE LENGTH: 144 1/2"

OVERALL LENGTH: 173 3/8"

POLE DIAMETER: 2 3/4"

FORK POCKETS ARE 7 5/8" W x 2 5/8" H

USABLE ON 24" FORK CENTERS

WITH SAFETY CHAIN TO SECURE TO THE UNIT TO THE MAST OF THE FORK TRUCK

DURABLE LIQUID PAINT

BLUE FINISH ON FRAME

SPECIAL FEATURES

NONE

| REPRE REQUIRE C COMPL AND | SENTED SATISFIES DESI MENTS. I ALSO ACKN ONFIRM PRODUCT AN IANCE WITH ALL APPL LOCAL REGULATION | GN AND DIMENSION OWLEDGE MY DUTY TO ND INSTALLATION ICABLE FEDERAL, STATE S AND STANDARDS. E NON-RETURNABLE |
|---------------------------------------|---|---|
| Signed: | | Date: |
| Printed Nan | | OF SIGNED APPROVAL DRAWING |
| BUTOR'S NAME: | | P.O.# X |
| VESTIL MANUFACTURING | | W.O.# |
| | REPRE REQUIRE C COMPL AND ANY MO Signed: Printed Nar LEAD TIME WILL BUTOR'S NAME: | Signed: Printed Name: LEAD TIME WILL START UPON RECEIPT OF BUTOR'S NAME: |

QUOTE #

1/12/2008

SALES: X

08-007-158

SCALE: 1:28 FILE NAME:

BJW

reference: X

QUOTED LEAD TIME: Y